



Debris flow velocity and volume estimations based on seismic data

Andreas Schimmel^{1,2}, Velio Coviello^{1,3}, and Francesco Comiti¹

¹Faculty of Science and Technology, Free University of Bozen-Bolzano, Bozen-Bolzano, Italy

²Andreas Schimmel – Alpine Monitoring Systems (ALMOSYS), Mkt. Piesting, Austria

³Research Institute for Geo-Hydrological Protection, Consiglio Nazionale delle Ricerche, Padua, Italy

Correspondence: Velio Coviello (velio.coviello@cnr.it)

Received: 15 December 2020 – Discussion started: 4 January 2021

Revised: 17 March 2022 – Accepted: 19 April 2022 – Published: 10 June 2022

Abstract. The estimation of debris flow velocity and volume is a fundamental task for the development of early warning systems and the design of control structures and of other mitigation measures. Debris flow velocity can be calculated using seismic data recorded at two monitoring stations located along the channel, and previous analysis of the seismic energy produced by debris flows showed that the peak discharge of each surge can be estimated based on the maximum amplitude of the seismic signal. This work provides a first approach for estimating the total volume of debris flows from the integrated seismic energy detected with simple, low-cost geophones installed along a debris flow channel. The developed methods were applied to seismic data collected from 2014 to 2018 in three different test sites in the European Alps: Gadria and Cancia (Italy) and Lattenbach (Austria). An adaptable cross-correlation time window was used to calculate the velocity of the different surges, which can offer a better estimation of the velocity compared to a constant window length. The analyses of the seismic data of 14 debris flows show the strong control of the sampling rate and of the inter-station distance on velocity estimation. A linear relationship between the squares of seismic amplitudes – a proxy for seismic energy – and independent measurements of the debris flow volume is proposed for a first-order estimation of the latter. Uncertainties in the volume estimations are controlled by flow properties – such as liquid or viscous surges generating low-amplitude signals and thus underestimating the calculated volume – but in most cases (9 out of 11 events of the test dataset of the Illgraben basin, CH) the order of magnitude of the debris flow volume is correctly predicted.

1 Introduction

With the rapid socio-economic development of European mountain areas, the automatic detection and identification of mass movements like landslides, debris flows, and avalanches become of paramount importance for risk mitigation. Technological development has rapidly advanced during the last decade, along with the conceptual advancements brought by former debris flow research, making the implementation of monitoring devices for research, early warning, and alarm purposes more and more effective (Hürlimann et al., 2019). Past studies showed that such processes induce characteristic seismic and acoustic signals, the latter mostly in the infrasonic spectrum, which can thus be used for event detection. Seismic-based monitoring and warning systems have become increasingly applied worldwide to mitigate risks associated with debris flow processes. Several investigations have already addressed signal processing and detection methods based on seismic (e.g., Coviello et al., 2018; Walter et al., 2017; Burtin et al., 2016) or infrasound sensors (e.g., Zhang et al., 2004; Ulivieri et al., 2012; Marchetti et al., 2019). However, for developing an efficient warning system, not only is the detection of events important but also the identification of the event type (e.g., debris flow vs. debris flood as they have different momentum and thus damaging power) and the estimation of its velocity and volume.

An early approach to estimate the process velocity based on seismic data and cross-correlation was proposed by Aratano and Marchi (2005). Later, Havens et al. (2014) and Marchetti et al. (2015) used arrays of infrasound sensors to estimate the velocity of snow avalanches. Differently, Takezawa et al. (2010) developed a method by which flow velocity is estimated based on the amplification rate of the

seismic signals of debris flows. The estimation of the debris flow volume based on seismic data is still an open problem. A quantitative characterization of the event size based on theoretical models (e.g., Lai et al., 2018; Farin et al., 2019) is difficult because of the limited knowledge on the radiated wavefield produced by debris flows and of the uncertainties due to the heterogeneity of the media (Allstadt et al., 2019; Kean et al., 2015). Some possible approaches can be found in the methods used to analyze the seismic signals generated by other processes, such as rockfalls. Manconi et al. (2016) presented an estimation of rockslide volumes based on the ratio between the local magnitude and the duration magnitude detected by broadband seismic networks. The first is computed using the maximum amplitude while the second is computed using the total duration of the seismic train produced by the seismic source (i.e., the rockslide). Controlled experiments point to the relationships among the potential energy lost, the kinetic energy, and the radiated seismic energy and allow the retrieval of the rockfall mass from the seismic signal (Hibert et al., 2017). Le Roy et al. (2019) found a relation between the potential energy of a freefall rockfall and the seismic energy generated during the impact that allows the estimation of the rockfall volume. For debris flows, Coviello et al. (2019) investigated the energy radiated by natural debris flow surges deducing a scaling relation between kinetic and seismic energy. Interestingly, Pérez-Guillén et al. (2019) deduced similar scaling relationships based on seismic parameters to quantify the size of mass flows at Mt. Fuji, Japan, independently from the type of flow (avalanches or lahars) and from the flow path. Using such scaling relationships, the estimation of the flowing mass is possible based on the seismic energy detected by a geophone and the information about flow velocity. Despite such recent advances, the estimation of debris flow volume from seismic data only is a challenging task in the perspective of the real-time event characterization, and uncertainties in the volume estimations are still large (Coviello et al., 2019; Pérez-Guillén et al., 2019; Walsh et al., 2012). Remarkably, most of the (quite few) studies published so far on this topic have addressed estimations in single catchments only.

This paper explores the possibility to develop a simple method to estimate debris flow velocity and volume based on data from seismic sensors installed along the channel, with a limited calibration dataset. The aim is not to seek a universal law relating seismic energy to debris flow characteristics, but just to provide robust tools for debris flow risk management. Specifically, the proposed method is intended to be easily applicable in different catchments, at least for first-order estimations of debris flow volumes.

2 Methods

Data collected in three small catchments located in the European Alps prone to frequent debris flows are analyzed

here: Gatria (South Tyrol, Italy), Cancia (Veneto, Italy), and Lattenbach (Tyrol, Austria). The data of Illgraben (Valais, Switzerland) is used to test the developed volume estimation method.

The Gatria basin is located in the Vinschgau–Venosta Valley, in South Tyrol (eastern Italian Alps). It has a catchment area of 6.3 km², ranges in elevation from 2945 down to 1394 m a.s.l., and is characterized by a regular debris flow activity. The monitoring system consists of rain gauges, flow stage sensors, geophones, video cameras, piezometers, and soil moisture probes. Debris flow depth is monitored by radar sensors installed at three cross sections along the main channel. A linear array of geophones is used for event detection based on a short time average/long time average (STA/LTA) algorithm (Coviello et al., 2019), and such geophone data can also be used to calculate the velocity. The geophones G1, G2, and G3 used for the calculation of the velocity (marked with a yellow circle) are placed at a distance of 100 m (G1, G2) and 75 m (G2, G3) along the channel. The geophone G4 (marked with a red circle) used for the volume estimation is part of a debris flow detection system based on a combination of infrasound and seismic sensors. This detection system (MAMODIS) consists of one infrasound sensor, one geophone, and a microcontroller, where a specially designed detection algorithm is executed to detect events in real time directly at the sensor site (Schimmel and Hübl, 2016; Schimmel et al., 2018).

The Cancia channel is located in the Dolomites within the province of Belluno (Italy), and the catchment features an area of 2.5 km² on the southwestern slope of Mount Antelao (3264 m a.s.l.). The catchment ranges in elevation between the Salvella Fork at 2500 m a.s.l. and a retaining basin at the village of Cancia at 1001 m a.s.l. (Gregoret et al., 2019). The data used for the volume estimation and velocity calculation are recorded by the geophones installed at stations 1 and 2 belonging to the monitoring and warning system designed by the company CAE (Cavalli et al., 2021). Geophones G1 and G3 are used for the velocity estimation, and geophone G2 is used for the volume estimation. Besides a monitoring system of the company CAE, three monitoring stations have been installed by the Universities of Padua, Bologna, and Bolzano in 2019. These monitoring stations include two laser stage sensors, two rain gauges, several time-lapse cameras, geophones, and the infrasound/seismic detection system MAMODIS and integrate a monitoring network that was operational in the previous years only for scientific purposes (Simoni et al., 2020).

Finally, the Lattenbach Creek (district of Landeck, Tyrol) has a catchment area of 5.3 km² and is a monitoring site for debris flows operated by the Institute of Mountain Risk Engineering at the University of Natural Resources and Life Sciences, Vienna (Hübl and Moser, 2006). Three monitoring stations are installed along the channel, and these are equipped with flow height (radar gauges), geophones, video cameras, and a 2D-laser scanner. At the middle monitoring

station, a debris flow pulse Doppler radar can be used for measuring the surface velocity. Near this radar, two stations for testing the warning system MAMODIS are installed at a distance of 90 m. The geophone data from the two stations (G1 and G2) are used to calculate the debris flow velocity, and the lower one (G2) is used for the volume estimation in this study. Figure 1 gives an overview of the three catchments and the monitoring setup.

Table 1 gives an overview of the seismic sensors used at the different sites. The seismic amplitudes used for this study are calculated every second as a signal envelope (Arattano et al., 2014) from the raw data recorded at the reported sampling rates. At Cancia, an internal sampling rate of 500 Hz is used, but the available seismic data are recorded as 0.1 Hz max. amplitude values. For the geophones of the type SG-5 and SM-6, amplitude values of 1 Hz are calculated from the raw signals sampled at 100 Hz. At Gadria the used data for this study are 0.5 Hz amplitude values.

2.1 Velocity estimation

The estimation of debris flow velocity is carried out by the time–distance method, whereby velocity is calculated as the distance between two stations measuring seismic amplitude along the channel divided by the time difference of the two signals calculated from amplitude maximum values (Coviello et al., 2021; Schimmel et al., 2018), or by cross-correlation of the two seismic signals (Arattano et al., 2012). The result of this method is a mean surge velocity (celerity) between the two stations. To obtain the time difference based on amplitude maxima, the signal is manually analyzed, identifying comparable peaks (i.e., representing the debris flow front or subsequent surges) in the signals recorded at the two stations. The manual analysis is used for validating the results of application of the cross-correlation method. For the cross-correlation analysis, the analysis window size has to be selected. After testing several settings, we decided to use a starting window size related to the distance of the two geophones. This choice offers the best result for the cross-correlation and provides an objective method, based on one parameter (distance) only, to adapt the cross-correlation analysis at new sites. The number of samples is set equal to the distance in meters, which means that a resolution from 1 ms^{-1} is possible, which seems to be a physically meaningful starting value for describing turbulent debris flows (e.g., Theule et al., 2018). Three different sliding time window sizes are used because an adaptation of the time window ensures better results for the cross-correlation for all flow stages. For choosing the window length, the ratio between maximum amplitude and minimum amplitude is analyzed in the starting window size, which has a number of samples equal to the distance. Analyses of the seismic data of 12 events (three at Gadria, three at Cancia, and six at Lattenbach) showed that when such a ratio > 6 the debris flow features an adequate signal shape for cross-correlation to be

adopted. If the ratio is < 6 , the window length will be enlarged by another number of samples equal to the distance. If the signal shape still is not suitable, the window will be further expanded. Figure 2 shows the principle of the adaptive window sizes. Therefore, the lowest velocity that can be calculated is theoretically 1 ms^{-1} in the first, typically rougher part of the debris flow hydrograph, with a signal length equal to the distance, and it could reduce to 0.33 ms^{-1} for the smoother tail phase of the event if a window length of 3 times the distance is used. Cross-correlation is performed with an overlap of half of the sample numbers. The two signals are normalized in the window frame by the maximum amplitude value. Only if the cross-correlation coefficient exceeds 0.8 is the result kept for the velocity calculation. This threshold was selected by a trial-and-error procedure. Since the cross-correlation analysis is performed at 1 s time steps, the Cancia and Gadria data are upsampled to a sample rate of 1 Hz. Therefore amplitude values from Cancia and Gadria are constant over 10 and 2 s, respectively.

2.2 Volume estimation

As reported in the introduction, a linear trend between the seismic energy (J), which is proportional to the square of the seismic amplitude ($\text{m}^2 \text{ s}^{-2}$), and the kinetic energy per unit area produced by debris flows has been observed by Coviello et al. (2019). Consequently, we integrated the squared amplitude values during the whole duration of a debris flow to obtain an estimation of the seismic energy of each event. To make the results comparable for all three sites and not depending on different detection methods, the used event duration has been determined manually based on the signal shape. Subsequently, we related these integrals of the seismic signal to the associated debris flow volumes. For these volumes, we used published and unpublished estimates obtained by several methods (topographic surveys, stage sensors, 2D scanners, and debris flow radar) in the study basins (Schimmel et al., 2018; Coviello et al., 2021; Simoni et al., 2020). Overall, a total of 14 events (occurred from 2014 to 2018) are available from the three different catchments (Table 2). The best fit curve relating debris flow volumes to the seismic signal was obtained by performing a linear regression analysis. The performances of the methods are investigated and discussed using 11 independent debris flow volumes recorded at Illgraben, Switzerland, from 2015 to 2017 (Schimmel et al., 2018; Marchetti et al., 2019). Since all monitoring stations used for this study are rather close to the channel (between 15 and 25 m) and the distances are nearly the same at every test site, attenuation of the signals in the ground, geometric spreading, and the influence of topography or geology can be neglected. Also, intense rainfall and wind can produce ground vibration that geophones detect. However, seismic signals recorded by sensors installed at a small distance from the channel (from 15 to 25 m, in our case) are dominated by in-channel processes. This is particularly true

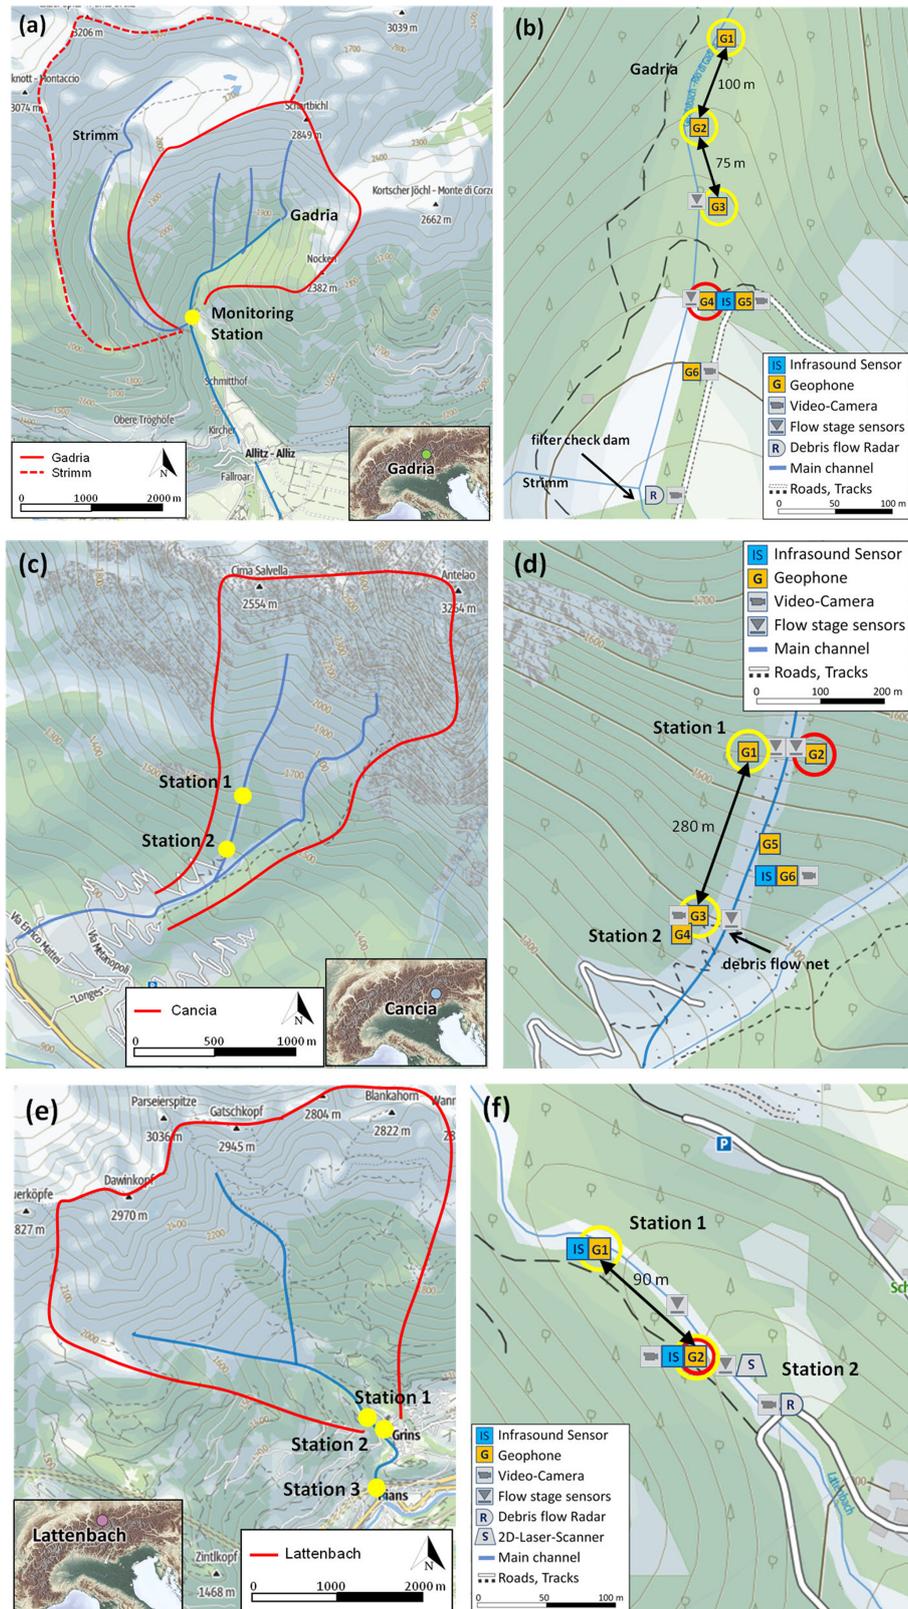


Figure 1. Overview of the Gadria site (a), Cancia site (c), and Lattenbach site (e). (b), (d), (f) Closer view of the monitoring stations and sensor setup (based on © OpenStreetMap contributors 2022). Distributed under the Open Data Commons Open Database License (ODbL) v1.0.)

Table 1. Summary of the seismic monitoring equipment.

| | Geophone | Type | Natural freq. (Hz) | Sensitivity (Vsm^{-1}) | Sampling rate (Hz) | Amp. values (Hz) |
|------------|----------|----------------------|--------------------|----------------------------|--------------------|------------------|
| Lattenbach | G1/2 | Sercel SG-5 | 5 | 80 | 100 | 1 |
| Gadria | G1/2/3 | Geospace | 10 | 85.8 | 128 | 0.5 |
| | G4 | Sercel SG-5 | 5 | 80 | 100 | 1 |
| | G5/6 | Sensor NL SM-6 | 4.5 | 28.8 | 100 | 1 |
| Cancia | G1/2/3/4 | SolGeo VELOGET-DNL-H | 14 | 18.2 | 500 | 0.1 |
| | G5/6 | Sensor NL SM-6 | 4.5 | 28.8 | 100 | 1 |

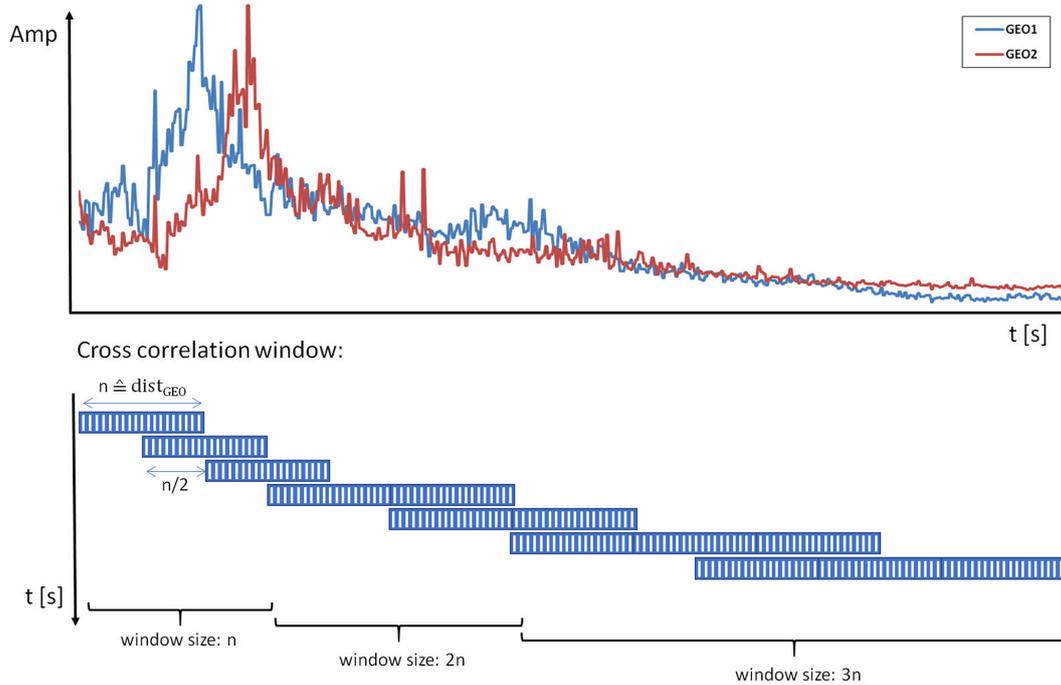


Figure 2. Method cross-correlation analysis: window sizes and overlaps.

in our study sites, which are located in lower reaches of the main channels where the debris flow surges are well formed and characterized by velocities of several meters per second and flow depth on the order of meters. To make data analysis comparable among the sites, the lowest sampling rate (10 s for the Cancia dataset) is used, and seismic data from the other catchments are transformed in terms of maximum values of amplitude over periods of 10 s.

3 Results

First we present the results about velocity estimation adopting the methods described above, applied to three debris flow events recorded in different catchments. Figure 3 illustrates velocity estimations applied to the Lattenbach event that occurred on 30 July 2017, which featured a peak discharge of

$88 \text{ m}^3\text{s}^{-1}$, a total volume of $41\,100 \text{ m}^3$, and an overall duration of around 3500 s. This debris flow had a front about 1.3 m high, and the velocity (3.5 to 4.7 ms^{-1}) calculated by using the time difference between maximum amplitude values is very similar to the velocity calculated by cross-correlation with 4 ms^{-1} . For the peak discharge (flow height exceeding 3.5 m), the velocity calculated by means of maximum values turns out slightly higher (10 ms^{-1}) than the one (9 ms^{-1}) determined by cross-correlation. During the following part of the event (i.e., after 2500 s), no significant surges could be found to calculate flow velocities using maximum values, and the cross-correlation most likely leads to overestimating velocities due to such a lack of surges.

Figure 4 displays the seismic signals and the velocity estimation for a debris flow that occurred in Gadria on 8 June 2015, which was characterized by a total volume of $12\,600 \text{ m}^3$. The event is composed of several surges in the

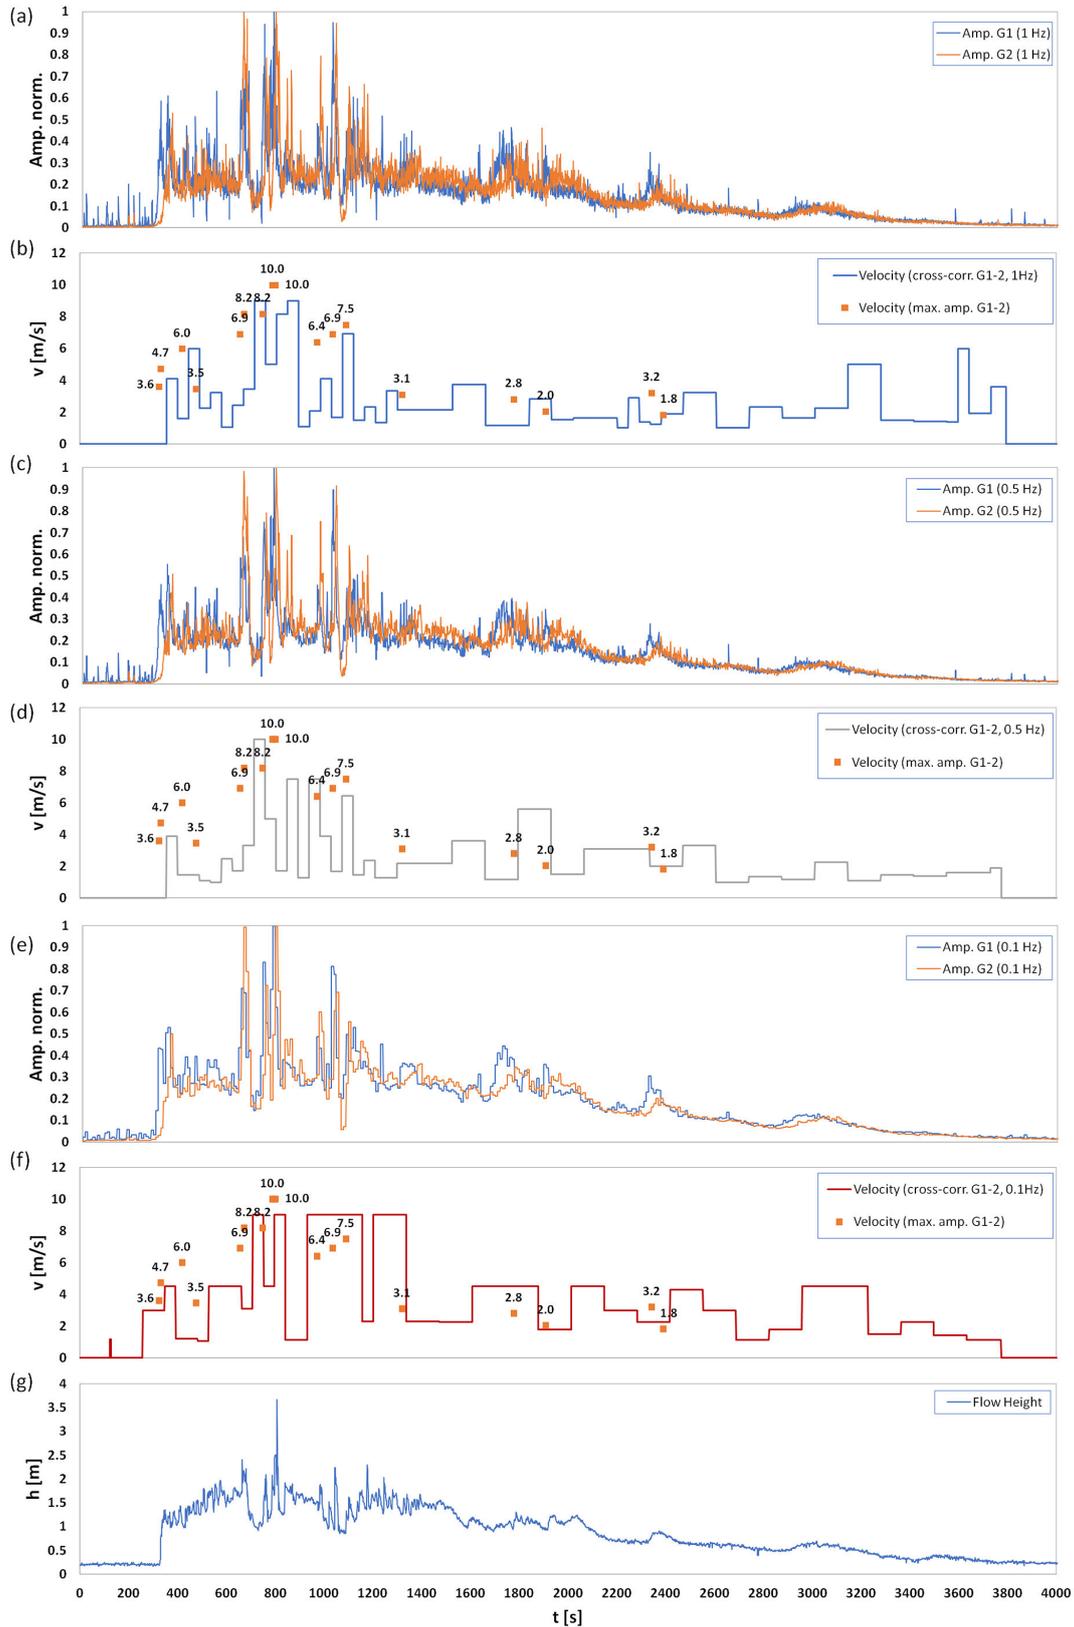


Figure 3. Debris flow at Lattenbach on 30 July 2017: (a, c, e) normalized amplitudes of the two geophones (G1, G2), (g) flow height, and (b, d, e) velocity estimation based on maximum values and cross-correlation (compared for sampling rates of 1, 0.5, and 0.1 Hz)

Table 2. List of event dates and volumes for all sites. Data gathered in Gadria, Cancia, and Lattenbach were used to retrieve the empirical Eq. (1) while data from Illgraben were used for validation; see Fig. 7.

| | Date | tot. Volume (m ³) | Duration (s) | Reference |
|------------|----------|-------------------------------|--------------|-------------------------|
| Lattenbach | 09.08.15 | 11 500 | 1600 | Schimmel et al. (2018) |
| | 10.08.15 | 18 500 | 2800 | Schimmel et al. (2018) |
| | 16.08.15 | 5000 | 1200 | Schimmel et al. (2018) |
| | 10.09.16 | 46 000 | 3900 | Schimmel et al. (2018) |
| | 29.07.17 | 14 000 | 1600 | unpublished BOKU data |
| | 30.07.17 | 41 000 | 3500 | unpublished BOKU data |
| Gadria | 15.07.14 | 11 600 | 2000 | Coviello et al. (2021) |
| | 08.06.15 | 12 600 | 3300 | Coviello et al. (2021) |
| | 12.07.16 | 2400 | 2500 | Coviello et al. (2021) |
| | 19.08.17 | 2300 | 1400 | Coviello et al. (2021) |
| Cancia | 23.07.15 | 25 000 | 1600 | Simoni et al. (2020) |
| | 04.08.15 | 20 000 | 2000 | Simoni et al. (2020) |
| | 01.08.18 | 4500 | 2700 | Simoni et al. (2020) |
| | 29.10.18 | 11 000 | 3200 | Simoni et al. (2020) |
| Illgraben | 22.07.15 | 8700 | 3500 | Schimmel et al. (2018) |
| | 10.08.15 | 6100 | 6700 | Schimmel et al. (2018) |
| | 14.08.15 | 25 000 | 9500 | Schimmel et al. (2018) |
| | 15.08.15 | 2000 | 5500 | Schimmel et al. (2018) |
| | 12.07.16 | 10 000 | 4200 | Schimmel et al. (2018) |
| | 12.07.16 | 60 000 | 3000 | Schimmel et al. (2018) |
| | 22.07.16 | > 10 000 | 3000 | Schimmel et al. (2018) |
| | 09.08.16 | < 10 000 | 2500 | Schimmel et al. (2018) |
| | 29.05.17 | 70 000 | 3500 | Marchetti et al. (2019) |
| | 04.06.17 | 24 000 | 2800 | Marchetti et al. (2019) |
| | 14.06.17 | 33 000 | 3100 | Marchetti et al. (2019) |

range of 1–1.5 m of flow height. The front velocity and the velocity of the surge visible at 2000 s seem to be overestimated by the cross-correlation method, because velocities over 9 and 7 ms⁻¹, respectively, seem unrealistically high based on previous results from Gadria (Theule et al., 2018; Coviello et al., 2021). In contrast, for the other surges, flow velocities calculated based on maximum values and cross-correlation give consistent estimates, around 5 ms⁻¹.

Finally, Fig. 5 shows the case of a debris flow in the Cancia channel. This event was recorded on 1 July 2020. While the debris flow height reaches 2.4 m, flow velocities for this event appear to be lower (max. 3.2 ms⁻¹) than in the case of Lattenbach and Gadria.

To test the methodology described above for the estimation of debris flow volumes based on seismic signals, a total of 14 events (occurred from 2014 to 2018) are available from the three different catchments (Table 2). Figure 6 shows that the use of the squared seismic amplitudes (A^2 in mm² s⁻²) with a linear fitting seems most promising to provide a preliminary estimate of event volumes (V_{tot} in m³) compared to other curve fitting approaches like power law ($R^2 = 0.56$) and exponential fitting ($R^2 = 0.57$). The best fitting linear

equation reads

$$V_{\text{tot}} = 164 A^2 + 1419. \quad (1)$$

The method has then been tested against 11 independent debris flow volumes recorded at Illgraben, Switzerland. Figure 7 compares all the observed values (vertical axis) for total volume to the predicted values (horizontal axis) according to Eq. (1). Two events at Illgraben plot quite far off the confidence level shown in Fig. 7. Possible reasons for the poor prediction of their volumes by Eq. (1) is provided in the discussions.

4 Discussion

Our results suggest that the cross-correlation method we used – based on a window length adaptable according to the signal waveform – provides solid estimates of debris flow velocity, as the temporal resolution of the calculation is high during the fast, initial stages of the flow, while longer window lengths are applied for smoother flows, thus permitting us to avoid wrong correlation results. Arattano et al. (2012)

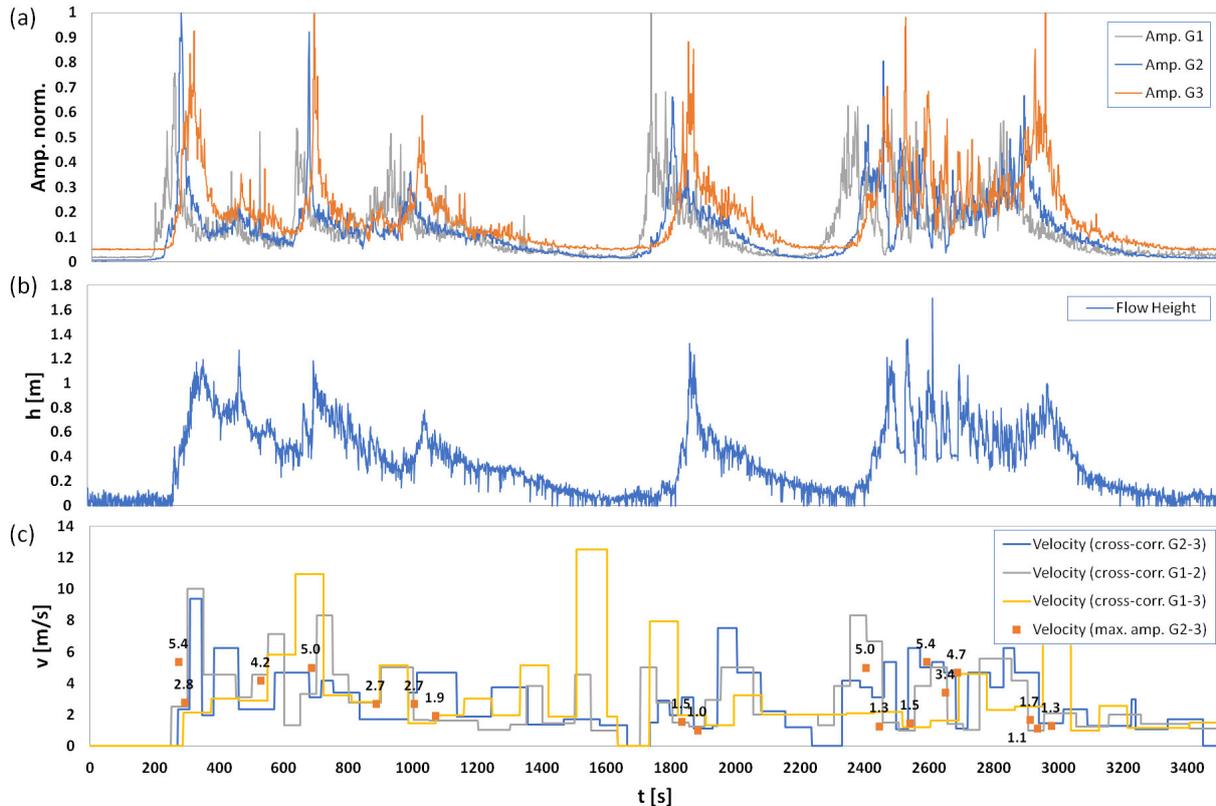


Figure 4. Debris flow at Gatria on 8 June 2015: (a) normalized amplitudes of the three geophones (G1, G2, G3), (b) flow height, and (c) velocity estimation based on maximum values and cross-correlation.

already showed how the cross-correlation technique can provide a reliable estimation of the flow velocity even when the signals recorded at the two monitored cross sections do not present a clear, common feature, i.e., typically the passage of the debris flow front. Nonetheless, some significant signal features are required such as a progressive rise and subsequent decrease in the signal amplitude. Signals characterized by many amplitude peaks close to each other produced, for instance, by the propagation of roll waves can represent a limitation to the application of cross-correlation methods (Fig. 5c). The validation approach for the velocity estimates, i.e., manually determining matching amplitude peaks at the two stations, is also affected by uncertainty. In Gatria, this is particularly evident for the tail of the debris flow of 8 June 2015 (Fig. 4c, from $t = 2400$ s) during which roll waves propagate and produce multiple peaks, one following the other. The uncertainty in the manual velocity calculation was also observed in a previous analysis based on data gathered with a pair of flow stage sensors and led to the approximation of lumping multiple waves into one single surge for the subsequent volume estimation (Coviello et al., 2021). The velocity estimates of surges lacking multiple peaks (i.e., from $t = 200$ to 2400 s in Fig. 4c) are consistent with those performed with the flow stage sensors located downstream from G3 (Fig. 1c). Indeed, they are slightly higher (i.e., dif-

ferences from 0.3 to 1.7 ms^{-1}) than those calculated by the flow stage data on a milder sloping channel reach (Coviello et al., 2021).

Importantly, our study benefited from three quite different test sites. The influence of different distances between the geophones is evident on the velocity estimation. The longitudinal geophone distance in Gatria (75 m) and Lattenbach (90 m) appears to be appropriate for fast debris flows, while the longer distance in Cancia (280 m) makes it difficult or even impossible to capture the same surges at different sensors. In any case, the transversal distance between the channel and the geophones should be much smaller (at least half) than the longitudinal distance between the two geophones (Coviello et al., 2019). The distance has to be chosen to provide a significant difference in the signals in an appropriate time, so that the cross-correlation offers valid results for flow velocity.

The sampling rate also has an important effect on the reliability of velocity estimations. At Lattenbach and Gatria, one amplitude value every $1\text{--}2 \text{ s}$ was available. This seems to be a proper sampling in combination with the sensor distances. At Cancia, only one sample every 10 s is available, so that the signal shapes can be very different at the two geophones, determining problems for the cross-correlation analysis. In fact, surges can be missed, and such a low sampling rate cou-

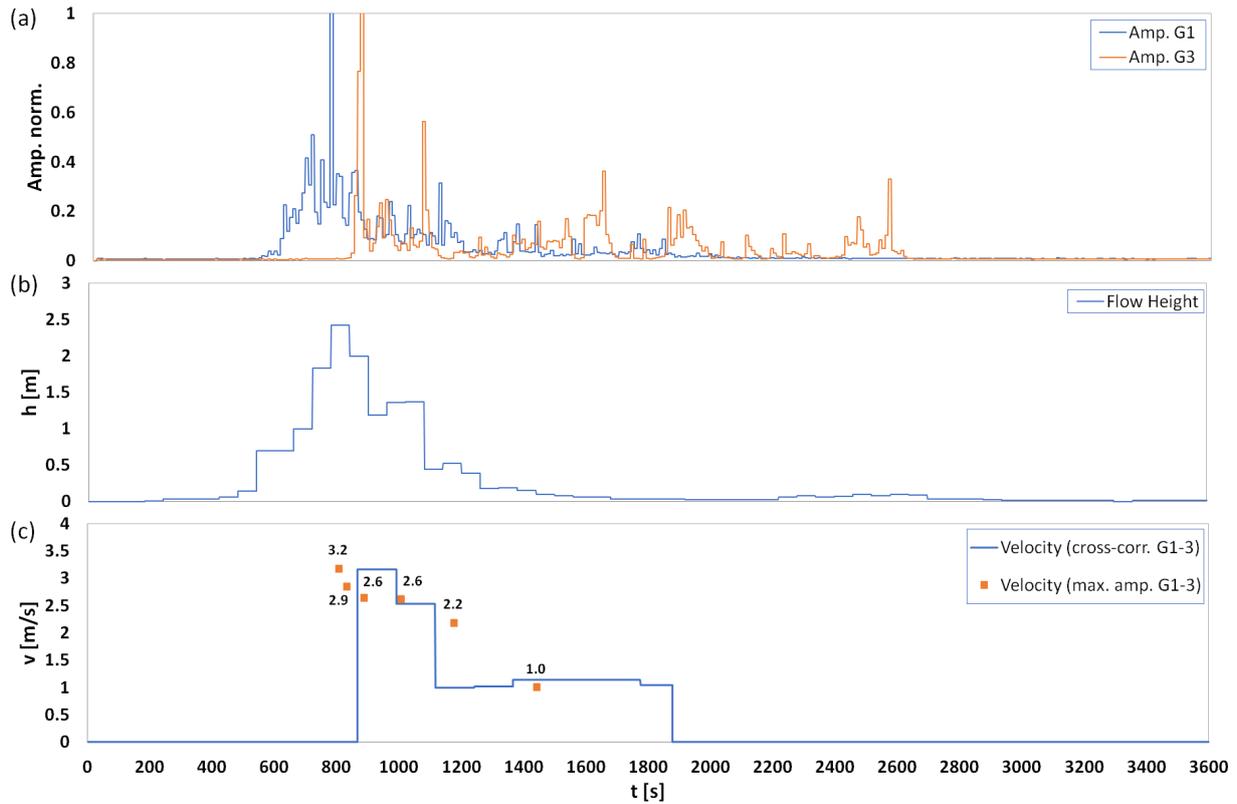


Figure 5. Debris flow at Cancia on 1 July 2020: (a) normalized amplitudes of the two geophones (G1, G3), (b) flow height, and (c) velocity estimation based on maximum values and cross-correlation.

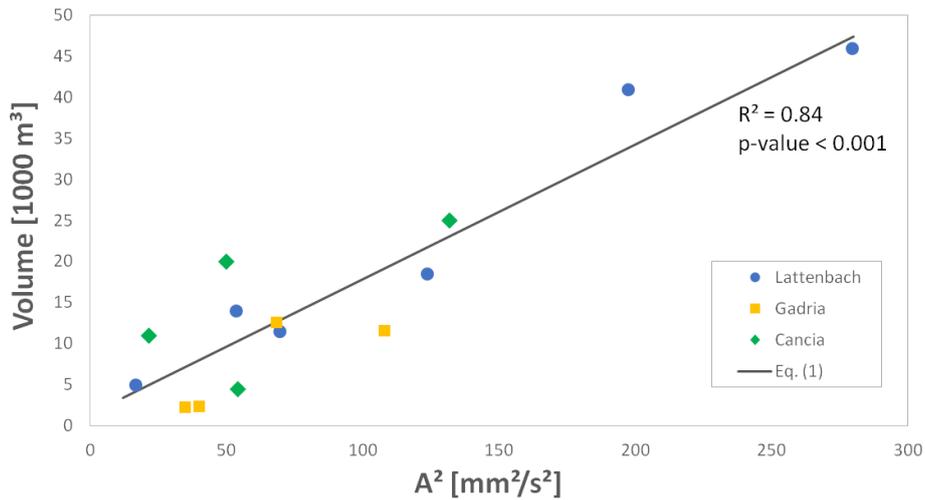


Figure 6. Relationship between squared integrated seismic amplitude and total volume based of the debris flow events listed in Table 2 (from Gatria, Lattenbach, and Cancia).

pled with the long distance led to an exaggerated averaging of flow velocity of different surges. This might have an effect on the calculated velocity values in Cancia, which are much lower compared to the other sites. However, in Cancia velocities estimated on the basis of image analysis of time-lapse videos on previous events (Simoni et al., 2020)

are in the same range (e.g., 1.5 to 4 ms⁻¹ for a debris flow on 23 July 2015). Therefore we believe that the lower velocities in Cancia compared to Gatria and Lattenbach stem from the different characteristics of debris flows of this catchment, which are more granular compared to the other sites.

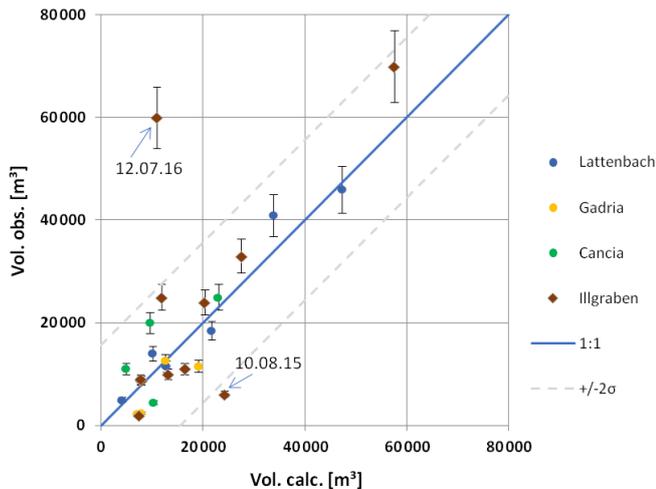


Figure 7. Comparison of the predicted volume vs. observed volume. The dark blue line represents the one-to-one relationship, and the dashed lines represent the confidence interval of the distribution.

We performed a test on the debris flow event recorded at Lattenbach on 30 July 2017 (Fig. 3). Seismic data of this event were recorded at 1 Hz. We subsampled data at 0.5 and 0.1 Hz, and we compared the flow velocity calculated on these three signals. Figure 3 shows remarkable differences when adopting the cross-correlation technique at different sampling rates. Apart from the obviously larger duration of the time windows, the signal subsampled at 0.1 Hz produces an overestimation of the flow velocity of the main surges (i.e., from $t = 500$ to $t = 1500$ s) compared to the original signal.

Different sensors other than the geophones can be used to determine debris flow velocity. So instead of geophones, two separated stage sensors can be used for the time–distance method. The advantage of stage sensors is that they measure the process directly, so there are no effects of ground damping, channel texture, or the viscosity of the process, which have a high influence on the seismic signal shape. On the other hand, stage sensors need a structure above the channel, so they have a much higher installation effort and are more exposed to the debris flow (Coviello et al., 2019). Alternatively, flow velocity can be measured by pulse Doppler radar (Koschuch et al., 2015). This method calculates the velocity from the frequency shift of a pulse-modulated high-frequency reflected radar signal, which is proportional to the velocity of the moving object (Doppler effect). The detection area is divided into different range gates, and the result is an instantaneous surface velocity distribution (velocity spectrum) for each range gate. Therefore, a debris flow radar measures the velocity directly, but there is an averaging over the range gate, so the surge velocity measured by the radar is often lower than the surge velocity measured by the time–distance method. When velocity data measured by the debris flow radar in Lattenbach (unpublished data) are compared against values calculated from the geophones installed there,

very similar results can be observed. In fact, the maximum velocity measured by the debris flow radar for the event on 30 July 2017 is 10.0 ms^{-1} , while the maximum value calculated from the geophone data is 9.0 ms^{-1} . The mean velocity of the whole event is 1.8 ms^{-1} based on the debris flow radar and 1.9 ms^{-1} for the presented method based on the geophone data.

A linear trend between the square of the seismic amplitudes and the debris flow volumes is apparent from analysis conducted by merging the three sites. The fact that a linear model definitely performs well is in agreement with the physical processes linking seismic energy to debris flow parameters such as mass and velocity combined or peak discharge, as already noted by other authors (Coviello et al., 2019; Andrade et al., 2022). Figure 7 compares the observed values (vertical axis) of total volume to the predicted values (horizontal axis) of all the debris flow events reported in Table 2. Data gathered at Gatria, Cancia, and Lattenbach represent the test dataset while the validation dataset is composed of debris flows observed in the Illgraben catchment, Switzerland, from 2015 to 2017 (Table 3). This analysis suggests that it is possible to obtain first-order estimates of debris flow volumes based on the seismic amplitudes, but there is still a large variance, since there are several factors affecting the seismic signals: distance from geophone to channel, damping in the ground, or sampling rate (e.g., Kean et al., 2015; Coviello et al., 2018; Allstadt et al., 2019). As already highlighted in the results, two events in Illgraben out of 11 that compose the validation dataset (debris flows observed at Illgraben) plot out of the confidence interval of the distribution (2σ). The error in the volume prediction of the 10 August 2015 event is possibly due to the significantly higher velocity of this event compared to the others (Schimmel et al., 2018). Indeed, the volume prediction is strongly controlled by the velocity and the mass (i.e., solid content) of the mixture (Coviello et al., 2019). Concerning the other outlier (12 July 2016 debris flow), the velocity of the first surge was high (7.8 ms^{-1}), but in the video recording the first part of the flow appears very liquid and the tail viscous. This can explain the low amplitudes of the geophone signal that generate such a small volume when using Eq. (1). Additionally, the total volume is estimated over the event duration, and for an automatic volume estimation (like the method presented in Schimmel et al., 2018) such event duration is defined by the detection method itself. For example, the amplitude thresholds for the detection criteria also has an influence on the event duration and thus on the total volume estimation.

Nonetheless, adopting such a physically sound empirical model, a near-real-time estimate of debris flow surges is possible. However, this volume estimation becomes available only at the end of the surge. This means that the final volume estimation would be provided too late to inform civil protection managers about the flow volume. Therefore, this method is still quite far from the goal of having an accurate real-time volume estimation to be implemented in early

Table 3. Errors in the volume prediction for the Illgraben test dataset.

| Event date | Observed vol. (m ³) | Predicted vol. with Eq. (1) (m ³) | Error Eq. (1) | Predicted vol. with scaled A (m ³) | Error scaled A | Notes |
|------------|---------------------------------|---|---------------|--|----------------|----------------------------|
| 22.07.15 | 8700 | 7866 | 10 % | 8167 | 6 % | |
| 10.08.15 | 6100 | 24 208 | −297 % | 24 667 | −304 % | high flow velocity |
| 14.08.15 | 25 000 | 11 907 | 52 % | 12 247 | 51 % | |
| 15.08.15 | 2000 | 7503 | −275 % | 7800 | −290 % | smallest event |
| 12.07.16 | 10 000 | 13 148 | −31 % | 13 500 | −35 % | |
| 12.07.16 | 60 000 | 10 933 | 82 % | 11 263 | 81 % | liquid front, viscous tail |
| 22.07.16 | 11 000 | 16 414 | −49 % | 16 798 | −53 % | |
| 09.08.16 | 9000 | 7739 | 14 % | 8038 | 11 % | |
| 29.05.17 | 70 000 | 57 544 | 18 % | 58 324 | 17 % | |
| 04.06.17 | 24 000 | 20 344 | 15 % | 20 765 | 13 % | |
| 14.06.17 | 33 000 | 27 498 | 17 % | 27 988 | 15 % | |

warning systems. Nonetheless, a rapid estimate of the order of magnitude of the debris flow volume would become available, which could be used by local authorities for managing the debris flow event, e.g., by organizing clearing of retention basins, bridges, and roads.

We highlight again that our method is based on seismic data gathered in the near field, i.e., geophone stations located along the channel. For such a volume estimation, small differences in the distance from sensor to channel are negligible compared to uncertainties descending from the variability of flow properties. Indeed, the distances from sensor to channel for the different sites are 15 m at Lattenbach, 23 m at Gadria, 25 m at Cancia, and 15 m at Illgraben. We then applied a simple empirical relation to model the decay of the seismic amplitude with distance:

$$A(d) = A e^{-\pi f d / Q v_u}, \tag{2}$$

where d is the distance from sensor to channel in meters. We used a value of quality factor of $Q = 20$ suggested as a reasonable approximation for the relatively high frequencies and shallow depths of interest (Tsai et al., 2012) and a reference value for group velocity (v_u) of 1300 ms^{-1} (Coviello et al., 2019). An additional approximation was needed to apply the formula using aggregated values of amplitude recorded with different sampling rates and recording frequencies (Table 1). We assumed that fronts of the different surges are the dominant sources of the seismic signal during the respective time window. This assumption is consistent with our approach of calculating the mean velocity of each surge by means of the cross-correlation technique, which needs to split the entire debris flow signal. We tested values of f ranging from 10 to 20 Hz, typical of the main frequency of debris flows. Higher differences in the scaled amplitude are obtained with the lower-frequency value ($f = 20 \text{ Hz}$), so we used this latter value in the calculation to maximize the uncertainties. Finally, we recalculated the debris flow volumes using a linear regression equation similar to Eq. (1) but based on the square of the scaled amplitudes (Fig. 8). Results clearly show how

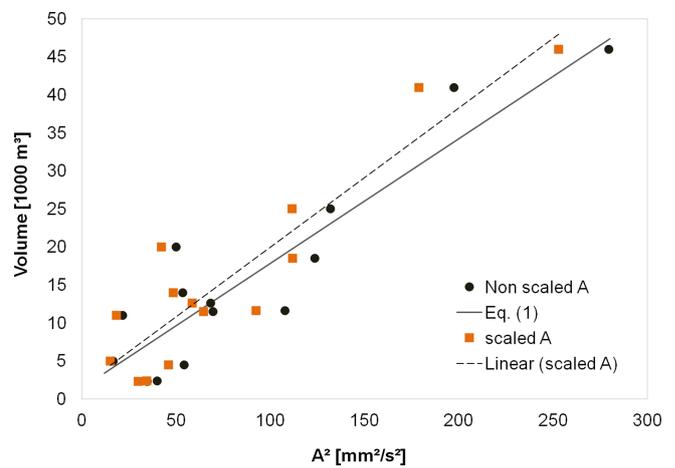


Figure 8. Comparison of the relationship between debris flow volumes vs. scaled and non-scaled seismic amplitudes.

the differences in the calculated volumes with the non-scaled and the scaled amplitude equations are negligible (Table 3).

Studies of different events also showed a large dependency of the seismic amplitudes and their frequency spectrum on the velocity of the debris flow. For example, Lai et al. (2018) proposed a model where the seismic amplitudes are most sensitive to the product of four physical parameters related to the debris flow: length and width of the boulder snout, grain size cubed, and average speed cubed. This model and also the model presented by Farin et al. (2019) show that a method including the estimation of the debris flow velocity and grain size distribution can result in a more accurate calculation of debris flow volume. The influence of the sediment concentration on the seismic data can therefore improve the results of the volume estimation, but there is still no method to automatically estimate the sediment concentration on seismic data, which could be implemented in the volume estimation. Currently it is only possible to differ between debris flow and debris floods based on the infrasound or seismic peak

frequencies (e.g., Hübl et al., 2013), but this still poses large uncertainties and is far from providing reliable estimation of sediment concentration.

5 Conclusions

This work shows that important differences can be observed in the debris flow velocity estimation among the different sensor setups at the different catchments. The optimal distance between the sensors, the best sample rate for cross-correlation, or the analyzed frequency range has an important influence of the quality of the results. The presented approach with a cross-correlation window length adapted to the signal waveform improves velocity estimation over the entire debris flow duration (from fast initial stages to smoother flows).

The estimation of the debris flow volume based on seismic data is still an open problem as theoretical models are still affected by large uncertainties. Starting from the relation between kinetic and seismic energy, our results show that the order of magnitude of debris flow volumes can be correctly estimated from seismic data only, by adopting a linear model based on the squares of the seismic amplitude. However, improvements are necessary for an automatic volume identification usable for a warning system. In fact, flow velocity and the sediment concentration also have a large influence on the seismic amplitudes of a debris flow, so including them in the volume estimation could lead to more accurate results.

Data availability. The debris flow waveforms gathered at Gadria and Lattenbach are available through the Exotic Seismic Events Catalog (<https://ds.iris.edu/ds/products/esecl/>, Bahavar et al., 2019).

Supplement. The supplement related to this article is available online at: <https://doi.org/10.5194/nhess-22-1955-2022-supplement>.

Author contributions. AS proposed the idea and analyzed the data. VC contributed to the paper writing and the figure preparation and provided data from the Gadria test site. FC supervised the research work. All authors participated in the organization and discussion of results.

Competing interests. The contact author has declared that neither they nor their co-authors have any competing interests.

Disclaimer. Publisher's note: Copernicus Publications remains neutral with regard to jurisdictional claims in published maps and institutional affiliations.

Acknowledgements. We thank Johannes Hübl (Institute of Mountain Risk Engineering, University of Natural Resources and Life Sciences, Vienna) for contributing data from the Lattenbach test site, Pierpaolo Macconi (Civil Protection Agency, Autonomous Province of Bozen/Bolzano) for providing data collected by the Gadria station, and Matteo Cesca (Regional Department for Land Safety, Hydrogeological Services Center, ARPA Veneto) for data relative to the Cancia site. Lorenzo Marchi, Marco Cavalli, Massimo Arattano, and Stefano Crema (CNR IRPI) are acknowledged for debris flow volume estimations in the Gadria basin. Publication fees have been covered by Comiti's personal fund provided by the Free University of Bozen-Bolzano.

Financial support. Andreas Schimmel has been supported by the "Accordo di collaborazione tecnico-scientifica ex Art. 15 della L.241/90 e S.M.I. per la definizione delle soglie di allarme e le conseguenti logiche di funzionamento del sistema di monitoraggio e allarme della colata detritica di Cancia in Borca di Cadore" led by CNR-IRPI Padova in collaboration with the Free University of Bozen-Bolzano and the University of Padua. Andreas Schimmel has been also funded by Niederösterreichischen Wirtschafts- und Tourismusfonds, F&E project "Automatische Identifikation alpiner Massenbewegungen" (grant no. WST3-F-5033340/001-2020).

Review statement. This paper was edited by Yves Bühler and reviewed by Fabian Walter and two anonymous referees.

References

- Allstadt, K. E., Lockhart, A. B., McBride, S. K., Kean, J. W., Iverson, R. M., Logan, M., Smith, J. B., Tsai, V. C., and George, D.: Overcoming barriers to progress in seismic monitoring and characterization of debris flows and lahars, in 7th International Conference on Debris-Flow Hazards Mitigation, Golden, CO (USA), Colorado School of Mines, 10–13 June 2019, <https://doi.org/10.25676/11124/173234>, 2019.
- Andrade, S. D., Almeida, S., and Saltos, E.: A simple and general methodology to calibrate seismic instruments for debris flow quantification: application to Cotopaxi and Tungurahua volcanoes (Ecuador), *Landslides* 19, 747–759, <https://doi.org/10.1007/s10346-021-01784-5>, 2022.
- Arattano, M. and Marchi, L.: Measurements of debris flow velocity through cross-correlation of instrumentation data, *Nat. Hazards Earth Syst. Sci.*, 5, 137–142, <https://doi.org/10.5194/nhess-5-137-2005>, 2005.
- Arattano, M., Marchi, L., and Cavalli, M.: Analysis of debris-flow recordings in an instrumented basin: confirmations and new findings, *Nat. Hazards Earth Syst. Sci.*, 12, 679–686, <https://doi.org/10.5194/nhess-12-679-2012>, 2012.
- Arattano, M., Abancó, C., Coviello, V., and Hürlimann, M.: Processing the ground vibration signal produced by debris flows: The methods of amplitude and impulses compared, *Comput. Geosci.*, 73, 17–27, <https://doi.org/10.1016/j.cageo.2014.08.005>, 2014.
- Bahavar, M., Allstadt, K. E., Van Fossen, M., Malone, S. D., and Trabant, C.: Exotic seismic events catalog

- (ESEC) data product, *Seismol. Res. Lett.*, 90, 1355–1363, <https://doi.org/10.1785/0220180402>, 2019 (data available at: <https://ds.iris.edu/ds/products/esecc/>, last access: 20 May 2022).
- Burtin, A., Hovius, N., and Turowski, J. M.: Seismic monitoring of torrential and fluvial processes, *Earth Surf. Dynam.*, 4, 285–307, 2016.
- Cavalli, M., Crema, S., Coviello, V., Marchi, L., Gregoretti, C., Schimmel, A., Comiti, F., and Pasuto, A.: Accordo di collaborazione tecnico-scientifica ex Art. 15 della L. 241/90 e S.M.I. per la definizione delle soglie di allarme e le conseguenti logiche di funzionamento del sistema di monitoraggio e allarme della colata detritica di Cancia in Borca di Cadore. Seconda relazione tecnica (revisione 01), ARPAV, CNR IRPI, Università di Padova-TeSAF, Libera Università di Bolzano, 101 pp., 2021.
- Coviello, V., Capra, L., Vázquez, R., and Márquez-Ramírez, V. H.: Seismic characterization of hyperconcentrated flows in a volcanic environment, *Earth Surf. Proc. Land.*, 43, 2219–2231, <https://doi.org/10.1002/esp.4387>, 2018.
- Coviello, V., Arattano, M., Comiti, F., Macconi, P., and Marchi, L.: Seismic characterization of debris Flows: Insights into energy radiation and implications for warning, *J. Geophys. Res.-Earth*, 124, 1440–1463, <https://doi.org/10.1029/2018JF004683>, 2019.
- Coviello, V., Theule, J. I., Crema, S., Arattano, M., Comiti, F., Cavalli, M., Lucia, A., Macconi, P., and Marchi, L.: Combining instrumental monitoring and high-resolution topography for estimating sediment yield in a debris-flow catchment, *Environ. Eng. Geosci.*, 27, 95–111, 2021.
- Farin, M., Tsai, V. C., Lamb, M. P., and Allstadt, K. E.: A physical model of the high-frequency seismic signal generated by debris flows, *Earth Surf. Proc. Land.*, 44, 2529–2543, 2019.
- Gregoretti, C., Stancanelli, L. M., Bernard, M., Boreggio, M., Degetto, M., and Lanzoni, S.: Relevance of erosion processes when modelling in-channel gravel debris flows for efficient hazard assessment, *J. Hydrol.*, 568, 575–591, <https://doi.org/10.1016/J.Jhydrol.2018.10.001>, 2019.
- Havens, S., Marshall, H.-P., Johnson, J.B., and Nicholson, B.: Calculating the velocity of a fast-moving snow avalanche using an infrasound array, *Geophys. Res. Lett.*, 41, 6191–6198, <https://doi.org/10.1002/2014GL061254>, 2014.
- Hibert, C., Malet, J.-P., Bourrier, F., Provost, F., Berger, F., Bornemann, P., Tardif, P., and Mermin, E.: Single-block rockfall dynamics inferred from seismic signal analysis, *Earth Surf. Dynam.*, 5, 283–292, <https://doi.org/10.5194/esurf-5-283-2017>, 2017.
- Hsu, L., Finnegan, N. J., and Brodsky, E. E.: A seismic signature of river bedload transport during storm events, *Geophys. Res. Lett.* 2011, 38, L13407, <https://doi.org/10.1029/2011GL047759>, 2011.
- Hübl, J. and Moser, M.: Risk Management in Lattenbach: a case study from Austria, edited by: Lorenzini, G., Brebbia, C. A., and Emmanoueloudis, D. E., *Monitoring, Simulation, Prevention and Remediation of Dense and Debris Flows*, WIT Press, Southampton, 333–342, ISBN 1-84564-169-8, 2006.
- Hübl, J., Schimmel, A., Kogelnig, A., Suriñach, E., Vilajosana, I., and McArdell, B. W.: A review on acoustic monitoring of debris flow, *International Journal of Safety and Security Engineering*, 3, 105–115, ISSN 2041-9031, <http://www.witpress.com/elibrary/sse-volumes/3/2/716> (last access: 1 December 2020), 2013.
- Hürlimann, M., Coviello, V., Bel, C., Guo, X., Berti, M., Graf, C., Hübl, J., Miyata, S., Smith, J. B., and Yin, H. Y.: Debris-flow monitoring and warning: Review and examples, *Earth-Sci. Rev.*, 199, 102981, <https://doi.org/10.1016/j.earscirev.2019.102981>, 2019.
- Kean, J., Coe, J., Coviello, V., Smith, J., McCoy, S. W., and Arattano, M.: Estimating rates of debris flow entrainment from ground vibrations, *Geophys. Res. Lett.*, 42, 6365–6372, <https://doi.org/10.1002/2015GL064811>, 2015.
- Koschuch, R., Jocham, P., and Hübl, J.: One Year Use of High-Frequency RADAR Technology in Alpine Mass Movement Monitoring, Principles and Performance for Torrential Activities, *Engineering Geology for Society and Territory*, 1st Edition, Chap. 14, 3, 69–72, 2015.
- Lai, V. H., Tsai, V. C., Lamb, M. P., Ulizio, T. P., and Beer, A. R.: The seismic signature of debris flows: Flow mechanics and early warning at Montecito, California, *Geophys. Res. Lett.*, 45, 5528–5535, <https://doi.org/10.1029/2018GL077683>, 2018.
- Le Roy, G., Helmstetter, A., Amitrano, D., Guyoton, F., and Le Roux-mallouf, R.: Seismic analysis of the detachment and impact phases of a rockfall and application for estimating rockfall volume and free-fall height, *J. Geophys. Res.-Earth*, 124, 2602–2622, <https://doi.org/10.1029/2019JF004999>, 2019.
- MAMODIS: Mass Movement Detection and Identification System, system platform, <http://mamodis.ddns.net/>, last access: 15 May 2022.
- Manconi, A., Picozzi, M., Coviello, V., De Santis, F., and Elia, L.: Real-time detection, location, and characterization of rockslides using broadband regional seismic networks, *Geophys. Res. Lett.*, 43, 6960–6967, <https://doi.org/10.1002/2016GL069572>, 2016.
- Marchetti, E., Ripepe, M., Ulivieri, G., and Kogelnig, A.: Infrasound array criteria for automatic detection and front velocity estimation of snow avalanches: towards a real-time early-warning system, *Nat. Hazards Earth Syst. Sci.*, 15, 2545–2555, <https://doi.org/10.5194/nhess-15-2545-2015>, 2015.
- Marchetti, E., Walter, F., Barfucci, G., Genco, R., Wenner, M., Ripepe, M., McArdell, B., and Price, C.: Infrasound array analysis of debris flow activity and implication for early warning, *J. Geophys. Res.-Earth*, 124, 567–587, 2019.
- Pérez-Guillén, C., Tsunematsu, K., Nishimura, K., and Issler, D.: Seismic location and tracking of snow avalanches and slush flows on Mt. Fuji, Japan, *Earth Surf. Dynam.*, 7, 989–1007, <https://doi.org/10.5194/esurf-7-989-2019>, 2019.
- Simoni, A., Bernard, M., Berti, M., Boreggio, M., Lanzoni, S., Stancanelli, L. M., and Gregoretti, C.: Runoff-generated debris flows: Observation of initiation conditions and erosion-deposition dynamics along the channel at Cancia (Eastern Italian Alps), *Earth Surf. Proc. Land.*, 45, 3556–3571, <https://doi.org/10.1002/esp.4981>, 2020.
- Schimmel, A. and Hübl, J.: Automatic detection of debris flows and debris floods based on a combination of infrasound and seismic signals, *Landslides*, 13, 1181–1196, <https://doi.org/10.1007/s10346-015-0640-z>, 2016.
- Schimmel, A., Hübl, J., McArdell, B., and Walter, F.: Automatic identification of alpine mass movements by a combination of seismic and infrasound sensors, *Sensors*, 18, 1658, <https://doi.org/10.3390/s18051658>, 2018.
- Takezawa, N., Yanagimachi, T., Yamakoshi, T., Tamura, K., Suwa, H., and Kanno, T.: Estimation of frontal velocity of debris flows

- by monitoring the amplification rate of seismic wave, Congress Interpraevement, Taipei, Taiwan, 26–30 April 2010, 920–928, 2010.
- Theule, J. I., Crema, S., Marchi, L., Cavalli, M., and Comiti, F.: Exploiting LSPIV to assess debris-flow velocities in the field, *Nat. Hazards Earth Syst. Sci.*, 18, 1–13, <https://doi.org/10.5194/nhess-18-1-2018>, 2018.
- Tsai, V. C., Minchew, B., Lamb, M. P., and Ampuero, J.P.: A physical model for seismic noise generation from sediment transport in rivers, *Geophys. Res. Lett.*, 39, L02404, <https://doi.org/10.1029/2011GL050255>, 2012.
- Ulivieri, G., Marchetti, E., Ripepe, M., Chiambretti, I., and Segor, V.: Infrasonic monitoring of snow avalanches in the Alps, Proceedings International Snow Science Workshop 2012, Anchorage, Alaska, 16–21 September 2012, 723–728, <https://arc.lib.montana.edu/snow-science/item/1634> (last access: 24 May 2022), 2012.
- Walsh, B., Jolly, A., and Procter, J.: Seismic analysis of the 13 October 2012 Te Maari, New Zealand, lake breakout lahar: Insights into flow dynamics and the implications on mass flow monitoring, *J. Volcanol. Geoth. Res.*, 324, 144–155, <https://doi.org/10.1016/j.jvolgeores.2016.06.004>, 2016.
- Walter, F., Burtin, A., McArdell, B. W., Hovius, N., Weder, B., and Turowski, J. M.: Testing seismic amplitude source location for fast debris-flow detection at Illgraben, Switzerland, *Nat. Hazards Earth Syst. Sci.*, 17, 939–955, <https://doi.org/10.5194/nhess-17-939-2017>, 2017.
- Zhang, S., Hong, Y., and Yu, B.: Detecting infrasound emission of debris flow for warning purpose, 10. Congress Interpraevement, Riva del Garda, Italy, 24–27 May 2004, 359–364, 2004.