



The 27 May 1937
catastrophic flow
failure, México

J. L. Macías et al.

This discussion paper is/has been under review for the journal Natural Hazards and Earth System Sciences (NHESD). Please refer to the corresponding final paper in NHESD if available.

The 27 May 1937 catastrophic flow failure of gold tailings at Tlalpujahua, Michoacán, México

J. L. Macías¹, P. Corona-Chávez², J. M. Sánchez-Núñez³, M. Martínez-Medina^{4,5}, V. H. Garduño-Monroy², F. García-Tenorio¹, and G. Cisneros-Máximo¹

¹Instituto de Geofísica, Unidad Michoacán, Universidad Nacional Autónoma de México Campus-Morelia, Morelia, 58090, Michoacán, México

²Instituto de Investigaciones en Ciencias de la Tierra, Universidad Michoacana de San Nicolás de Hidalgo, Morelia, 58040, Michoacán, México

³Instituto Politécnico Nacional-CIEMAD, Miguel Othón de Mendizabal s/n, Col. La Escalera, 07320, Del. Gustavo A. Madero, México D.F.

⁴Maestría en Geociencias y Planificación del Territorio, Universidad Michoacana de San Nicolás de Hidalgo, Morelia, 58040, Michoacán, México

⁵Instituto Nacional de Estadística Geografía e Informática, Centro de Información Michoacán, 58130, Morelia, 58040, Michoacán, México

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)



[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



Received: 16 June 2014 – Accepted: 6 July 2014 – Published: 20 August 2014

Correspondence to: J. L. Macías (macias@geofisica.unam.mx)

Published by Copernicus Publications on behalf of the European Geosciences Union.

NHESSD

2, 5361–5399, 2014

The 27 May 1937 catastrophic flow failure, México

J. L. Macías et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Abstract

On 27 May 1937, after one week of sustained heavy rainfall, a voluminous flood caused the death of at least 300 people and the destruction of the historic El Carmen church and several neighborhoods in the mining region of Tlalpujahua, Michoacán, central Mexico. This destructive flood was triggered by the breaching of the impoundment of the Los Cedros tailings and the sudden release of 16 Mt of water-saturated waste materials. The muddy silty flood, moving at estimated speeds of 20–25 m s⁻¹, was channeled along the Dos Estrellas and Tlalpujahua drainages and devastated everything along its flow path. After advancing 2.5 km downstream, the flood slammed into El Carmen church and surrounding houses at estimated speeds of ~7 m s⁻¹, destroying many of construction walls and covering the church floor with ~2 m of mud and debris.

Eyewitness accounts and newspaper articles, together with analysis of archived photographic materials, indicated that the flood consisted of three muddy pulses. This interpretation is confirmed and extended by the results of our geological investigations during 2013 and 2014. Stratigraphic relations and granulometric data for selected proximal and distal samples show that the flood behaved as a hyperconcentrated flow along most of its trajectory. Even though premonitory signs of possible impoundment failure were reported days before the flood, and people living downstream were alerted, authorities ordered no evacuations or other mitigative actions. The catastrophic flood at Tlalpujahua provides a well-documented, though tragic, example of impoundment breaching of a tailings dam caused by the combined effects of intense rainfall, dam weakness, and inadequate emergency-management protocols – unfortunately an all too common case-scenario for most of the world's mining regions.

1 Introduction

“Tailings” is the general term for milled waste materials from processing of ore that are successively accumulated during the course of mining activities (Rico et al., 2008).

NHESSD

2, 5361–5399, 2014

The 27 May 1937 catastrophic flow failure, México

J. L. Macías et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



The 27 May 1937 catastrophic flow failure, México

J. L. Macías et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Such tailings are usually accumulated upstream/downstream valleys or ring impoundments and, in all cases, these are retained by an outer dam wall or dyke generally made of wood (Klohn, 1972; Blight, 1997; Sammarco, 2004; Blight and Fourie, 2003). As summarized by Blight and Fourie (2003), if for any reason the dam wall breaks, there is the danger that the settled tailings can escape the impoundment, causing mass movements and/or a flow failure, which commonly results in serious socio-economic and environmental consequences. Several dam failures have occurred during the past century, with key examples studied in South Africa (Blight et al., 1981; Van Niekerk and Vlijoen, 2005), Spain (Ayala-Carcedo, 2004; Gens and Alonso, 2006), Italy (Genevois and Tecca, 1993; Chandler and Tosatti, 1995; Berti et al., 1997), and Chile (Dobry and Alvarez, 1967). Sammarco (2004) grouped dam breakouts into two categories: (i) failures in which water flows over the tailings causing erosion and transportation of the material progressively deposited downstream (overtopping) and, (ii) failures in which liquefaction of the tailings and/or breakout of the dam produces a highly hazardous flow that rushes downhill. Blight and Fourie (2003) documented different types of dam failures from mine tailings and municipal dumps by analyzing a database of 184 cases (US National Committee on Large Dams, 1994). These authors documented at least 22 failures over a period of 72 years (1928 to 2000) that caused 1400 casualties. Rico et al. (2008) documented 147 cases worldwide of dam tailings failures triggered by 16 different factors, including: management operations, seismic liquefaction, rise of the phreatic surface, mass movement slope instability, fluvial undermining, inadequate/insufficient beach or free board, piping/seepage, dam overtopping/overflow, foundation failure, water level rise, snowmelt, inadequate decant pipe construction, unusual rainfall event/period, insufficient perviousness of filter drain, mine subsidence, and structural failure. However, the most common incidences were caused by unusual rain/snow periods, accounting for as much as 26 % of all factors, or 39 % for a combination of one or two factors. As documented by these authors, breaching floods are usually composed of highly water-saturated oozy sediment, which exhibits a wide range of fluid behavior from debris flows to muddy floodwater (Rico et al., 2008a). Considering

outflow volume vs. runout distance, ~~these~~ authors classify ~~these~~ floods into two categories: (1) floods with high viscosity spilled mine waste, and (2) floods with large volume of water within the tailings dam (70–85 %) related to heavy rains and dam overtopping. Despite all these data, there remains an evident gap between the diversity of the tailings dam characteristics in the world and the relative few studies documenting them, especially for cases in Latin America. Consequently, modern geotechnical, hydrological, and hydraulic studies are critically needed to improve the environmental regulations relevant to safe management of mine wastes.

In this work, we present a ~~very~~ well-documented case study of a dam failure on 27 May 1937, caused by a combination of unusual rainfall and breaching of the tailings impoundment that generated a catastrophic flood in the town of Tlalpujahua, Michoacán, central México. Based on eyewitness accounts, information in printed reports, and ~~past and present~~ photographs, we present ~~herein~~ additional results from detailed field ~~reconnaissance~~ and **selected** laboratory analyses, we were able to reconstruct the flow type, behavior and dynamics downstream as well as its impact to settlements.

2 Background geology and geography

The Mining District El Oro-Tlalpujahua (MDOT) is located within the states of Michoacán and Mexico and is part **of the hydrological basin “Lerma Santiago River”**, region 12 (Fig. 1). In terms of geologic setting, the MDOT is located within the Miocene-Pliocene Trans-Mexican Volcanic Belt (Gómez-Tuena et al., 2007). However, the geological unit that actually hosts the MDOT ore deposits is comprised of Jurassic-Early Cretaceous basement rocks (Silva-Ortiz and Salgado-Soto, 1988; De La Teja Segura, 2000; Centeno-García et al., 2003). Even though MDOT is essentially known as a gold deposit, the mineralization in the district is part of an extensive silver metallogenic province (Ostroumov and Corona Chávez, 1999; Albinson et al., 2001) (Fig. 1). The mineralized structures are hosted in a NW–SE hydrothermal vein system, which has a roughly tabular form, ~ 3.5 km in length and with thicknesses varying from 0.5 to

The 27 May 1937 catastrophic flow failure, México

J. L. Macías et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



33 m. Au-Ag minerals are essentially hypogenic sulphides and sulfosalts associated with a gangue of calcite and quartz (Flores, 1920; Reiniery, 1955).

Geographically, the MDOT lies within a mountainous area, with average elevations of 2600–3000 m and moderately steep slopes of > 16 to 35° . The morphology of the MDOT basin ends abruptly to the north because of the active tectonics of the Morelia-Acambay Graben system. To the East, the MDOT is adjacent to El Oro region, where monogenetic cinder cones coexist with shallow lacustrine basins containing wetlands. The MDOT has humid temperate climate, with summer rainfall averaging 900 mm year^{-1} (CNA, 2013; <http://www.conagua.gob.mx/>; Fig. 2). The driest months are from January to May and November to December with **precipitations under 40 mm**. The region's annual average temperature varies between 12 and 18°C , with the lowest in January (~ 3 – 18°C) and higher temperatures during April and May ($> 22^\circ\text{C}$).

3 Summary of the MDOT development

Industrial mining in Mexico began during the Colonial era, during which the MDOT was known as the “Real de Minas of Tlalpujahua”. During this time, a series of exposed veins were exploited within areas of the present-day cities of El Oro and Tlalpujahua (Fig. 1). During the following centuries (XVI–XX), the mining works were continuous and large, medium, and small mining companies succeeded to create a culture linked to the work of mineral extraction and processing of silver and gold. The largest production period began in the early XIX; since then, the mining activity can be summarized in three periods (Fig. 2): (i) during the first one (1820–1870), the British El Oro Company committed capital and technology towards the rehabilitation of mines that were destroyed or abandoned during the Mexican Independence War, (ii) in the second one (1898–1938) (Table 1), the richest gold veins were discovered under the Cerro Somera and were exploited intensively; and (iii) the third one (1939–1959), when the Mining Co-operative “Las Dos Estrellas” in El Oro and Tlalpujahua and the Commission of Mining Development started operations (Uribe Salas, 2008, 2009). The towns of Tlalpujahua

The 27 May 1937 catastrophic flow failure, México

J. L. Macías et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



(XVI century) and El Oro (XVIII century) became increasingly developed with the construction of the mineral separation and metal-casting plants, roads, shafts or pits to access mineral deposits, and accumulation of dumps and mine tailings (Uribe Salas, 2008) (Fig. 1). Many investigations of mining exploration in the DMOT have been carried out, but there are no published records of industrial mining production since the 1960s. Nonetheless, despite the demise of active mining, the villages of El Oro and Tlalpujahua have survived during recent decades, coexisting with the piles of tailings and archaeological industrial remains. At Tlalpujahua, there is a museum that focuses on the history and the remains of the region's mining past, including a very informative and pleasant tour inside a mine.

4 The Los Cedros tailings dam

On 14 December 1907, the mining company received the authorization to construct a tailings dam by a Federal Agency (Secretaría de Fomento). On 25 January 1908, the company submitted a project plan (involving 33 acres) to the Federal agency and constructed within its property the base of the dam at the Sangría stream at an approximated elevation of 2850 m a.s.l., besides the Los Cedros metallurgical plant and ~ 500 m near the village of Tlalpujahua.

The impoundment began with the construction of a wood retaining wall and during more than three decades, these tailings dam, well-known as “Lamas Los Cedros” considering their proximity with Los Cedros metallurgical plant were associated with the exploitation and generation of mine wastes from the “Las Dos Estrellas” mine (Fig. 3). These tailings filled areas upstream of the gullies of Sangría and Dos Estrellas and drastically modified the morphology of the terrain around the village of Tlalpujahua. Consisting of soft unconsolidated material associated with cyanidation processes, the mass of accumulated tailings was prone to remobilization.

The dam was built with wood to form a rectangular base where mine wastes were deposited after crushing, milling, cyanidation and concentration processes were

The 27 May 1937 catastrophic flow failure, México

J. L. Macías et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



performed. The thickness of the tailings increased rapidly (ca. 35 m thick) to an approximated elevation up to 2875 m and acquired a platform-like form (Fig. 4). From 1908 to 1936, the dam had an approximated volume of 14.7 million t of mine waste (Uribe Salas, 2009; Corona Chávez et al., 2010; Table 1). In 1934, the mine had its largest production (820 603 t, ~ 2 thousand t day⁻¹). By 1935, the mining company was projecting the construction of a new dam, suggesting that Los Cedros dam was already at or near its capacity. However, this new project of the company never materialized.

4.1 Premonitory signs of a catastrophe

Prior to the 27 May catastrophe, dam caretakers had reported cracks and softening of the impoundment surface, but apparently, these reports were considered of no immediate danger (Bernal-Navarro, 2012). However, this author concluded that the base of the impoundment had softened due to the persistent rains and a permanent stream that existed at the base of the gully. In fact, on 26 May, at 5.30 p.m. a ~ 4 t block detached from the lower part of the impoundment leaving a 30 m-wide hole. After this small landslide, mine dam caretakers warned villagers downstream to leave their homes because a large landslide may occur. Unfortunately, only a few paid any attention and this warning went unheeded. That same day, at around 11.20 p.m., another block detached from the impoundment, flooding the road to the Los Cedros metallurgical plant and the Juarez bridge. Intense rain accompanied by lightning persisted throughout the night.

4.2 The 27 May 1937 flood known as “Las Lamas”

At around 5.20 a.m. of 27 May, a large block (6–8 t) of tailings collapsed (Bernal-Navarro, 2012), producing a din followed after a few seconds by a powerful air blast “that we interpreted as an air pressure wave” that flattened trees, fences, and houses. Eyewitnesses described the flood as a muddy to sandy fetid mass that rapidly channeled into, and filled, the stream. The ensuing flood rushed downstream, first hitting the

The 27 May 1937 catastrophic flow failure, México

J. L. Macías et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Los Cedros metallurgical plant (Fig. 5a and b) and then the Trigueros hill. Inhabitants felt the ground shaking caused by the flood impact.

As the flood crashed against Trigueros hill, it diverted into an eastern upstream flood and a western downstream flood. The upstream flood flowed moved eastward to the Los Cedros metallurgical plant a few hundred meters and then it waned and stopped. Instead the downstream flood rapidly transformed into a huge catastrophic wave at least 30 m in depth that swept towards the village of Tlalpujahua and San Jesus del Monte hill that was crowned by a church. Between, Los Cedros Metallurgical plant and San Jesus del Monte hill at least eight neighborhoods were completely destroyed (among which La Cuadrilla, Chinchas Bravas, El Dos, and Las Cabecillas). Unfortunately, no detailed census of these neighborhoods existed; in fact, many people who were oblivious of the happenings at Tlalpujahua were working at the Dos Estrellas mine at the time.

The huge rushing flood uprooted everything along its path as houses, trees, electrical poles, people, and animals were swept away. The electrical poles and wires downed by the flood generated short circuits, producing explosions, lightning, and gases. The explosions burned trees everywhere, initiating short-lived fires. During all this chaos, the windy storm persisted. Some people climbed the hills of Trigueros and San Jesus del Monte to save themselves (Fig. 6). Survivors who that reached these, or lived at higher elevations, described that the flood had the appearance of a fetid lake moving downstream. The muddy flood scoured the outskirts of Tlalpujahua and move around Jesus del Monte hill downstream along the Tlalpujahua River. Eyewitnesses observed roofs, logs, furniture, and plants floating on the flood.

After advancing one kilometer, the flood encountered El Carmen village, including the church, cemetery, and hamlets located along the eastern bank of the river. The flood partly destroyed the structures, buried the church with at least 2.5 m of mud. Some walls of the El Carmen church were destroyed while others withstood the impact of the flood (Fig. 6). One of these intact walls protected the painting of the “Madonna El Carmen” – this was considered as a miracle by the surviving inhabitants. Days after

The 27 May 1937 catastrophic flow failure, México

J. L. Macías et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



the catastrophic flood, inhabitants dug out the undamaged painting and paraded in a religious precession to transport it to the Tlalpujahua Cathedral. Beyond El Carmen Village, the muddy flood did not weakened but continued downstream for several more kilometers, but without encountering any other churches or hamlets. Because the muddy deposits had a whitish to light-gray color, the inhabitants nowadays know it as the “Las Lamas” flood deposit. The flood catastrophe produced a casualty toll of circa 300 people.

5 Mineralogy and chemistry of the tailings

The physical and chemical characteristics of the MDOT tailings were previously studied (Corona Chávez et al., 2010). Most of the tailings have silt to clay textures (Siebe et al., 1996) with a grain-size distribution of silt (< 80 %) and significant variations of clay (7–10 %) and fine sand (7–38 %). pH varies from neutral to slightly alkaline (7.8–8.46) with variable conductivity (predominantly > 800 moh cm⁻¹) which indicates a minor and variable concentration of metals. Mineralogically, the tailings consist of quartz (> 42 %), clay (9–19 %), and calcite (11–12 %). The amounts of opaque minerals vary little (> 2–3 %) and consist of pyrite, argentite, galena, goethite, ilmenite, magnetite, hematite, arsenopyrite, chalcopyrite, and pyrrhotite (Maldonado Villanueva, 2008). The analyzed samples contained abundant silica (56–92 wt. %), aluminum (5–13 wt. %), iron (3–5 wt. %), calcium (2.5–5 wt. %) and potassium (1–2 wt. %) (Corona Chávez et al., 2010). The samples have values that are potentially profitable, with Au 0.6 to 4.4 g t⁻¹ and Ag 1.8–178.3 g t⁻¹. The potentially toxic elements (PTE) show values ranging from: 3.0 to 83.9 ppm for As, 7.4 to 808.6 ppm for Cu, 16.5 to 317.5 ppm for Pb, and 63.8 to 548.2 ppm for Zn. Some of these concentrations exceed the official safe levels established by the Mexican government. Finally, the nature of the tailings with respect to water chemistry anomalies (Nieto Monroy, 2007) is dominated by relatively neutral water and, therefore, the PTE values of the tailings did not seem to generate acid drainage.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



existed at the time of the flooding, it might have had a minimum volume between 0.0019 and 0.0029 km³.

6.2 Description and granulometry

Twenty-two stratigraphic sections were measured of the remnants along the path of the Tailings Flood Deposit (TFD) (Fig. 8). From ten of these sections, we sampled 14 specimens to perform granulometric analyses from -8 to $+12 \phi$ grain-sizes (Fig. 9). The correlation of these sections suggested that the deposit mainly consists of one massive layer. However, at two locations (El Carmen Church TL08 and TL14) three and two beds were described, respectively. At locations between San Jesus del Monte and El Carmen the deposit is soft and loose, but beyond El Carmen church it is partly indurated and contains void spaces in all sections.

The TFD shows a light-gray to whitish color and has a flat planar lower contact and an upper contact grading into the modern soil. It usually overlies a brown to orange paleosol that may contain pottery or other artifacts (site TL13) or over the local green-schist basement (site TL-18) (Fig. 10c). At section TL14, the TFD deposit overlies the 1937 soil, a brown hyperconcentrated flow, a brown paleosol, a debris flow deposit with rounded to angular blocks pieces of broken glass in a coarse sand-matrix, and the underlying schists (Fig. 10a). All this sequence stands beside or atop the remains of an old bridge wall. This stratigraphic column suggests that other historical fluvial debris flows have occurred at Tlalpujahua.

Along its extent, the TFD has variable thicknesses, for instance around 40 cm at section TL-13 (San Jesus del Monte Church), 2.8 m at site TL16 (0.8 km downstream), and 40 cm at the farthest location (TL-23) (Fig. 8). As a whole, the deposit is massive, matrix-supported ($> 56\%$), and composed of sandy to clayey particles (Fig. 9, Table 2). These characteristics indicate that the deposit had an unimodal granulometric distribution with the main mode shifting from 1 to 4 ϕ (Table 2) and good sorting ($0.55\text{--}1.35 \sigma\phi$). The structure, texture, and grain-size characteristics of TFD suggest it corresponds to a hyperconcentrated flow deposit (Fig. 9). In some sections, however,

The 27 May 1937 catastrophic flow failure, México

J. L. Macías et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



The 27 May 1937 catastrophic flow failure, México

J. L. Macías et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



the deposit may contain scattered gravel to boulder-size fragments, as in section TL-01B (up to 40 %) or at section TL-21 (43 %) (Table 2). In these sections, the granulometric distribution of TFD is bimodal, with a coarse mode (-5 to -3ϕ) not shown at other locations, a fine mode ($1.8-4 \phi$) and medium sorting (5.2 to $1.1 \sigma\phi$). The structure, texture, and grain-size characteristics of the deposit at these specific locations allow us to classify them as debris flow deposits.

At site TL13, along the steps of the San Jesus del Monte church, the TFD varies in thickness from 80 cm to 40 cm. It overlies an anthropogenic layer rich in pottery shards, charcoal and other remains, and older debris flow and the basement green schists (Fig. 11).

Site TL01 (remains of the El Carmen Church) exhibits an extraordinary sequence of the TFD made of three different layers (A–C) separated by erosive contacts. The intermediate unit, which is rich in boulder size fragments and church blocks, seems to correlate with the deposit at all other locations (Fig. 12a and b). These layers are light-tan in color, massive, and partly indurated with voids. The lowermost layer A rests on the 1937 El Carmen church floor (Fig. 12b). It is a 40 cm thick and contains sporadic subangular clasts usually smaller than 3 cm set in silty to clayey matrix (~ 95 %).

Layer B (≤ 0.85 cm thick) consists of angular to subangular clasts (30–84 cm in diameter) set in a clayey-silty matrix (80 %). This layer contains stone church blocks, glassware, pottery, bricks, wood chips, and charcoal. Layer C (≤ 60 cm thick) is heterolithic with ignimbrite and metamorphic subangular fragments ranging in size from 1.5 to 6 cm in diameter. The clasts are dispersed in the middle part of the bed within a sandy to silty matrix (70–75 % wt.). The upper portion of layer C grades into the modern soil.

7 Discussion

Mining activity in the MDOT reached its **climax** during the first half of the XX century, when the “Las Dos Estrellas Company” was established. At that time, ≥ 2 mil t of rock

The 27 May 1937 catastrophic flow failure, México

 J. L. Macías et al.

[Title Page](#)
[Abstract](#)
[Introduction](#)
[Conclusions](#)
[References](#)
[Tables](#)
[Figures](#)

[Back](#)
[Close](#)
[Full Screen / Esc](#)
[Printer-friendly Version](#)
[Interactive Discussion](#)


were extracted daily producing alike amounts of waste materials disposed into the tailings. As mentioned previously, the construction of the Los Cedros tailings dam in 1908, and accumulation of waste materials within it, drastically modified the geomorphology and the drainage system around the village of Talpujahuá. The mass of > 2 million t of soft unconsolidated material associated with cyanidation processes was prone to remobilization. Such morphological and hydrological modifications of the landforms were primed for some triggering phenomenon to release a large amount of material in a catastrophic way.

Taking into account all the previous information of the event, the worldwide literature of similar events, ~~and our own research~~, we conclude that several factors combined to produce the terrible flood catastrophe as summarized by Rico et al. (2008a, b). First at all, the impoundment was built upstream, infilling the Dos Estrellas valley and changing the morphology and drainage pattern of the perennial and seasonal streams. Secondly, prior to the breaching of the dam, some people witnessed diverse small landslides caused by softening of the impoundment. This was likely facilitated by seepage of a small stream that flowed at the bottom of the tailings dam (Bernal Navarro, 2012). At that time, the people living downstream were alerted, but the authorities did not evacuate them or took any additional preventive measures. Therefore, a combination of bad management operations and the lack of preventive measures to evacuate people at risk played an important role in the catastrophe, as it has been emphasized by Gipson (2003). These anthropogenic factors compounded the effect of sustained torrential rainfall in the region that saturated and softened the tailings dam material, culminating in the breaching of the impoundment that suddenly released a silty, fetid mass that rapidly transformed into a catastrophic flood. To date, no Mexican regulations exist to prevent the environmental impact of tailings ponds as it has been proposed in other countries several decades ago. Yet, despite recent advances, environmental problems and dam failures continued to occur (East, 2000), even during the past decade (Azam and Li, 2010). For example, the 4 October 2010 dam failure in Hungary released 700 000 m³ of tailings with fatal consequences, underscoring the critical importance to understand,

and possibly to mitigate, these failures. A step forward regarding the study and analyses of dam failures was proposed by Neves Correia et al. (2011) who applied a Failure modes and effects analysis (FMEA) at Cerro do Lobo tailings, Portugal.

7.1 Failure of the Tlalpujahua tailings dam

5 Unfortunately, no local weather stations existed around the MDOT before the failure. The first station (15183-Oro), which became operational in 1972, is relatively close to the Los Cedros metallurgical plant (Fig. 5). This station has a continuous rainfall record from 1972 to 2002, with some small gaps in 1988, 1993, and 1994. By using descriptive statistical methods, Martínez-Medina et al. (2012) concluded that the MDOT showed an average precipitation of 900 mm year^{-1} (904 mm mode and a median of 34 mm). These results resemble the regional rainfall weather (see Fig. 2). However, it is worth noting that, during this period, at least two years had atypical rainfall (exceeding $> 1200 \text{ mm}$). The first is evidently related to the 27 May 1937 catastrophic flow failure and, the second occurred during the 1986 year, when the rainfall exceeded 2000 mm (Fig. 13).
15 Martínez-Medina et al. (2012) argued that return periods for 1800–2100 mm rainfalls occurred every 29 years. On the other hand, there is evidence that atypical rainfall periods have caused other catastrophic debris flows along the Tlalpujahua-Americas stream as it has been attested by at least two historical floods (older than 1937) observed in the stratigraphic record (site TL-14). One of them, had a coarser granulometry than the 1937 flood, and contained broken glass and blocks from an old bridge destroyed by this debris flow suggesting that previous events along the Tlalpujahua-Americas stream have had larger magnitudes. By considering the time recurrence of the most recent extreme rainfall event (in 1986) and the sedimentological record, we may expect that an atypical event may occur in the near future in Tlalpujahua and consequently the risk is still present.
25

The 27 May 1937 catastrophic flow failure, México

J. L. Macías et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



7.2 Reconstruction of events

Eyewitness accounts clearly described the passage of at least two floods on the morning of 27 May 1937. At 5.40 a.m. (Bernal Navarro, 2012). The first landslide from tailings dam caused a huge roar that was suddenly accompanied by an air pressure wave. The roaring noise likely alerted people in Tlalpujahua and spurred them to try to escape. By natural instinct, people in their pajamas or partly nude were seen walking, crawling, and running uphill to Trigueros, Tlalpujahua and to Jesus del Monte Church. It is not clear how many people were able to flee this first flood wave, which was as deep as 20 m around Tlalpujahua. People who managed to save themselves observed the horror of terrified, screaming people being engulfed by the flood and disappearing downstream. Some survivors were able to rescue other people, although they failed in their attempts to either save lives or rescue their belongings, when they were cut off by the flood. **Eyewitnesses mentioned that a woman with her head poking out of the flood was asking for help when another wave of mud dragged her to death.** From such accounts, it is clear that the main devastating flood was followed by several smaller waves and surges.

Based on our reconnaissance fieldwork and the sedimentological analyses of samples collected of the TFD along the Sangria and Dos Estrellas streams and the Tlalpujahua river, **we conclude** that the stratigraphic record shows at least three hyperconcentrated/debris flow deposits associated with the same number of floods. The best exposure of this interpretation is seen at El Carmen church (TL-01). This conclusion was confirmed by the detailed governmental report carried out by an expert who described three flow surges and several other details and facts of the tragedy (Antonio López Portillo, 1937 in Juárez Bobadilla, 2007).

7.3 Flood behavior

As previously discussed, there were at least three flow surges. The first and largest flow originated in the Sangria gully, and the later smaller flows involved sources at the Dos Estrellas stream. Eyewitness accounts, historical photographs, and recent fieldwork

NHESSD

2, 5361–5399, 2014

The 27 May 1937 catastrophic flow failure, México

J. L. Macías et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



helped us to understand the dynamic behavior of the largest flow. The flow was sourced from someplace along the Sangria gully, the initial mass fed by the fine-grained tailings (silt and sand material) and cyanide mixed with water that rapidly rushed down the gully. At ca. 0.7 km from the probable source, the flow initially struck the Los Cedros metallurgical plant and impacted against Trigueros northern side hill scraping ca. 30 m of forest (Fig. 14a).

Velocities of the flow were estimated from runup obstacles aligned perpendicular to the flow by using the simple relationship $v = \sqrt{2gh}$ in which h is the runup height and g is the acceleration due to gravity (Sheridan et al., 2005). High mud marks observed in photographs were about 30 m high, suggesting flow speeds of 25 m s^{-1} . As emphasized by Sheridan et al. (2005) these estimates are considered minimum velocities because this equation does not account for friction. The impact of the flood against Trigueros hill caused its split into a short-lived, less powerful upstream surge that only advanced a few hundred meters and the huge sustained flow wave that rushed downstream towards the village of Tlalpujahua, scouring the old road, trees and tailings from the retaining wall of the dam (Fig. 14b). Unfortunately, several neighborhoods stood downstream and were completely devastated by the flood (Fig. 14c). Pictures of the places and remains of these neighborhoods show the maximum thickness of deposits and the high-water marks suggesting that the wave was moving as an hyperconcentrated flow (ca. 50 % sediment concentration). Downstream, the Tlalpujahua river carved a gully between the outskirts of the Tlalpujahua village and the Jesus del Monte hill that was surrounded by several neighborhoods, including La Cuadrilla, at its base.

The catastrophic flood reached depths of ca. 20 m in this area destroying everything in its path, knocking down all standing things, and scouring the ground to the base of the Jesus del Monte church located at ca. 1.4 km from the flood source (Fig. 14d and e). Eyewitnesses reported that the moving flood was striking the frontal walls of the church to the point of tilting them. The flood reached a maximum elevation of 20 m at the church for estimated speeds of 20 m s^{-1} (60 km h^{-1}). After the Jesus del Monte

The 27 May 1937 catastrophic flow failure, México

J. L. Macías et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



hill the flood was confined within the gully, along which several neighborhoods were located, including El Carmen village.

El Carmen village was very typical of the region because it was perhaps one of the oldest settlements of Tlalpujahua, and it was dedicated to the “Maddona El Carmen” with an historical cemetery behind the church. The flood hit El Carmen village, which is located at 2.4 km from the flood source, at speeds of 7 m s^{-1} (25 km h^{-1}) knocking down the western walls of the church, while the entrance and altar were able to resist the impacts. The flood buried the church with 2.5 m of debris and mud. Behind the church, the flood was able to move and tilt grave markers as they are exposed nowadays. High-mud marks 5 m above the deposit that partially buried the church corroborated that the flood was moving as a hyperconcentrated flow. The flood was able to incorporate chunks of church walls as large as 30 cm. Kinematical structures of the flow suggest that these blocks were suspended and rolled downstream. Beyond this area, there are a lot of scattered remnants of the TFD deposit at several locations as far as 8 km downstream. In all these sections, the tailings deposit appears as a massive hyperconcentrated flow deposit without any signs of dilution into a sediment-laden flow.

8 Conclusions

An extreme rainfall event, which lasted at least five days, triggered the softening, and ultimately, the breaching of the Los Cedros tailings dam at Tlalpujahua, Central Mexico. The tailings dam during 30 years accumulated $> 2 \text{ MT}$ of rock waste milled by cyanidation at Las Dos Estrellas mine. The sudden breaching of the dam generated a muddy flood that moved with hyperconcentrated amount of sediments, destroying several settlements, a church, and killed circa 300 people. This study used historical photographic materials, eyewitness accounts, and data from recent field and laboratory studies to reconstruct the flood behavior with increasing distance from the source. We believe that our results provide a useful insight on such collapses. Worldwide databases of dam

The 27 May 1937 catastrophic flow failure, México

J. L. Macías et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



The 27 May 1937 catastrophic flow failure, México

J. L. Macías et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



failures suggest that a combined effect of rainfall and dam rupture of the dam is the dominant case for nearly 39 % of all cases (Rico et al., 2008). Thus, careful analyses of past catastrophic floods of tailings in inactive and active mining districts must be conducted to collect the knowledge analyzed and considered as a basic knowledge to improve governmental regulations and oversight related to minimize the risks of future hazardous events that may threaten human lives and property.

Authors contribution

All authors, carried fieldwork at Tlalpujahua and participate during manuscript writing. P. Corona, M. Martínez and V. H. Garduño revised the archive data of the mine and resumed local geology and mining activities. J. M. Sánchez analyzed grain size data, F. García performed granulometric analysis, and G. Cisneros managed the GIS database. J. L. Macías prepared the manuscript with contributions from all co-authors.

Acknowledgements. We are grateful to the Museo Tecnológico y Minero del Siglo XIX “Dos Estrellas” for providing us unique oral information and access to its photographic archive of the disaster. We also thank to Remedios Cisneros of the Instituto de Investigaciones Metalúrgicas, Universidad Michoacana de San Nicolas de Hidalgo for the laser analyses of the fine-grained material of samples. We appreciate the comments and suggestion made to this manuscript by Robert I. Tiling.

References

- Albinson, T., Norman, D. I., Cole, D., and Chomiak, B. A.: Controls on formation of low-sulfidation epithermal deposits in Mexico: constraints from fluid inclusion and stable isotope data, *Soc. Eco. Geo. Spc. Pub.*, 8, 1–32, 2001.
- Ayala-Carcedo, F. J.: La rotura de la balsa de residuos mineros de Aznalcóllar (España) de 1998 y el desastre ecológico consecuente del río Guadiamar: causas, efectos y lecciones, *Boletín Geológico y Minero*, 115, 711–738, 2004.

**The 27 May 1937
catastrophic flow
failure, México**

J. L. Macías et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



- Azam, S. and Li, Q.: Tailings dam failures: a review of the last one hundred years, *Geotechnical News*, December, 50–53, 2010.
- Bernal-Navarro, G.: *Notas y Apuntes para la Historia de la Mina Las Dos Estrellas*, APE Editorial, México DF, 80 pp., 2012.
- 5 Berti, M., Genevois, R., and Tecca, P. R.: The 1985 flow slide and debris flow at Stava (Italy), in: *Debris-Flow Hazards Mitigation*, edited by: Chen, C.-L., American Society of Civil Engineers, New York, 309–321, 1997.
- Blight, G. E.: Destructive mudflows as a consequence of tailings dyke failures, *P. I. Civil Eng.*, 125, 9–18, 1997.
- 10 Blight, G. E. and Fourie, A. B.: A review of catastrophic flow failures of deposits of mine waste and municipal refuse, Introductory report of the International Workshop on Occurrence and Mechanisms of Flows in Natural Slopes and Earthfills, IW-FLOWS2003, Sorrento, Italy, 14–16 May 2003, Associazione Geotecnica Italiana (AGI), available at: <http://www.unina2.it/flows2003/flows2003/articoli/articoli.htm>, last access: February, 2003.
- 15 Blight, G. E., Robinson, M. J., and Diering, J. A. C.: The flow of slurry from a breached tailing dam, *Journal of South African Inst. Mining and Metallurgy*, January, 1–8, 1981.
- Centeno-García, E., Corona-Chávez, P., Talavera-Mendoza, O., and Iriondo, A.: Geology and tectonic evolution of the western guerrero terrane: a transect from Puerto Vallarta to Zihuatanejo, in: *Geologic Transects Across Cordilleran Mexico*, Guidebook for the Fieldtrips of the 99th Geological Society of America Cordilleran Section Meeting 1–3 April 2003 and Publicacion Especial del Instituto de Geología y Centro de Geociencias UNAM, México DF, 201–228, 2003.
- 20 Chandler, R. J. and Tosatti, G.: The Stava tailings dam failure, Italy, July 1985, *P. I. Civil Eng.*, 113, 67–79, 1995.
- 25 Comisión Nacional del Agua: available at: <http://www.conagua.gob.mx/>, last access: July 2014.
- Corona Chávez, P., Uribe Salas, J. A., Razo Pérez, N., Martínez Medina, M., Maldonado Villanueva, R., Ramos Arroyo, Y. R., and Robles Camacho, J.: The impact of mining in the regional ecosystem: the mining district of El Oro and Tlalpujahua, Mexico, *De Re Metallica*, 15, 21–33, 2010.
- 30 De la Teja Segura, G.: *Carta Geológico-Minera de Tlalpujahua*, Secretaría de Comercio y Fomento Industrial, Chart and internal report, 65 pp., México, D.F., 2000.
- Dobry, R. and Alvarez, L.: Seismic failures of Chilean tailings dams, *Journal of the Soil Mechanics and Foundation Division*, American Society of Civil Engineers, 94, 237–260, 1967.

**The 27 May 1937
catastrophic flow
failure, México**

J. L. Macías et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



- East, D. R.: Tailings dam failures – why do they continue to occur?, *Min. Eng.-Littleton*, 2, 57–60, 2000.
- Flores, T.: Estudio geológico-minero de los distritos de El Oro y Tlalpujahua, *Boletín del Instituto Geológico de México*, 43, 85 p., 1920.
- 5 Genevois, R. and Tecca, P. R.: The tailings dams of Stava (northern Italy): an analysis of the disaster, in: *Environmental Management. Geo–Water and Engineering Aspects*, edited by: Chowdhury, R. and Sivakumar, M., A. A. Balkema, Rotterdam, 23–38, 1993.
- Gens, A. and Alonso, E. E.: Aznalcóllar dam failure, Part 2: Stability conditions and failure mechanism, *Géotechnique*, 56, 185–201, 2006.
- 10 Gipson, A. H.: Tailings dam failures – the human factor, in: *Tailings and Mine Waste '03*, A. A. Balkema Publishers, Lisse, 451–456, 2003.
- Gómez-Tuena, A., Orozco-Esquivel, M. T., and Ferrari, L.: Igneous petrogenesis of the trans-Mexican volcanic belt, in: *Geology of México: Celebrating the Centenary of the Geological Society of México*, edited by: Alaníz-Álvarez, S. A. and Nieto-Samaniego, Á. F., Geological Society of America Special Paper 422, 129–181, Boulder, Colorado, USA, 2007.
- 15 Juárez Bobadilla, J. A.: Las Lamas, 27 de mayo 1937, *El Despertador Tlalpuhahuense*, available at: <http://tlalpujahua.blogspot.mx/2007/06/las-lamas-27-de-mayo-1937.html> (last access: 13 February 2012), 2007.
- Klohn, W.: *Hidrografía de las Zonas Desérticas de Chile*, Contribución Proyecto CHI-35, Programa de las Naciones Unidas para el Desarrollo, 188 pp., Santiago de Chile, Chile, 1972.
- 20 Maldonado Villanueva, R.: *Caracterización Mineralógica de Fases Minerales Metálicas en Muestras de Jales del Distrito Minero El Oro-Tlalpujahua, México*, Tesis de licenciatura, Universidad Nacional Autónoma de México, Facultad de Ingeniería, 89 pp., 2008.
- Martínez Medina, M., Corona Chávez, P., Ramos Arroyo, Y., Bocco Verdinelli, G., and Martínez Arredondo, J. C.: *Caracterización Hidrográfica del Distrito Minero el Oro y Tlalpujahua: Implicaciones en los Procesos de Erosión y de Remoción de los Residuos Mineros*, Simposio de la cuenca del lago de Cuitzeo, Morelia Mich, 14–16 November, 35–42, 2012.
- 25 Neves Correia dos Santos, R., Maria Mello Saraiva Caldeira, L., and Bilé Serra, J. P.: FMEA of a tailings dam, *Georisk: assessment and Management of Risk for Engineered Systems and Geohazards*, 6, 1–16, doi:10.1080/17499518.2011.615751, 2011.
- 30 Nieto Monroy, A. P.: *Variabilidad Espacial y Temporal de la Hidrogeoquímica de Arroyos del Distrito Minero El Oro-Tlalpujahua*, Tesis de Licenciatura, Universidad de Guanajuato, Guanajuato, 64 pp., 2007.

**The 27 May 1937
catastrophic flow
failure, México**

J. L. Macías et al.

[Title Page](#)
[Abstract](#)
[Introduction](#)
[Conclusions](#)
[References](#)
[Tables](#)
[Figures](#)




[Back](#)
[Close](#)
[Full Screen / Esc](#)
[Printer-friendly Version](#)
[Interactive Discussion](#)


- Ostroumov, M. and Corona-Chávez, P.: Ensayo metalogenético del estado de Michoacán. in: La Carta Geológica del Estado de Michoacán escala 1 : 250 000 en 4 hojas con notas explicativas, 1–27, Morelia, Michoacán, Mexico, 1999.
- Reiniery, E.: Aceituno, Informe geológico de la región auroargentífera de El Oro, México, y Tlalpujahua, Michoacán, México, s/e. Consejo de Recursos Minerales, 56 pp., 1955.
- Rico, M., Benito, G., and Díez-Herrero, A.: Floods from tailings dam failures, J. Hazard. Mater., 154, 79–87, 2008a.
- Rico, M., Benito, G., Salgueiro, A. R., Díez-Herrero, A., and Pereira, H. G.: A review of the European incidents in the worldwide context Reported tailings dam failures, J. Hazard. Mater., 152, 846–852, 2008b.
- Sammarco, O.: A tragic disaster caused by the failure of tailings dams leads to the formation of the Stava 1985 Foundation, Mine Water Environ., 23, 91–95, 2004.
- Sheridan, M. F., Stinton, A. J., Patra, A., Pitman, E. B., Bauer, B., and Nichita, C. C.: Evaluating Titan2D mass-flow model using the 1963 Little Tahoma Peak avalanches, Mount Rainier, Washington, J. Volcanol. Geoth. Res., 139, 89–102, 2005.
- Siebe, C. D., Jahn, R., and Stahr, K.: Manual para la Descripción y Evaluación Ecológica de Suelos en el Campo: chapingo, México, Sociedad Mexicana de la Ciencia del Suelo, A. C., Publicación Especial, 4, 57 pp., 1996.
- Silva Ortiz, I. and Salgado Soto, Z.: Estudio Estratigráfico Estructural en la Región de Tlalpujahua – El Oro, Edos de Mic., Méx. Ed. Instituto Politecnico Nacional, México, DF, 74 pp., 1988.
- Uribe Salas, J. A.: Recuento Histórico Bibliográfico de la Minería en la Región Central de México, Ed. UMSNH, IIH y Departamento de Historia de México, 271 pp., 1994.
- Uribe Salas, J. A.: Historia de la Minería en Michoacán, Volumen II. Ed. UMSNH, Sociedad Mexicana de Mineralogía, Museo Tecnológico del Siglo XIX “Las Dos Estrellas”, Vol. 2, Morevallado Editores, Morelia, Michoacán, 227 pp., 2008.
- Uribe Salas, J. A.: Historia Económica y Social de la Compañía Minera “Las Dos Estrellas” en El Oro y Tlalpujahua, 1898–1959, México, Universidad Autónoma Metropolitana, Universidad Michoacana de San Nicolás de Hidalgo, Morevallado Editores, Morelia, Michoacán, 560 pp., 2009.
- Uribe Salas, J. A.: Notas y Apuntes Para la Historia de la Mina Las Dos Estrellas (1899–1960), Museo Tecnológico Mineo del Siglo XIX, APE Editorial, México DF, 80 pp., 2012.

US National Committee on Large Tailings Dams: Tailings dam incidents, 182 pp., Denver, Colorado, USA, 1994.

Van Niekerk, H. J. and Viljoen, M. J.: Causes and consequences of the Merriespruit and other tailings-dam failures, Land Degrad. Dev. 16, 201–212, 2005.

NHESSD

2, 5361–5399, 2014

The 27 May 1937 catastrophic flow failure, México

J. L. Macías et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Table 1. Summary of extracted metals and amount of waste produced at Talpujahua.

Year	Extracted (t)	Silver (kg)	Gold (kg)	Waste (t)
1900				
1901	22 435	2000	0	20 435
1902	52 722	4700	1000	47 022
1903	67 305	6000	1500	59 805
1904	75 157	6700	2000	66 457
1905	89 740	8000	2000	79 740
1906	131 133	11 690	2321	117 122
1907	325 309	29 000	3227	293 082
1908	432 000	28 127	3075	400 798
1909	341 111	35 000	5000	301 111
1910	424 198	47 685	6530	369 983
1911	479 723	62 627	6775	410 321
1912	505 000	63 000	6000	436 000
1913	673 053	60 000	4000	609 053
1914	245 664	21 900	1000	222 764
1915	191 820	17 100	4000	170 720
1916	229 959	20 500	4300	205 159
1917	463 655	41 333	5200	417 122
1918	482 354	43 000	5000	434 354
1919	509 770	45 444	4000	460 326
1920	504 789	45 000	3300	456 489
1921	503 533	44 888	3000	455 645
1922	473 313	46 675	2750	423 888
1923	493 857	41 966	2699	449 192
1924	533 772	35 428	2548	495 796
1925	665 316	37 024	2805	625 487
1926	632 056	45 627	2096	584 333
1927	752 198	51 132	2351	698 715
1928	693 460	55 850	2328	635 282
1929	693 257	64 461	1914	626 882
1930	676 962	76 425	2034	598 503
1931	593 835	46 447	1856	545 532
1932	786 936	38 385	1812	746 739
1933	821 645	31 702	1585	788 358
1934	829 663	40 111	2416	787 136
1935	777 759	46 339	2138	729 282
1936	717 755	40 000	2000	675 755
1937	628 129	28 452	1258	598 419
1938	589 275	–	–	589 275
1939	761 431	–	–	761 431
1940	772 083	–	–	772 083
1941	758 148	–	–	758 148
1942	759 625	–	1500	758 125
1943	744 709	–	–	744 709
1944	614 713	–	–	614 713
1945	379 183	–	–	379 183
1946	266 073	2676	228	263 169
1947	178 750	–	–	178 750
Total	23 344 333	1 372 394	109 546	21 862 393

NHESD

2, 5361–5399, 2014

The 27 May 1937 catastrophic flow failure, México

J. L. Macías et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



The 27 May 1937 catastrophic flow failure, México

J. L. Macías et al.

Table 2. Granulometric analyses and statistical parameters of samples collected along the tailings flood deposit.

Sample	Gravel ($-8 \phi - -2 \phi$)	Sand ($-1 \phi - 4 \phi$)	Silt ($5 \phi - 8 \phi$)	Clay ($\geq 4 \phi$)	Fines (Silt + Clay)	Matrix ($-1 \phi - 9 \phi$)	Md ϕ	$\sigma \phi$	Skewness	Curtosis
TL-01A	4.2	64.41	27.93	168.98	196.91	95.23	6.2	2.73	-0.21	0.97
TLA-01B	39.67	56.54	2.26	105.59	107.85	59.05	-1.1	2.8	-0.32	0.83
TL-01C	7.06	66.14	23.71	57.11	80.82	91.97	2.12	4.15	-0.38	1.53
TL-13D1	3.39	94.22	2	18.44	20.44	96.39	2.3	0.93	-0.19	1.34
TL-13D2	0	98.96	0.84	19.78	20.62	99.9	2.6	0.55	0.09	1.01
TL-14D	0	96.35	2.98	29.82	32.8	99.65	4.3	0.57	-0.04	0.95
TL-14C	0	97.41	2.08	32.69	34.77	99.73	2.55	0.7	0.07	0.99
TL-15B	0	97.7	2.01	19.3	21.31	99.85	1.75	1.35	0.26	0.8
TL-18	0	89.04	9.26	51.11	60.37	99.11	1.8	0.98	0.38	0.9
TL-19	0	89.3	8.98	36.71	45.69	99.09	2.6	0.75	0.11	1.67
TL-20	0	93.3	5.87	42.42	48.29	99.56	3.15	1.15	-0.48	0.71
TL-21	43.04	50.04	5.9	29.01	34.91	56.38	-6.25	5.23	0.73	0.51
TL-22	7.05	88.9	6.67	39.92	46.59	95.94	2.6	1.05	-0.19	2.41
TL-23	11.16	88.74	0.05	4.81	4.86	88.8	0.95	1.73	-0.3	1.24

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



The 27 May 1937 catastrophic flow failure, México

J. L. Macías et al.

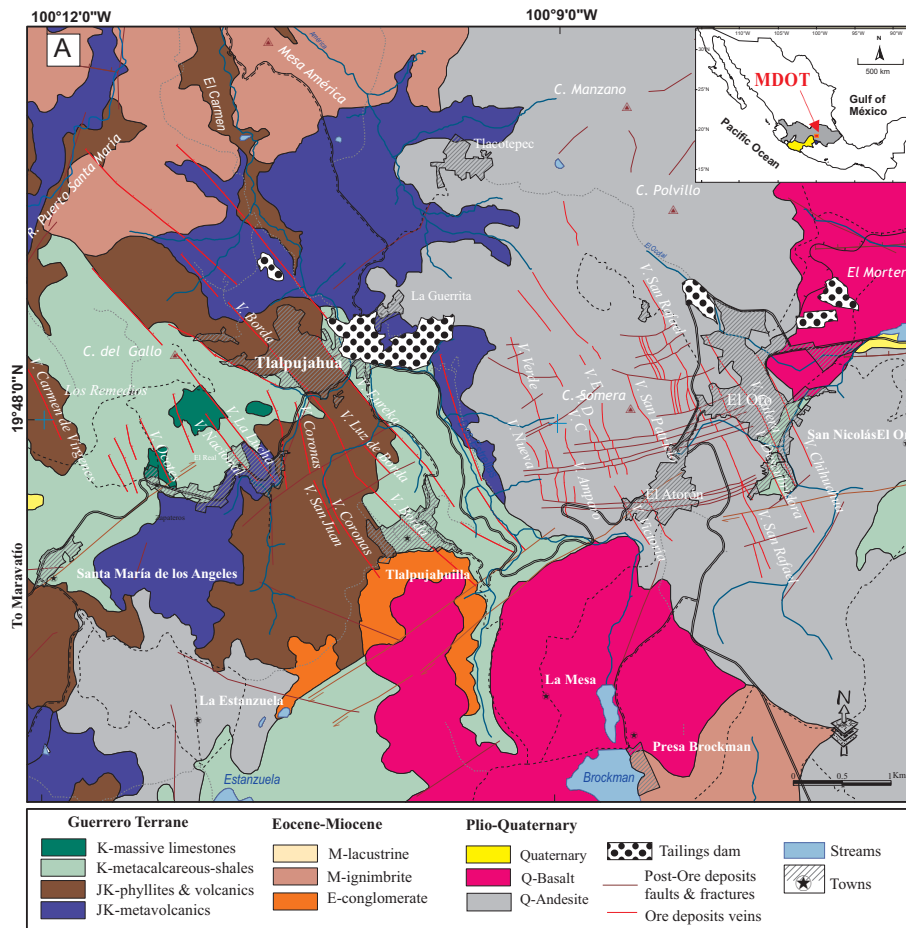


Figure 1. Location of the Mining District of El Oro-Tlalpujahua (MDOT) in Central Mexico (inset), showing the principal rock types, ore veins, and tailings dams. Geological map of the MDOT from Corona-Chavez et al. (2010).



The 27 May 1937 catastrophic flow failure, México

J. L. Macías et al.

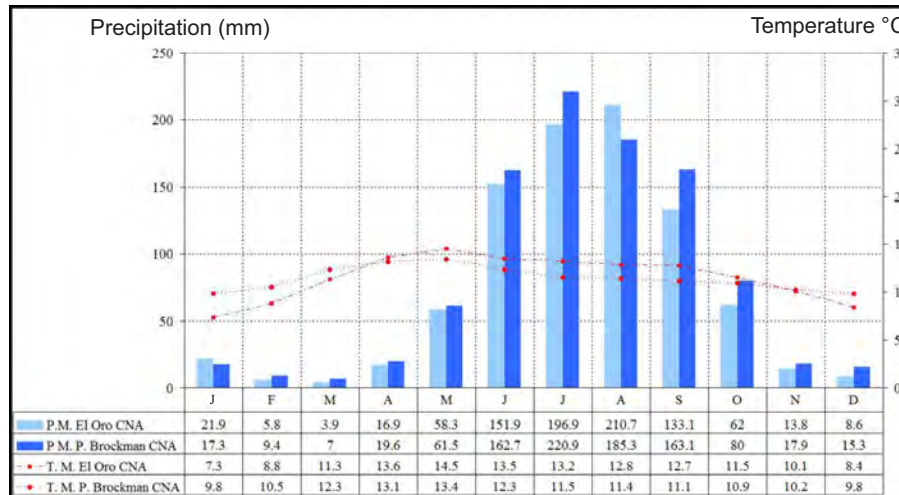


Figure 2. Annual precipitation and temperature data recorded at the meteorological stations at from El Oro (15183) and Presa Brockman (15070) of the Comisión Nacional del Agua (CNA).

[Title Page](#)

[Abstract](#) [Introduction](#)

[Conclusions](#) [References](#)

[Tables](#) [Figures](#)

[◀](#) [▶](#)

[◀](#) [▶](#)

[Back](#) [Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



The 27 May 1937 catastrophic flow failure, México

J. L. Macías et al.

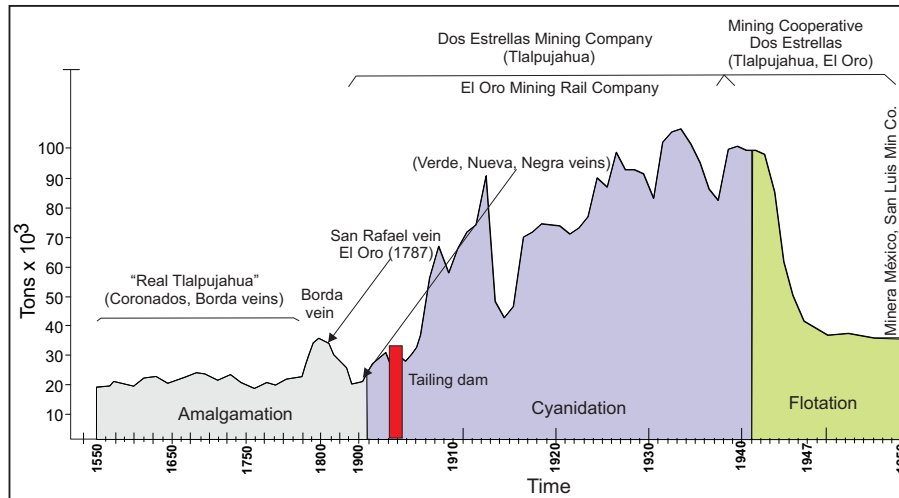


Figure 3. Historical record of the amounts of material extracted by the Mining Company (1898–1938) and Cooperativa Minera “Dos Estrellas” (1939–1959) and the relationships with the metallurgical processes used (after Uribe Salas, 2008).

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



The 27 May 1937 catastrophic flow failure, México

J. L. Macías et al.

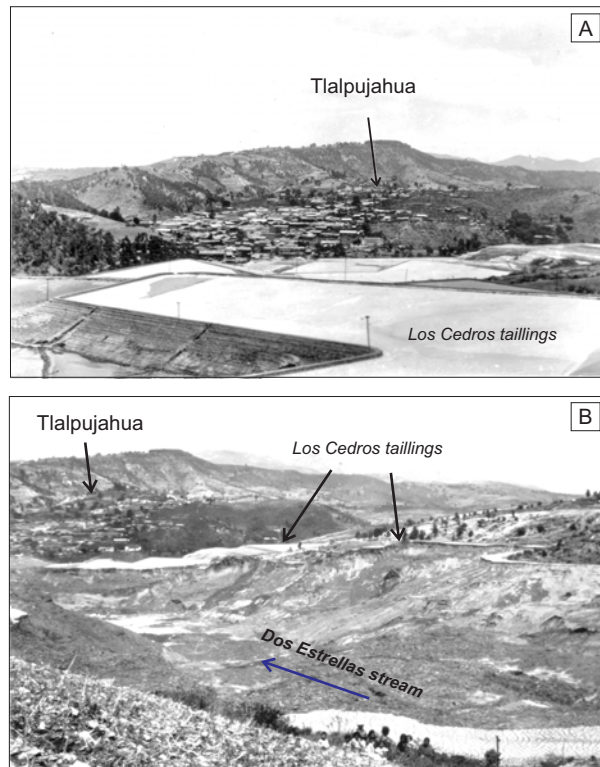


Figure 4. Panoramic views in 1937 from the southeast that show **(A)** Los Cedros tailings dam with a platform-like form prior to the collapse; and **(B)** the tailings and the Dos Estrellas Stream scoured by the flood after the collapse. See people standing on the hill in the foreground.

[Title Page](#)[Abstract](#)[Introduction](#)[Conclusions](#)[References](#)[Tables](#)[Figures](#)[◀](#)[▶](#)[◀](#)[▶](#)[Back](#)[Close](#)[Full Screen / Esc](#)[Printer-friendly Version](#)[Interactive Discussion](#)

NHESSD

2, 5361–5399, 2014

The 27 May 1937 catastrophic flow failure, México

J. L. Macías et al.

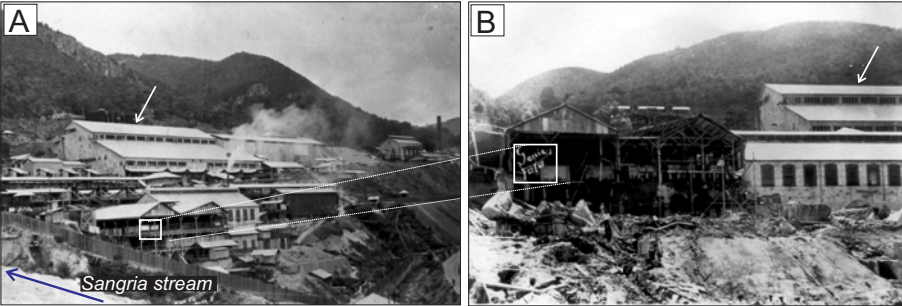


Figure 5. Panoramic view of Los Cedros metallurgical plant of “Las Dos Estrellas” mining company at the Sangria stream, (A) before and (B) after the collapse. The white squares show the same location in both images, and an undisturbed roof of the Metallurgical plant (white arrows).

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



The 27 May 1937 catastrophic flow failure, México

J. L. Macías et al.

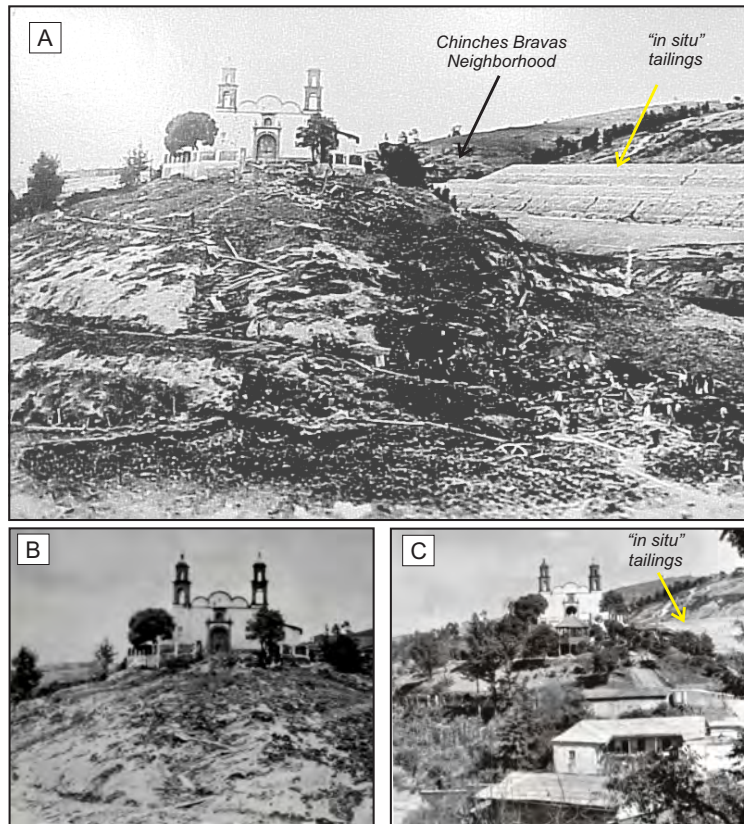


Figure 6. (A) Panoramic and (B) close-up view from the southwest of San Jesus del Monte hill and Church after the 27 May 1937 flood with rubble, and wood planks dispersed on the surface and the striped slopes of the hill. (C) View of the same hill prior to the flood that shows houses on its southern slope.

**The 27 May 1937
catastrophic flow
failure, México**

J. L. Macías et al.

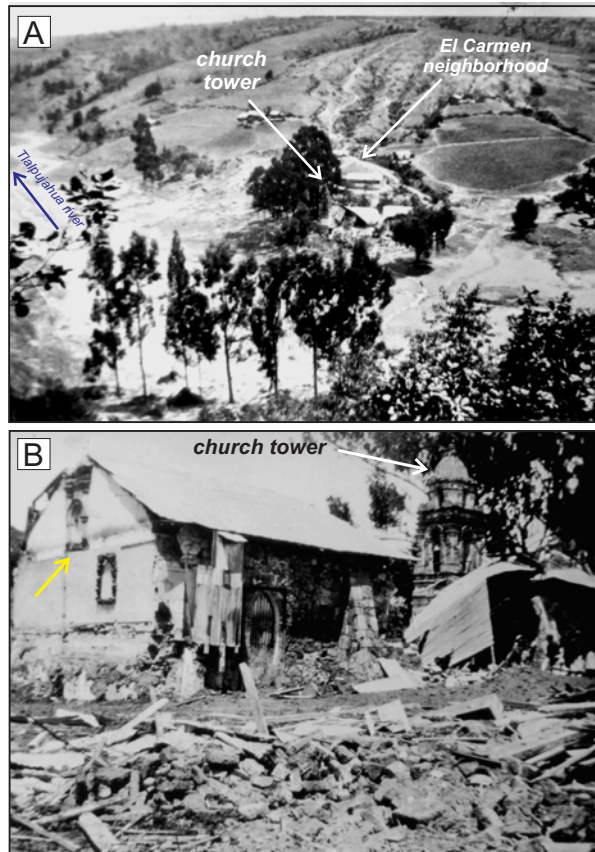


Figure 7. Different views of El Carmen Church after the 1937 flood and extent of the deposit along the Tlalpujahua river (a), and rubble and high-mud marks (yellow arrow) (b).

The 27 May 1937 catastrophic flow failure, México

J. L. Macías et al.

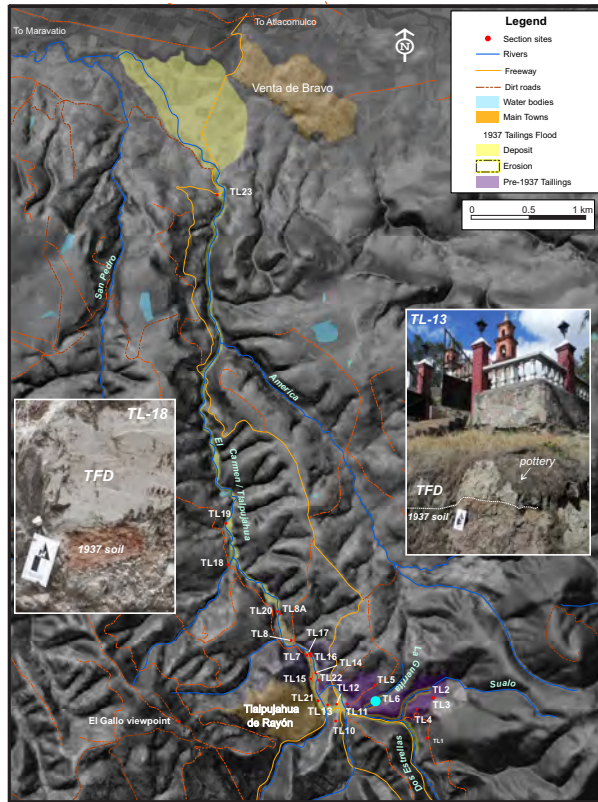


Figure 8. Shaded relief map of the MDOT displaying the location of Tlalpujahuá and Venta de Bravo villages, the extension of Los Cedros tailings in 1937 as well as the present extension of the 1937 flood deposit. Red circles are stratigraphic sections measured during this study.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



The 27 May 1937 catastrophic flow failure, México

J. L. Macías et al.

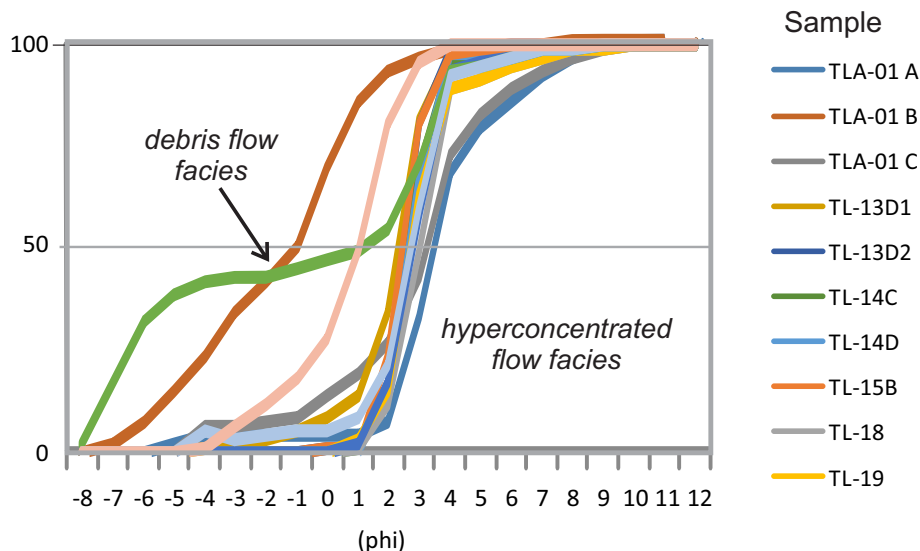


Figure 9. Cumulative curves of the TFD deposit at different distances from the source. Most of the deposits are fine-grained (hyperconcentrated flow deposits) while a few exposures contained boulder and gravel-sized particles set in a silty matrix (debris flow deposits). See Fig. 8 for locations of the samples.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



The 27 May 1937 catastrophic flow failure, México

J. L. Macías et al.

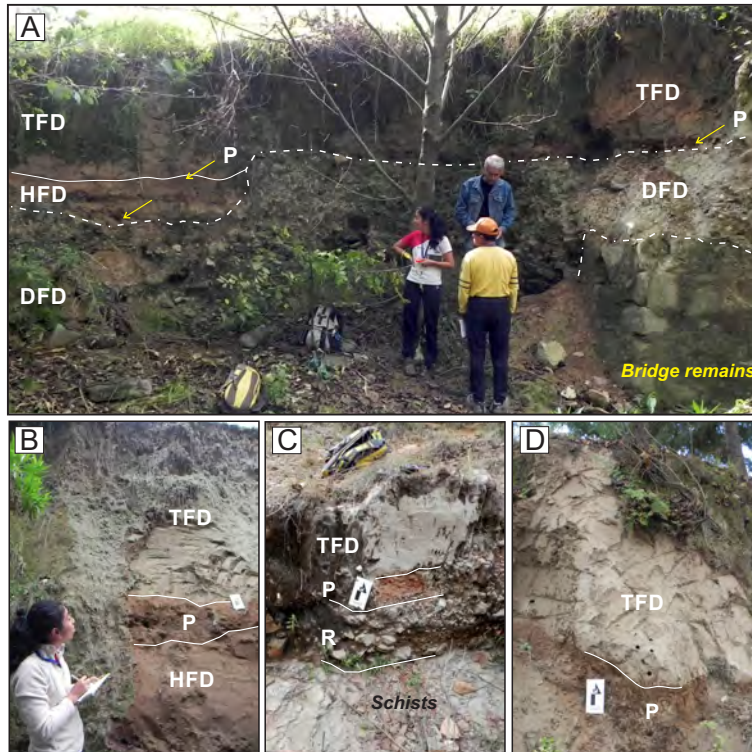


Figure 10. Aspects of the Tailings Flood Deposit (TFD) at three different sections. **(A)** At section TL-14, the TDF rests over a paleosol, a thin hyperconcentrated flood deposit (HFD), another paleosol, and a basal debris flood deposit (DFD) that contains pieces of bottle glass. The DFD forms a paleo-channel that stands against the remains of an old stone bridge. **(B)** View of the TFD at Sect. 17 overlying a paleosol and the lower brown hyperconcentrated flood deposit (HFD) rich in sand-size particles. **(C)** At section TL-18 the TFD overlies a poorly developed paleosol, a reworked bed with gravel-sized fragments and schists from the local basement. **(D)** At section TL-19 the deposits rests directly on top of a thicker paleosol.

[Title Page](#)
[Abstract](#)
[Introduction](#)
[Conclusions](#)
[References](#)
[Tables](#)
[Figures](#)
[⏪](#)
[⏩](#)
[◀](#)
[▶](#)
[Back](#)
[Close](#)
[Full Screen / Esc](#)
[Printer-friendly Version](#)
[Interactive Discussion](#)


The 27 May 1937 catastrophic flow failure, México

J. L. Macías et al.

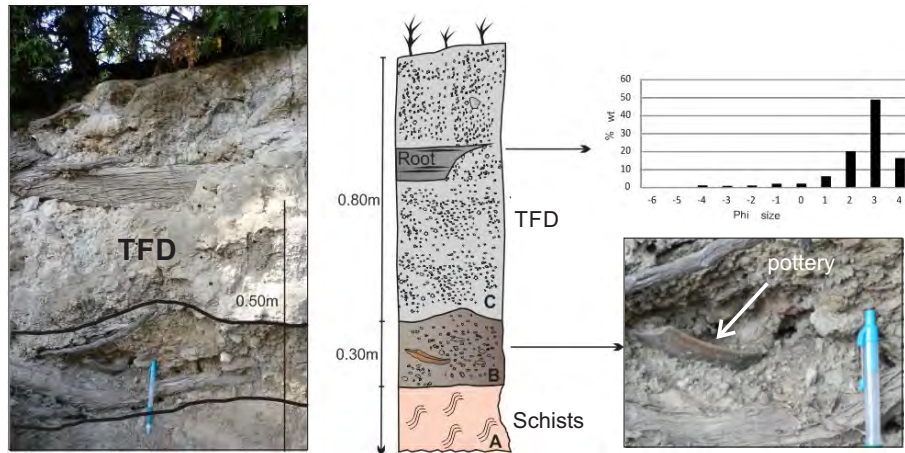


Figure 11. View of section TL13 looking to the west at the steps of San Jesus del Monte Hill. The section shows from the base schists, a debris flow deposit that turns into a pottery rich soil, and the whitish TFD atop grading into the modern soil cover with trees.

Title Page	
Abstract	Introduction
Conclusions	References
Tables	Figures
◀	▶
◀	▶
Back	Close
Full Screen / Esc	
Printer-friendly Version	
Interactive Discussion	



The 27 May 1937 catastrophic flow failure, México

J. L. Macías et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

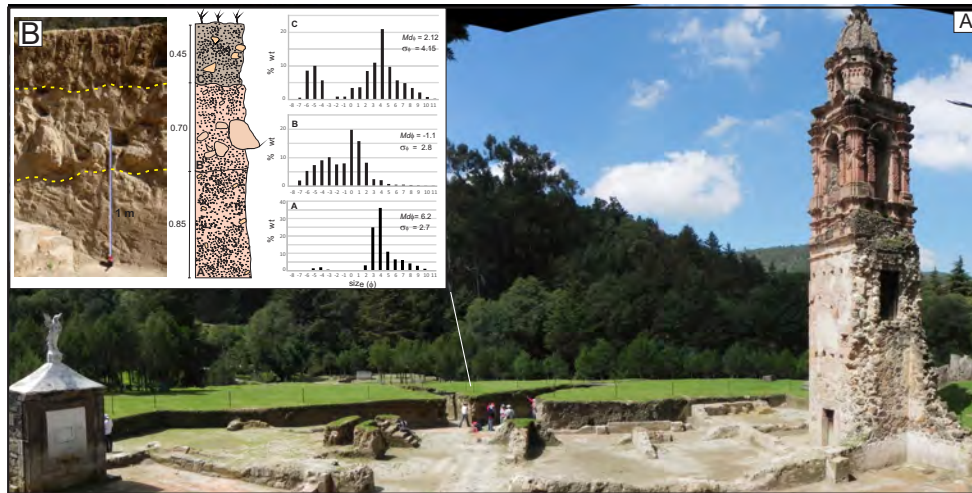


Figure 12. (A) Panoramic view from the east of the remains of El Carmen church buried by the Tailings Flood Deposit (section TL-01). The excavation of the church remains exposed the ancient floor of the sanctuary also observed in insets. (B) Stratigraphic column showing three beds separated by dashed yellow lines and their granulometric bimodal distributions.

The 27 May 1937 catastrophic flow failure, México

J. L. Macías et al.

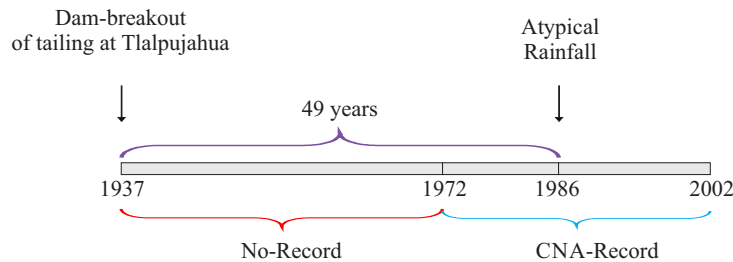
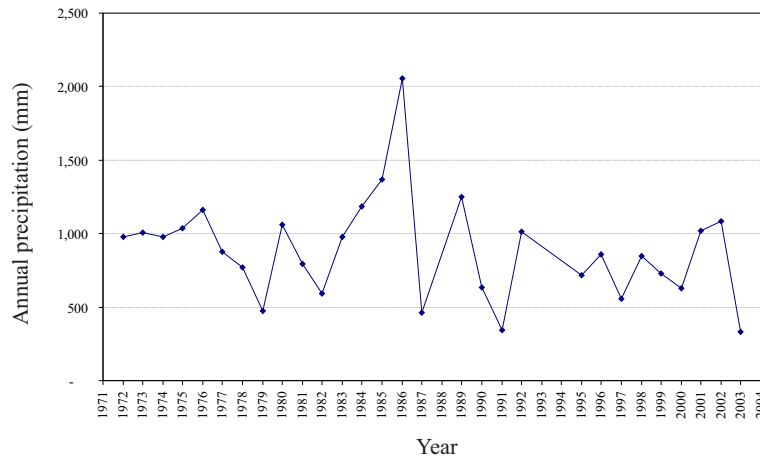


Figure 13. Timeline showing the 1986 year with exceptionally high precipitation recorded in the region of MDOT. Data from the 15183-El Oro meteorological station. The Las Llamas flood occurred during sustained intense rainfall in May 1937 when no weather station existed. It is interesting to note two atypical precipitation events have return periods of 49 years (Corona Chavez et al., 2010).

Title Page

[Abstract](#) | [Introduction](#)
[Conclusions](#) | [References](#)
[Tables](#) | [Figures](#)

[◀](#) | [▶](#)
[◀](#) | [▶](#)

[Back](#) | [Close](#)

Full Screen / Esc

[Printer-friendly Version](#)
[Interactive Discussion](#)



The 27 May 1937 catastrophic flow failure, México

J. L. Macías et al.

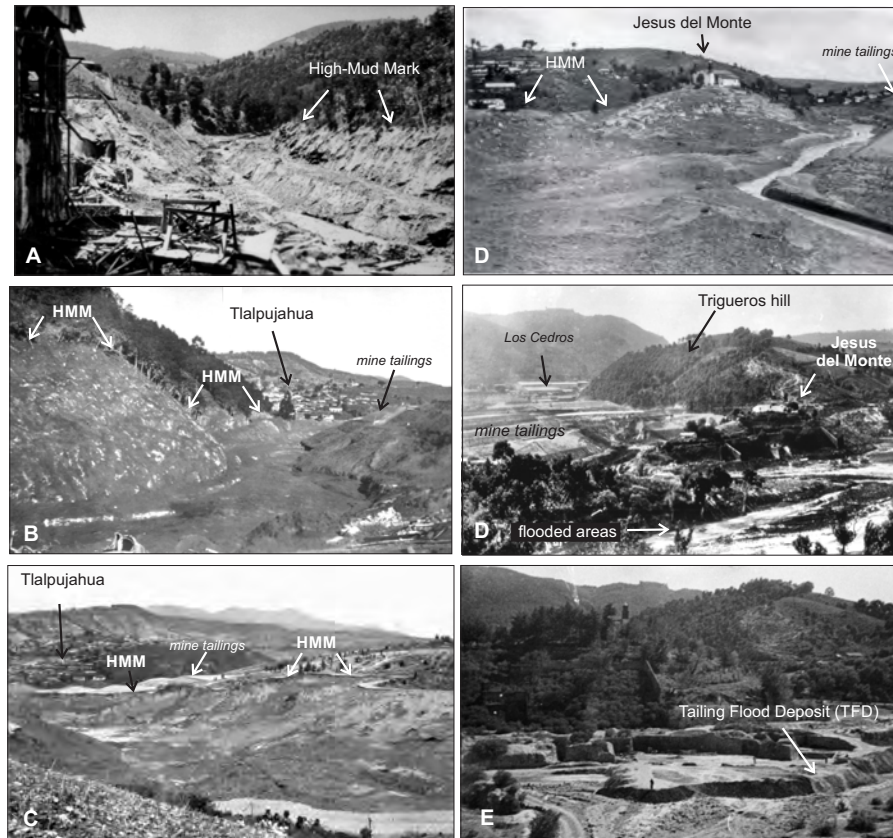


Figure 14. Views of damage caused by the Tailings flood in 1937 at different locations of this study: los Cedros metallurgical plant (A), Trigueros Hill (B), the Dos Estrellas stream between Trigueros and Jesus del Monte (C), and Jesus del Monte (D–F). HMM = High Mud Marks.

Title Page	
Abstract	Introduction
Conclusions	References
Tables	Figures
◀	▶
◀	▶
Back	Close
Full Screen / Esc	
Printer-friendly Version	
Interactive Discussion	

