

# **Continental Portuguese Territory Flood Susceptibility Index - Contribution for a Vulnerability Index**

Jacinto, R.<sup>1\*</sup>, Grosso, N.<sup>2\*</sup>, Reis, E.<sup>1</sup>, Dias, L.<sup>2</sup>, F. D., Santos<sup>2</sup>, Garrett, P.<sup>2</sup>

<sup>1</sup> Centre for Geographical Studies, IGOT, Edifício da Faculdade de Letras da Universidade de Lisboa, University of Lisbon, Alameda da Universidade, 1600-214 Lisbon, Portugal.

<sup>2</sup> Climate Change Impacts, Adaptation and Modelling Research Group, CCIAM, Faculdade de Ciências – Universidade de Lisboa (FC-UL), Portugal Campo Grande, Edif. C1, office 1.4.21, 1749-016 - Lisboa, Portugal.

Correspondence to: R. Jacinto ([jacinto.rita@gmail.com](mailto:jacinto.rita@gmail.com)).

\*equally contributing authors

1    **Abstract**

2    This work defines a national flood susceptibility index for the Portuguese continental territory,  
3    by proposing the aggregation of different variables which represent natural conditions for  
4    permeability, runoff and accumulation. This index is part of the national vulnerability index  
5    developed in the scope of Flood Maps in Climate Change Scenarios (CIRAC) project, supported  
6    by the Portuguese Association of Insurers (APS).

7    This approach expands on previous works by trying to bridge the gap between different floods  
8    mechanisms (e.g. progressive and flash floods) occurring at different spatial scales in the  
9    Portuguese territory through: a) selecting homogeneously processed datasets; b) aggregating  
10   their values to better translate the spatially continuous and cumulative influence in floods at  
11   multiple spatial scales.

12   Results show a good ability to capture, in the higher susceptibility classes, different flood types:  
13   fluvial floods and flash floods. Lower values are usually related to: mountainous areas, low  
14   water accumulation potential and more permeable soils. Validation with independent flood  
15   datasets confirmed these index characteristics, although some overestimation can be seen in the  
16   southern region of Alentejo where, due to a dense hydrographic network and an overall low  
17   slope, floods are not as frequent as a result of lower precipitation mean values.

18   Future work will focus on: i) including extreme precipitation datasets to represent the triggering  
19   factor; ii) improving representation of smaller and steeper basins; iii) optimizing variable  
20   weight definition process; iii) developing more robust independent flood validation datasets.

21   **Keywords:** Flood Susceptibility Index, CIRAC, Flash Floods, Fluvial floods, Portugal.

## 22 1. Introduction

23 Hydro-meteorological events such as floods and storms, are the most frequent natural disaster in  
24 Europe (IPCC, 2012), responsible for two thirds of the damages and costs associated with all  
25 types of natural disasters (EEA, 2012). Those costs have been growing since 1980, as a result of  
26 human activities and the increasing severity and frequency of floods (EEA, 2012). Floods  
27 frequency and severity are expected to continue increasing due to climate change, even in  
28 regions, like Portugal, where mean annual rainfall will probably decrease (EEA, 2012; IPCC,  
29 2012).

30 In Portugal the growing concentration of people and activities along with soil  
31 impermeabilization, especially in urban areas, are responsible for a current increase in flood  
32 hazard and losses (Quaresma, 2008; EEA, 2012, 2012a; Jacinto et al., 2012). At the same time,  
33 the 100 year return period flood discharge maximum level and consequent flood related losses  
34 are expect to further intensify, until the end of the century, under climate change scenarios,  
35 when compared to 1961-1990 period (EEA, 2012). For example, several Portuguese cities with  
36 more 10000 inhabitants are estimated to have more than 10% of its area flooded if the rivers rise  
37 1 m (EEA, 2012a).

38 The focus of this work will be on susceptibility to floods, for the Portuguese continental  
39 territory, which is defined as the propensity of an area to be affected by floods. This propensity  
40 is given by the territory intrinsic characteristics such has slope, geology, river network, and land  
41 use. The present work is part of a flood vulnerability study for the Portuguese continental  
42 territory, developed in the Flood Risk Mapping in Climate Change Scenarios (CIRAC) project.

43 Section 2 presents a state of the art review of concepts and methods implemented to translate  
44 flood susceptibility and its relation with flood vulnerability and provides insight on the current  
45 work contribution to improve flood susceptibility mapping at the national scale. Section 3 is  
46 divided into three subsections describing the study area hydromorphological characteristics, the  
47 different used datasets and the methodology followed to design and implement the national  
48 susceptibility index map. Section 4 presents the main results, including intermediate and final  
49 index maps, provides a first overall interpretation of its advantages and limitations and validates  
50 them through a comparison with historical flood events. Finally section 5 analyses the main  
51 findings, the contributions for the state of the art and the impact of the results in the Portuguese  
52 context.

## 53 2. State of the Art

54 The crucial factor on turning a flood on a potential damaging event for communities and  
55 ecosystems is the proximity to prone areas such as floodplains which determines their  
56 vulnerability to the phenomena (Cutter *et al.*, 2008). The IPCC (2012) presented vulnerability as  
57 being the “predisposition, susceptibilities, fragilities, weaknesses, deficiencies, or lack of  
58 capacities that favor adverse effects on the exposed elements”. This is a general concept that  
59 introduces susceptibility as one of the different dimensions that contribute to and should be  
60 contained in a vulnerability assessment (**Figure 1**). Adger (2006) also relates both concepts by  
61 defining vulnerability as the susceptibility to harm from exposure to a change on the  
62 environment or on the society and the incapacity to adapt to those changes. The juxtaposition  
63 and interdependency between vulnerability and susceptibility is evident, leading sometimes to  
64 inconsistencies in their definition, depending on the researching perspective.

65 **Figure 1**

66 For instance, according to Balica *et al.* (2012), “a system is susceptible to floods due to  
67 exposure in conjunction with its capacity/ incapacity to be resilient, to cope, recover or adapt  
68 to”. The authors connected susceptibility with exposure, considered as the hydro-geological  
69 component, and also with the institutional and socio-economic systems.

70 Collier and Fox (2003), despite not discussing directly the susceptibility concept, identified  
71 some components to describe a baseline susceptibility to flash floods that were mostly derived  
72 from inherent characteristics of a specific basin. Those characteristics are: the likelihood of  
73 unimpeded flow and the existence of channel constrictions, catchment slope, ratio of catchment  
74 area to mean drainage path length, ratio of land use to vegetation type as a proxy of urban  
75 extension. This approach to susceptibility leads to the definition adopted in this work and also  
76 indentified in other studies (Verde and Zêzere, 2007; Zêzere *et al.*, 2005), where flooding  
77 susceptibility is a characteristic of an area, given by its natural terrain configuration and  
78 occupation and that determines its propensity to flooding.

79 The several steps included in the methodological approach to susceptibility estimation, from  
80 variable and source data selection, to the composition of indicators, depend not only on the  
81 chosen definition of susceptibility but also on the spatial scale of analysis. National assessments  
82 are usually designed to provide a high level picture of flood susceptibility and are unable to  
83 represent in a consistent manner the different flooding mechanisms (e.g. urban flash floods  
84 versus fluvial floods). For instance, when working susceptibility mapping at European level,  
85 Roo *et al.* (2007) and Marchi *et al.* (2010) used topography to characterize the flooding  
86 phenomena. They used SRTM-3 (Roo *et al.*, 2007) combined with other generalizable  
87 topographic factors such as catchment slope, the ratio between the catchment area and the mean  
88 drainage path length (Marchi *et al.*, 2010). In contrast, at the watershed scale, a wider range of  
89 site specific data and indicators can be used, like the ones selected by Yahaya *et al.* (2010) and  
90 Santangelo *et al.* (2011), with several data sources like precipitation, river network, slope, soil  
91 type and land use; This allows for a better characterization of the flooding phenomena in that  
92 basin but hinders the generalization of the methodology to other areas. Scale is, therefore, a  
93 determinant factor on variables selection; when the territory is larger, the short number and  
94 simplicity of variables prevail, since it's more difficult to have the same kind of data in all  
95 territory, but also because some variables might not make sense in such a scale due to the  
96 generalization or territorial asymmetries (e.g. precipitation in Portugal Mainland presents a great  
97 contrast north and south Tagus river).

98 In Portugal there are limited academic works on floods vulnerability or susceptibility  
99 evaluation. Sá and Vicêncio (2011), presented an approach for mapping flood risk and  
100 vulnerability for each municipality of the Portuguese continental territory, using information on  
101 the 100 year return period precipitation for each district (group of municipalities), urban land  
102 use percentage for each municipality (obtained from Corine Land Cover data), mean number of  
103 floods registered by the National Civil Protection Authority (ANPC), river length (in  
104 kilometers) compared to the area of the municipality and the number of inhabitants in each  
105 municipality. Other academic work, for smaller study areas, analyzed the vulnerability to floods  
106 in Águeda Municipality and used the floodable areas of the National Ecologic Reserve to  
107 represent susceptibility to floods (Figueiredo *et al.*, 2009).

108 The work presented here contributes to the improvement of the current state of the art in the  
109 susceptibility evaluation field by designing and implementing, for the first time, a flood  
110 susceptibility index for the Portuguese territory. Some innovative methodological features are  
111 also introduced to overcome the limitations stated above, regarding the determination of flood  
112 susceptibility at a national scale. Variable selection tries to reflect the different flood dynamics  
113 that occur in the Portuguese territory. Selected parameters include flow accumulation potential,  
114 topographical and land use/soil permeability characteristics, representative of processes at  
115 different scales and influent in both progressive and flash floods. The selection process also  
116 reflects the need to reduce index complexity by choosing fewer input variables and select  
117 datasets that are uniformly processed across the Portuguese territory, to minimize index  
118 misinterpretation due to possible spatial inconsistencies at a country scale. The exclusion of  
119 precipitation reflects a focus on the territory characteristics, but also a difficulty of having a  
120 dataset that could efficiently represent the reality and not hide the susceptibility in the Alentejo  
121 and Algarve regions, both located in the south of Tagus River where the mean annual  
122 precipitation is much less than northern Tagus River and which is less affected by frontal  
123 systems than the north. The inclusion of precipitation would require a different scale of analysis,  
124 namely a regional index. Also, a double evaluation for types of episodes and events, extreme  
125 rainfall and annual mean rainfall. Finally, the presented methodology applies an aggregation  
126 methodology to some of the chosen variables, described in more detail in section 3.3, to better  
127 represent the spatially continuous and cumulative nature of their influence in flood generating  
128 mechanisms, across increasingly higher spatial scales.

### 129 **3. Materials and Methods**

#### 130 **3.1 Study area**

131 The study area is the continental Portuguese territory (Figure 2 (i)), part of the Iberian  
132 Peninsula, located in the southwest of Europe.

133 Historically, and due to climatic characteristics, this territory has frequently registered flood  
134 occurrences. According to Quaresma (2008), during the period between 1900 and 2006, the  
135 annual average of hydro-geomorphological occurrences with losses in the Portuguese  
136 continental territory has been growing. For a similar period (1900-2008), Quaresma and Zêzere  
137 (2011), concluded that 82% of the hydro-geomorphological events in Portugal mainland where  
138 floods.

139 In mainland Portugal different kinds of hydrologic extreme events occur, varying from those  
140 with slow spreading and large duration, normally extending to large areas (so-called fluvial  
141 floods), and those with very fast spreading, short duration and concentrated impact (flash flood  
142 events) (Ramos and Reis, 2001; Ramos and Reis, 2002). The flash floods events occur mainly  
143 on small watersheds or in urban areas and the fluvial floods occur usually at a larger scale such  
144 as the Tagus, Guadiana, Mondego and Douro basins (Figure 2 (ii)). The topography of the  
145 Portuguese territory is steeper to the north of the Tagus River and flatter in the South, especially  
146 in Alentejo region, between the rivers Tagus and Mira (Figure 2 (iii)).

#### 147 **Figure 2**

148

### 3.2 Datasets

150 As stated above, the selection of variables and respective datasets was based on three criteria: a)  
151 ability to incorporate parameters influent in both progressive and flash floods; b) minimizing  
152 number of introduced variables to contribute to index transparency and; c) dataset homogeneity  
153 (e.g., origin, spatial resolution) across the Portuguese territory. Three final variables were  
154 chosen: (i) flow accumulation (Lehner *et al.*, 2008); (ii) cost distance matrix; (iii) flow number  
155 (Figure 3). The first two describe the potential water accumulation in the riverbed and adjacent  
156 areas, while the last assesses soil permeability based on land use and geology.

157 The Hydrosheds (Hydrological data and maps based on Shuttle Elevation Derivatives at  
158 multiple Scales) Digital Elevation Model (DEM) was used to obtain two of the three final  
159 variables and several other auxiliary variables. Hydrosheds data is derived from the Shuttle  
160 Radar Topography Mission (SRTM) at 3 arc-second resolution (90 meters) and is freely  
161 available online (<http://hydrosheds.cr.usgs.gov>). The original data has been hydrologically  
162 conditioned in order to be used in regional and global watershed analysis. Furthermore it has an  
163 adequate scale for country scale flood susceptibility analysis, allowing for a homogeneous and  
164 spatially continuous processing of the different datasets. The Hydrosheds DEM was used to  
165 derive slope, flow accumulation and direction and the hydrographic network. All original and  
166 subsequently processed datasets were converted to the WGS1984 coordinate system and  
167 resampled to a 90 m resolution grid.

#### 168 **Figure 3**

169 Flow Accumulation shows the accumulation paths and the amount of cells in the entire basin  
170 that contribute to the flow on a specific cell. In the case of an international river, this variable  
171 accounts for both the Portuguese and international parts of the basin. It represents the drainage  
172 network and its water accumulation potential. Therefore, an increase in flow accumulation  
173 should reflect an increase in flood susceptibility (Lehner *et al.*, 2008). Accumulation values are  
174 representative of the entire territory and although represented by a spatially continuous grid, the  
175 range of values is very wide, making the small rivers visually imperceptible, due to their small  
176 flow accumulation values when compared with the bigger ones as Tagus, Douro or Guadiana  
177 rivers (Figure 3 (i)). For this reason this variable is more representative of flood events  
178 associated with fluvial floods in main Portuguese rivers.

179 The cost distance matrix (Figure 3 (ii)) was obtained using the cost distance ArcGIS tool, based  
180 on the hydrography and slope themes. It represents the topographic resistance to water lateral  
181 movements associated with overflow processes during floods and inundations and also  
182 identifies more flood prone accumulation areas in the proximity of water courses. The cost  
183 value is calculated for each 90 m cell based on two factors: a) the original slope and b) the  
184 distance to the drainage network derived from Hydrosheds. It varies between 0 and 1, where  
185 lower cost distance can be found in flat areas, closer to the water courses values, corresponding  
186 to areas with higher susceptibility to be flooded. The resulting matrix complements the  
187 information given by flow accumulation, since it locates potential water accumulation areas in  
188 the regions contiguous to the drainage network. Lower cost distance values, corresponding to  
189 flat areas, can be found, for instance, in the region between the Tagus River and Algarve Region  
190 (Alentejo) as well as the occidental coastal part of the territory. In the specific case of the  
191 Alentejo region there is an apparent disagreement between the relatively sparse hydrographic  
192 network represented in Figure 3 (i) and the high frequency of low cost distance values. This is

193 due to the presence of a numerous impermanent rivers in the drainage network map derived  
194 from DEM information, when compared with the permanent river network.

195 The flow number dataset for the national territory was collected from the Water Atlas online,  
196 made available by the Portuguese Water Institute (<http://geo.snirh.pt/AtlasAgua/>). It was  
197 produced by the Portuguese Environment Institute, based on two maps:

- 198 1. the hydrological soil type divided in four classes (A, B, C and D), according to the Soil  
199 Conservation Service classification, with increasing capacity to generate superficial  
200 flow (United States Soil Conservation Service - USSCS, 1986);
- 201 2. the Corine Land Cover 2000 (CLC2000) map (Instituto do Ambiente, 2005).

202 The final Flow Number map (Figure 5 (iii)) was determined, following the work done by Lobo-  
203 Ferreira (1995), based on a reclassification that combines the two parameters. Further details on  
204 the production of this theme are given in the Water Atlas website<sup>1</sup>. The values are adimensional  
205 and range from 59 to 100, with higher values corresponding to higher soil permeability. This  
206 variable is representative of conditions at smaller local scale and is particularly important to  
207 translate, for instance, the higher superficial flow generation potential in urban impermeabilized  
208 areas.

209 The Portuguese Water Atlas also provided: a) inundated area maps for the 100 year return  
210 period flood for some of the main Portuguese rivers (e.g., Tagus, Mondego, Sado, Zêzere e  
211 Vouga); and b) a flood occurrences point map, produced by the Water Institute, based on events  
212 registered by the National Civil Protection Association (ANPC) and on information gathered  
213 from periodic journals (Figure 4 (i)).

214 The first was used to adjust the final index composition based on different variable weights and  
215 to help define the interval range of each final susceptibility class. The second was used to  
216 validate the index results, together with a database, provided by Quaresma (2008), containing  
217 the number of events with considerable damages per municipality that occurred in the last  
218 century (Figure 4 (ii)).

#### 219 **Figure 4**

220 Table 1 summarizes all information regarding the different datasets used in this work.

#### 221 **Table 1**

222 A decision was made not to include a precipitation dataset in the index formulation since its  
223 purpose was to reflect only the terrain morphological characteristics that influence flood  
224 susceptibility, regardless of the magnitude and spatiotemporal variation of flood triggering  
225 factors. This also allows the possibility of including, on a later stage, a precipitation theme or a  
226 combination of precipitations themes (e.g., mean annual precipitation or a set of maps with the  
227 interpolated ground station precipitations for different return periods and durations (Brandão *et*  
228 *al.*, 2001) to better reflect flood susceptibility for any specific climatological time period.

---

<sup>1</sup> <http://geo.snirh.pt/AtlasAgua/download/ProducaoNumerosEscoamento.pdf>

### 3.3 Methods

230 The main objective of the methodology presented in this section is to produce, using the above  
231 described datasets, a spatially continuous flood susceptibility index for the Portuguese territory,  
232 varying from 0 to 1, where the highest values correspond to a higher flood propensity. To  
233 achieve this, a four stage approach was followed, including: a) an aggregation process for the  
234 flow number dataset to better represent, for each cell, the cumulative influence of its upstream  
235 to downstream spatial distribution; b) a normalization process for all variables to rescale them to  
236 common 0 to 1 range, where higher values represent areas more susceptible to floods (Figure  
237 5)); c) an expert analysis based variable weight definition technique to establish the importance  
238 of each individual variable in the final index; d) the definition of four susceptibility classes by  
239 comparison with inundated areas maps developed for the Portuguese main rivers and urban  
240 areas and; e) an index validation procedure by comparison with other independent flood  
241 datasets.

242 The first methodological phase corresponded to one of the main innovative aspects of this work:  
243 the application, for the entire Portuguese continental territory, of a variable spatial aggregation  
244 method, based on the one developed by Reis (2011) and already implemented for basin scale  
245 studies in regional (e. g. Ramos *et al.*, 2009, 2010) and municipal (e. g. Ascenso, 2011) contexts.  
246 This approach improves substantially the depiction of the cumulative nature of the flooding  
247 phenomena (from upstream to downstream) and provides a good framework to introduce basin  
248 scale features as a driver for variables dynamics at a wider national scale. Using the flow  
249 direction theme to determine the flow accumulation path, an accumulated value is calculated for  
250 each cell corresponding to the sum of the variable value for all cells upstream. This method is  
251 inherent to the calculation of the flow accumulation theme and it's not applicable to the cost  
252 distance theme, since the nature and influence of this variable is noncumulative. Therefore it  
253 was only applied to the flow number and, because this variable should be representative of soil  
254 permeability conditions at a basin scale, the calculated accumulated value for each cell  
255 corresponded to the mean of all upstream cells instead of the sum.

#### 256 **Figure 5**

257 The definition of variables weights for the final composition of the index was based on an  
258 iterative comparison process (Reis, 2011) with the 100-year flood inundation area map for the  
259 main Portuguese rivers.

260 The final step to arrive to a Flood Susceptibility Index (FSI) for the Portuguese territory was to  
261 define four classes. The definition of those classes was made based on a comparison with the  
262 already mentioned 100-year flood area maps dataset and on an empirical analysis of the physical  
263 characteristics of the Portuguese territory.

264 In order to evaluate the quality of FSI model a further validation was carried out, based on the  
265 DISASTER hydro-geomorphologic database. The properties of this database are fully described  
266 in Zêzere *et al.* (2014). However, it should be noted that this database does not contain all  
267 detected flood occurrences, but only those where people were directly affected (human  
268 casualties: dead, missing, wounded, displaced and evacuated). Therefore, the records are  
269 coincident with the presence of human constructions and activities, so the flooding that occurred  
270 outside these areas or that didn't had the specified human impacts, were not recorded in this  
271 database. In this context, the normally used ROC curves for validation proposes are not  
272 appropriate for success evaluation of model results.



273 Additionally, the records have different levels of positional accuracy; so, only the records based  
274 in precise coordinates, topographic features and identified toponyms (1187 occurrences) were  
275 considered for validation, ensuring the necessary spatial accuracy compatible with the resolution  
276 (90 m) used in work.

277 After FSI classification, the map was crossed with the spatial distribution of flood occurrences  
278 for the period 1865 to 2010. Differences in classification process can lead to different  
279 interpretations; this fact, together with the specific characteristics of the database and the  
280 methodology associated to FSI, requires careful evaluation of the results.

281 A classification of FSI values in 6 classes shows that nearly 62% of the occurrences lie in the  
282 0.45 to 0.5 susceptibility class (see Figure 6A). Values below 0.3 are not coincident with  
283 occurrences and these ones are present residually in class 0.6 to 0.95 (about 0.6%). The non-  
284 increasing occurrence frequency, from the lowest to the higher susceptibility class, is also  
285 associated with differences in class frequency in mainland Portuguese territory (see Figure 6B).  
286 The calculation of occurrence densities eliminates the influence of the frequency of each class in  
287 the results; thus calculating this density (number of occurrences per km<sup>2</sup>) allows to accept the  
288 results obtained for FSI as representatives for the entire mainland Portugal (see Figure 6C). In  
289 fact, the FSI value of 0.5 appears to provide a critical threshold above which the relatively high  
290 hazard and the presence of vulnerable elements comes together. Thus, the occurrence density  
291 value of the class 0.5-0.6 (0.22 NO/km<sup>2</sup>) is 11 times greater than in the previous class (0.02  
292 NO/km<sup>2</sup>).

293 The density of events in the class of highest susceptibility (0.6-0.95) remains similar to the  
294 previous class value (0.5-0.6), and even a small decrease can be observed that reverse the  
295 growing trend along the remaining classes. This is perfectly explainable through the people  
296 perception regarding flood hazard: although the areas classified with FSI values above 0.6 are in  
297 fact the most dangerous by the frequency and magnitude of floods, this behavior is apprehended  
298 and remains in memory of local populations that avoid the most dangerous places within these  
299 areas. In this context it is relevant that the class 0.5-0.6 coincides largely with the presence of  
300 flash floods and contains almost all the dead and wounded occurrences, while the class 0.6-0.95  
301 essentially coincide with the occurrence of fluvial floods, where the dead and wounded are  
302 almost absent, but on the contrary the evacuated and temporarily displaced persons situations  
303 are predominant.

304 **Figure 6**

305

#### 306 **4. Results and Discussion**

307 Since the first two methodological steps presented in the previous section refer only  
308 intermediary preprocessing tasks, only the analysis of the different index composition stages  
309 and its respective validation procedure are included in the Results section.

310 The final variable weights for the composition of the FSI, obtained after comparison with flood  
311 area maps for the main rivers and expert consultation, heightens the importance of flow  
312 accumulation (0.47) and cost distance (0.36), which have a combined weight of 0.83, when  
313 related to the flow number (0.17). This fact points towards a possible higher sensitivity of the  
314 index to overflow processes usually associated with fluvial floods in comparison to superficial

315 flow generation processes that, although also influence in this flood type, are more determinant  
316 in flash floods, especially in impermeable urban areas. This will be further investigated during  
317 the validation process.

318 Regarding the definition of the susceptibility classes, the visual analysis of the range of original  
319 susceptibility values present inside and outside the limits defined by the 100-year flood area  
320 map for the main Portuguese Rivers allowed an accurate assessment of the two higher classes.  
321 In fact, most of the values included in those classes are within the limits of those flooded areas.  
322 As can be seen in Figure 7, the adjacent areas to all major and medium sized rivers in the  
323 Portuguese territory are also included in these higher classes. This demonstrates the FSI ability  
324 to better identify regions susceptible to fluvial floods in the highest class (see section 3.4) due,  
325 as stated above, to the higher importance given to the flow accumulation and cost distance  
326 variables.

### 327 **Figure 7**

328 The definition of the remaining classes was made by visual interpretation of the spatial  
329 distribution of the index values when compared with maps of the original variables, such as the  
330 Hydrosheds DEM, slope and land use. All information related to the final set of classes is given  
331 in Table 2.

### 332 **Table 2**

333 It should be noted that this susceptibility class definition methodology led to unequal interval  
334 ranges for the different classes, as can be seen in the third column of Table 2. This was  
335 somewhat expected since it was improbable that an index composed of three linearly  
336 normalized and combined variables could translate flood susceptibility in a regular scale. In  
337 fact, the variation of influence of each of those variables in flooding processes is, in most cases,  
338 non-linear and therefore is associated with very different interval ranges. Therefore their  
339 combination would most probably lead, as it was confirmed by this work, to susceptibility  
340 classes defined by heterogeneous intervals. Moreover, some of the input variables also have  
341 very unbalanced normalized values distributions, namely flow accumulation (high frequency of  
342 low values and a few very high values) and cost distance (mostly high values), further distorting  
343 the distribution of the final susceptibility values and consequently the definition of the  
344 correspondent classes.

345 In addition to the above mentioned main rivers, FSI (Figure 8) for the Portuguese territory also  
346 identifies some major cities like Lisbon, Coimbra, Aveiro, Setúbal, Faro and Oporto and some  
347 small basin areas in the south part of Portugal (Algarve) as highly susceptible to floods (classes  
348 3 and 4). This showcases the index sensitivity to identify also flash flood prone areas,  
349 characterized by highly impermeabilized artificial surfaces situated in plain regions in the  
350 vicinity of relevant water courses (see Figure 9, panels (ii) and (iii)). The Alentejo region, east  
351 of Lisbon (Figure 9 (i)), is also classified as highly susceptible (class 3) due to its topographical  
352 and geological characteristics, since most of the most the territory is plain, with a high  
353 hydrographic network density and impermeable rocky (shale and marble) or clay soils.

### 354 **Figure 8**

355 In the lower susceptibility classes is possible to find: a) the more mountainous regions like Serra  
356 da Estrela, in the center of Portugal, between Coimbra and Guarda and some of the northeast of

357 Portugal; b) areas with highly permeable sandy soils, such as the south part of the Tagus and  
358 Sado basins and most of the coastal area between Lisbon and Aveiro; or c) combining both  
359 those characteristics, in the north central part of Portugal and northern part of Algarve.

360 Validation of the Portuguese FSI against the flood events point dataset provided by the Water  
361 Institute showed a general good direct correspondence between the frequency of flood points  
362 and the magnitude of susceptibility values in the vicinity of those points (Figure 7 (i)). Looking  
363 in greater detail the index confirmed its ability to capture: a) a higher flood susceptibility  
364 associated with the main Portuguese rivers and their adjacent areas (example given for the  
365 Tagus basin in Figure 9 (ii)); and b) flash flood prone urban areas like Lisbon and Setúbal  
366 (Figure 9 (iii)).

## 367 **Figure 9**

368 In the case of Alentejo, while some flood points can be found along the rivers Guadiana and  
369 Sado and some of their tributaries, there is an apparent overall inconsistency between the high  
370 flood susceptibility values and the corresponding number of flood points. This arises from the  
371 nature of the index which reflects the flood propensity associated with terrain characteristics and  
372 excludes flow or precipitation quantitative information. Since, although dense, most of the  
373 hydrographic network in Alentejo is characterized by a low flow regime with a high seasonal  
374 variation, driven by low mean annual precipitation, this artifact is to be expected.

375 Finally the flood dataset compiled by Quaresma (2008), representing the number of high  
376 magnitude flood events per municipality in the last century (Figure 4 (ii)) shows a good  
377 correspondence between the spatial variation in both datasets, particularly in the Tagus basin  
378 and in the Lisbon and Oporto regions. Nevertheless the inconsistency in the Alentejo region is  
379 also visible in the comparison with this flood map. It should be noted that both validation  
380 datasets used in this analysis have a bias towards more densely populated areas since they are  
381 compiled from information gathered in journals and civil protection registries and misrepresent  
382 flood occurrence in rural and natural areas with lower human presence.

## 383 **5. Conclusions**

384 The development of a national flood susceptibility index entails several challenges related to  
385 difficulties in capturing the different flood dynamics usually occurring in a wide territory across  
386 different spatial scales. The work presented here presents a first attempt to implement this type  
387 of index for the Portuguese continental territory.

388 The first results are very promising with a consistent representation of the overall spatial  
389 distribution of flood susceptibility. The presented methodological approach addresses some of  
390 those scale issues by applying a spatial aggregation methodology that better characterizes the  
391 cumulative influence of the different variables across spatial scales (from cell to basin and  
392 higher). Furthermore the selection of only three variables that represent water accumulation  
393 potential, topography and soil permeability allowed for a clear interpretation of the index and an  
394 apprehension of different flooding phenomena, ranging from fluvial floods in large rivers to  
395 urban flash floods.

396 Nevertheless some possible overestimation of flood susceptibility in regions of low precipitation  
397 was observed and should be addressed in future work by including appropriate precipitation  
398 datasets such as interpolated ground station precipitations for different return periods and

399 durations (Brandão *et al.*, 2001). Other developments to be implemented in the future will be  
400 focused on improving the representation of the higher susceptibility associated with smaller  
401 basins or with steeper slopes due to a higher superficial flow generation potential and smaller  
402 concentration times. In the future, this could be overcome by the inclusion of two themes  
403 containing spatially aggregated values of slope (accumulated mean) and concentration time  
404 (accumulated sum), following the methodology used in this work.

405 Future work will also include: a) the minimization of possible index distortion and subjectivity  
406 in the definition of the final susceptibility classes using reclassified variables, according to their  
407 influence in susceptibility, instead of a continuous scale; b) the optimization of the variable  
408 weight definition process based on the work of Kouriagalas and Karzas (2011) and; c) the  
409 inclusion of more robust national flood validation datasets compiled from flood insurance data  
410 and more accurate Civil Protection registries.

## 411 **6. Acknowledgements**

412 We present our acknowledgements to: a) Hugo Costa and Professor Filipe Duarte Santos, also  
413 part of CIRAC Project technical team for their contributions in the discussions and GIS layouts;  
414 b) APS - Portuguese Association of Insurers, which funded the project.

## 415 **7. References**

416 Adger, W. N.: Vulnerability. *Global Environmental Change*, 16: 268-281, 2006.

417 Ascenso, V. P.: Análise de Ocorrência de Cheias e Deslizamentos de Vertente no Concelho da Batalha,  
418 Msc Thesis, Departamento de Geografia da Faculdade de Letras Lisboa, Universidade de Lisboa,  
419 Portugal, pp. 133, 2011. ([http://repositorio.ul.pt/bitstream/10451/5956/1/igotul001414\\_tm.pdf](http://repositorio.ul.pt/bitstream/10451/5956/1/igotul001414_tm.pdf))

420 Balica, S. F., Wright, N. G., and Meuden, F. van der: A Flood vulnerability index for coastal cities and  
421 its use in assessing climate change impacts, *Nat Hazards*, pp. 73-105, doi: 10.1007/s11069-012-0234-1,  
422 2012.

423 Brandão, C., Rodrigues, R., Costa, J. P.: Análise de Fenómenos Extremos Precipitações Intensas em  
424 Portugal Continental, Direção dos Serviços de Recursos Hídricos, Lisboa, 2001.  
425 ([http://www.isa.utl.pt/der/Hidrologia/relatorio\\_prec\\_intensa.pdf](http://www.isa.utl.pt/der/Hidrologia/relatorio_prec_intensa.pdf))

426 Collier, C.G., and Fox, N.I.: Assessing the flooding susceptibility of river catchments to extreme rainfall  
427 in the United Kingdom. *International Journal of River Basin Management*, Vol. 1, Iss.3, pp. 225-235, doi:  
428 10.1080/15715124.2003.9635209, 2003.

429 Cutter, S. L., Barnes, L., Berry, M., Burton, C., Evans; E., Tate, E., Webb, J.: Community and Regional  
430 Resilience: Perspectives from hazards, disasters, and emergency management - CARRI Research Report  
431 1, Hazards and Vulnerability Research Institute, Department of Geography, University of South Carolina,  
432 Columbia, South Carolina, 2008.

433 EEA: Climate change, impacts and vulnerability in Europe 2012. EEA Report No 12/2012, European  
434 Environment Agency, ISBN: 978-92-9213-346-7, pp. 253, Copenhagen, Denmark, 2012.

435 EEA: Urban adaptation to climate change in Europe, Challenges and opportunities for cities together with  
436 supportive national and European policies, EEA Report No 2/2012, European Environment Agency,  
437 ISBN: 978-93-9213-308-5, 2012a.

- 438 Figueiredo, E., Valente, S., Coelho, C., and Pinho, L.: Coping with Risk – Analysis on the importance of  
439 integrating social perceptions on flood risk into management mechanisms - the case of the municipality of  
440 Águeda, Portugal, *Journal of Risk Research*, vol. 12, nº 5, pp. 581 - 602, doi:  
441 10.1080/13669870802511155, 2009.
- 442 Instituto do Ambiente: CORINE Land Cover 2000 em Portugal, Relatório Técnico, 2005.  
443 (<http://sniamb.apambiente.pt/clc/frm/>)
- 444 IPCC: Managing the Risks of Extreme Events and Disasters to Advance Climate Change Adaptation. A  
445 Special Report of Working Groups I and II of the Intergovernmental Panel on Climate Change [Field,  
446 C.B., V. Barros, T.F. Stocker, D. Qin, D.J. Dokken, K.L. Ebi, M.D. Mastrandrea, K.J. Mach, G.-K.  
447 Plattner, S.K. Allen, M. Tignor, and P.M. Midgley (eds.)]. Cambridge University Press, Cambridge, New  
448 York, USA, pp. 582, ISBN 978-1-107-02506-6, 2012
- 449 Jacinto, R., Cruz, M. J., and Santos, F. D.: Development of water use scenarios as a tool for adaptation to  
450 climate change of a water supply company, *Drink. Water Eng. Sci.*, 6, pp 61-68, doi:10.5194/dwes-6-61-  
451 2013, 2013.
- 452 Kourgialas, N. N., and Karatzas, G. P.: Flood Management and a GIS modelling method to assess flood-  
453 hazard areas- a case study, *Hydrological Sciences Journal*, Vol. 56, Issue 2, pp. 212-225, DOI:  
454 10.1080/02626667.2011.555836, 2011.
- 455 Lehner, B., Verdin, K., Jarvis, A.: *HydroSheds Technical Documentation. Version 1.1.*  
456 <http://hydrosheds.cr.usgs.gov> , 2008.
- 457 Lobo-Ferreira, J.P. C.: *Inventariando, Monitorizando e Gerindo de Forma Sustentável Recursos Hídricos*  
458 *Subterrâneos*, LNEC, Lisboa, 1995. ([http://grupo.us.es/ciberico/archivos\\_acrobat/sevilla1lobo.pdf](http://grupo.us.es/ciberico/archivos_acrobat/sevilla1lobo.pdf))
- 459 Marchi, L., Borga, M., Preciso, E., Gaume, E.: Characterisation of selected extreme flash floods in  
460 Europe and implications for flood risk management, *Journal of Hydrology*, Volume 394, Issues 1–2, 17  
461 November 2010, Pages 118-133, ISSN 0022-1694, doi: 10.1016/j.jhydrol.2010.07.017, 2010.
- 462 Quaresma, I.: *Inventariação e Análise de Eventos Hidro-Geomorfológicos com carácter danoso em*  
463 *Portugal Continental*, Msc Thesis, Departamento de Geografia da Faculdade de Letras Lisboa, University  
464 of Lisbon, Portugal, 2008.
- 465 Quaresma, I., and Zêzere, J.L.: *Cheias e movimentos de massa com carácter danoso em Portugal*  
466 *Continental*. Santos, N.; Cunha, L. (coord.), *Trunfos de uma Geografia Activa, Desenvolvimento*  
467 *Regional, Ordenamento e Tecnologia*, Imprensa da Universidade de Coimbra, p.799-807. ISBN: 978-989-  
468 26-0111-3, 2011.
- 469 Ramos, C., and Reis, E.: *As Cheias no Sul de Portugal em Diferentes Tipos de Bacias Hidrográficas*,  
470 *Finisterra*, XXXVI, pp. 61-82, ISSN: 0430-5027, Lisbon, 2001.
- 471 Ramos, C., and Reis, E.: *Floods in Southern Portugal: their physical and human causes, Impacts and*  
472 *Human response, Mitigation and Adaptation Strategies for Global Change*, vol.7, p. 267-284, Kluwer  
473 Academic Publishers, Netherlands, 2002.
- 474 Ramos, C., Reis, E., Zêzere, J. L.: *Reserva Ecológica Nacional do Oeste e Vale do Tejo - Anexo 4 Zonas*  
475 *Ameaçadas pelas Cheias (ZAC) e pelo mar (ZAM)*, *Quadro de Referência Regional da Reserva Ecológica*  
476 *Nacional do Oeste e Vale do Tejo*. Comissão de Coordenação e Desenvolvimento Regional do Oeste e  
477 Vale do Tejo, 2009, (<http://www.ccdr-lvt.pt/pt/areas-de-ren---quadro-de-referencia-regional/1913.htm>).
- 478 Ramos, C.; Reis, E.; Zêzere, J. L.: *Reserva Ecológica Nacional da Área Metropolitana de Lisboa - Anexo*  
479 *4 Zonas Ameaçadas pelas Cheias (ZAC) e pelo Mar (ZAM)*, *Quadro de Referência Regional da Reserva*  
480 *Ecológica Nacional do Oeste e Vale do Tejo*. Comissão de Coordenação e Desenvolvimento Regional do

- 481 Oeste e Vale do Tejo, 2010, ([http://www.ccdr-lvt.pt/pt/areas-de-ren---quadro-de-referencia-](http://www.ccdr-lvt.pt/pt/areas-de-ren---quadro-de-referencia-regional/1913.htm)  
482 [regional/1913.htm](http://www.ccdr-lvt.pt/pt/areas-de-ren---quadro-de-referencia-regional/1913.htm)).
- 483 Reis, E.: Análise de bacias hidrográficas, susceptibilidade à ocorrência de cheias e Sistemas de  
484 Informação Geográfica: da definição do quadro conceptual até à proposta de um modelo de avaliação.  
485 VIII Congresso da Geografia Portuguesa, Repensar a Geografia para Novos Desafios, Comunicações,  
486 Lisboa, Portugal, pp. 1 - 6, 2011.
- 487 Roo, Ad., Barredo, J., Lavalle, C., Bodis, K., Bonk, R.: Potential Flood Hazard and Risk Mapping at Pan-  
488 European Scale. Book Chapter - Digital Terrain Modelling, Lecture Notes in Geoinformation and  
489 Cartography, Jordan, Gyoza (coord.), Springer Berlin Heidelberg, Earth and Environmental Science,  
490 ISBN: 978-3-540-36731-4, doi: 10.1007/978-3-540-36731-4\_8, pp: 183 -202, 2007 .
- 491 Santangelo, N., Santo, A., Crescenzo, G. D., Foscari, G, Liuzza, Sciarrotta, S.: Flood susceptibility  
492 assessment in a highly urbanized alluvial fan: the case study of Sala Consilina (southern Italy). Nat.  
493 Hazards Earth Syst. Sci., 11, 2765-2780, doi:10.5194/nhess-11-2765-2011, 2011.
- 494 Sá, L., Vicêncio, H.: Risco de Inundações - Uma Metodologia para a sua Cartografia. Territorium, 18, pp.  
495 227-230, 2011. ([http://www.uc.pt/fluc/nicif/riscos/Documentacao/Territorium/T18\\_artg/Luis\\_Sa.pdf](http://www.uc.pt/fluc/nicif/riscos/Documentacao/Territorium/T18_artg/Luis_Sa.pdf)).
- 496 Verde, J., Zêzere, J. L.: Avaliação da Perigosidade de Incêndio Florestal, VI Congresso da Geografia  
497 Portuguesa, Lisbon, Portugal, 17-20 October 2007, pp. 23, 2007.  
498 ([http://riskam.ul.pt/images/pdf/comlivactnac\\_2007\\_perigosidade\\_incendio\\_florestal.pdf](http://riskam.ul.pt/images/pdf/comlivactnac_2007_perigosidade_incendio_florestal.pdf)) .
- 499 Yahaya, S., Ahmad, N., and Abdalla, R.: Multicriteria Analysis for Flood Vulnerable areas in Hadejia-  
500 Jama'are River Basins, Nigeria, European Journal of Scientific Research, ISSN 1450-216X, Vol. 42,  
501 No.1., pp 71-83, 2010.
- 502 USSCS, United States Department of Agriculture, Soil Conservation Service: Urban Hydrology for Small  
503 Watersheds, Technical Release No. 55, Second Edition, Washington, D.C, 1986.
- 504 Zêzere, J. L., Pereira, A. R.,, and Morgado, P.: Perigos Naturais e Tecnológicos no Território de Portugal  
505 Continental. X Coloquio Ibérico de Geografia, Évora, Universidade de Évora, Portugal, 2005.
- 506 Zêzere, J. L., Pereira, S., Tavares, A., Bateira, C., Trigo, R., Quaresma, I., Santos, P., Santos, M. and  
507 Verde, J.: DISASTER: a GIS database on hydro-geomorphologic disasters in Portugal, Natural Hazards,  
508 71: 1029-1050, doi: 10.1007/s11069-013-1018-y, 2014.

## Tables

**Table 1 – Information summary for all used datasets.**


Variable	Source	Original Resolution	Spatial	Role in index calculation
<b>Auxiliary Variables</b>				
DEM	Hydrosheds website ( <a href="http://hydrosheds.cr.usgs.gov/">http://hydrosheds.cr.usgs.gov/</a> )	3 arc-seconds (≈90 m)		Auxiliary variable to calculate the Slope theme.
Slope	Calculated based on the Hydrosheds DEM	3 arc-seconds (≈90 m)		Auxiliary variable to calculate Flow Direction and Accumulation , Hydrography
Flow Direction	Calculated based on the slope	3 arc-seconds (≈90 m)		Auxiliary variable used to define the Hydrography and Flow Accumulation
Hydrography	Calculated based on flow direction	3 arc-seconds (≈90 m)		Auxiliary variable used to define the Cost Distance
<b>Main Variables used in Flood Susceptibility Index</b>				
Flow accumulation	Derived from the Hydrosheds DEM and Flow Direction themes	3 arc seconds		Definition of water accumulation areas
Cost Distance	Derived from the Hydrography and Slope themes	3 arc seconds		Difficulty associated to water lateral movements in overflow processes
Flow number	Portuguese Water Atlas ( <a href="http://geo.snirh.pt/AtlasAgua/">http://geo.snirh.pt/AtlasAgua/</a> )	500 m		Soil Permeability

**Table 2 – Flood susceptibility index classes**


<b>Class</b>	<b>Area characterization</b>	<b>Index interval</b>	<b>Physical characteristics</b>
4 Very High	+ Differentiation of main water lines + Some main urban areas	]0.49; 1]	+ Water Lines and contiguous regions + Regions of impervious soil (e.g. cities)
3 High	+ Differentiation of adjacent flood plains in the main rivers	]0.47; 0.49]	+ Flooding regions associated with large rivers + Regions of permeable soil + Regions with high water accumulation potential.
2 Low	+ Areas with increasing distance to water courses and steeper slopes	]0.42; 0.47]	+ Regions of medium/low water accumulation + Regions with significant water transport cost distance values + Regions of permeable soil
1 Very Low	+ Mountainous areas or with no water courses in their vicinity	[0; 0.42]	+ Regions with no water accumulation potential; + Regions with higher soil permeability + Regions with very high water transport cost distance values





## Figures

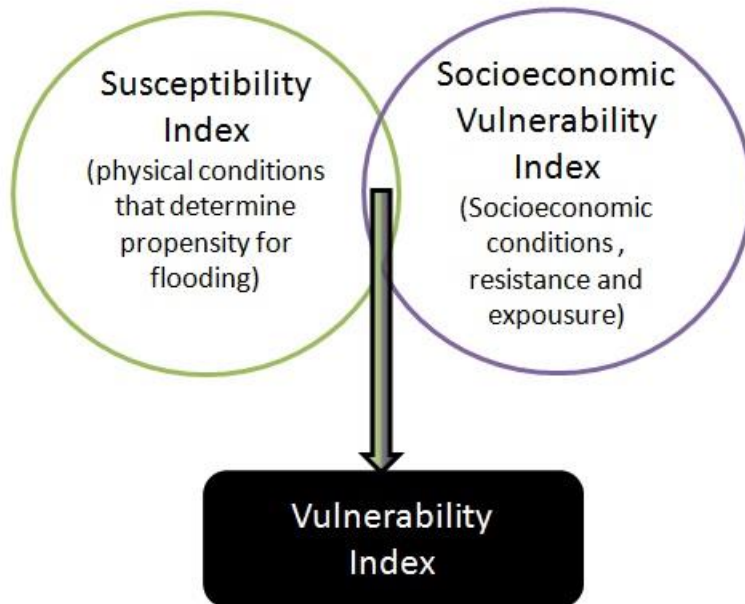


**Figure 1 - Components of a vulnerability Index**

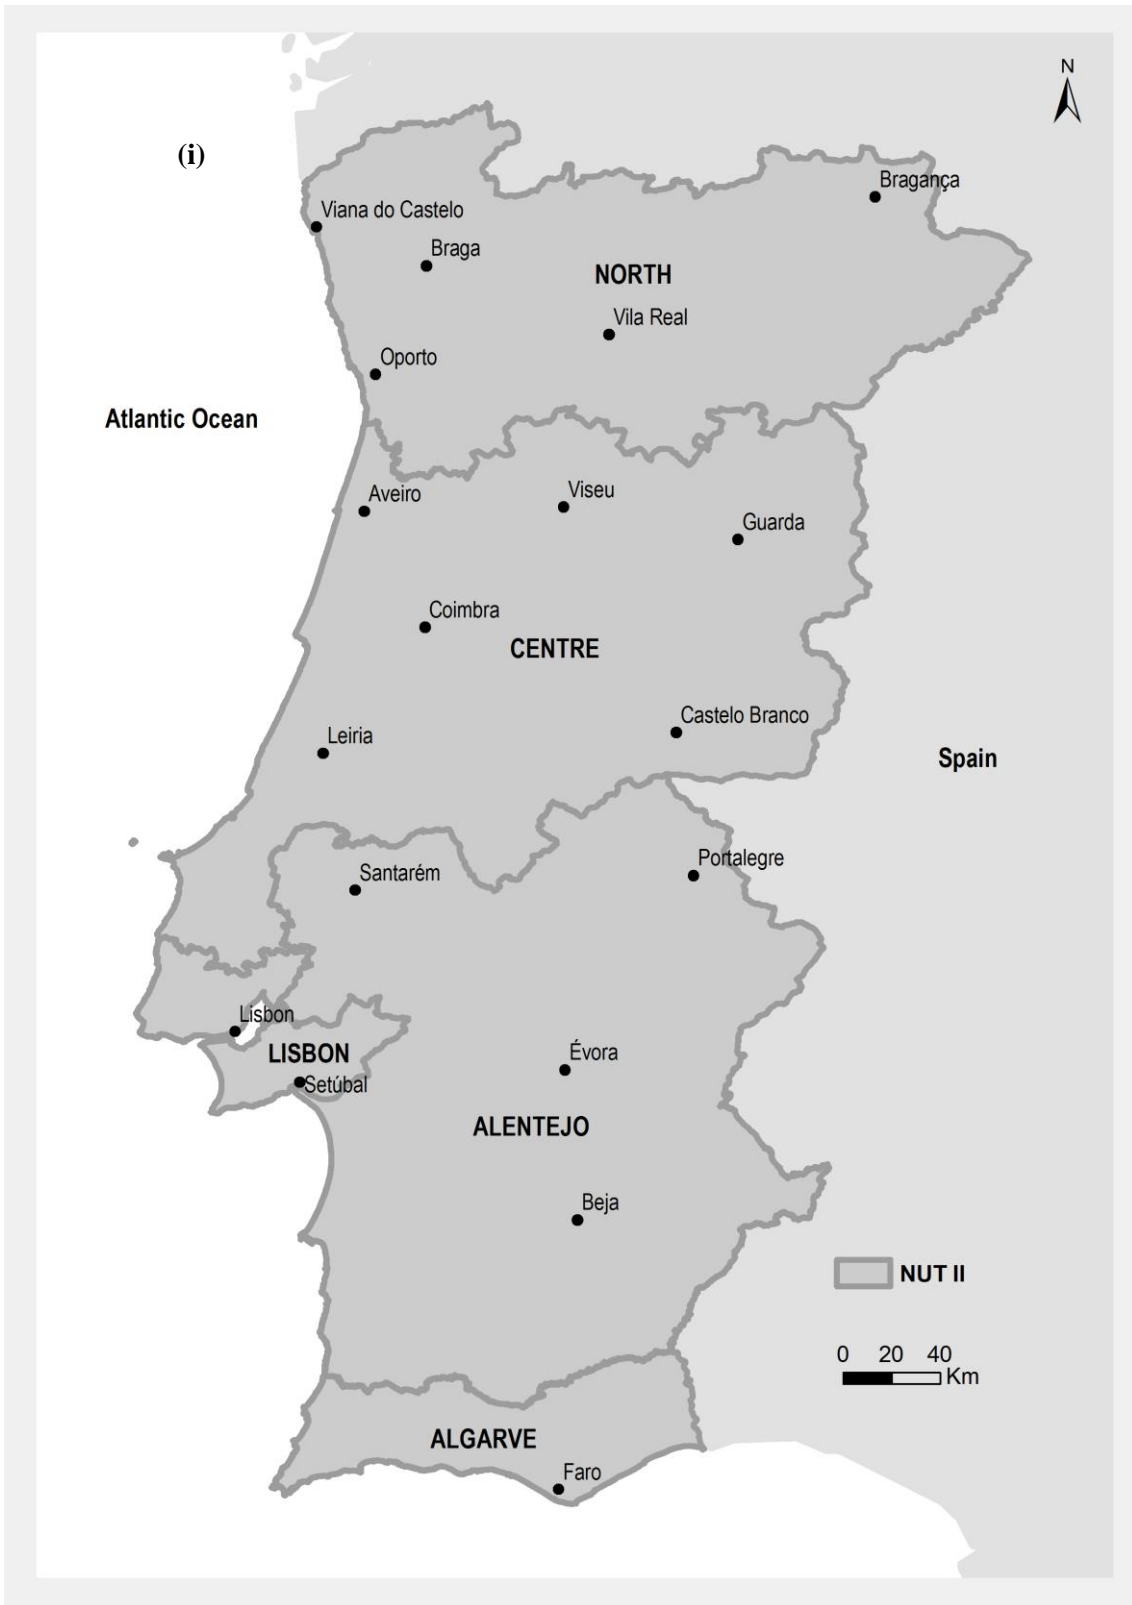


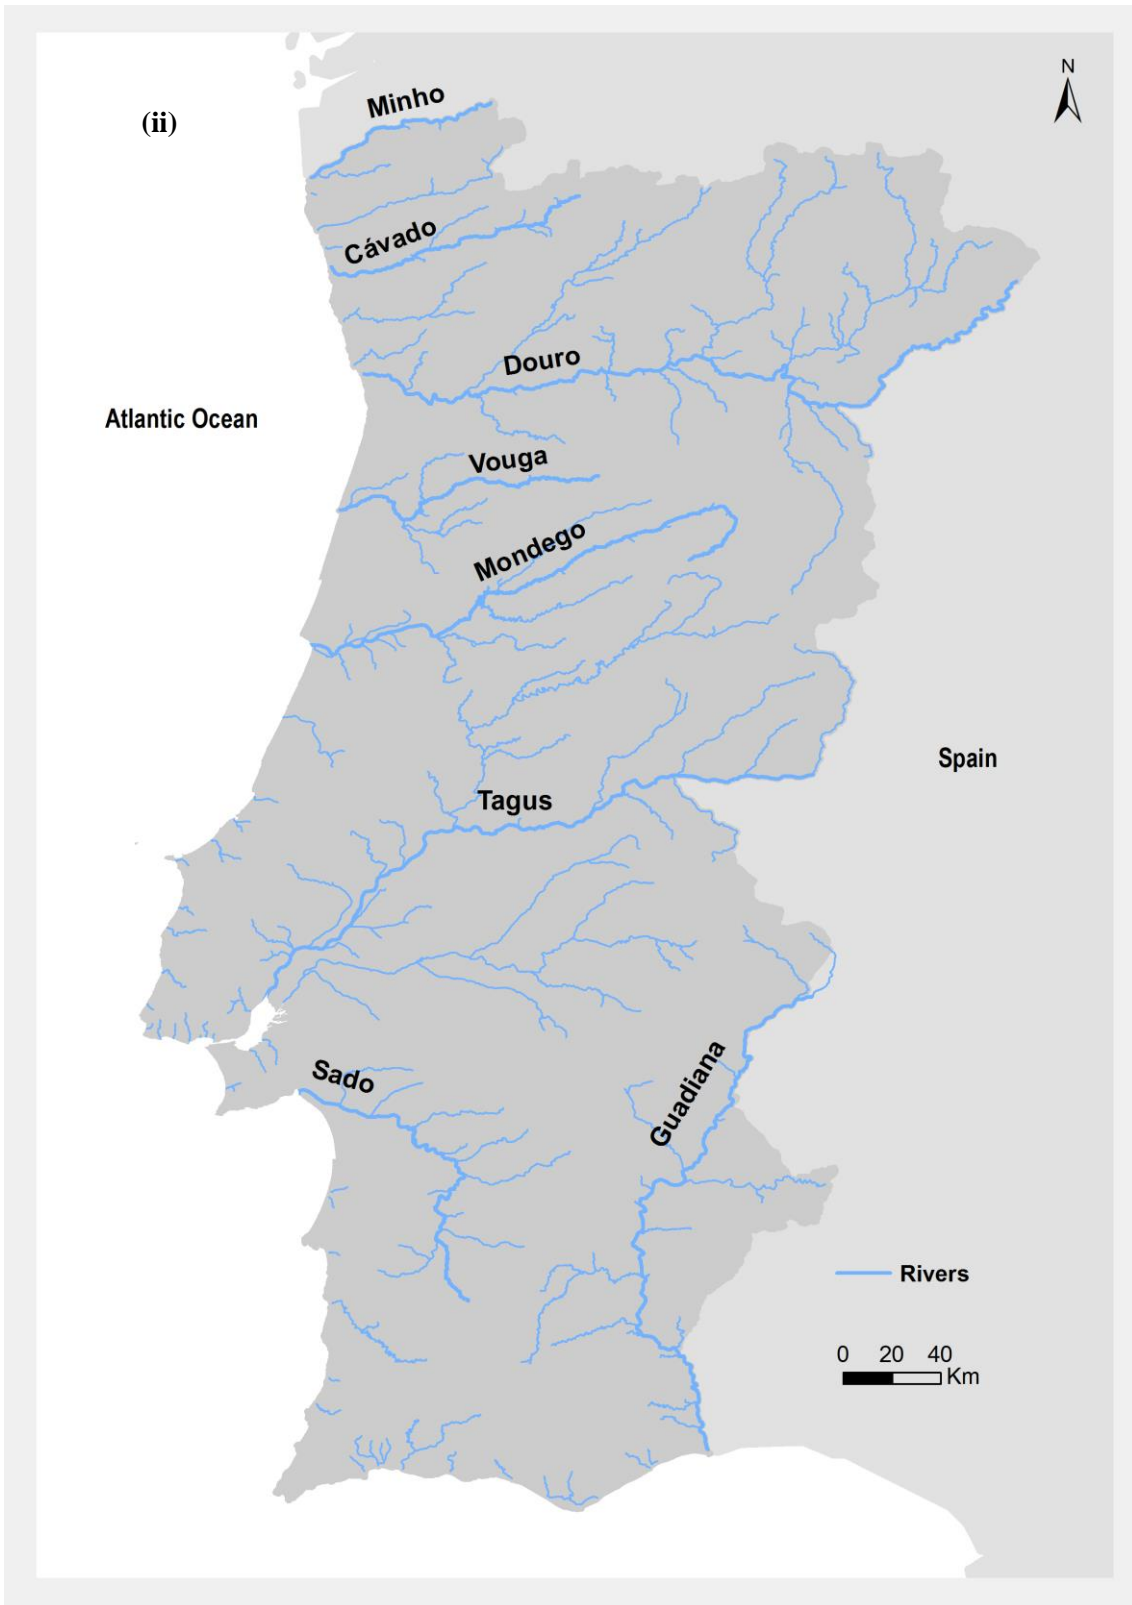


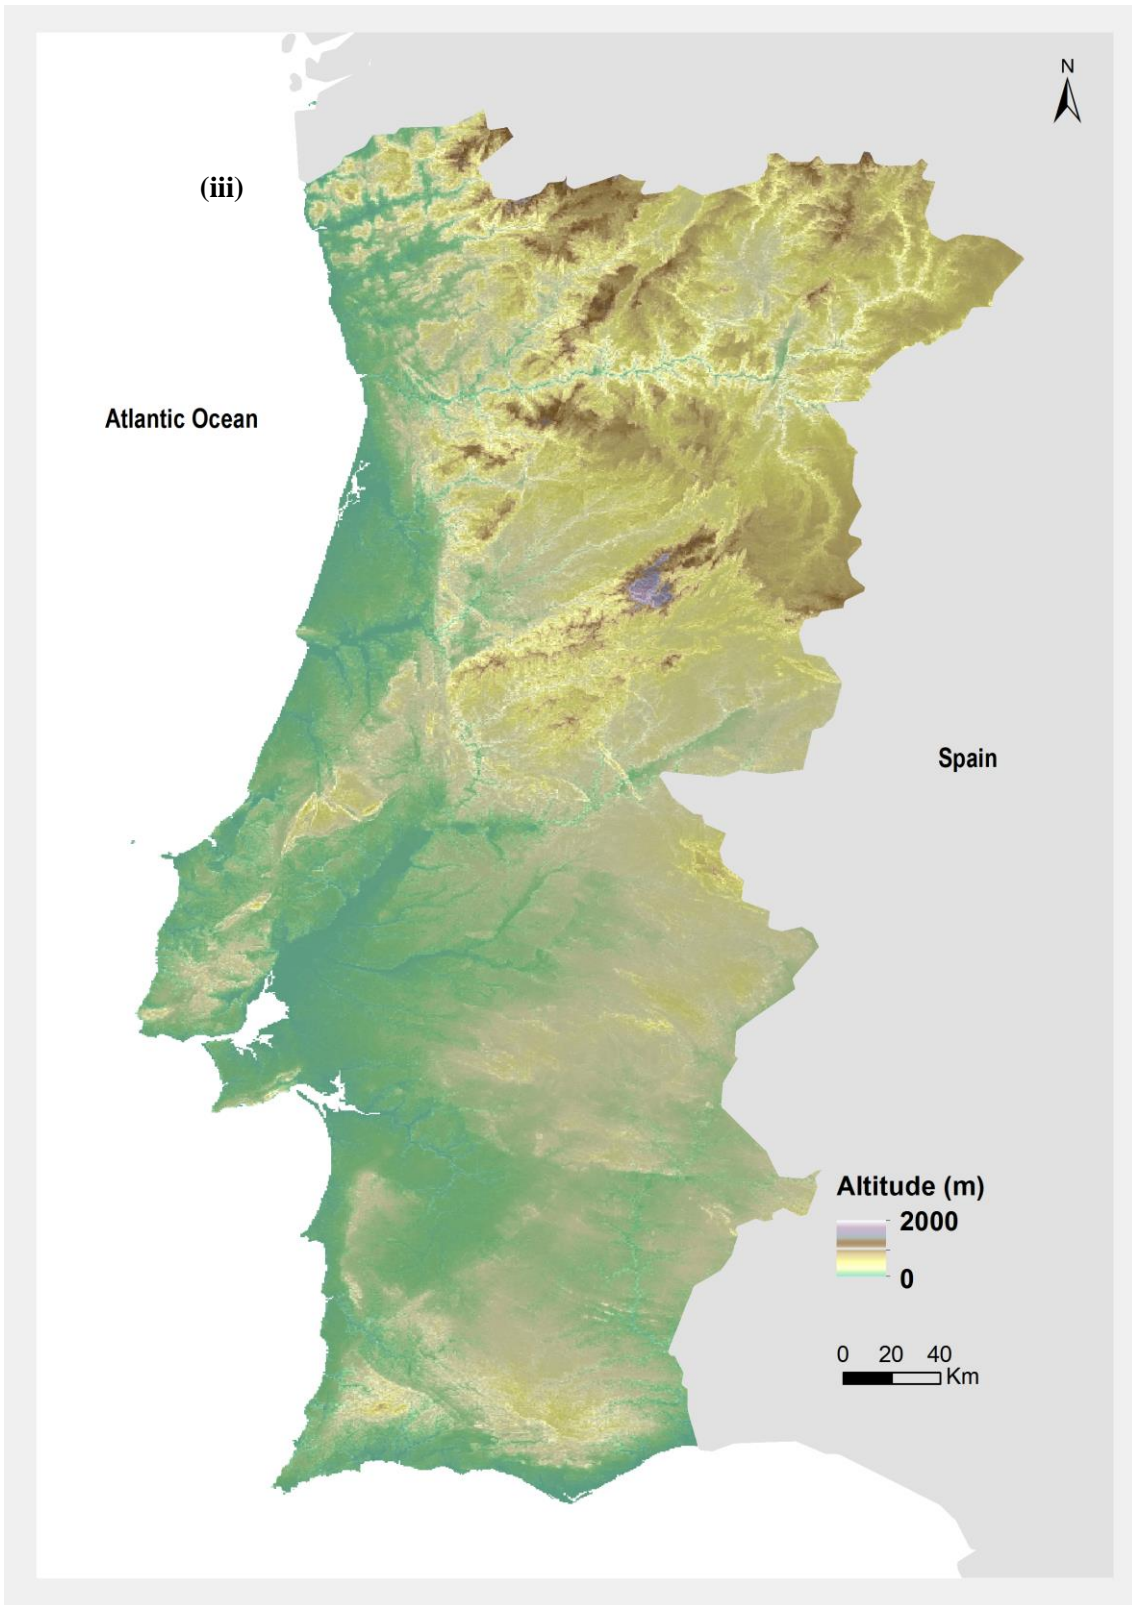


**Figure 2 - Characterization of the study area – Portuguese regions and main cities (i); Portuguese mainland main river network (ii) and; altitude (iii).**

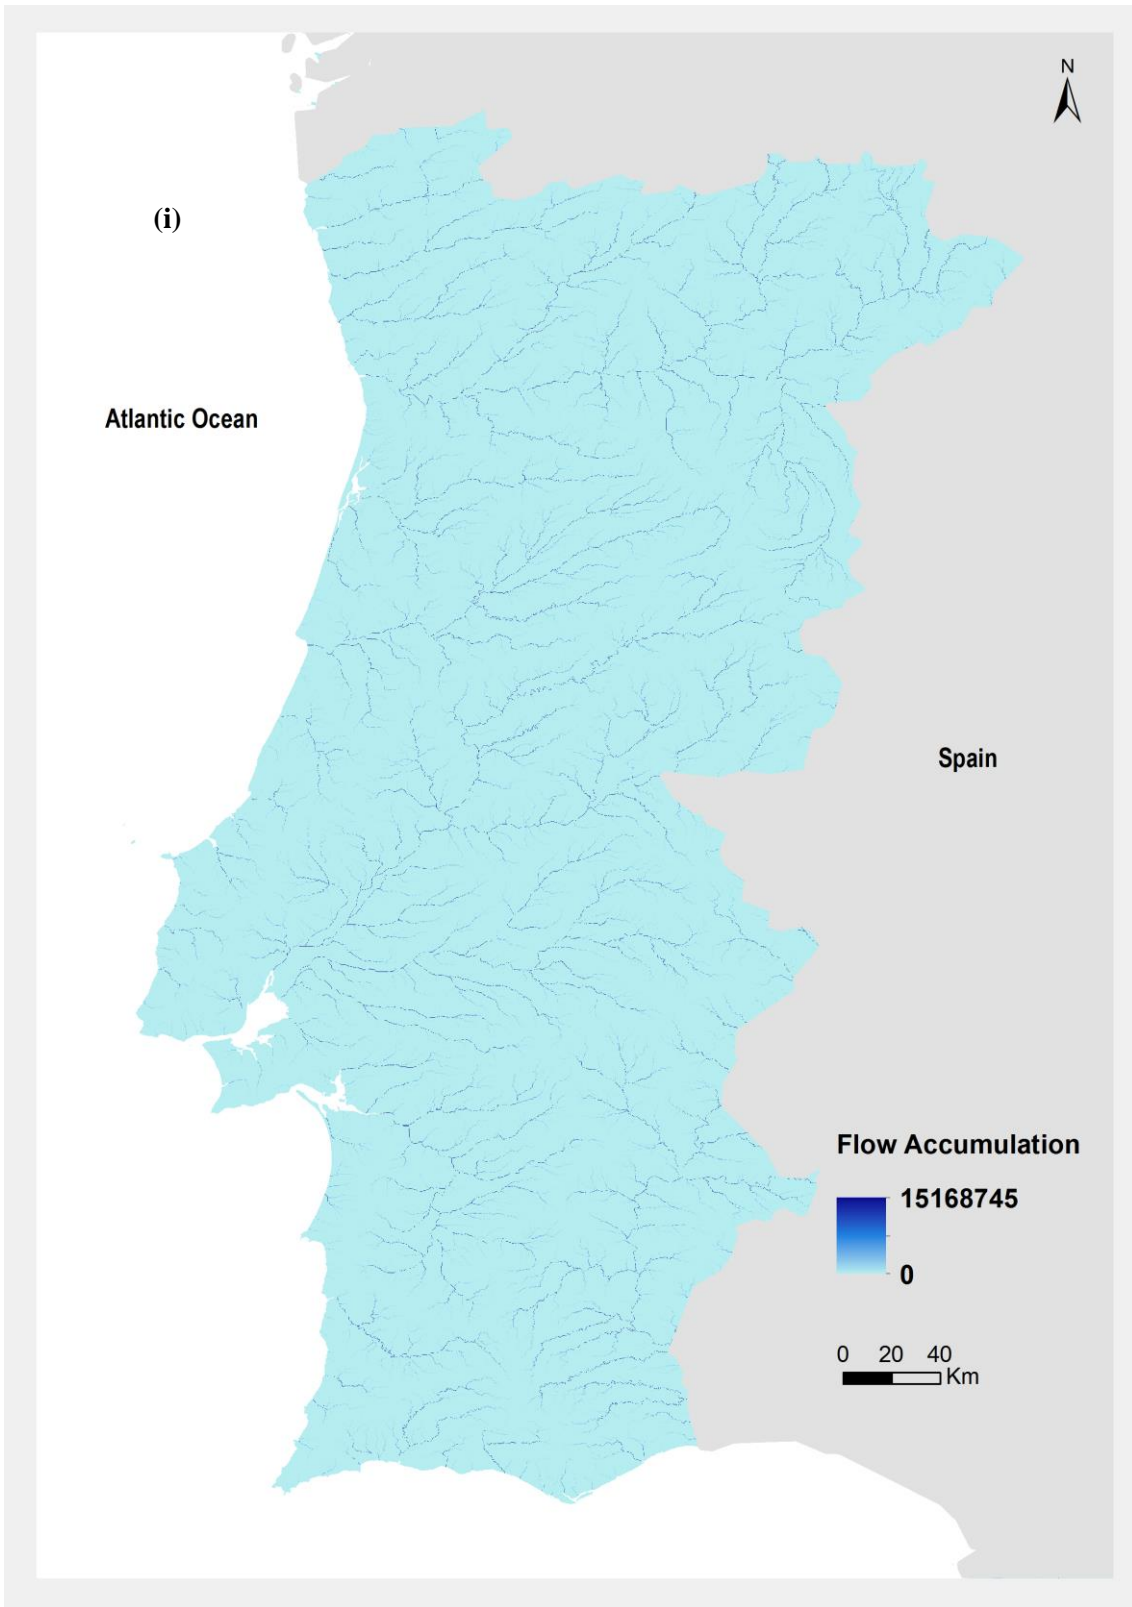

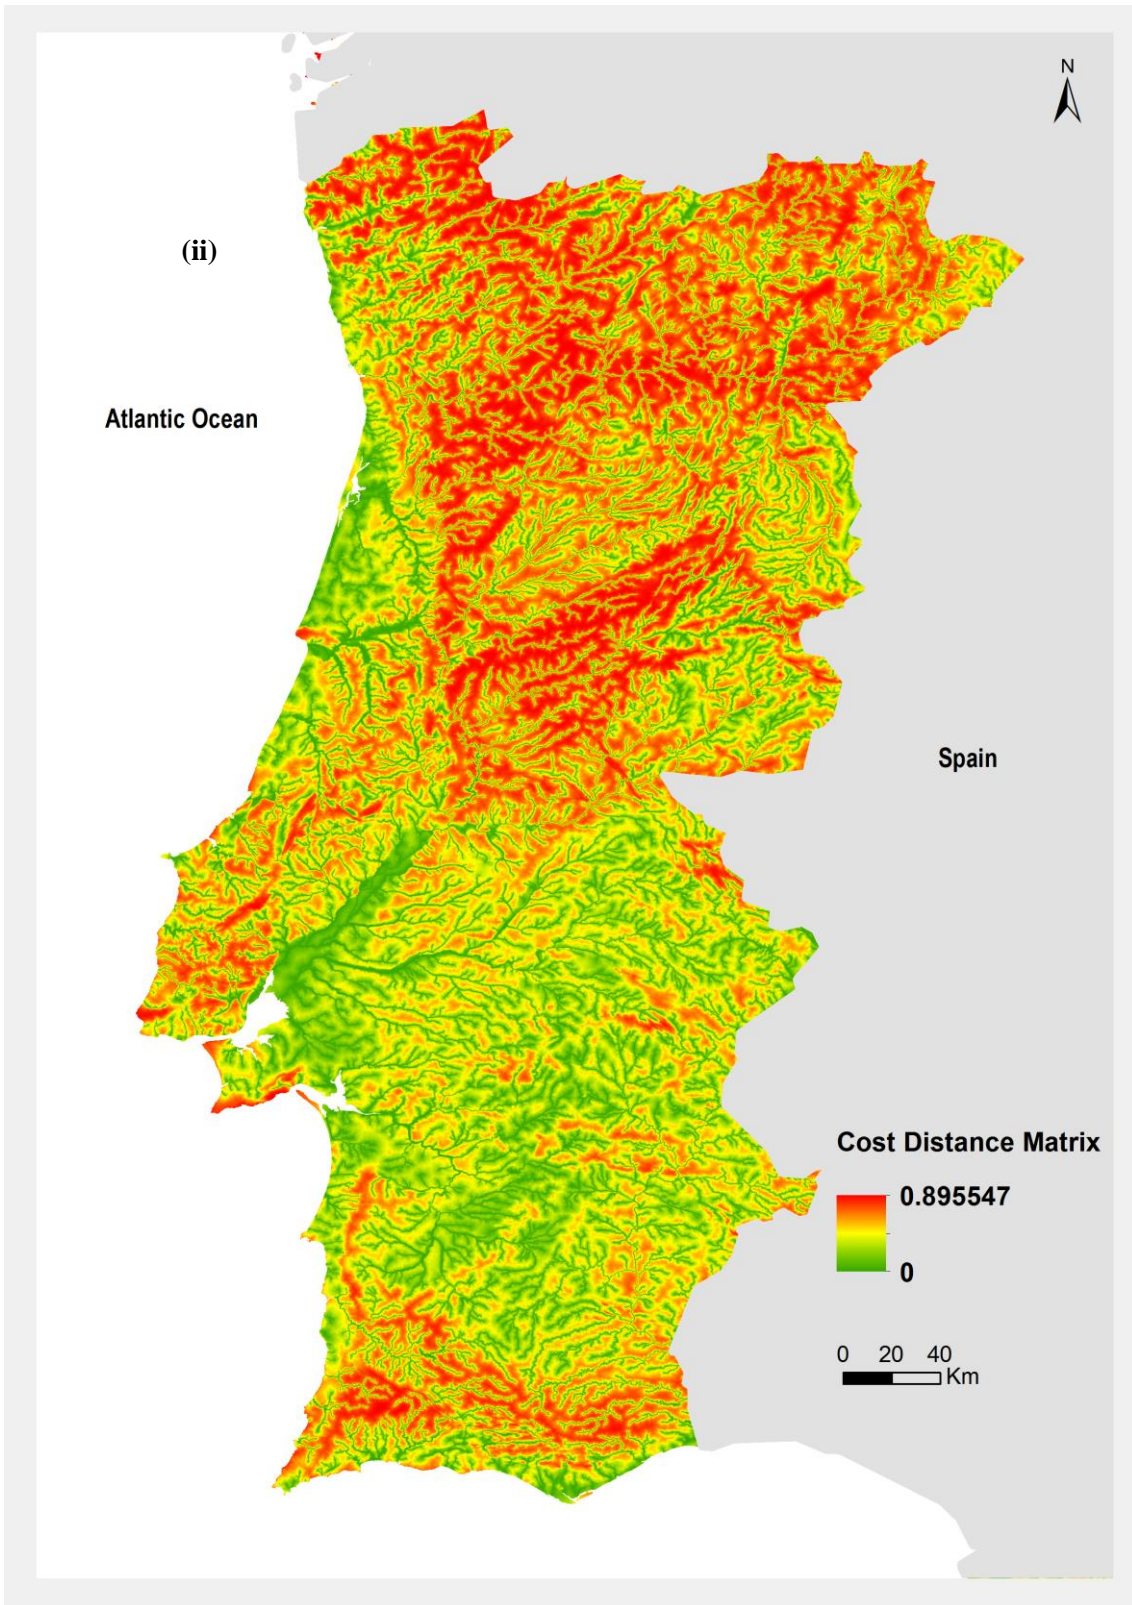


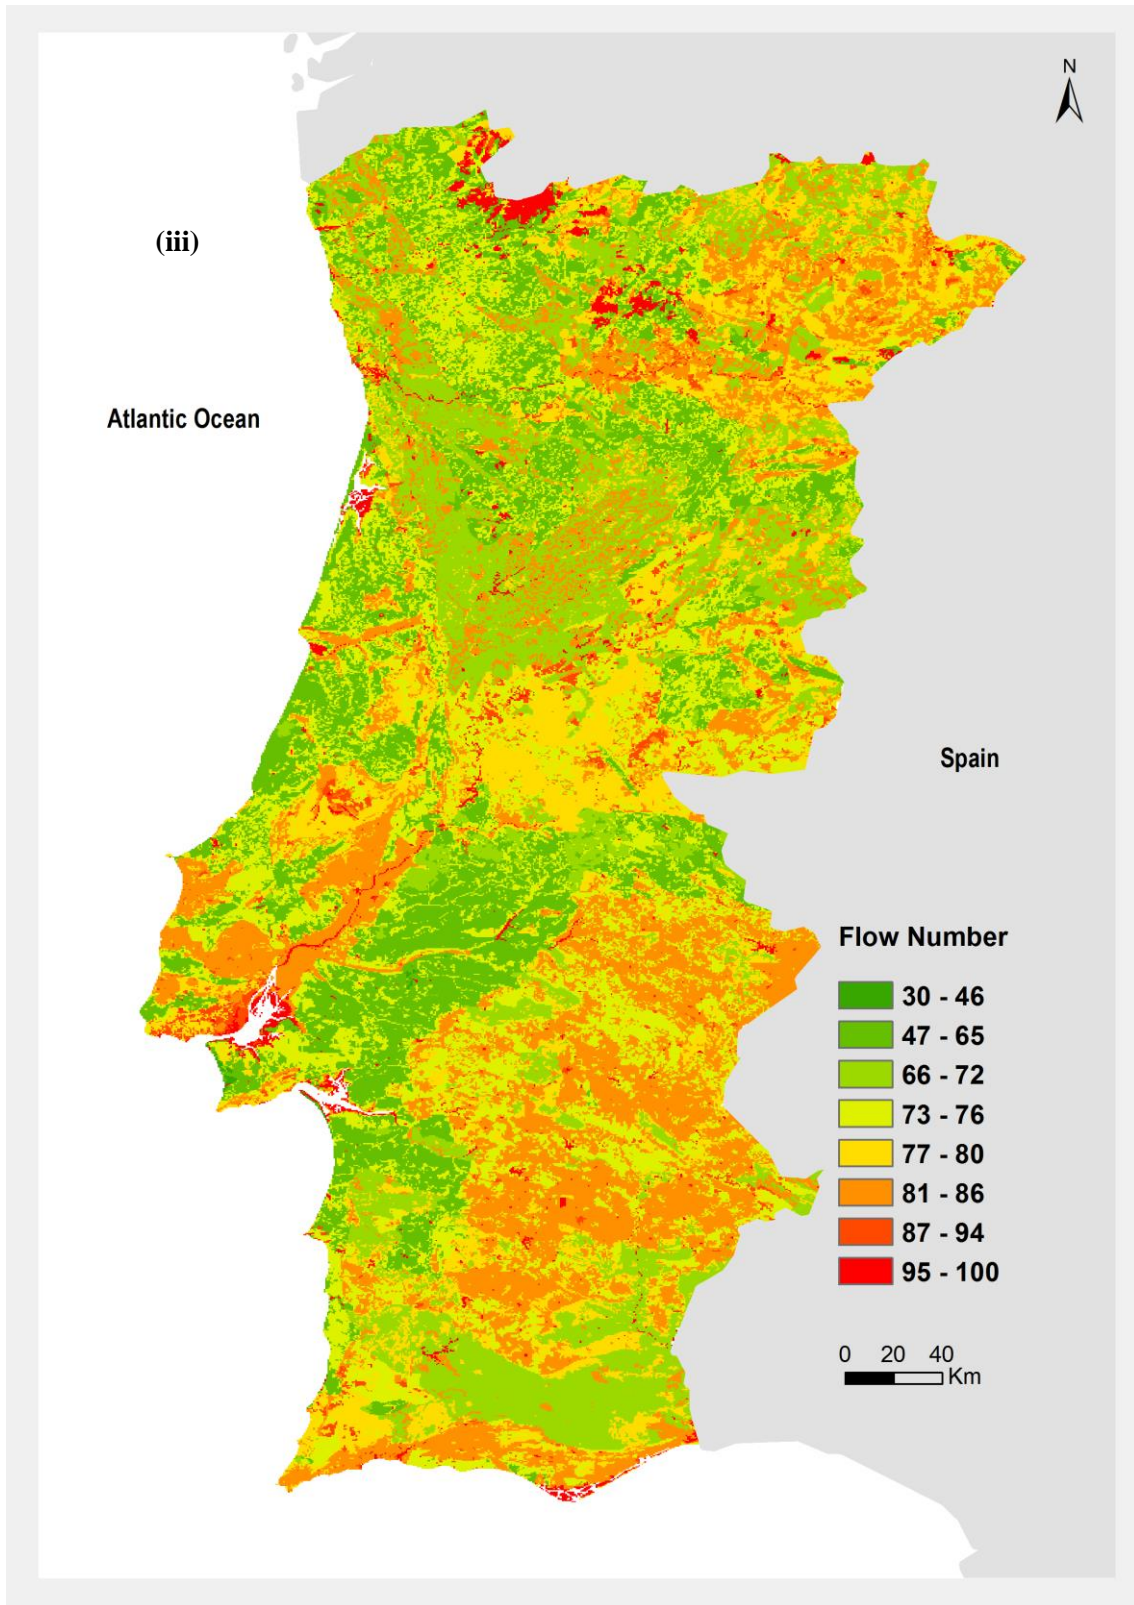


**Figure 3 - Maps of the original variables used in the flood susceptibility index: i) Flow Accumulation ; ii) Cost Distance Matrix; iii) Flow Number.**

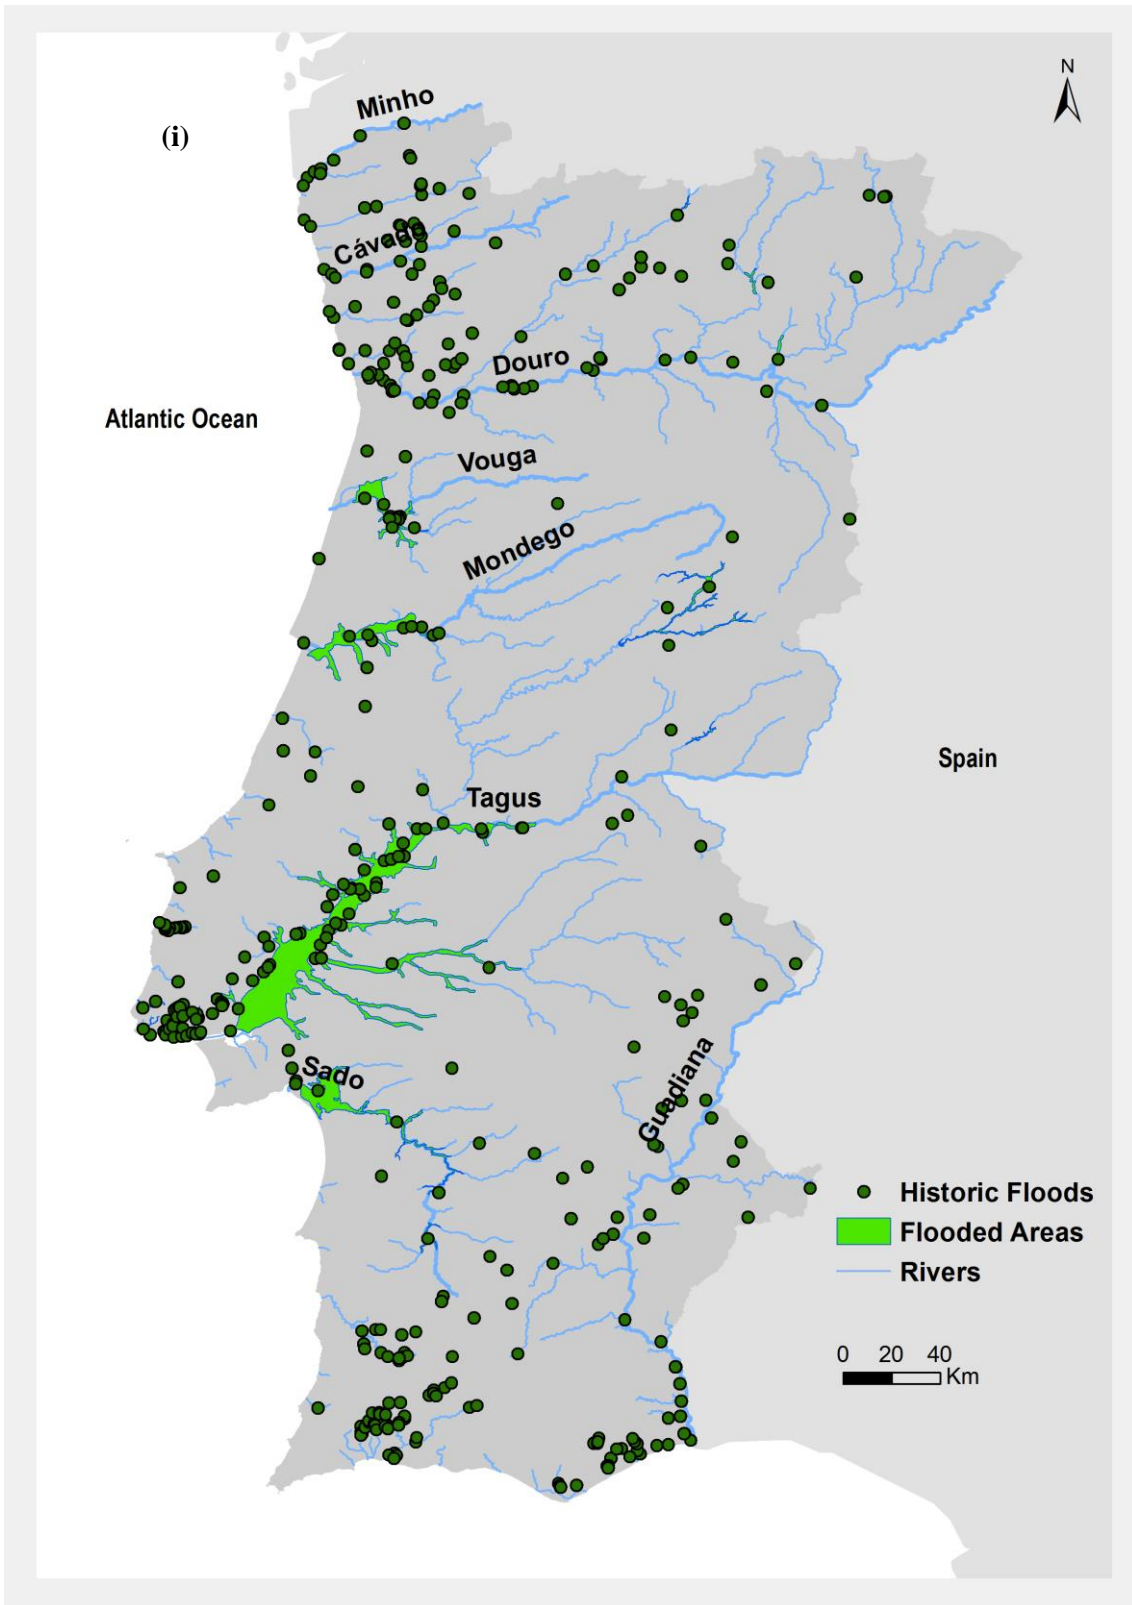





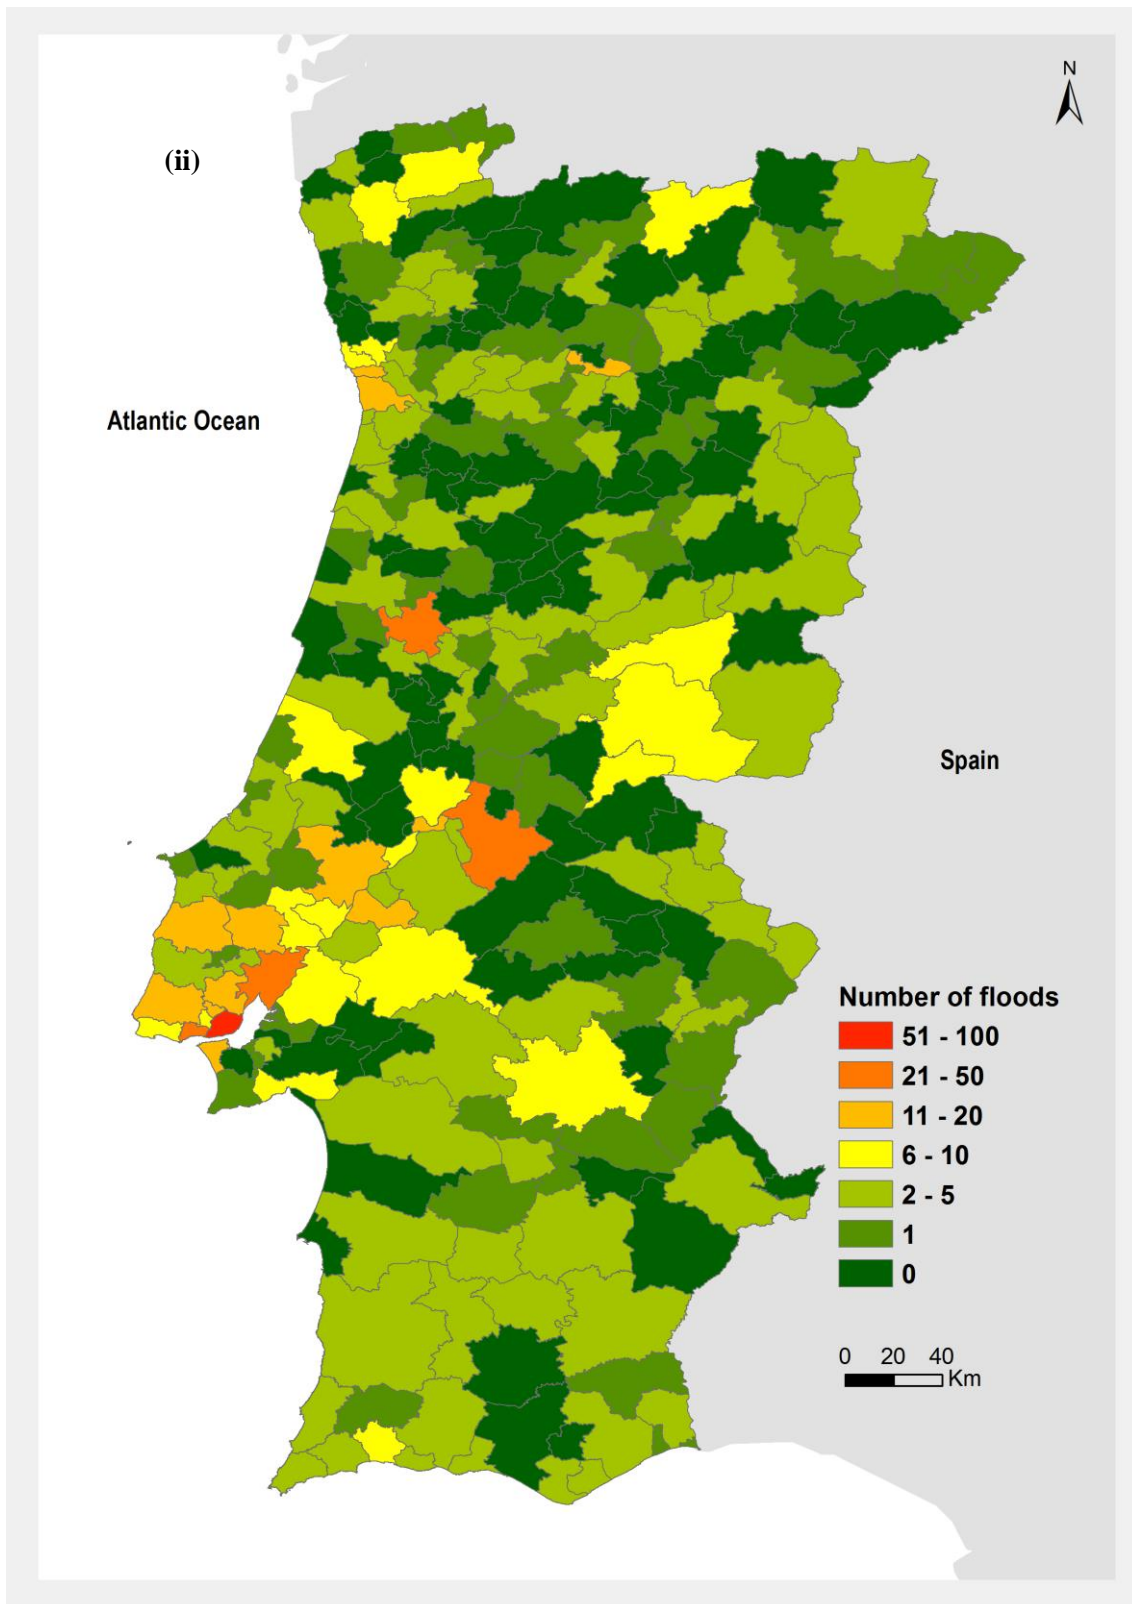


**Figure 4 - External flood datasets used in this work: i) inundated area for the 100 year return period flood in the main Portuguese rivers and flood historical points based on Civil Protection registries and information from journals; ii) number of occurrences with considerable damages per municipality that occurred in the last century (adapted from Quaresma, 2008).**

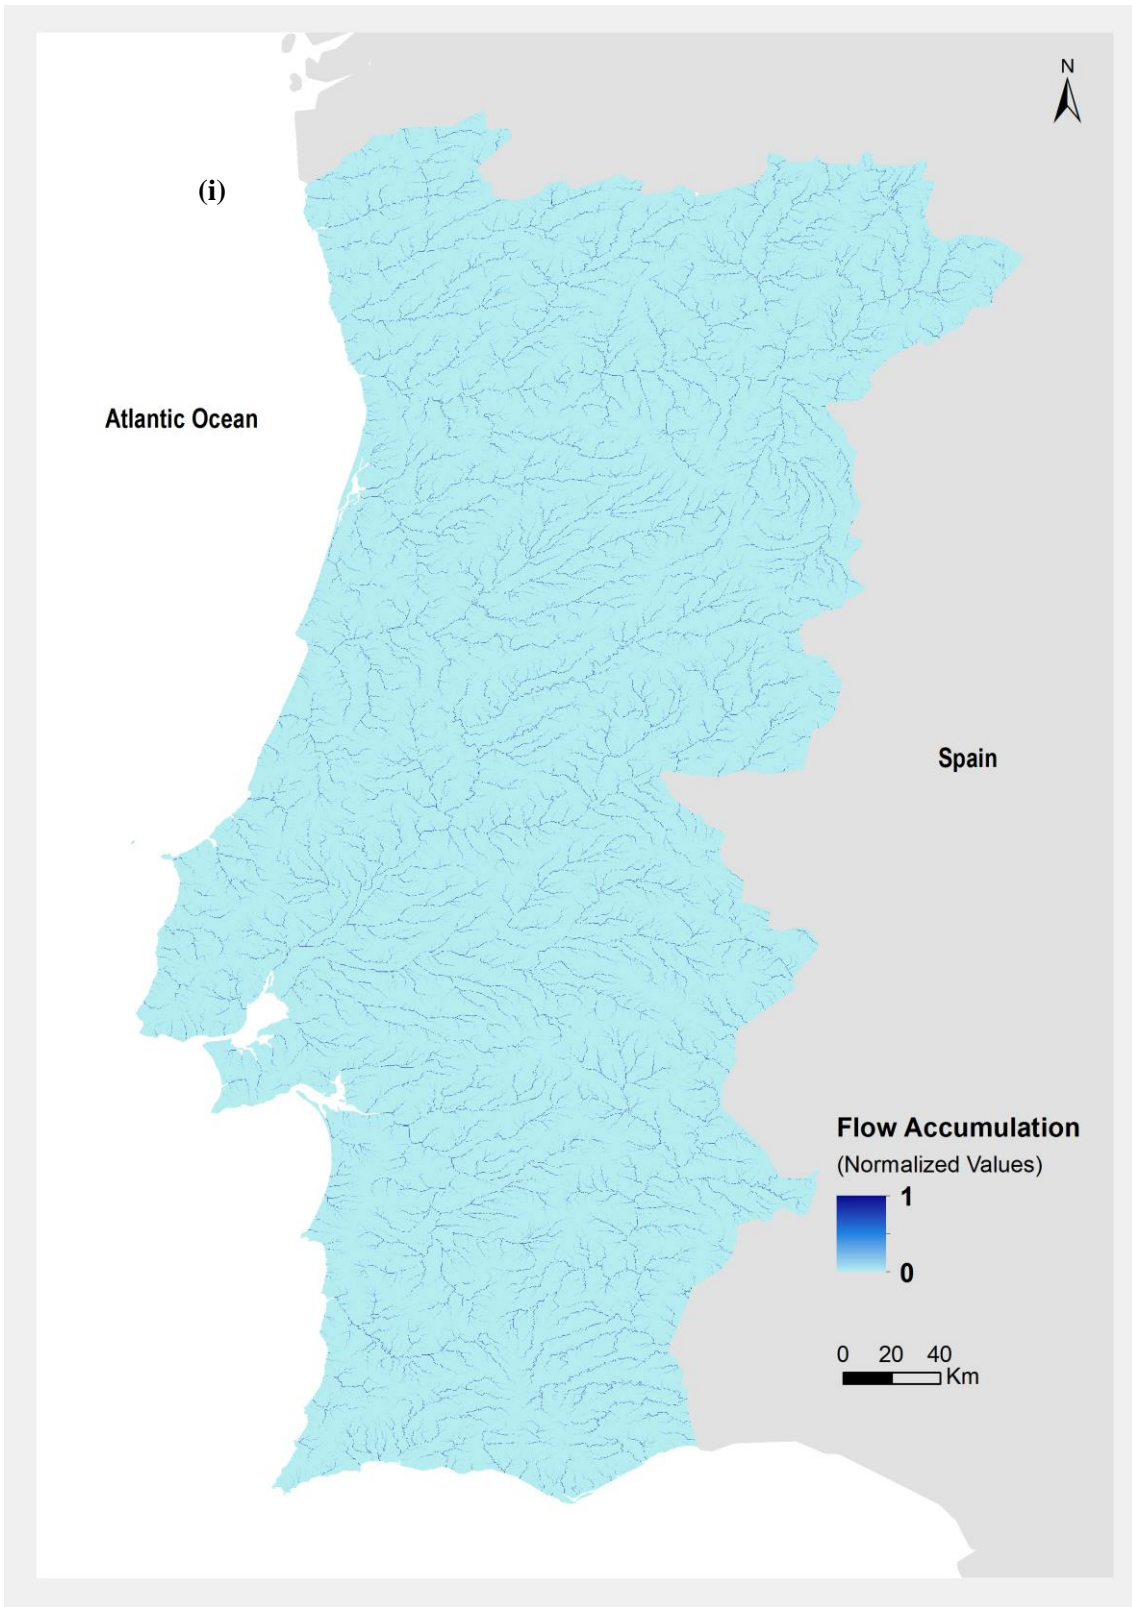

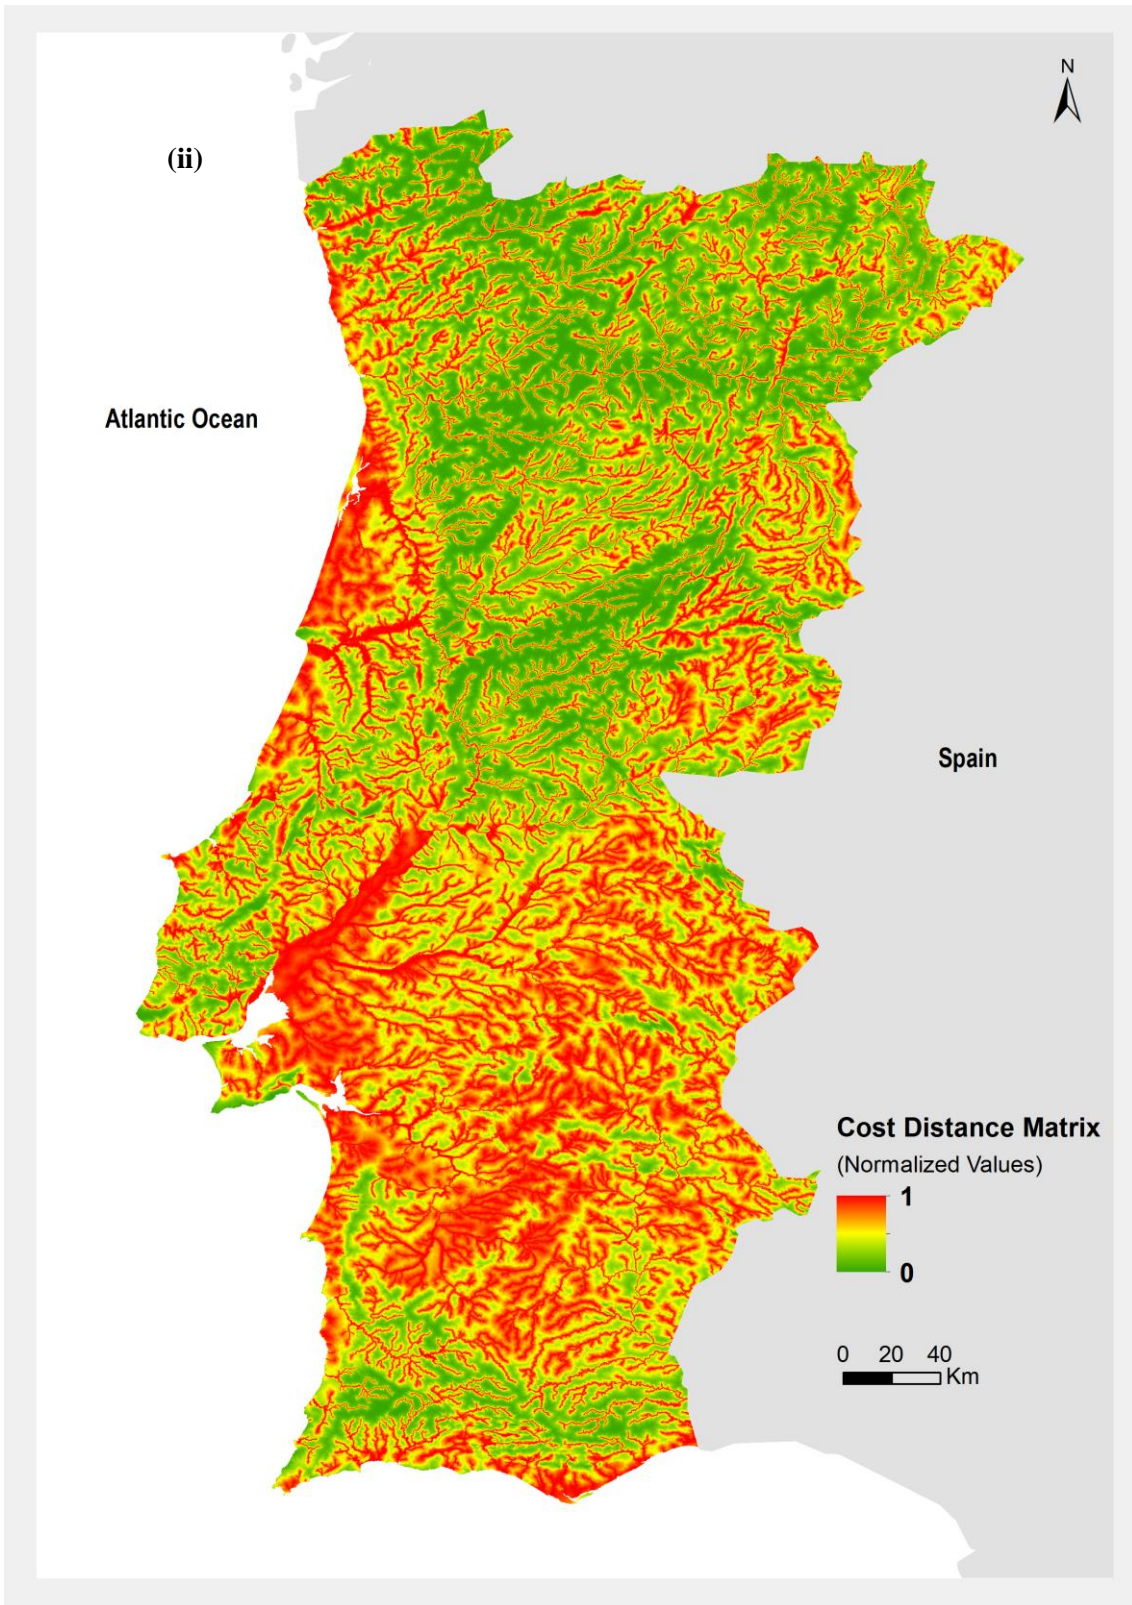


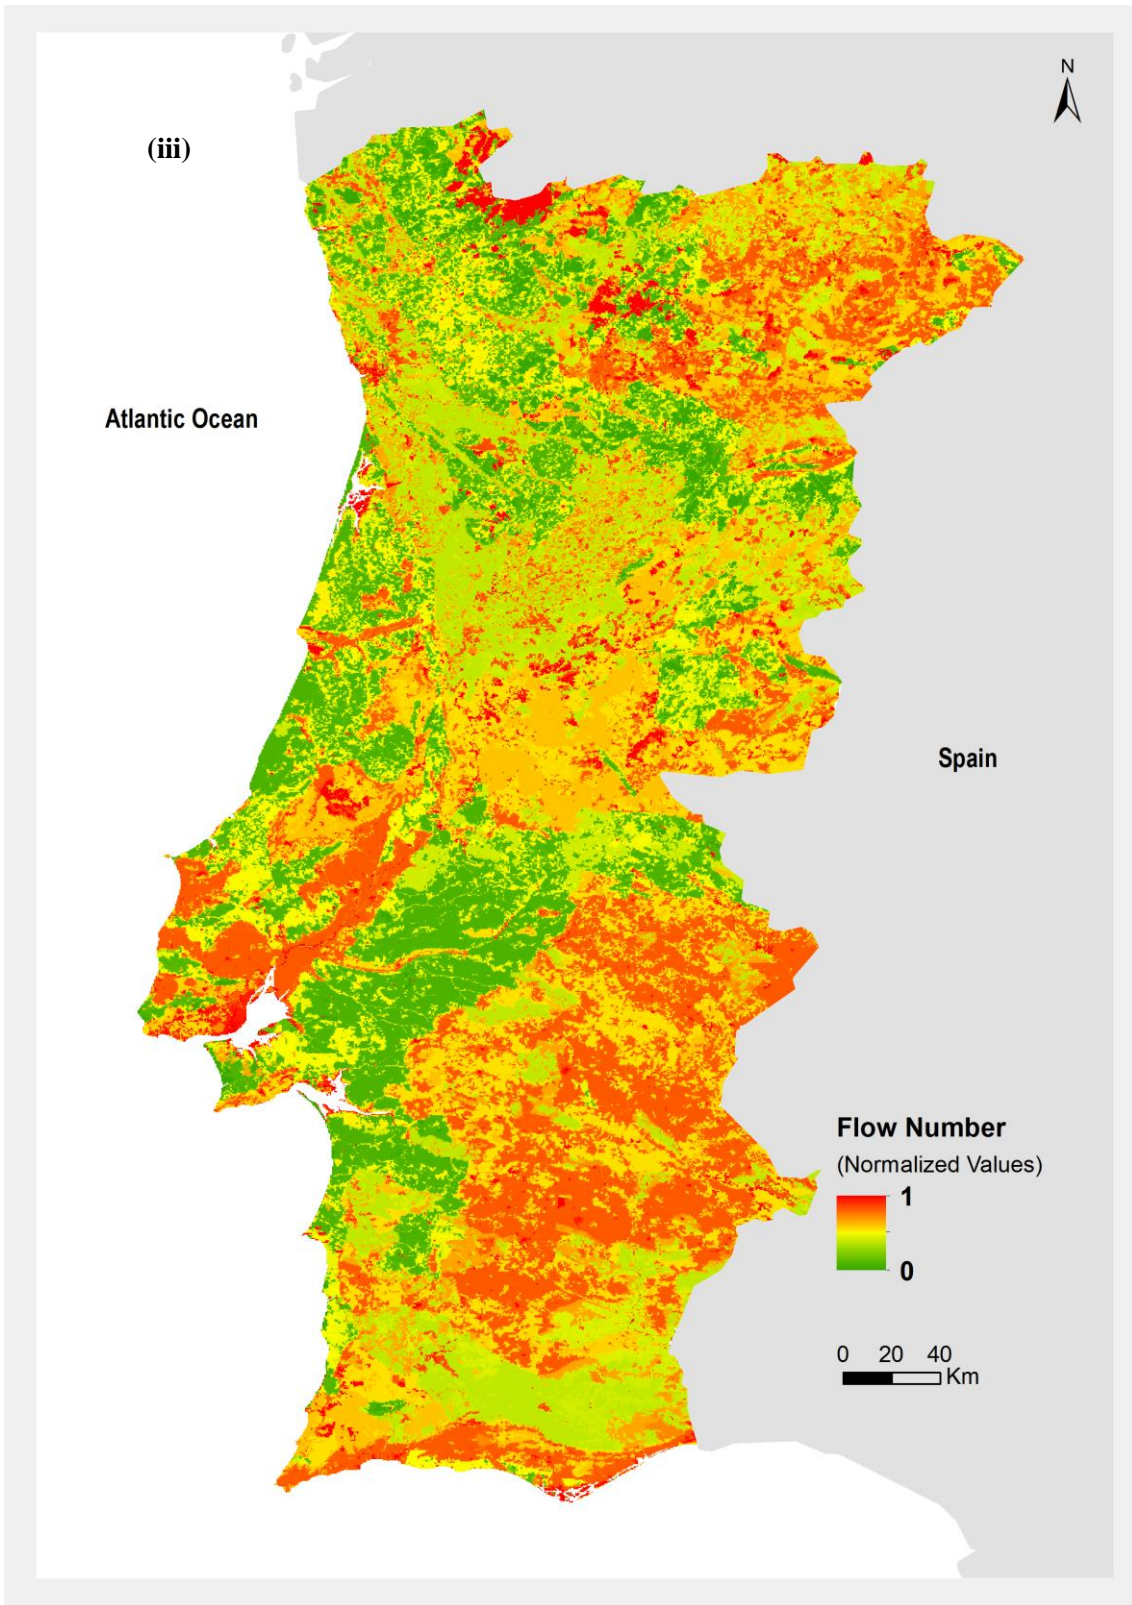


**Figure 5 - Normalized variables used in the flood susceptibility index: i) Flow Accumulation ; ii) Cost Distance Matrix; iii) Flow Number.**

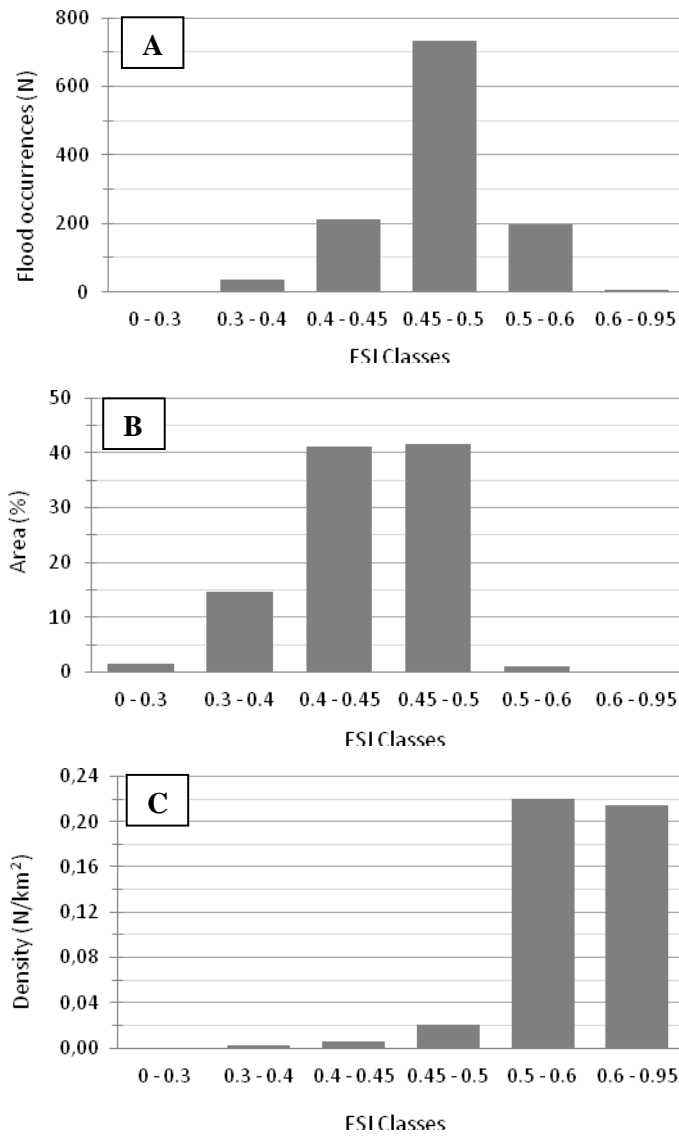


**Figure 6 - Relationship between the FSI classes and the spatial distribution of DISASTER occurrences (1865 a 2010) in mainland Portugal: (A) Occurrence frequency per class (N); (B) Frequency of each FSI class (km<sup>2</sup>); (C) Occurrence density (N/km<sup>2</sup>) per FSI class.**

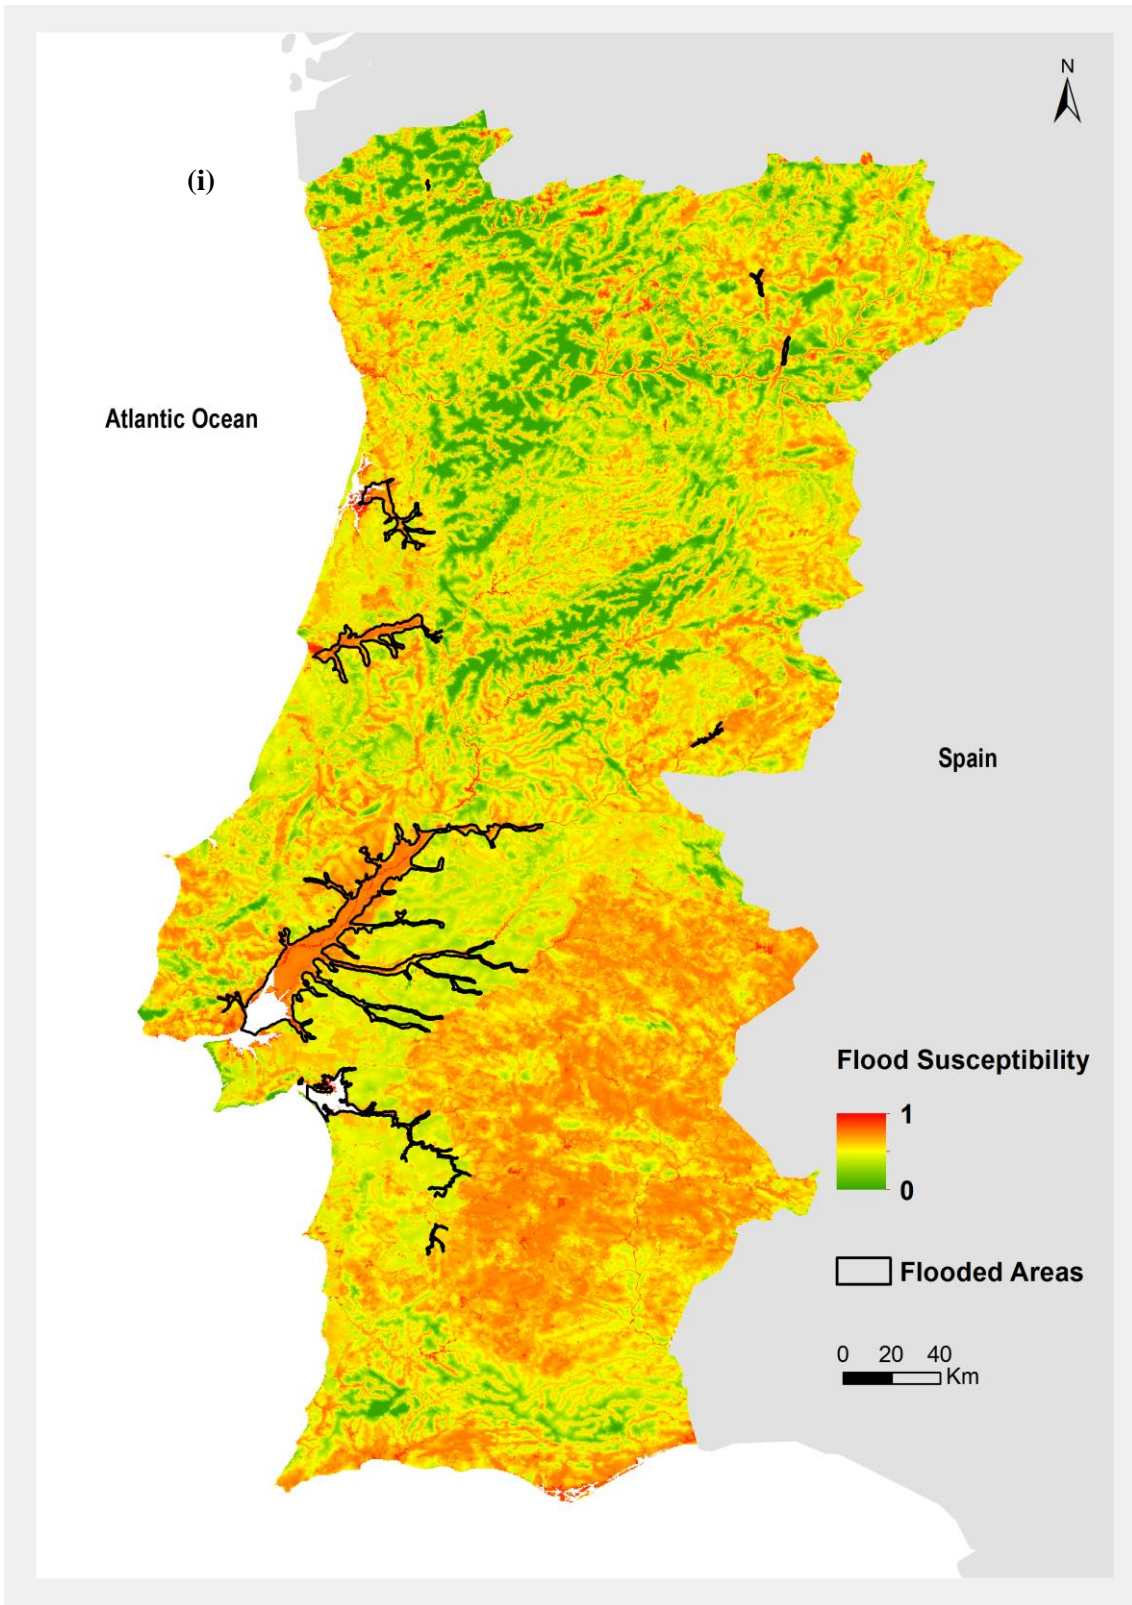

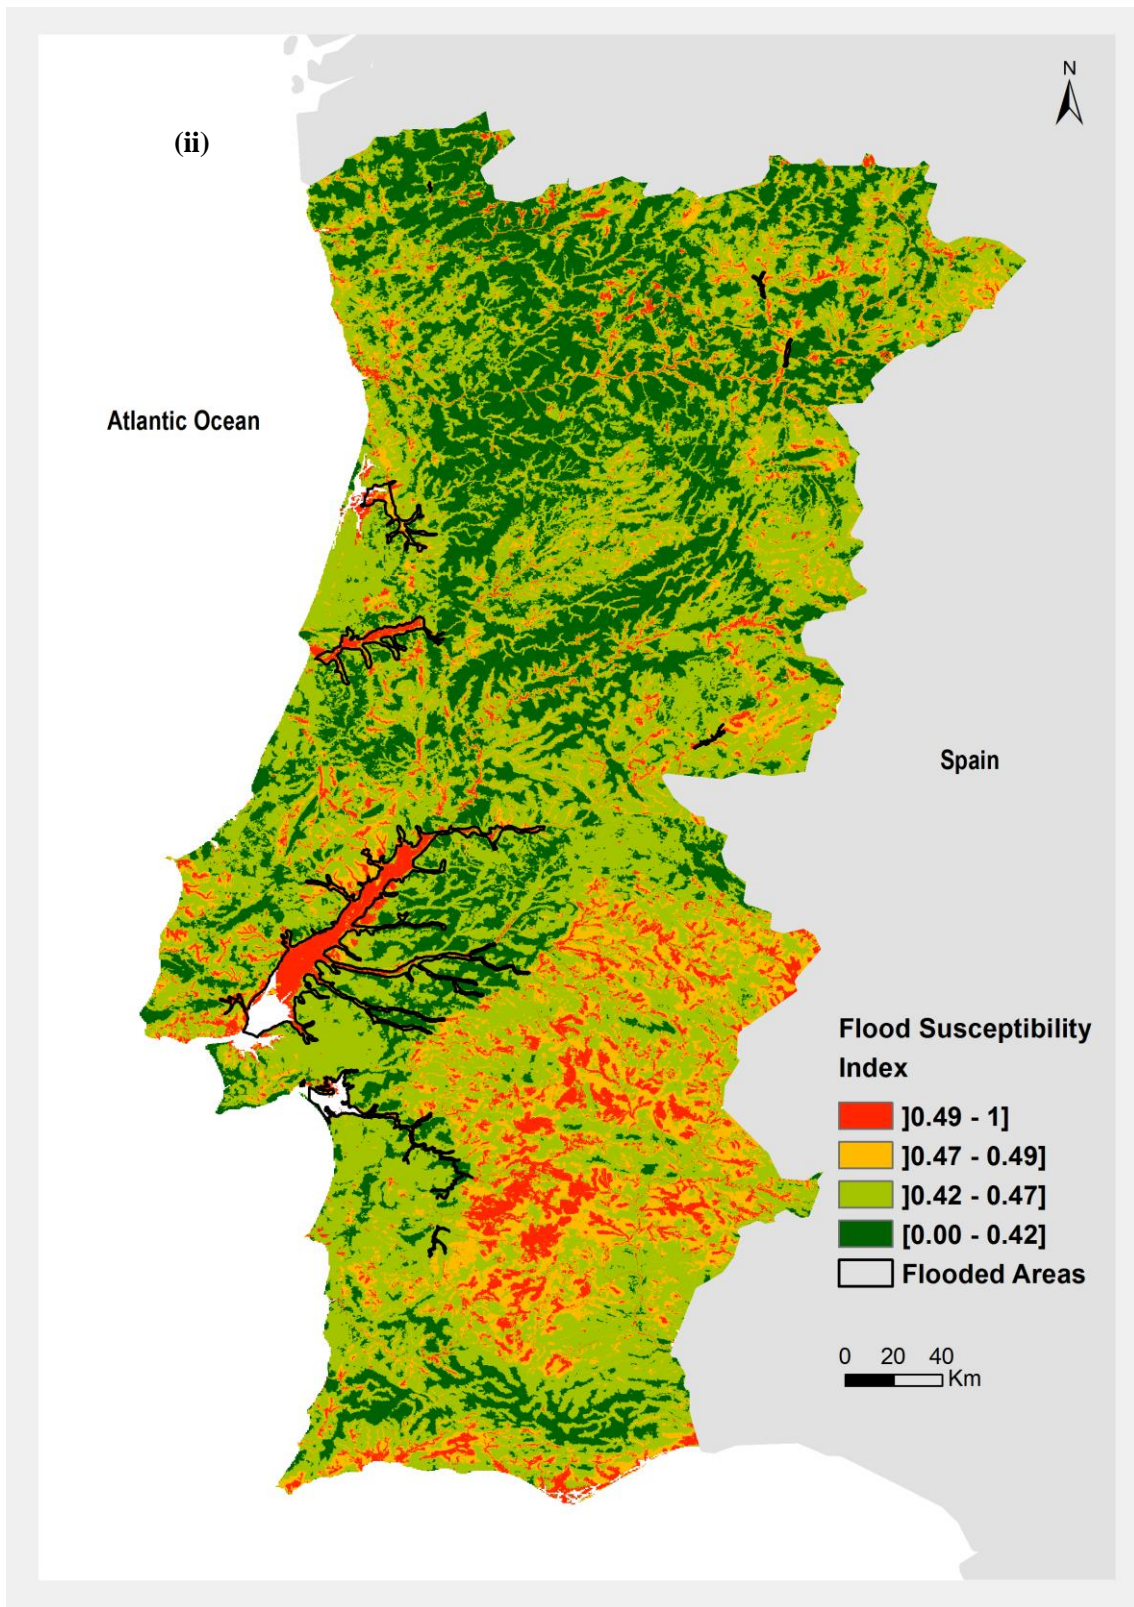


**Figure 7 - Comparison between the flood susceptibility index values and the limits of the 100-year flood area map dataset for the main Portuguese rivers considering: (i) a continuous susceptibility scale; (ii) the proposed index classes.**

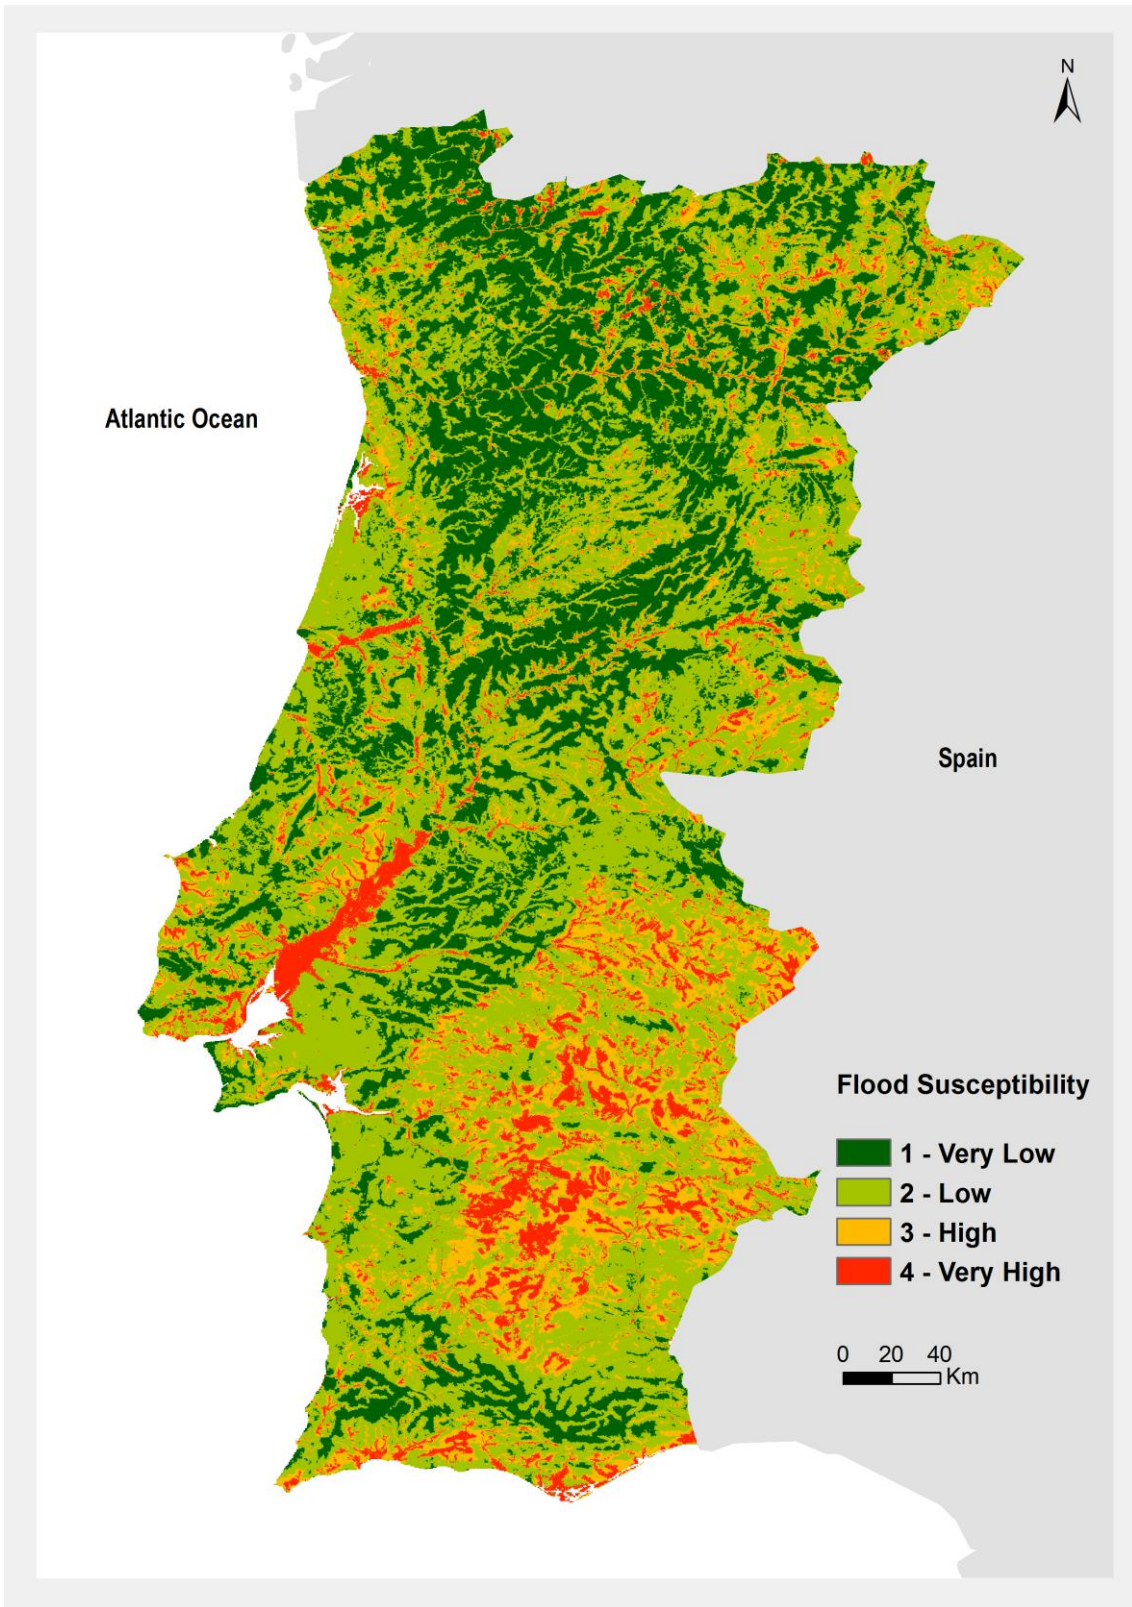

**Figure 8 - Flood Susceptibility Index**



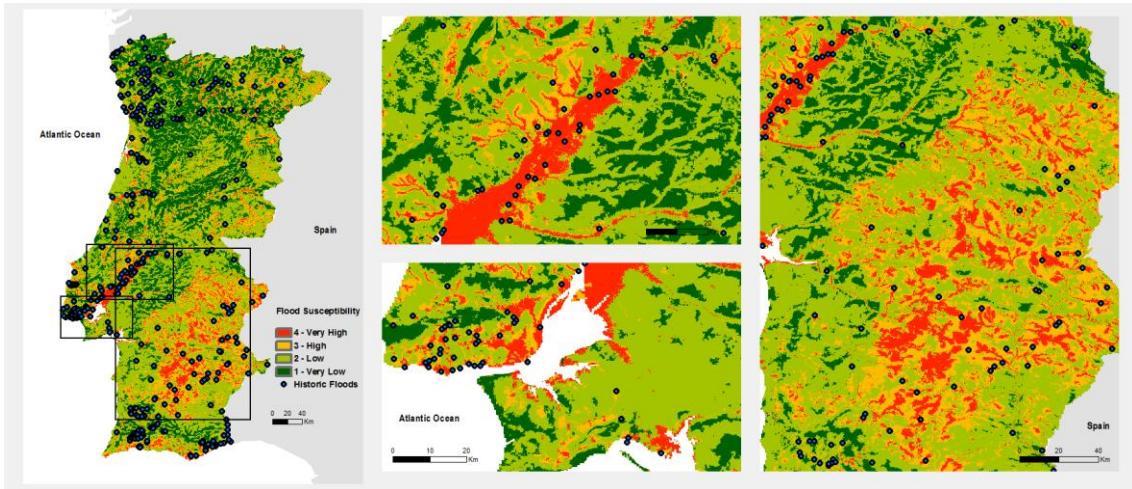

**Figure 9 - Comparison of the Flood Susceptibility Index with the flood events map provided by the Water Institute for: (i) Portugal; (ii) Tagus Basin; (iii) Cities of Lisbon and Setúbal; (iv) Alentejo region**