



Landslide early warning based on failure forecast models

A. Manconi and
D. Giordan

Landslide early warning based on failure forecast models: the example of Mt. de La Saxe rockslide, northern Italy

A. Manconi and D. Giordan

Geohazard Monitoring Group, CNR IRPI, Strada delle Cacce 73, 10135 Torino, Italy

Received: 30 January 2015 – Accepted: 8 February 2015 – Published: 23 February 2015

Correspondence to: A. Manconi (andrea.manconi@irpi.cnr.it)

Published by Copernicus Publications on behalf of the European Geosciences Union.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Abstract

We investigate the use of landslide failure forecast models by exploiting near-real-time monitoring data. Starting from the inverse velocity theory, we analyze landslide surface displacements on different temporal windows, and apply straightforward statistical methods to obtain confidence intervals on the estimated time of failure. Here we describe the main concepts of our method, and show an example of application to a real emergency scenario, the La Saxe rockslide, Aosta Valley region, northern Italy. Based on the herein presented case study, we identify operational thresholds based on the reliability of the forecast models, in order to support the management of early warning systems in the most critical phases of the landslide emergency.

1 Introduction

The use of analytical and numerical models to determine the occurrence of natural hazards is a major scientific subject. For landslides, this topic has great relevance in the scientific community, but leads to strong effects also on best practices for an efficient management of the territory. The approaches used to forecast landslide occurrence mainly depend on the spatial scale analyzed (regional vs. local), the temporal range of forecast (long- vs. short-term), as well as the triggering factor and the landslide typology considered. A consistent portion of landslide phenomena is triggered by intense and prolonged rainfall events, thus, a large number of studies have focused on the relationship between intensity/duration of the rainfalls, and the consequent activation (or re-activation) of landslides (Wieczorek and Guzzetti, 1999). In general, the main inputs for these analyses are retrieved from rain gauges data and historical landslide catalogues. Models are used to identify and calibrate the intensity/duration thresholds that, if overcome during a rainfall event, may lead to the occurrence of landslides in a specific area. Early Warning Systems (EWS) based on this approach rely on the acquisition of near real time rain gauges data, and consider both the precipitation measured as well

Landslide early warning based on failure forecast models

A. Manconi and
D. Giordan

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



as rain forecasts based on meteorological models (Rossi et al., 2012). EWS of this kind are used worldwide and usually applied at regional scales, and can be well considered as a suitable solution in areas where the combination of peculiar climatic conditions, landslide susceptibility, and dense population generate high-risk exposure.

By considering large slope instabilities at the scale of a single phenomenon, event forecast attempts are generally approached in a different manner. Large instable slopes include a wide range of landslides, from slow slope deformations to rapid and catastrophic rockslides. One of the most critical issues related to these phenomena is their attitude to evolve into gravitational events of impulsive nature, involving a partial or total portion of the instable mass (e.g. rock falls and/or rock avalanches). In this context, surface displacements and/or deep-seated deformation represent often the key information for a proper understanding and interpretation of the phenomenon (Wieczorek and Snyder, 2009). When instable slopes menace population and/or important infrastructures, complex monitoring networks are set up as the base of EWS.

In such situations, EWS may rely on thresholds defined on direct measurements of physical parameters describing the landslide evolution over time, i.e. surface and/or sub-surface displacements data (Michoud et al., 2013). If thresholds are exceeded, specific actions are typically predisposed to reduce the consequences of a potential landslide failure on the population and/or exposed infrastructures (Medina-Cetina and Nadim, 2008). Problems on the identification of these thresholds are well known, and are mainly caused by the complexity of the phenomena analyzed, as well as by the large number of variables to consider (Crosta and Agliardi, 2002). Moreover, an additional limitation of this approach is that, when the last threshold is exceeded, EWS end their efficacy. This is usually the most critical stage of the landslide emergency; indeed, the time lasting before a (partial or total) landslide failure occurrence is still unknown, and thus the critical situation can be protracted for long periods.

In the last decades, several modeling procedures have been proposed for the estimation of the Time of Failure (ToF) for landslide phenomena. These approaches, hereafter cited as Failure Forecast Methods (FFMs), analyze the evolution of the landslide de-

Landslide early warning based on failure forecast models

A. Manconi and
D. Giordan

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

Landslide early warning based on failure forecast models

A. Manconi and
D. Giordan

Title Page	
Abstract	Introduction
Conclusions	References
Tables	Figures
◀	▶
◀	▶
Back	Close
Full Screen / Esc	
Printer-friendly Version	
Interactive Discussion	

(ii) $v > thr_1$ = warning conditions, (iii) $v > thr_2$ = alarm. When thr_1 or thr_2 are exceeded at a specific measurement point (or area), the EWS can be set to send alert messages (e.g. via SMS and/or email) to the responsible authorities. The latter have to evaluate the situation and eventually activate specific civil protection procedures (Allasia et al., 2013; Intrieri et al., 2012). EWS using as thresholds only values based on the actual deformation measured do not provide any information about the possible evolution of the landslide towards failure. Thus, to overcome this issue, when thr_2 has been exceeded an automatic procedure is activated to provide a failure forecast. More specifically, the Fukuzono's inverse-velocity method is applied by considering several Calculation Time Windows (CTW, e.g. data acquired over the last 12, 24, 48 h, 1 week, etc.), and iterating the procedure several times (e.g. $N = 1000$ iterations) within a bootstrap resampling strategy (readers are referred to Manconi and Giordan (2014) for more details). This approach is aimed at evaluating the evolution of the landslide status considering data over different periods, as well as to derive robust assessments of errors associated to the estimated ToF. In addition, the fitness of the forecast vs. observations is evaluated by calculating the Pearson's correlation coefficient (CC) between the model and the data. Normalized CC values, when statistically significant, can be interpreted as a measure of the Reliability (R) of the computed forecast model. At this stage, we consider a number of model reliability ranges as follows: (i) $50\% < R < 60\%$ = model reliability is low, failure is unlikely but the situation has to be surveyed, (ii) $60\% < R < 75\%$ = model reliability is higher, a failure within the estimated ToF range starts to be more likely, (iii) $75\% < R < 90\%$ = model reliability is high, a failure within the estimated ToF range is likely, (iv) $R > 90\%$ = model reliability is very high, a failure within the estimated ToF range is highly probable. In general, the results of the failure forecast procedure herein presented have to be read as follows: "if the landslide velocity continues to increase as in the last CTW, the probability to observe a failure within the estimated ToF range is $R\%$ ".

Additional information to take into account when interpreting the FFM results is the consistency of the forecast among different CTW, as well as the evolution of R ten-



gency. For example, if R progressively increases and/or remains stable over high values (e.g. $R > 75\%$), the probability to observe a failure is higher.

In order to facilitate the exploitation of the information based on failure forecast, as well as to provide a straightforward understanding of the modeling results also to people without detailed knowledge on the inverse-velocity theory, we designed specific representations aimed at summarizing the obtained results (see Fig. 2). We have implemented this procedure within the ADVICE system (Allasia et al., 2013), and “Failure Forecast plots” are generated automatically when a monitored target velocities overcome $v > thr_2$.

3 Application to Mont de La Saxe rockslide

Active mass movement affects a large portion of the southern flank of the Mount de La Saxe, northwestern part of Aosta Valley, northern Italy. The rockslide, hereafter referred to as La Saxe, involves an instable volume of ca. $8 \times 10^6 \text{ m}^3$ (Crosta et al., 2013, 2015) and menaces part of the Courmayeur municipality, i.e. Entreves and La Palud villages. In addition, the landslide threatens also a crucial point of the route E25, an important highway connection crossing Europe from north to south, and ensuring commercial activities between Italy and transalpine countries. Continuous monitoring of surface modifications started from 2009, and evidenced that snow melting during spring seasons causes progressive acceleration of the surface displacements, which may locally reach up to several decimeters (or even meters) per day. Over the years, these acceleration phases lead to failures of portions of the landslide body, with volumes ranging from minor rock falls up to relatively larger mass wasting ($> 1 \times 10^4 \text{ m}^3$). The monitoring network deployed includes several instruments, which allow following the surface and subsurface evolution of the landslide over time (Crosta et al., 2013); however, the EWS is based mainly on thresholds set on measurements performed via a Robotized Total Station (RTS). When one or more RTS point targets overcome predefined warning and/or alarm levels (1 and 2 mm h^{-1} , respectively, considered in a 24 h observation

Landslide early warning based on failure forecast models

A. Manconi and
D. Giordan

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



window), specific civil protection procedures are activated, including the interruption of roads traffic, and evacuation of inhabitants from edifices located in areas potentially involved by a failure event.

Starting from the end of March 2014, a specific sector of the La Saxe rockslide started again to accelerate (see Fig. 3). This acceleration phase lead to a large number of minor rock falls, but also to two main failure events: (i) 17 April 2014, 20:00 CET, ca. $5 \times 10^3 \text{ m}^3$, (ii) 21 April 2014, 23:00 CET, ca. $3 \times 10^4 \text{ m}^3$. Figure 4 shows examples of the failure forecast plots generated in near real time from RTS measurements on target “B4” during this particular phase. The target B4 was installed close to the zone characterized by the larger displacements, and at that moment considered as one of the most representative for understanding the evolution of the most active kinematic domain. We notice that from 31 March to 15 April the reliability of the FFM has progressively increased for all the considered CTWs. At this stage, landslide material reached surface displacement rates larger than several centimeters per hour, and a failure was considered highly probable.

4 Discussion and conclusions

We presented an approach aimed at updating operational EWS thresholds by including a values based on the results of the Failure Forecast Method. Our approach has been applied to forecast landslide events associated to the evolution of the La Saxe rockslide during the 2014 emergency scenario. Our results show that reliability threshold applied to FFM results can be used to help the interpretation of the evolution of the landslide body towards a failure, and to provide an additional support for early warning purposes. Despite the number of events observed is yet very limited, we evaluated the performance of the proposed methodology by building contingency tables (Jolliffe and Stephenson, 2012). For this purpose, we have taken into account the failure forecast results for the la Saxe failure event occurred in 21 April 2013 (see Manconi and Giordan, 2014) and the two major events occurred on 2014. In particular, the analysis was

Landslide early warning based on failure forecast models

A. Manconi and
D. Giordan

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Landslide early warning based on failure forecast models

A. Manconi and
D. Giordan

Title Page	
Abstract	Introduction
Conclusions	References
Tables	Figures
◀	▶
◀	▶
Back	Close
Full Screen / Esc	
Printer-friendly Version	
Interactive Discussion	

performed by assuming as “event forecast” only those models with Reliability (R) higher than a predefined value. Among them, models predicting a ToF range that included the time of the real events observed have been considered as “true positive”, “false alarms” are models predicting a ToF range antecedent the real event occurrence, while “missed alarms” are models predicting a ToF range successive to the real event occurrence. Despite, models with R below the predefined reliability threshold have been considered as “non-event forecast”, and thus as “true negatives”. The analysis was performed on forecast models obtaining reliability thresholds $R > 75\%$ and $R > 90\%$ in the week preceding the failure (see Supplement). We note that the model hit-rate for the 2013 event is in the order of 0.8 (see Table S7), and highly depends on the considered computational time windows. Despite, the modeling procedure yields to a consistent number of false alarms, although among them the mean distance between the predicted and the real event is in the order of 2.5–3 days. Moreover, we note that by considering only the forecast models with $R > 90\%$, the number of missed alarms tends towards zero. For the 2014 events, the evaluation of the model performance with standard contingency estimators is of difficult interpretation. Indeed, on 21 April 2013, the event occurred after a straightforward evolution towards failure, and the target analyzed was installed right on the top of the collapsed landslide sector (see Fig. 3). On the contrary, the 2014 emergency scenario was characterized by a different evolution. In particular, in the period starting from 15 April 2014 up to 21 April 2014, a progressively large number of rock falls and minor collapses was observed (Bertolo and Arrighetti, 2014), and the landslide acceleration was highly non-linear. In addition, while the landslide acceleration trend was recorded by several RTS targets, none of them was located right on the sectors that finally collapsed (see Fig. 3). This is a main limitation of using this typology of failure forecast models on data acquired on a punctual basis: if the point is not representative of the collapsing sector, the forecasted time of failure can be inaccurate.

For the above-discussed reasons, it is difficult to identify proper failure events for cases as encountered in the La Saxe 2014 emergency phase. Instead of failure events, it is more appropriate to define a “critical time range” where failure may occur.



Landslide early warning based on failure forecast models

A. Manconi and
D. Giordan

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Based on the modeling results obtained for the La Saxe case study, we can consider $\text{thr}_3 = R > 75\%$ as a good compromise to catch in advance the occurrence of the critical time range (see Fig. 1). We remind that as for forecast models relevant to other natural phenomena (e.g. meteorological events), our results are based on a statistical inference, and they have to be always considered in terms of probability. Moreover, unpredictable changes of the boundary conditions, as well as deviations of the material behavior from the classical creep theory may deeply affect the results of the forecast model (Mazzanti et al., 2015). It is worth to mention that our method has been developed to achieve reliable short-term failure forecast, but is not intended for medium- and long-term predictions of the ToF. On the contrary, we aim at providing a supporting toolbox to manage EWS in critical situations, especially when predefined early warning thresholds are overcome. EWS managers can benefit of the additional information provided by the FFM, because when the reliability of the forecast is high and thus a landslide failure more likely, authorities can be informed in advance (in automatic and/or semi-automatic manner), and thus have the time to take eventual countermeasures. The final interpretation on landslide failure potential has to be provided by experienced users, which have a deep knowledge of landslide phenomena, have access to additional data on the landslide status, and are conscious of the limitations of FFM. Thus, the FFM information can be better interpreted by taking carefully into account additional evidence from other data sources, depending on the specific context. Further investigation will be performed on the reliability and accuracy of the herein presented method, mainly by considering different data sources, as well as performing tests larger number of case studies.

**The Supplement related to this article is available online at
doi:10.5194/nhessd-3-1511-2015-supplement.**

Acknowledgements. The authors thank D. Bertolo and P. Thuegaz of the Geological Survey of Regione Valle d'Aosta (RVDA) for providing the data used for the validation of the method.

References

- Allasia, P., Manconi, A., Giordan, D., Baldo, M., and Lollino, G.: ADVICE: a new approach for near-real-time monitoring of surface displacements in landslide hazard scenarios, *Sensors*, 13, 8285–8302, doi:10.3390/s130708285, 2013.
- 5 Bertolo, D. and Arrighetti, S.: Early detection of rockfalls and trajectory evaluation by “state-of-the-art” computer vision technologies, in: Proceedings of the ROCEXS Meeting 2014, Lecco, Italy.
- Crosta, G. and Agliardi, F.: How to obtain alert velocity thresholds for large rockslides, *Phys. Chem. Earth*, 27, 1557–1565, doi:10.1016/S1474-7065(02)00177-8, 2002.
- 10 Crosta, G. B., Prisco, C., Frattini, P., Frigerio, G., Castellanza, R., and Agliardi, F.: Chasing a complete understanding of the triggering mechanisms of a large rapidly evolving rockslide, *Landslides*, 11, 747–764, doi:10.1007/s10346-013-0433-1, 2013.
- Crosta, G. B., Lollino, G., Frattini, P., Giordan, D., Tamburini, A., Rivolta, C., and Bertolo, D.: Rockslide monitoring through multi-temporal LiDAR DEM and TLS data analysis, in: *Engineering Geology for Society and Territory*, Vol. 2, edited by: Lollino, G., Giordan, D., Crosta, G., Corominas, J., Azzam, R., Wasowski, J., and Sciarra, N., Springer International Publishing, 613–617, 2015.
- 15 Dick, G. J., Eberhardt, E., Cabrejo-Liévano, A. G., Stead, D., and Rose, N. D.: Development of an early warning time-of-failure analysis methodology for open pit mine slopes utilizing ground-based slope stability radar monitoring data, *Can. Geotech. J.*, doi:10.1139/cgj-2014-0028, in press, 2014.
- 20 Federico, A., Popescu, M., Elia, G., Fidelibus, C., Internò, G., and Murianni, A.: Prediction of time to slope failure: a general framework, *Environ. Earth Sci.*, 66, 245–256, doi:10.1007/s12665-011-1231-5, 2012.
- 25 Fukuzono, T.: A New Method for Predicting the Failure Time of a Slope, in: Proceedings of the 4th International Conference and Field Workshop on Landslides, Tokyo, Tokyo University Press, Tokyo, 145–150, 1985.
- Intrieri, E., Gigli, G., Mugnai, F., Fanti, R., and Casagli, N.: Design and implementation of a landslide early warning system, *Eng. Geol.*, 147–148, 124–136, doi:10.1016/j.enggeo.2012.07.017, 2012.
- 30 Jolliffe, I. T. and Stephenson, D. B.: *Forecast Verification: A Practitioner’s Guide in Atmospheric Science*, John Wiley & Sons Ltd., 2012.

Landslide early warning based on failure forecast models

A. Manconi and
D. Giordan

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Landslide early warning based on failure forecast models

A. Manconi and
D. Giordan

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Manconi, A. and Giordan, D.: Landslide failure forecast in near-real-time, *Geomat. Nat. Hazards Risk*, doi:10.1080/19475705.2014.942388, in press, 2014.

Mazzanti, P., Bozzano, F., Cipriani, I., and Prestininzi, A.: New insights into the temporal prediction of landslides by a terrestrial SAR interferometry monitoring case study, *Landslides*, 12, 55–68, doi:10.1007/s10346-014-0469-x, 2015.

Medina-Cetina, Z. and Nadim, F.: Stochastic design of an early warning system, *Georisk Assess. Manag. Risk Eng. Syst. Geohazards*, 2, 223–236, doi:10.1080/17499510802086777, 2008.

Michoud, C., Bazin, S., Blikra, L. H., Derron, M.-H., and Jaboyedoff, M.: Experiences from site-specific landslide early warning systems, *Nat. Hazards Earth Syst. Sci.*, 13, 2659–2673, doi:10.5194/nhess-13-2659-2013, 2013.

Rose, N. D. and Hungr, O.: Forecasting potential rock slope failure in open pit mines using the inverse-velocity method, *Int. J. Rock Mech. Min. Sci.*, 44, 308–320, doi:10.1016/j.ijrmmms.2006.07.014, 2007.

Rossi, M., Peruccacci, S., Brunetti, M. T., Marchesini, I., Luciani, S., Ardizzone, F., Balducci, V., Bianchi, C., Cardinali, M., Fiorucci, F., Mondini, A. C., Reichenbach, P., Salvati, P., Santangelo, M., Bartolini, D., Gariano, S. L., Palladino, M., Vessia, G., Viero, A., Antronico, L., Borselli, L., Deganutti, A. M., Iovine, G., Luino, F., Parise, M., Polemio, M., and Guzzetti, F.: SANF: National warning system for rainfall-induced landslides in Italy, in: *Landslides and engineered slopes: protecting society through improved understanding*, Vol. 2, edited by: Eberhardt, E., Froese, C., Turner, A. K., and Leroueil, S., *Proceedings 11th Symposium on Landslides and 2nd North American Symposium on Landslides*, Banff, Canada, 1895–1899, 2012.

Saito, M.: Forecasting the Time of Occurrence of a Slope Failure, vol. 2, *Proceedings of 6th Int. Conf. S. M. F. E.*, Montreal, 537–541, 1965.

Wieczorek, G. F. and Guzzetti, F.: A review of rainfall thresholds for triggering landslides, in: *Proceedings of the EGS Plinius Conference*, Maratea, Italy, 407–414, 1999.

Wieczorek, G. F. and Snyder, J. B.: Monitoring slope movements, *Geol. Monit.*, 245–271, 2009.

Landslide early warning based on failure forecast models

A. Manconi and
D. Giordan

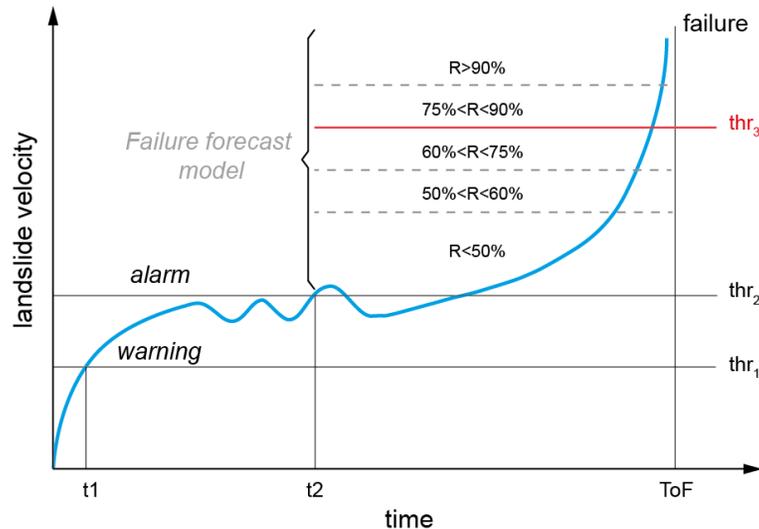


Figure 1. Schematic representation of the evolution over time of landslide velocity prior to a failure event, by considering materials behaving under creep conditions. The evolution towards failure may have different phases characterized by non-linear accelerations. While thr_1 and thr_2 are static thresholds defined from a-priori information on the landslide behavior, thr_3 is based on the results from the failure forecast modeling obtained in near real time.

Landslide early warning based on failure forecast models

A. Manconi and
D. Giordan

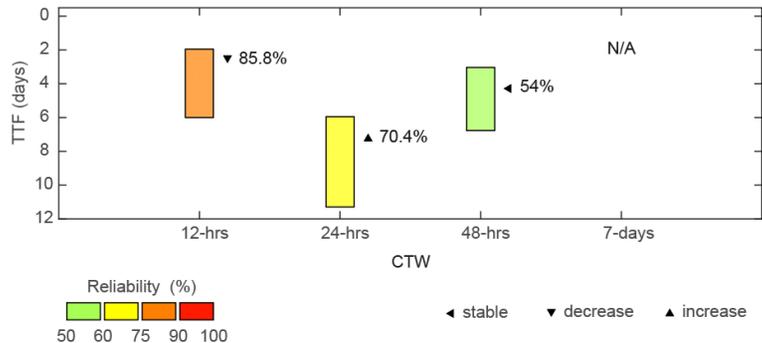


Figure 2. Example of the “Failure Forecast Plots”. x axis represent the different computational time windows (CTW), while in the y axis is indicated the predicted Time to Failure (TTF = ToF-now, where now is the time of the current computation). The bar length is function of the TTF range between 5 and 95 percentiles computed with the bootstrap procedure (see text for details). The bar colors depend on the forecast model reliability values (R). Black triangles indicate the reliability tendency with respect to the previous model: increase (or decrease) occurs when current R is higher (or lower) by 1%. N/A indicates that the modeling results are not reliable, thus the failure forecast model is not applicable.

Landslide early warning based on failure forecast models

A. Manconi and
D. Giordan

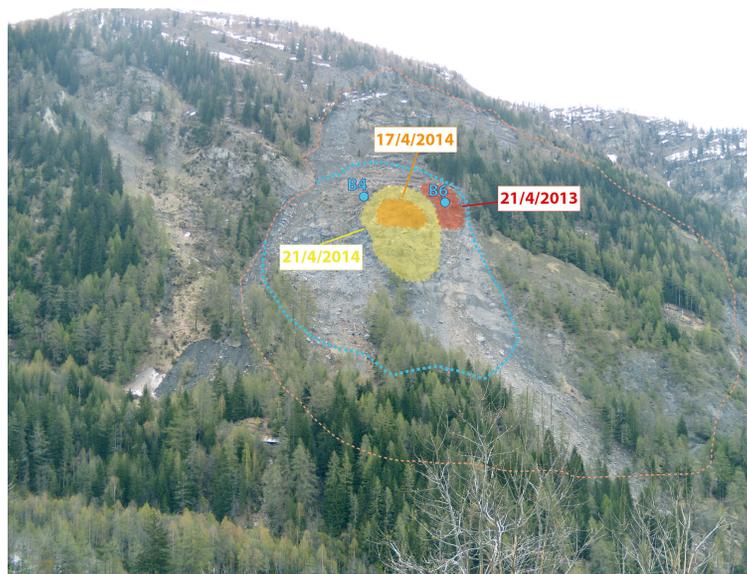


Figure 3. Frontal view of the La Saxe rockslide (April 2013). Red dashed line is the limit of the instable slope, while blue dashed line defines the most active landslide sector. B4 and B6 are the location of the RTS targets considered for the failure forecast. Colored areas represent the zones collapsed on 21 April 2013 (reddish), 17 April 2014 (orange), and 21 April 2014 (yellow), respectively.

[Title Page](#)[Abstract](#)[Introduction](#)[Conclusions](#)[References](#)[Tables](#)[Figures](#)[◀](#)[▶](#)[◀](#)[▶](#)[Back](#)[Close](#)[Full Screen / Esc](#)[Printer-friendly Version](#)[Interactive Discussion](#)

Landslide early warning based on failure forecast models

A. Manconi and
D. Giordan

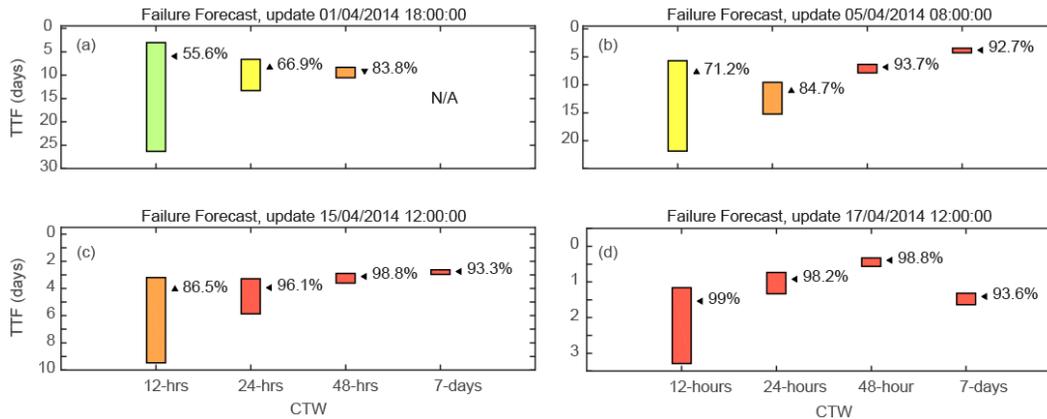


Figure 4. results of the failure forecast procedure obtained in near real time during the 2014 emergency scenario. Note how the TTF predicted varies depending on the CTW considered.

Title Page

Abstract Introduction

Conclusions References

Tables Figures

◀ ▶

◀ ▶

Back Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

