



This discussion paper is/has been under review for the journal Natural Hazards and Earth System Sciences (NHESD). Please refer to the corresponding final paper in NHESD if available.

# Structurally controlled hazard mapping of Southern Leyte, Philippines

P. K. Luzon<sup>1,2</sup>, K. P. Montalbo<sup>1,2</sup>, J. A. M. Galang<sup>1,2</sup>, J. M. Sabado<sup>1,2</sup>,  
C. M. Escape<sup>1,2</sup>, R. P. Felix<sup>1,2</sup>, and A. M. F. Lagmay<sup>1,2</sup>

<sup>1</sup>National Institute of Geological Sciences, University of the Philippines, C. P. Garcia corner Velasquez street, U. P. Diliman, 1101 Quezon City, Philippines

<sup>2</sup>Nationwide Operational Assessment of Hazards, Department of Science and Technology, Quezon City, Metro Manila, NCR, Philippines

Received: 1 September 2015 – Accepted: 7 September 2015 – Published: 1 October 2015

Correspondence to: P. K. Luzon (pauluzon@yahoo.com)

Published by Copernicus Publications on behalf of the European Geosciences Union.

**NHESD**

3, 5891–5921, 2015

**Structurally  
controlled hazard  
mapping of Southern  
Leyte, Philippines**

P. K. Luzon et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Abstract

The 2006 Guinsaugon landslide in St. Bernard, Southern Leyte is one of the largest known landslides in the Philippines in recent history. It consists of a 15–20 million m<sup>3</sup> rockslide-debris avalanche from an approximately 675 m high mountain weakened by continuous movement of the Philippine fault. The catastrophic Guinsaugon landslide killed 1221 people and displaced 19 000 residents over its 4.5 km path. To investigate the present day morphology of the scar and potential failure that may occur, analysis of a 5 m resolution IfSAR-derived Digital Elevation Model was conducted using Coltop3D and Matterocking software, leading to the generation of a landslide hazard map for the province of Southern Leyte in Central Philippines. The dip and dip-direction of discontinuity sets that contribute to gravitational failure in mountainous areas of the province were identified and measured using a lower Schmidt-Lambert color scheme. After measurement of the morpho-structural orientations, potential sites of failure were analyzed. Conefall was then utilized to compute the extent of rock mass runout. Results of the analysis show instability in the scarp area of the 2006 Guinsaugon landslide and in adjacent slopes because of the presence of steep discontinuities that range from 45–60°. Apart from the 2006 Guinsaugon landslide site, runout models simulated farther rock mass extent in its adjacent slopes, revealing a high potential for fatal landslides to happen in the municipality of St. Bernard. Concerned agencies may use maps produced in the same manner as this study to identify possible sites where structurally-controlled landslides can occur. In a country like the Philippines, where fractures and faults are common, this type of simulated hazard maps would be useful for disaster prevention and facilitate disaster risk reduction efforts for landslide-susceptible areas.

Structurally controlled hazard mapping of Southern Leyte, Philippines

P. K. Luzon et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



# 1 Introduction

## 1.1 Guinsaigon landslide

One of the largest known mass wasting events in the Philippines happened in the province of Southern Leyte. On 17 February 2006, 10:26 LT, an estimated 15–20 million m<sup>3</sup> (Lagmay et al., 2006) of cascading rocks from a 700 m-high mountain buried the entire village Guinsaigon in the municipality of Saint Bernard, and killed 1221 people. Identified as a rockslide-debris avalanche (Lagmay et al., 2008), the fatal landslide happened on the slopes of Mt. Can-abag along a steep scarp defined by the Philippine Fault Zone or PFZ (Allen, 1962) (Fig. 1). The landslide was 4.1 km long, 1.5 km wide and had a planform area of about 3.3 km<sup>2</sup>.

## 1.2 Geotechnical consideration

The study area is part of the Southern Leyte segment of the sinistral PFZ which has an average movement of 0.55 cm yr<sup>-1</sup> (Cole et al., 1989) up to 3.5 cm yr<sup>-1</sup> (Duquesnoy, 1997, as cited by Catane et al., 2006). This has led to formation of regional discontinuities and development of thick clay-rich gouge zones in the surface prominent in the entire province and other locations along the PFZ (Hart et al., 2002). As a result of active tectonic movement, poor rock mass quality is evident in many of the mountain ranges of Southern Leyte (Evans et al., 2007) making the region prone to structurally-controlled landslides. Other lithologies in the area are ophiolite basement, Paleogene sedimentary rocks and late Pliocene to Pleistocene volcanic rocks.

The Guinsaigon landslide was preceded by continuous downpour of rain from 8–14 February amounting to 683.6 mm (Lagmay et al., 2006). Measurements from the Otikon weather station, 7 km away from the landslide, show rainfall was highest during the period 10–12 February ranging from 131 to 171 mm although these are believed to be less than the actual values due to the orographic effect. Around the same time as the landslide, two earthquakes were recorded by the Philippine Institute of Volcanology and

NHESD

3, 5891–5921, 2015

**Structurally  
controlled hazard  
mapping of Southern  
Leyte, Philippines**

P. K. Luzon et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Seismology (PHIVOLCS) and the United States Geological Survey (USGS) (Lagmay et al., 2006). Each were reported 21 km west and about 2 km north of Guinsaugon, respectively.

1.3 Failure mechanism

The topmost contributing slope of the Guinsaugon landslide is 50 to 60° (Catane et al., 2006) with a post landslide configuration of the crown exhibiting a distinct 4 slip plane failure. Based on the observed orientation of discontinuities and immense pore pressure developed from accumulated rainfall, a combined wedge, toppling and planar slide is believed to have caused gravitational failure at Guinsaugon (Catane et al., 2008). At the foot slope of Mt. Can-abag are prehistoric landslide deposits, which were scoured during the 2006 landslide event contributing to the development of the massive avalanche which transformed into debris flows at its frontal edge.

1.4 Objectives

A large part of Southern Leyte, Philippines is susceptible to structurally controlled landslides. Old landslide scars and large-scale landslide deposits are apparent in the area with the most-recent landslide being formed by the 2006 Guinsaugon debris avalanche event. Identifying manually specific areas where landslides may occur in the region is a challenge in terms of resources and scale of effort required. However, advanced methods in computer analysis of landslides may aid remotely-sensed and field mapping in the province of Southern Leyte (Luzon et al. (2013), as preliminarily reported in). The method also helps identify potential sites of slope failure. This study aims to use numerical models for deep-seated landslides, complemented by field mapping to identify danger zones. Using high-resolution topography as base map for the simulations, hazard maps at barangay (village)-scale will be generated for use in disaster prevention and mitigation efforts in the Philippines. If proven useful, the technique can be employed elsewhere in the country.

Structurally controlled hazard mapping of Southern Leyte, Philippines

P. K. Luzon et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion





2 Methods and concepts

2.1 Lineament pattern analysis

For decades, advances in remote sensing have helped the field of natural hazards in terms of scale and workability. Reliability relies greatly on two factors: (1) how accurate the image captivates reality and (2) the approach to generate desired output from the data (Jaboyedoff et al., 2012). In geology, these methods are extensively used considering both factors. Lineament patterns are one of the most observable features using a digital elevation model. They correspond to many fault and crustal fractures thus providing ideas on regional tectonics. In digital modelling, they are sets of relatively adjacent pixels having similar terrain values (Koike et al., 1998). Improvement in such method comes in two different ways (Raghavan et al., 1995). First is the continuous enhancement of images for extraction through higher resolution imagery and better color or shading representation. Second is in automatic lineament detection using different algorithms (Koike et al., 1994).

In this study we use high-resolution imagery derived from Interferometric Synthetic Aperture Radar (IfSAR) to identify structural features for use in hazards mapping of landslides using numerical models. The IfSAR used is from a 2012 nationwide digital terrain model (DTM) and digital surface model (DSM) dataset with 0.5 m vertical accuracy and 5 m pixel resolution. Shaded relief images generated from these DEMs provided high resolution and shaded relief images that reveal well-defined lineaments and distinct changes in the face of mountains slopes. Four sun azimuth directions were used to highlight geological structures in the province of Southern Leyte (Fig. 2).

2.2 Discontinuity identification

After identifying important lineament patterns in the region, dip and dip direction of slopes corresponding to each trend were measured using Coltop3D. It is a pseudo 3-Dimensional topographic analysis software that represents slope aspect and slope

Structurally controlled hazard mapping of Southern Leyte, Philippines

P. K. Luzon et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



angle. It gives unique color for a given combination of dip and dip direction using classical Hue Saturation Value with a Schmidt-Lambert projected stereonet and depicts continuous and similar planar orientations with the same color (Metzger et al., 2009). Slope aspect maps are effective tools for locating target sites that warrant structural investigation, and have particularly significant implications for the stability of slopes (Tengonciang, 2008). With Coltop3D, there is added capacity to delimit targets to those significant to the study. Recurring linear patterns are isolated with a particular tolerance and viewed separately. This step allows large amount of computer generated point cloud data of discontinuity sets necessary for structural analysis that uses stereoplots and rose diagrams. It should be noted that this method assumed structurally homogeneous areas in regional scale as scope (precision) (Jaboyedoff et al., 1999).

2.3 Kinematic analysis and instabilities

Rock strength and friction are factors that could resist the gravitational force pulling down the surface materials. Rock strength is defined by the physical and chemical property of a rock related to any kind of break or gap in a rock while friction is the force resisting the relative movement of materials (Hoek and Bray, 1981). Friction increases with roughness or angularity of a rock as well as the surface roughness. Slope angle also contributes to the determination of mass wasting occurrence. The closer a slope to being parallel to the downward direction of the material, the easier it is for gravity to overcome friction and rock strength resistance. Other factors that contribute to mass wasting include water, earthquakes as well as human activities. Fractures, joints, faults and other structural features weaken rock strength. Having these gaps favor water seepage which contributes to bond weakening through the weathering process.

In the identification of structurally-controlled landslides, these discontinuities are treated as the primary cause of slope failure. Once determined, the discontinuity sets are subjected to kinematic analysis using Matterocking software, which in turn is used to identify unstable slopes. Matterocking is an open source software which was used in this study to compute the mechanisms for planar, wedge, and toppling failure (Jaboyed-

Structurally controlled hazard mapping of Southern Leyte, Philippines

P. K. Luzon et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



off, 2002). The following definitions for the different failure types were observed in the analysis of unstable slopes for the region of Sothern Leyte.

### 2.3.1 Planar failure

A planar failure is a rare occurence in rock slopes due to the fact that all the geometric conditions required to produce it only happens occasionally on an actual slope (Kliche, 1999). In planar failure, the rock mass only slides on a single surface and for it to continue, certain geometric conditions need to be satisfied (Wyllie and Mah, 2004).

1. the sliding plane must strike parallel or nearly parallel to the slope face;
2. the sliding plane must have its plane dip less than the dip of the slope face;
3. the dip of the sliding plane should be greater than the angle of friction of the sliding plane;
4. the upper end of the sliding plane should intersect the upper slope or where the tension crack terminates;
5. lateral boundaries of the slide should be defined by the negligible resistance to sliding provided by the release surfaces.

### 2.3.2 Wedge failure

Wedge failures occur when a mass of discontinuous rock slides on two intersecting planes (Kliche, 1999). They occur over a much wider range of conditions as well as geologic factors which is why it is more difficult to study this component of rock slope engineering. Wedge failure has basic mechanis analyzed in terms of its geometry and conditions defined by Wyllie and Mah (2004):

1. The two sliding planes will always intersect in a line. The line of intersection can be represented on a stereonet by the point where the two great circles of the two

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



sliding planes intersect. The orientation of the line is then defined by the trend and plunge of the line.

2. The line of intersection plunge should be less steep than the dip of the slope face and steeper than the friction angle of the two sliding planes. The slope face inclination is determined by the view at right angles to the intersection line. The true dip of the slope face would only be determined if the dip direction of the intersection line is the same as the dip direction of the slope face.

3. The intersection line must dip in a direction out of the slope face for sliding to be possible.

Stereonets can show a wedge failure is kinematically possible. However, the actual factor of safety of the wedge cannot be determined by it. This factor also depends on the geometry of the wedge as well as the plane shear strength and water pressure.

### 2.3.3 Toppling failure

Toppling failure is the forward rotation out of the rock slope about an axis below the center of gravity of the unstable rock. It is one of the basic landslide mechanisms that leads to serious and hazardous rock slope instability. This failure can be classified into four types: flexural, blocky, blocky-flexural and secondary type. Two mechanisms causes for toppling to proceed, one of which is the growth of erosion notches that is produced due to differential weathering. The support area of the rock will decrease and in consequence, the center of gravity of the unstable rock will offset outward the slope. Secondly, the development of tension cracks due to tensile stress concentration leads to rotational toppling failure of unstable rocks because of momentum unbalance. They will inevitably occur under self-weight and fissure water pressure water as well.

To summarize, the total toppling failure occurs due to erosion notches and tension cracks and continue on to gravitational transport and accumulation (Wang et al., 2013).

## Structurally controlled hazard mapping of Southern Leyte, Philippines

P. K. Luzon et al.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

[◀](#)

[▶](#)

[◀](#)

[▶](#)

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



These concepts can be simply illustrated as shown in Fig. 3. Matterocking applies these in an iterative manner to the entire DTM and computes the slopes which satisfy the criteria for instability. It generates a map of potential rock slide zone which is used as landslide source for propagation.

### 3 Results

### 3.1 Lineament analysis of Southern Leyte

### 3.2 Identification of discontinuities using Coltop3D

dip direction to the actual field measurements considered in a post disaster report by Catane et al. (2008) as shown in Table 2.

### 3.3 Verifying rose diagrams of discontinuity sets

Selections of discontinuities along the Philippine fault are also presented in rose diagrams. Shown in Fig. 5 are different segments of the lineament. The diagram is consistent with the usual rose diagram appearance of a left lateral strike slip fault with a main long axis parallel to the master fault (i.e. Philippine Fault) and 2 other minor orientation directions that represent associated faults such as Riedel shears.

### 3.4 Potential rock slide zone generated by Matterocking

Failure zones generated by Matterocking are shown in Fig. 6. The province of Southern Leyte is highly susceptible to structurally controlled landslide as obviously presented. This includes the analysis for a planar and wedge failure that may occur due to discontinuities considered. Generally steep slopes in the region and presence of discontinuities due to the segment of PF caused this high susceptibility. Looking closer on the Guinsaun Landslide area, we can expect more failure as for the presence of the scarp before the mass movement happened. It is the case of wedge failure that could trigger most rock slide. This is due to the persistence of intersecting discontinuity sets in the area. About 10 % of the slopes in the province have failure potential according to the model.

Kinematic analysis was performed for several slopes of the Mt. Can-abag east facing facade as shown in Fig. 7. Slopes covered in red are those that were identified as rockslide source. These were chosen just to verify and further analyze the mode of failure that could occur as shown in Table 3. Present discontinuity sets in the area were used in the analysis. Results have shown the probability of wedge and planar failure in almost all cases. Intersection of Discontinuity sets 41/61 and 41/185 most probably would cause wedge failure on this side of the mountain. Toppling failure couldnt be

## Structurally controlled hazard mapping of Southern Leyte, Philippines

P. K. Luzon et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



taken into account in this case due to lack of very steep recorded discontinuity. We considered the limitation of DEM's resolution that dip angles would always be less than the actual values on the field. Planar slide in S1 follows the configuration slide in one slip plane of the Guinasugon landslide.

## 4 Discussion

### 4.1 Slope angle distribution

It should be noted that this method assumed structurally homogeneous areas in regional scale as scope (precision) (Jaboyedoff et al., 1999). To put into scope the parameter used in determining the friction angle for the region, the slope family concept presented by different studies by (Strahler, 1954), Baillifard et al. (2005), Jaboyedoff et al. (2004), Loye et al. (2008) and Michoud et al. (2012) is a suitable tool due to prominent slope families produced by active movement in large part of the province (Cole et al., 1989; Duquesnoy, 1997). Result of Histofit (Loye et al., 2009; Michoud et al., 2012), a program for computing Gaussian fittings for a slope angle distribution shows a threshold value for a family of steep slopes of 38° (Fig. 8) which corresponds to the internal angle of friction. Direction of discontinuities produced by this movement are also as prominent. Thus, an incorporated effect of critical slope and discontinuity sets is enough for identifying potential source of failure.

Landslide hazard mapping does not end with identifying failure zones (FZ). It also requires the projection of possible runout extent to which the landslide mass will propagate. These areas are as exposed to landslide hazards as the FZ and are important to locate to get communities out of harm's way. Here we show the method used to determine the likely areas exposed to the hazard of structurally-controlled landslides.

## Structurally controlled hazard mapping of Southern Leyte, Philippines

P. K. Luzon et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



## 4.2 Propagation extent

A number of models use an angle from source to extent of a landslide to determine possible runout within the area of interest (Dorren, 2003). Studies differ on what the H/L ration to use in determining this limit angle as shown in Fig. 9, either the highest portion of the foot slope or the top failure plane. Evans and Hungr (1993) suggested that the minimum shadow angle is preferable (H is the lowest portion of the failure block). To come up with an acceptable value of this angle, a certain amount of landslide events' runout should be considered. A study by Onfri and Candian (1979) used 98 rockfalls to suggest a minimum Fahrboshung in Italy from structural instability to be 28.34°. Evans and Hungr (1993) used 16 profiles of rockfall paths suggesting a minimum shadow angle of 27.5° in British Columbia. Several studies also reported lower values (i.e. 22–24°) for shadow angles in smooth surfaces such those in snow and grass covered areas (Evans and Hungr, 1993). The use of this approach is widely accepted in terms of capturing real events scenarios.

This study uses a 20° shadow angle. This is a conservative approach based on the literature presented but is a reasonable choice considering that debris avalanches have a long runout. Conefall uses this shadow angle to compute for the runout zone in a GIS environment given a Digital Elevation Model (DTM) according to the following relationship (Eq. 1):

$$0 < \Delta x^2 + \Delta y^2 - \tan\left(\frac{\pi}{2} - \phi_p\right)^2 \times (z_0 - z)^2 \quad (1)$$

where  $z$  must be less than the surface height. The estimated runout in 3-D is the cone envelope (Fig. 10) covered by the aperture angle from the source point (Loye et al., 2008).

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

[◀](#)

[▶](#)

[◀](#)

[▶](#)

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)





### 4.3 Potential runout zones using cone-fall

Since the sources of rockfall/slide were already identified, zones where it will propagate were also mapped using Cone-fall. The study utilized a runout angle of 20° as discussed above. Ratio of “safe” zones from structurally controlled landslide to high susceptibility area is 2 : 1. Shown in Fig. 11 is the combined map for the source and propagation extent of Southern Leyte.

### 5 Conclusions

On 27 February 2006, one of the largest known non-volcanic debris avalanche event in the Philippines happened in the province of Southern Leyte. Gravitational initiated along the Philippine Fault were collapse of a sector of a 700 m-high mountain buried the entire village of Guinsaugon in the municipality of Saint, Bernard killing 1221 people and displacing 19 000 residents over its 4.5 km path.

Using high-resolution imagery derived from Interferometric Synthetic Aperture Radar (IfSAR), fractures were identified to interpret structural instability of mountainous areas in the province. Discontinuity sets, kinematic analysis of structures and classification of sites for planar, wedge and toppling failure were identified using the Coltop and Mat-errocking software. Combined use of these numerical tools enabled the rapid character-ization of the entire Southern Leyte in terms of its susceptibility to fracture-controlled landslides.

Apart from the old landslide scars and large-scale landslide deposits apparent in the area with the most-recent landslide being formed by the 2006 Guinsaugon debris avalanche event, the study shows that large parts of Southern Leyte are susceptible to structurally-controlled landslides. Identification of these potential sites for gravitational failure, which normally would have been a challenge in terms of scale of resources and effort required to map them all out, was done in a relatively short period of time. Pro-duction of these high-resolution landslide susceptibility maps through these advanced

methods, greatly aids field mapping of these potential sites of failure. Moreover, the numerical methods presented, not only quickly maps sites of mountain-side instability but also depicts the likely path and deposition of the landslide, which produce susceptibility maps that are critical input to a nationwide effort of the Philippine government to prevent and mitigate this type of natural hazard.

*Acknowledgements.* We thank the Department of Science and Technology for the support to this study through the Nationwide Operational Assessment of Hazards (Project NOAH). We also thank the National Mapping and Resource Information Authority (NAMRIA) for providing the digital elevation models. Our sincerest gratitude as well to our friends from Terranum for teaching us the foundation in structural mechanics and tools used.

## References

- Allen, C.: Circum-Pacific faulting in the Philippine-Taiwan region, *J. Geophys. Res.*, 67, 4795–4812, 1962. 5893
- Baillifard, F., Jaboyedoff, M., Rouiller, J.-D., Robichaud, G., Locat, P., Locat, J., Couture, R., and Hamel, G.: Towards a GIS-Based Rockfall Hazard Assessment Along the Quebec City Promontory, Quebec, Canada, in: *Landslides Evaluation and Stabilization*, Vol. 1, A. A. Balkema Publishers, Leiden, London, New York, Philadelphia, Singapore, 207–213, 2005. 5901
- Catane, S., Cabria, H., Zarco, M., Saturay Jr., R., Tomarong Jr., C., and Pioquinto, W.: Catastrophic Rockslide-Debris Avalanche at St. Bernard, Southern Leyte, Philippines, Springer-Verlag, Heidelberg, 2006. 5893, 5894
- Catane, S., Cabria, H., Zarco, M., Saturay Jr., R., and Mirasol-Robert, A.: The 17 February 2006 Guinsaungon rock slide-debris avalanvhe, Southern Leyte, Philippines: deposit characteristics and failure mechanism, *B. Eng. Geol. Environ.*, 67, 305–320, doi:10.1007/s10064-008-0120-y, 2008. 5894, 5900
- Cole, J., McCabe, R., Moriarty, T., Malicse, J., Delfin, F., Tebar, H., and Ferrer, H.: A preliminary neogene paleomagnetic data set from Leyte and its relation to motion on the Philippine fault, *Technophys*, 168, 205–221, 1989. 5893, 5901

## Structurally controlled hazard mapping of Southern Leyte, Philippines

P. K. Luzon et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



- Dorren, L.: A review of rockfall mechanics and modelling approaches, *Prog. Phys. Geogr.*, 27, 69–87, 2003. 5902
- Duquesnoy, B.: Contributions de la géodésie à l'étude de grands décrochements actifs associés à des zones de subduction à convergence oblique, MS thesis, University of Paris XI, Orsay, 1997. 5893, 5901
- Evans, S. G. and Hungr, O.: The assessment of rockfall hazard at the base of talus slopes, *Can. Geotech. J.*, 30, 620–636, 1993. 5902
- Evans, S. G., Guthrie, R. H., Roberts, N. J., and Bishop, N. F.: The disastrous 17 February 2006 rockslide-debris avalanche on Leyte Island, Philippines: a catastrophic landslide in tropical mountain terrain, *Nat. Hazards Earth Syst. Sci.*, 7, 89–101, doi:10.5194/nhess-7-89-2007, 2007. 5893
- Hart, J., Hearn, G., and Chant, C.: Engineering on the precipice: mountain road rehabilitation in the Philippines, *J. Eng. Geol.*, 35, 223–231, 2002. 5893
- Hoek, E. and Bray, J.: *Rock Slope Engineering*, 3rd Edn., Spon Press, London, New York, 1981. 5896
- Jaboyedoff, M.: *Matterocking 2.0*, Quanterra, Lausanne, Switzerland, 2002. 5896
- Jaboyedoff, M., Baillifard, F., Marro, C., Philippossian, F., and Rouiller, J.-D.: Detection of rock instabilities: Matterock methodology, Joint Japan-Swiss Scientific on Impact Load by Rock Falls and Design of Protection Structures, 4–7 October 1999, Kanazawa, Japan, 37–43, 1999. 5896, 5901
- Jaboyedoff, M., Baillifard, F., Couture, R., Locat, P., and Locat, J.: New insight of geomorphology and landslide prone area detection using digital elevation models, in: *Landslides: Evaluation and Stabilization*, Taylor and Francis Group, Leiden, London, New York, Philadelphia, Singapore, 191–197, 2004. 5901
- Jaboyedoff, M., Choffet, M., Derron, M.-H., Horton, P. A., Loyer, C. L., Mazotti, B., Michoud, C., and Pedrazzini, A.: Preliminary slope mass movement susceptibility mapping using DEM and LiDAR DEM, in: *Terrigenous Mass Movements*, Springer-Verlag, Berlin, Heidelberg, 109–170, 2012. 5895
- Kliche, C.: *Rock Slope Stability*, Society for Mining, Metallurgy, and Exploration, Inc., Littleton, 1999. 5897
- Koike, K., Nagano, S., and Ohmi, M.: Lineament analysis of satellite images using a Segment Tracing Algorithm (STA), *Comput. Geosci.*, 21, 1091–1104, 1994. 5895

# Structurally controlled hazard mapping of Southern Leyte, Philippines

P. K. Luzon et al.

[Title Page](#)[Abstract](#)[Introduction](#)[Conclusions](#)[References](#)[Tables](#)[Figures](#)[◀](#)[▶](#)[◀](#)[▶](#)[Back](#)[Close](#)[Full Screen / Esc](#)[Printer-friendly Version](#)[Interactive Discussion](#)

- Koike, K., Nagano, S., and Kawaba, K.: Construction and analysis of interpreted fracture planes through combination of satellite-image derived lineaments and digital elevation model data, *Comput. Geosci.*, 24, 573–583, 1998. 5895
- Lagmay, A., Ong, J., Fernandez, D., Lapus, M., Rodolfo, R., Tengonciang, A., Soria, J., Balitan, E., Quimba, Z., Uichanco, C., Paguican, E., Remedio, A., Lorenzon, G., Valdivia, W., and Avila, F.: Scientists investigate recent Philippine landslide, *EOS T. Am. Geophys. Un.*, 87, 121–128, 2006. 5893, 5894
- Lagmay, A., Ong, J., Fernandez, D., Lapus, M., Rodolfo, R., Tengonciang, A., Soria, J., Balitan, E., Quimba, Z., Uichanco, C., Paguican, E., Remedio, A., Lorenzon, G., Valdivia, W., and Avila, F.: Science guides search and rescue after the 2006 Philippine landslide, *Disasters*, 32, 416–433, doi:10.1016/j.0361-3666.2008.01047.X, 2008. 5893
- Loye, A., Pedrazzini, A., and Jaboyedoff, M.: Preliminary regional rockfall hazard mapping using lidar-based slope frequency distribution and cone-fall modelling, in: *Proceedings of the 4th Canadian Conference on Geohazards: from Causes to Management*, Laval University Press, Quebec, 2008. 5901, 5902, 5920
- Loye, A., Jaboyedoff, M., and Pedrazzini, A.: Identification of potential rockfall source areas at a regional scale using a DEM-based geomorphometric analysis, *Nat. Hazards Earth Syst. Sci.*, 9, 1643–1653, doi:10.5194/nhess-9-1643-2009, 2009. 5901
- Luzon, P., Galang, J., Escapa, C., Montalbo, K., Felix, R., Sabado, J., and Lagmay, A.: Hazard mapping of structurally controlled landslide in Southern Leyte, Philippines using high resolution digital elevation model, available at: <http://blog.noah.dost.gov.ph/2013/10/24/hazard-mapping-of-structurally-controlled-landslide-in-southern-leyte-philippines-using-high-resolution-digital-elevation-model-2/>, (last access: 5 March 2015), 2013. 5894
- Metzger, R., Jaboyedoff, M., Oppikofer, T., Viero, A., and Galgaro, A.: Coltop3d: A New Software for Structural Analysis with High Resolution 3D Point Clouds and DEM, *CSPG/CSEG/CWLS GeoConvention 2009*, Alberta, Canada, 2009. 5896
- Michoud, C., Derron, M.-H., Horton, P., Jaboyedoff, M., Baillifard, F.-J., Loye, A., Nicolet, P., Pedrazzini, A., and Queyrel, A.: Rockfall hazard and risk assessments along roads at a regional scale: example in Swiss Alps, *Nat. Hazards Earth Syst. Sci.*, 12, 615–629, doi:10.5194/nhess-12-615-2012, 2012. 5901
- Raghavan, V., Masumoto, S., Koike, K., and Nagano, S.: Automatic lineament extraction from digital images using a segment tracing rotation transformation, *Comput. Geosci.*, 21, 555–591, 1995. 5895

## Structurally controlled hazard mapping of Southern Leyte, Philippines

P. K. Luzon et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



- Strahler, A.: Statistical analysis in geomorphic research, J. Geol., 62, 1–25, 1954. 5901
- Tengonciang, A.: Tectonic deformation of Mayon Volcano, Philippines, MS thesis, University of the Philippines, Diliman, 2008. 5896
- Wang, G., Wu, F. and Ye, W.: Stability analysis for toppling failure of unstable rock in Three Gorges reservoir area, China, Rock Characterisation, Modelling and Engineering Design Methods, CRC Press, Boca Raton, London, New York, Leiden, 431–435, 2013. 5898
- Wyllie, D. and Mah, C.: Rock Slope Engineering: Civil and Mining, 4th Edn., Spon Press, London, New York, 2004. 5897, 5913

# Structurally controlled hazard mapping of Southern Leyte, Philippines

P. K. Luzon et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



**Structurally  
controlled hazard  
mapping of Southern  
Leyte, Philippines**

P. K. Luzon et al.

[Title Page](#)[Abstract](#)[Introduction](#)[Conclusions](#)[References](#)[Tables](#)[Figures](#)[◀](#)[▶](#)[◀](#)[▶](#)[Back](#)[Close](#)[Full Screen / Esc](#)[Printer-friendly Version](#)[Interactive Discussion](#)**Table 1.** List of regional discontinuities identified for Southern Leyte.

Discontinuity set	Dip (°)	Dip direction (°)
DS 1 PF	32	250
DS 2	41	061
DS 3	37	204
DS 4	41	185
DS 5	31	111
DS 6	36	307

**Structurally  
controlled hazard  
mapping of Southern  
Leyte, Philippines**

P. K. Luzon et al.

**Table 2.** Field measurements reported on a post-disaster assessment by Catane et al. (2008).

Discontinuity set	Dip (°)	Dip direction (°)
Bedding	35	252
Fault	45–56	057
Set 1	80–90/65–90	30/205
Set 2	60	185

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



**Structurally  
controlled hazard  
mapping of Southern  
Leyte, Philippines**

P. K. Luzon et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc


Printer-friendly Version

Interactive Discussion

**Table 3.** Failure modes of selected slopes in Mt/Can-abag.

Slope	Dip/Dip Direction	Failure
S1	60/054	Planar/Wedge
S2	56/143	Planar/Wedge
S3	52/91	Wedge
S4	45/132	Wedge/Planar



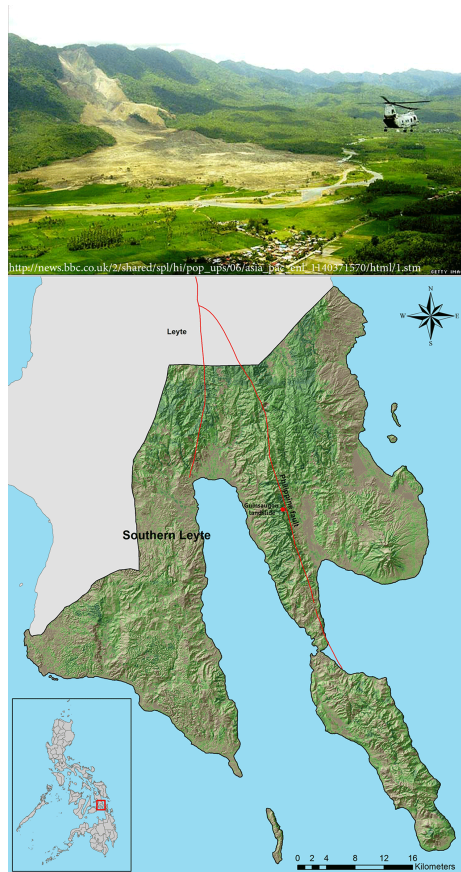


**Figure 1.** Location of Southern Leyte in the Philippine map with specifics of the Guinsaunon landslide (photo shown on top from BBC News UK) and Philippine fault segment in the province.




# Structurally controlled hazard mapping of Southern Leyte, Philippines

P. K. Luzon et al.

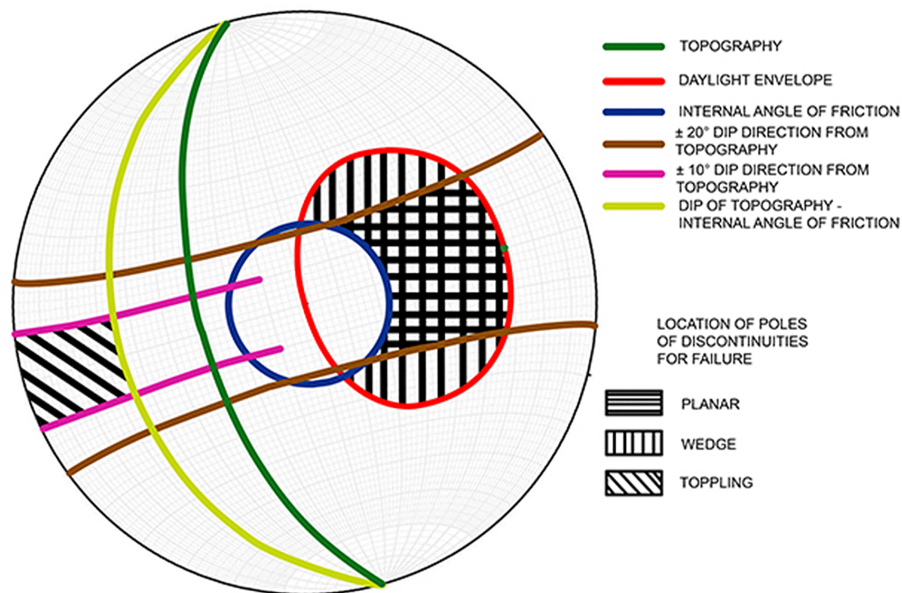

**Figure 3.** Criteria for discontinuities to cause failure (planar, wedge or toppling) on a given slope (Wyllie and Mah, 2004).

[Title Page](#)
[Abstract](#)
[Introduction](#)
[Conclusions](#)
[References](#)
[Tables](#)
[Figures](#)
[◀](#)
[▶](#)
[◀](#)
[▶](#)
[Back](#)
[Close](#)
[Full Screen / Esc](#)
[Printer-friendly Version](#)
[Interactive Discussion](#)

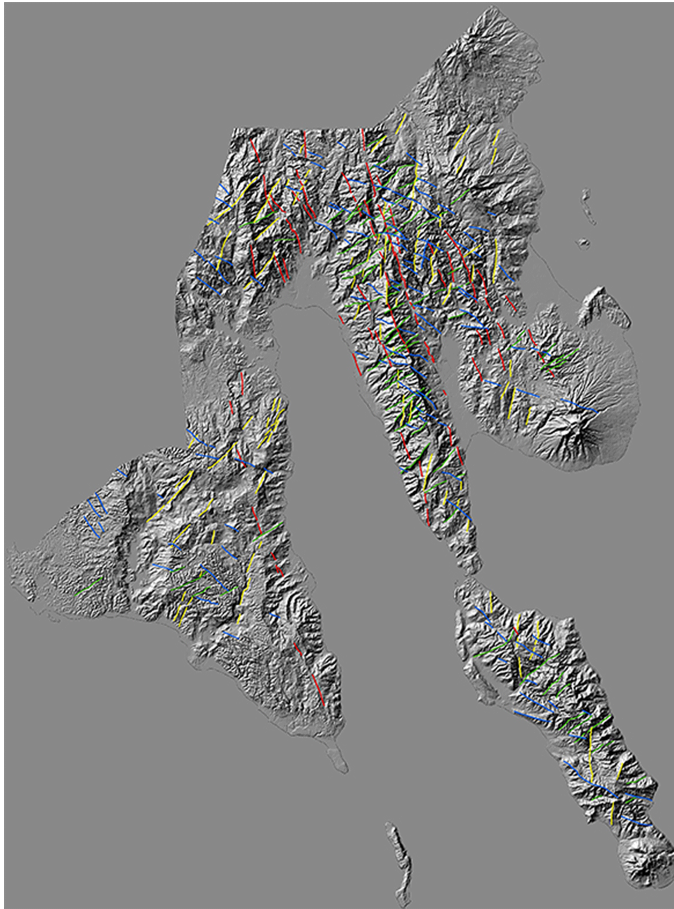**Figure 4.** Lineament Analysis for Southern Leyte.

Structurally controlled hazard mapping of Southern Leyte, Philippines

P. K. Luzon et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back


Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



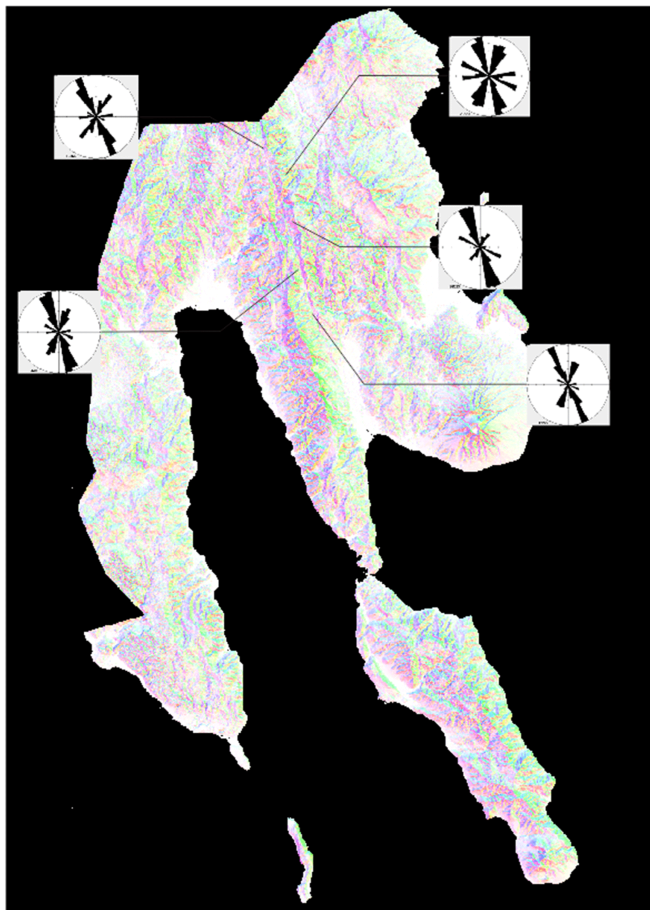

**Figure 5.** Different rose diagrams for a segment of the Philippine fault.

## Structurally controlled hazard mapping of Southern Leyte, Philippines

P. K. Luzon et al.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

[◀](#)

[▶](#)

[◀](#)

[▶](#)

[Back](#)


[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



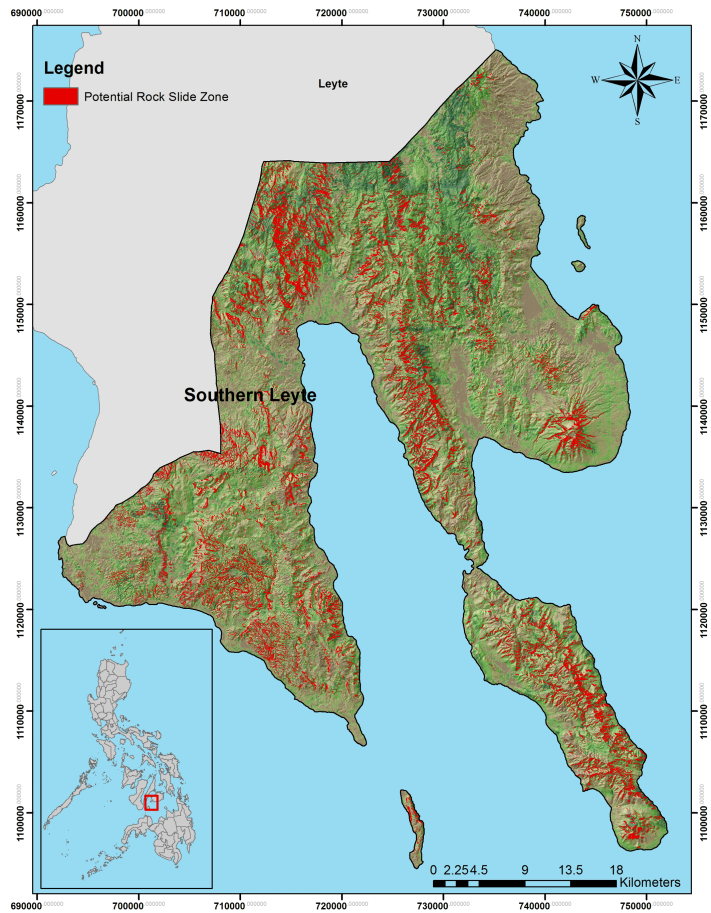


**Figure 6.** Area of potential rockslide zones in Southern Leyte using Matterocking.




**Structurally  
controlled hazard  
mapping of Southern  
Leyte, Philippines**

P. K. Luzon et al.

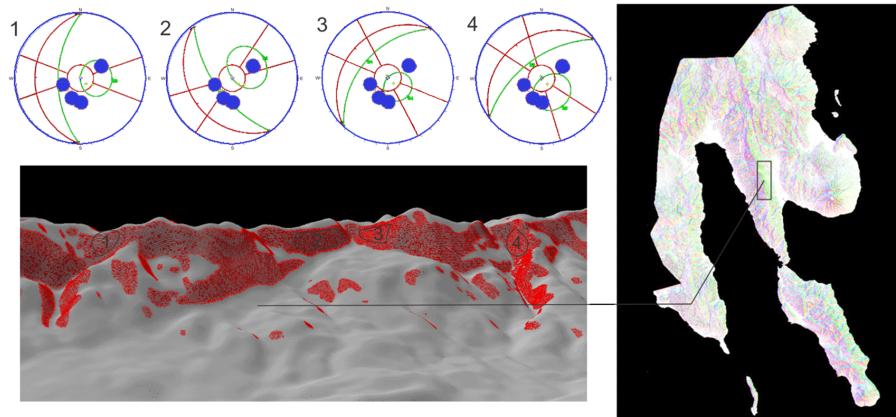[Title Page](#)[Abstract](#)[Introduction](#)[Conclusions](#)[References](#)[Tables](#)[Figures](#)[◀](#)[▶](#)[◀](#)[▶](#)[Back](#)[Close](#)[Full Screen / Esc](#)[Printer-friendly Version](#)[Interactive Discussion](#)**Figure 7.** Kinematic analysis of selected slopes in Mt. Can-abag.

# Structurally controlled hazard mapping of Southern Leyte, Philippines

P. K. Luzon et al.

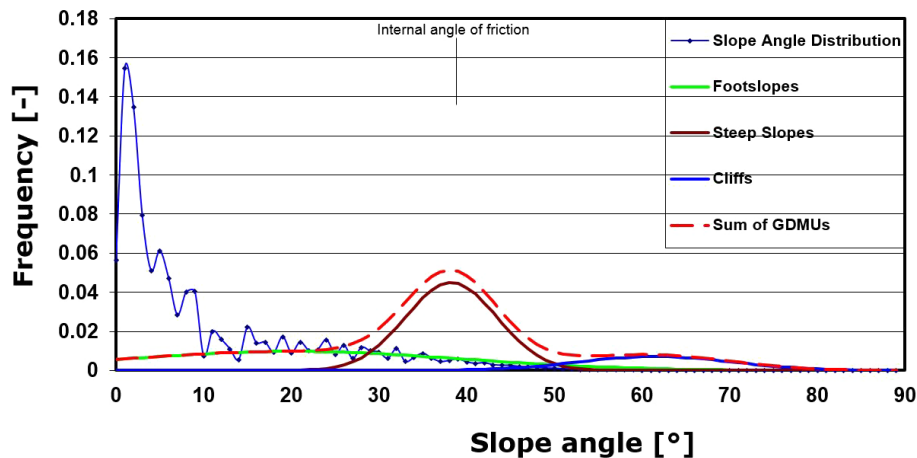

**Figure 8.** Slope families method using Histofit for the slope angle distribution of Southern Leyte, Philippines.

[Title Page](#)
[Abstract](#)
[Introduction](#)
[Conclusions](#)
[References](#)
[Tables](#)
[Figures](#)
[◀](#)
[▶](#)
[◀](#)
[▶](#)
[Back](#)
[Close](#)
[Full Screen / Esc](#)
[Printer-friendly Version](#)
[Interactive Discussion](#)




# Structurally controlled hazard mapping of Southern Leyte, Philippines

P. K. Luzon et al.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

[◀](#)

[▶](#)

[◀](#)

[▶](#)


[Back](#)

[Close](#)


[Full Screen / Esc](#)

[Printer-friendly Version](#)


[Interactive Discussion](#)

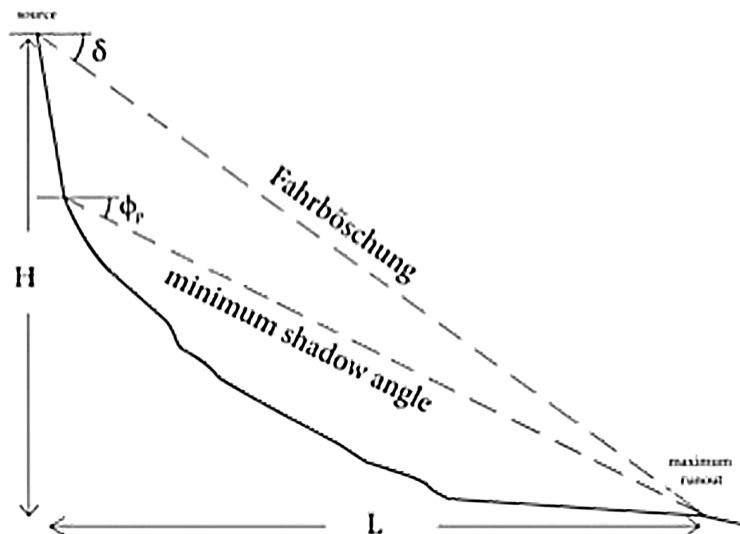

**Figure 9.** Simplified scheme using an empirical approach to determine runout projection.

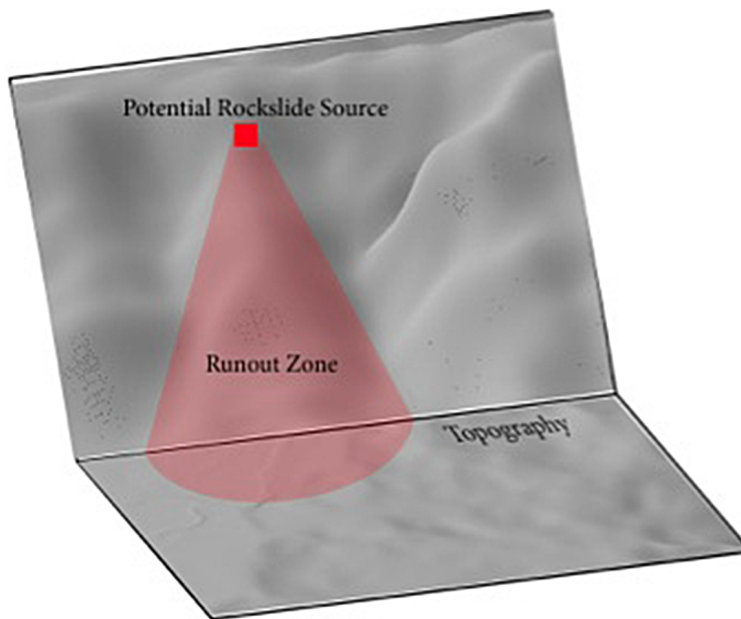

**Figure 10.** The cone method applied to simple topography in estimates of the runout zone using Conefall modified from Loye et al. (2008).

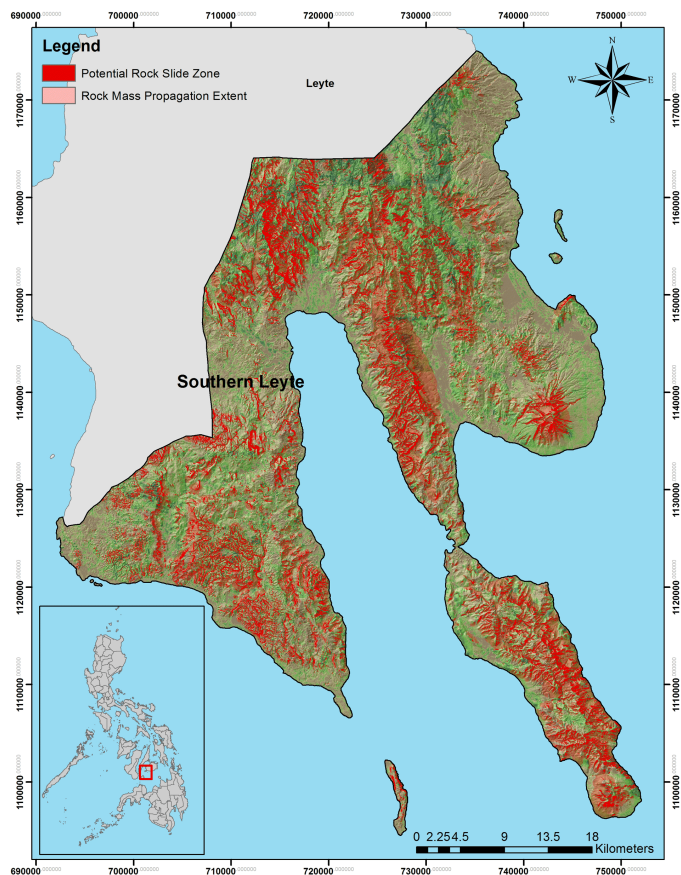

**Figure 11.** Combined map of potential rock slide zone sources and propagation extent for Southern Leyte.