

Discussion Paper	Discussion Paper	Discussion Paper	Discussion Paper
------------------	------------------	------------------	------------------

3, 7487–7525, 2015

K. Goda and K. Abilova

Published by Copernicus Publications on behalf of the European Geosciences Union.

Interactive Discussion



Abstract

This study investigates the issues related to underestimation of the earthquake source parameters in the context of tsunami early warning and tsunami risk assessment. The magnitude of a very large event may be underestimated significantly during the early stage of the disaster, resulting in the issuance of incorrect tsunami warnings. Tsunamigenic events in the Tohoku region of Japan, where the 2011 tsunami occurred, are focused on as a case study to illustrate the significance of the problems. The effects of biases in the estimated earthquake magnitude on tsunami loss are investigated using a rigorous probabilistic tsunami loss calculation tool that can be applied to a range of earthquake magnitudes by accounting for uncertainties of earthquake source parameters (e.g. geometry, mean slip, and spatial slip distribution). The quantitative tsunami loss results provide with valuable insights regarding the importance of deriving accurate seismic information as well as the potential biases of the anticipated tsunami consequences. Finally, usefulness of rigorous tsunami risk assessment is discussed in defining critical hazard scenarios based on the potential consequences due to tsunami disasters.

1 Introduction

Tsunami hazard maps and early warning systems are essential for mitigating the consequences of catastrophic tsunami disasters. Prior to actual detection of tsunamis, warnings can be issued based on earthquake information (e.g. magnitude and hypocenter location). Tsunami warning systems detect off-shore tsunami waves and issue updated warnings to residents in coastal communities based on the observations and modified earthquake information. In coastal areas, people evacuate to designated high grounds and shelters following local hazard maps and real-time instructions by emergency officers. The importance of these tsunami risk management tools (together with hard engineering mitigation measures) can be understood by comparing two

Effects of inaccurate seismic information on tsunami loss

K. Goda and K. Abilova

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



massive events, the 2004 Indian Ocean tsunami and the 2011 Tohoku tsunami. The tsunami early warning systems were not deployed prior to the 2004 tsunami and there were no tsunami protection along the coast, resulting in 230 000 + fatalities (Murata et al., 2010). On the other hand, the early warning systems were in place and operational during the 2011 Tohoku tsunami, saving many lives (Fraser et al., 2013).

Issuing accurate and prompt tsunami warnings to residents in coastal areas is critically important for mega-thrust tsunamigenic earthquakes. During the initial phase, it requires reliable estimation of key earthquake source characteristics, such as magnitude and location. The estimation of the earthquake information is usually accurate and prompt, however, for very large earthquakes satisfactory performance may not be achieved during the early phase of evacuation. This can be exemplified for the 2011 Tohoku tsunami case (Hoshiba and Ozaki, 2014). The first estimate of the Japan Meteorological Agency (JMA) magnitude was $M_j = 7.9$ (3 min after the earthquake) and later was updated to $M_j = 8.4$ (74 min after the earthquake). The significant underestimation was caused by the saturation of M_j . A correct estimate of the moment magnitude (M_w) equal to 8.8 (and eventually to 9.0) was reached 54 min after the earthquake. It took a considerably long time to reach the correct M_w value because seismograms recorded at broadband stations in Japan had exceeded the maximum amplitudes of the instruments. On the other hand, overseas agencies, such as the U.S. Geological Survey, obtained correct estimates of M_w about 10 min after the earthquake using teleseismic signals recorded outside of Japan. Consequently, tsunami warnings issued by the JMA underestimated the observed tsunamis significantly (3 to 6 vs. 10+ m; Cyranoski, 2011). Different estimates of the earthquake source parameters have significant influence on the wave heights and inundation depths because seismic events of $M_w = 8.0$ and $M_w = 9.0$, for instance, correspond to very different tsunami hazard scenarios in terms of size and earthquake slip.

From viewpoints of tsunami early warning and tsunami risk management, uncertainty of hazard and risk predictions based on macroscopic earthquake parameters (i.e.

Effects of inaccurate seismic information on tsunami loss

K. Goda and K. Abilova

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

[⏮](#)

[⏭](#)

[⏪](#)

[⏩](#)

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



magnitude and hypocenter) have important implications. For a M_w 9.0-class megathrust subduction event, the fault plane of the earthquake rupture extends to distances over several hundred kilometers (Murotani et al., 2013). Moreover, spatial distribution of earthquake slip varies significantly and these rupture characteristics, which are not captured by the earthquake magnitude and location, have major influence on tsunami waves and inundation in coastal cities and towns (Goda et al., 2014, 2015; Fukutani et al., 2015; Mueller et al., 2015). This often leads to significant uncertainty in predicted consequences due to tsunami (Goda and Song, 2016). In addition, with increasing earthquake magnitude, both amplitude and spatial extent of tsunamis increase rapidly. Hence, warnings should be issued in recognition of inherent uncertainty of the tsunami risk predictions and accuracy of the earthquake parameters. Nonetheless, this is not straightforward because the tsunami damage and loss generation processes are highly nonlinear and variable.

This study investigates the effects due to underestimation of the earthquake source parameters in the context of tsunami early warning and tsunami risk assessment. The 2011 Tohoku earthquake is focused on as a case study to illustrate the significance of the problems from a retrospective perspective. In the case study, a building portfolio (about 86 000) in Miyagi Prefecture is considered. The problem is set up as follow. A tsunami event of $M_w = 9.0$ in the offshore areas of the Tohoku region is adopted as reference. The magnitude of this event may be underestimated significantly during the early stage of the disaster (as was the case for the 2011 tsunami). The underestimated scenarios are represented by a set of earthquake scenarios with lower moment magnitudes than the reference scenario. For each assumed scenario, stochastic source models are generated by taking into account uncertainty of tsunami source characteristics. Using the multiple sets of tsunami source models corresponding to different moment magnitudes, probabilistic tsunami loss estimation is carried out. By analyzing the estimated tsunami loss for coastal cities and towns in Miyagi Prefecture, potential biases due to underestimation of earthquake magnitude can be quantified. These results provide with useful insights regarding the importance of deriving

Effects of inaccurate seismic information on tsunami loss

K. Goda and K. Abilova

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏮

⏭

⏪

⏩

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



accurate seismic information and can be compared with the effects due to uncertain source characteristics (e.g. geometry and spatial slip distribution) for given moment magnitudes, which is unavoidable in making risk predictions based on macroscopic earthquake parameters only.

For this purpose, a new probabilistic tsunami loss model for large $M_w = 8.0 +$ earthquakes in the Tohoku region of Japan is developed. For a given scenario magnitude, the loss model generates a tsunami loss curve for a building portfolio by considering uncertainties in earthquake source parameters (e.g. geometry, mean slip, and spatial slip distribution). In particular, a stochastic source modeling method (Mai and Beroza, 2002; Goda et al., 2014) is incorporated, and nonlinear shallow water equations with run-up are evaluated for each source model, enabling accurate inundation simulation. To extend the analyses to different earthquake scenarios, scaling relationships for the source parameters (Mai and Beroza, 2002; Murotani et al., 2013; Thingbaijam and Mai, 2015) are employed to generate stochastic source models that correspond to different moment magnitudes. Subsequently, Monte Carlo tsunami simulation is carried out, and inundation results at building locations are integrated with tsunami fragility curves and damage cost models that are applicable to the buildings of interest (Goda and Song, 2016). The novelty of the current tsunami loss model, with respect to other developments (e.g. Weibe and Cox, 2014; Goda and Song, 2016), is that generation of uncertain tsunami scenarios is not specific for (inverted) source models and can be applied to a range of scenarios in terms of earthquake magnitude. This is one step closer to the so-called probabilistic tsunami hazard analysis (PTHA; Geist and Parsons, 2006; Horspool et al., 2014), where multiple rupture scenarios are accounted for together with their occurrence probabilities. It is noteworthy that assignment of occurrence probability to extremely large earthquakes involves large uncertainty and may be unreliable (Kagan and Jackson, 2013). For this reason, occurrence probabilities for the large earthquakes are not considered in this study. It is noted that typical PTHA studies do not perform full inundation simulations and tsunami hazard parameters estimated at off-shore locations are extrapolated into land areas.

Effects of inaccurate seismic information on tsunami loss

K. Goda and K. Abilova

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏮

⏭

⏪

⏩

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Therefore, the extension of the current PTHA methodology to tsunami risk and loss estimation is limited by the fact that the accurate inundation simulation at local city/town levels is not performed and it is not possible to evaluate the tsunami damage and loss to individual buildings. The developed tsunami loss model in this study overcomes these limitations.

The paper is organized as follows. First, the methodology for probabilistic tsunami loss estimation is explained. Subsequently, a numerical example is set up for large subduction earthquakes ($M_w = 8.0$ to $M_w = 9.0$) off the Tohoku coast. The results of the tsunami loss estimation for the building portfolio in Miyagi Prefecture are obtained and are compared for different cases. In particular, the effects of different scenario magnitudes and uncertain source characteristics on tsunami loss are investigated from the viewpoints of tsunami early warning. Finally, conclusions are drawn for the use of advanced tsunami loss estimation tools in tsunami risk management.

2 Probabilistic tsunami loss estimation for multiple scenario magnitudes

This section presents a computational framework for probabilistic tsunami loss estimation that is applicable to a range of scenario magnitudes. The method is the generalized version of the stochastic tsunami loss model (Goda and Song, 2016). It consists of five components: (i) earthquake scenario generation, (ii) stochastic source modeling, (iii) tsunami inundation modeling, (iv) building exposure data, and (v) tsunami damage assessment and loss estimation. A computational flow of the tsunami loss model is illustrated in Fig. 1. Succinct descriptions of the model components are given below. The descriptions are based on the Tohoku region of Japan.

2.1 Earthquake scenario and scaling laws for source parameters

A seismic source region for possible large earthquakes is defined. The source region needs to be sufficiently large such that a $M_w 9.0$ -class event, which is regarded as an

Effects of inaccurate seismic information on tsunami loss

K. Goda and K. Abilova

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Effects of inaccurate seismic information on tsunami loss

K. Goda and K. Abilova

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

[⏪](#)

[⏩](#)

[⏴](#)

[⏵](#)

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



upper limit, can be accommodated. For the Tohoku region, a fault plane with 650 km in length and 250 km in width is considered (Fig. 2). The fault plane has a constant strike of 193° and variable dip angles, gradually steepening from 8 to 16° along the down-dip direction. The geometry and location of the fault plane are determined based on the source model for the 2011 Tohoku earthquake, developed by Satake et al. (2013), and are consistent with other source models for the Tohoku event (Goda et al., 2014). The fault plane is discretized with sub-faults having a size of $10\text{ km} \times 10\text{ km}$. Later, sub-faults of non-zero slips are determined based on sampled fault length and width of a seismic event for an assumed value of M_w , and slip values of these sub-faults are synthesized using stochastic synthesis methods (Sect. 2.2).

The shaded areas in Fig. 1 are sub-faults having the top-edge depth shallower than 20 km. The source inversion models considered by Goda et al. (2014) indicate that large slips tend to occur within the gently-dipping shallow segments along the Japan Trench. This empirical knowledge can be used as a constraint in selecting suitable synthesized slip distributions. Moreover, Fig. 1 shows the estimated hypocenter locations by three institutions, i.e. JMA, U.S. Geological Survey (NEIC), and Harvard Seismology Group. The hypocenter locations are variable and are apart from each other by more than 50 km, showing variability of the hypocenter location for a very large earthquake. In the context of early warning, the observed hypocenter locations can also be used to determine the acceptance of candidate slip models in stochastic source simulation. It is noteworthy that the hypocenter location does not exactly correspond to the so-called asperity areas with the largest slip but is located within areas of moderate slips near the asperities (Mai et al., 2005). Therefore, the hypocenter position, which is uncertain, gives only a loose constrain of areas with large deformation which cause major tsunami waves.

Empirical scaling laws describe relationships between seismological parameters (e.g. fault geometry and slip statistics) and earthquake size parameter, such as M_w and seismic moment M_o (note: $\log_{10} M_o = 1.5M_w + 9.05$; M_o in Nm). Many equations are available in the literature for different earthquake types (e.g. Wells and Coppersmith,

1994). To synthesize earthquake source models that have realistic features, a set of scaling laws and empirical models for the key source parameters is implemented. To account for the uncertainty of these parameters, probabilistic information of the adopted scaling laws and empirical models, which is summarized in Table 1, is taken into consideration in the simulation.

More specifically, three types of source parameters are considered in this study. The first type is related to fault geometry: the fault rupture area $S (= L \times W)$ and aspect ratio L/W , in which L and W are the fault length and width, respectively. The scaling relationship for S , developed by Murotani et al. (2013), is adopted, while the aspect ratio is treated as a uniform random variable between 1.5 and 3.0 (i.e. $L > W$), according to typical fault plane configurations of the inverted source models of the 2011 Tohoku earthquake (Goda et al., 2014).

The second type is related to slip statistics: average slip D_{ave} and maximum slip D_{max} (across the fault plane). The scaling relationships developed by Murotani et al. (2013) and Thingbaijam and Mai (2015) are considered for D_{ave} and D_{max} , respectively. Because both D_{ave} and D_{max} are treated as random variables, the physical constraint that the maximum slip is sufficiently greater than the average slip is implemented by requiring $D_{max} > 1.5 \times D_{ave}$. Moreover, in generating source model parameters probabilistically, the consistency among seismic moment, rupture area, and average slip is achieved based $M_0 = \mu S D_{ave}$, in which μ is the rock rigidity and is taken as 40 GPa in this study. Due to the variability in S and D_{ave} , (independent) random sampling of S and D_{ave} may result in a seismic moment that is very different from the target seismic moment or moment magnitude. To avoid such an inadequate combination of S and D_{ave} , sampling of these two parameters is repeated until the calculated seismic moment falls within a certain range; in this study, the target moment magnitudes minus/plus 0.05 units are considered for such a range. For instance, when the target moment magnitude is set to 9.0, sampling of S and D_{ave} is continued until the calculated moment magnitude falls between 8.95 and 9.05.

Effects of inaccurate seismic information on tsunami loss

K. Goda and K. Abilova

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

[⏮](#)

[⏭](#)

[⏪](#)

[⏩](#)

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



The wavenumber power spectrum can be modeled based on a von Kármán auto-correlation function:

$$P(k) \propto \frac{A_x A_z}{(1 + k^2)^{H+1}}, \quad (1)$$

where k is the wavenumber, $k = (A_z^2 k_z^2 + A_x^2 k_x^2)^{0.5}$. In the von Kármán model, A_z and A_x control the absolute level of the power spectrum in the low wavenumber range (i.e. $k \ll 1$; long wavelength) and capture the anisotropic spectral features of the slip distribution (when $A_z \neq A_x$). H determines the slope of the power spectral decay in the high wavenumber range (i.e. short wavelength), and is theoretically constrained to fall between 0 and 1. As mentioned in the previous subsection, the scaling relationships for H , A_x , and A_z are available (Table 1), and can be used in stochastic source simulation. Realizations of slip distributions with desirable spectral features are generated using a Fourier integral method (Pardo-Iguzquiza and Chica-Olmo, 1993). For a given set of H , A_x , and A_z , the amplitude spectrum of the target slip distribution is defined as in Eq. (1), while the phase spectrum is represented by a random phase matrix. The constructed complex Fourier coefficients are transformed into the spatial domain via two-dimensional inverse fast Fourier transform. The generated slip distributions have slip values that are normally distributed (i.e. symmetrical with respect to mean). To achieve realistic heavy right-tail features of the slip distribution (i.e. positive skewness), the synthesized slip distribution is converted via Box-Cox transformation: $y = (x^\lambda - 1)/\lambda$ ($\lambda \neq 0$), in which y is the transformed slip and x is the original slip (note: when $\lambda = 0$, $y = \log(x)$). The transformed slip distribution is further adjusted to achieve the target mean slip D_{ave} (which is also simulated in stochastic source modeling) and to avoid very large slip values exceeding the target maximum slip D_{max} . The excessive slip values are resampled from a histogram that is constructed based on slip values between $0.67D_{max}$ and D_{max} (Mai et al., 2005).

Subsequently, the position of the fault plane is determined randomly within the whole source region (Fig. 2) but ensuring that the fault plane contains the hypocenter location

Effects of inaccurate seismic information on tsunami loss

K. Goda and K. Abilova

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

[⏮](#)

[⏭](#)

[⏪](#)

[⏩](#)

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



(to be consistent with the situation for tsunami early warning). It is noteworthy that the hypocenter location is uncertain and can vary significantly (Fig. 2). To account for this uncertainty, for each synthetic source model, a location of the hypocenter is sampled from four locations; three are based on the JMA, USGS, and Harvard hypocenter locations (Fig. 2) and the other is the centroid of the three locations. The weights assigned to the JMA, USGS, and Harvard hypocenter locations are 0.2 each, while the weight assigned to the centroid is 0.4. Further to account for possible variability of the hypocenter location, deviation from the sampled location is modeled as a uniform random radius between 0 and 20 km with isotropic directionality.

Finally, to ensure that the synthesized slip distributions are realistic with respect to the seismological knowledge of earthquake rupture in the region, two additional constraints are implemented to determine the final acceptance of the generated source models. The first constraint requires that the ratio of the asperity area S_a to the total rupture area S of the candidate slip distribution falls between 0.15 and 0.25, where S_a is defined as the total area of sub-faults that have slip values greater than $1.5D_{ave}$. This criterion is based on the empirical finding by Murotani et al. (2013) that for large subduction earthquakes, typically S_a/S is about 0.20. The second constraint requires that the simulated earthquake slip is more concentrated in the shallow part of the fault plane rather than the deep part (Fig. 2), which is in agreement with the inverted source models for the 2011 Tohoku earthquake (Goda et al., 2014). Specifically, a candidate slip distribution is accepted if the total slip in the shallow segments (shaded sub-faults in Fig. 2) has a slip concentration between 60 and 75 % in terms of total slip across the fault plane. Multiple slip distributions are simulated until a sufficient number of acceptable source models are generated. In this study, 100 source models that meet all the criteria mentioned previously are generated for each of six moment magnitudes ranging from $M_w = 8.0$ to $M_w = 9.0$ with 0.2 units step (i.e. in total, 600 source models are generated).

Figure 4 shows synthesized earthquake source models for six moment magnitudes. Note that the source models shown in the figure is one of the 100 accepted source

Effects of inaccurate seismic information on tsunami loss

K. Goda and K. Abilova

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

[⏮](#)

[⏭](#)

[⏪](#)

[⏩](#)

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



models only. In the figure, mean and maximum slip values of the source models are indicated. Inspection of the illustrated six source models for different earthquake magnitudes indicates that both fault plane size and slip values increase significantly with moment magnitude. The location, size, and extent of the asperity areas also change significantly. Although it is not shown in Fig. 4, features of the 100 source models for the same moment magnitude also vary significantly. In particular, the locations of the asperity areas move around within the fault plane; this variability can be regarded as inherent uncertainty of earthquake rupture process in the context of tsunami early warning where only macroscopic earthquake information is available. In the case study, the effects due to errors in earthquake magnitudes and the effects of within-scenario variability of earthquake rupture on estimated seismic loss will be quantified and compared.

2.3 Tsunami inundation modeling

Tsunami modeling is carried out using a well-tested numerical code (Goto et al., 1997) that is capable of generating off-shore tsunami propagation and run-up/inundation by evaluating nonlinear shallow water equations using a leap-frog staggered-grid finite difference scheme. The run-up/inundation calculation is performed by a moving boundary approach, where a dry or wet condition of a computational cell is determined based on total water depth in comparison with its elevation. The computational domains are nested at five resolutions (i.e. 1350, 450, 150, 50, and 10 m domains). In this study, due to the computational reasons, the smallest grid size of the nested data is set to 50 m.

A complete dataset of bathymetry/elevation, coastal/riverside structures (e.g. breakwater and levees), and surface roughness is obtained from the Miyagi prefectural government. The ocean-floor topography data are based on the 1 : 50 000 bathymetric charts and JTOPO30 database developed by Japan Hydrographic Association and based on the nautical charts developed by Japan Coastal Guard. The raw data are gridded using triangulated irregular network. The land elevation data are based on

Effects of inaccurate seismic information on tsunami loss

K. Goda and K. Abilova

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

[⏪](#)

[⏩](#)

[◀](#)

[▶](#)

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



Effects of inaccurate seismic information on tsunami loss

K. Goda and K. Abilova

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

[⏪](#)

[⏩](#)

[◀](#)

[▶](#)

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



the 5 m grid DEM developed by the Geospatial Information Authority of Japan. The raw data are obtained from airborne laser surveys and aerial photographic surveys. These data have measurement errors of less than 1.0 m horizontally and of 0.3–0.7 m vertically (as standard deviation). The tidal fluctuation is not taken into account in this study.

The elevation data of the coastal/riverside structures are provided by municipalities in Miyagi Prefecture. In the coastal/riverside structural dataset, structures having dimensions less than 10 m only are represented, noting that those having dimensions greater than 10 m are included in the DEM data. In the tsunami simulation, the coastal/riverside structures are represented by a vertical wall at one or two sides of the computational cells. To evaluate the volume of water that overpasses these walls, Homma's overflowing formulae are employed.

The bottom friction is evaluated using Manning's formula. The Manning's coefficients are assigned to computational cells based on national land use data in Japan: $0.02 \text{ m}^{-1/3} \text{ s}$ for agricultural land, $0.025 \text{ m}^{-1/3} \text{ s}$ for ocean/water, $0.03 \text{ m}^{-1/3} \text{ s}$ for forest vegetation, $0.04 \text{ m}^{-1/3} \text{ s}$ for low-density residential areas, $0.06 \text{ m}^{-1/3} \text{ s}$ for moderate-density residential areas, and $0.08 \text{ m}^{-1/3} \text{ s}$ for high-density residential areas.

Differences in earthquake slip result in different boundary conditions for tsunami propagation and run-up. In tsunami simulation, the initial water surface elevation is evaluated based on formulae by Okada (1985) and Tanioka and Satake (1996). The latter equation accounts for the effects of horizontal seafloor movements in case of steep seafloor, inducing additional vertical water dislocation. The fault rupture is assumed to occur instantaneously, and numerical tsunami calculation is performed for duration of 2 h with an integration time step of 0.5 s. For each case, the maximum inundation depths at all in-land computational cells ($50 \text{ m} \times 50 \text{ m}$) are obtained by subtracting the DEM data from the calculated maximum wave heights.

2.4 Exposure data and cost information

An extensive tsunami damage database for the 2011 Tohoku earthquake is available from the Ministry of Land, Infrastructure, and Transportation (MLIT) of Japanese Government (MLIT 2014). In the database, each building located in the affected areas is classified according to different attributes, such as geographical location, structural material, story number, tsunami inundation depth, and sustained damage level. The material types are categorized into: reinforced concrete (RC), steel, wood, masonry, and unknown, whereas the number of stories is divided into: 1-story, 2-story, and 3+-story. In the database, seven discrete damage levels are defined: no damage, minor damage, moderate damage, major damage, complete damage, collapse, and wash-away. In this study, all buildings that are located between Soma City (south) to Minami Sanriku City (north) and have information on material and story number are considered for assessing the tsunami damage and loss. There are 86 219 buildings in total, consisting of 1446 RC structures, 4866 steel structures, 72 506 wood structures, and 7401 masonry structures. The spatial distribution of the building portfolio is shown in Fig. 5a. The buildings are concentrated in Sendai coastal plain.

For tsunami loss estimation, cost information for repairs and reconstruction is needed. Because the MLIT database does not contain occupancy information for individual buildings, simplified cost models for replacement that are based on building cost statistics (i.e. unit costs and footprint areas) are adopted by classifying buildings into residential houses (wood) and commercial stores/offices (RC/steel/masonry). It is considered that the unit costs for houses and stores/offices can be approximated by the lognormal distribution; the mean and coefficient of variation (CoV) are obtained from the regional building data statistics maintained by the MLIT. More specifically, the following cost information is adopted (USD 1 = JPY 100): mean unit cost = USD 1600 m⁻², and CoV = 0.320, and floor area = 130 m² for wooden houses, and mean unit cost = USD 1500 m⁻², and CoV = 0.318, and floor area = 540 m² for stores/offices.

Effects of inaccurate seismic information on tsunami loss

K. Goda and K. Abilova

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



2.5 Tsunami damage assessment and loss estimation

Structural vulnerability against tsunami loading can be modeled by empirical tsunami fragility curves, which relate tsunami intensity measures (IM) to tsunami damage states (DS) statistically. Using the MLIT tsunami damage database for the 2011 Tohoku tsunami, Suppasri et al. (2013) developed regional tsunami fragility models by distinguishing tsunami damage data according to the structural materials and the number of stories. The refinement for the different material types as well as for the number of stories is desirable, because the tsunami capacities for RC, steel, wood, and masonry buildings differ significantly (Koshimura et al., 2009; Suppasri et al., 2013; Tarbotton et al., 2015). Figure 5b shows four fragility curves that correspond to the wash-away damage state for four material types, indicating that wood structures are more vulnerable in comparison with others.

The exceedance probability of damage state ds_i for a given value im is expressed as:

$$P(DS \geq ds_i | im) = \Phi \left(\left[\ln(im) - \mu_{\ln IM | DS_i} \right] / \sigma_{\ln IM | DS_i} \right) \quad (2)$$

where Φ is the cumulative distribution function of the standard normal variate, and $\mu_{\ln IM | DS_i}$ and $\sigma_{\ln IM | DS_i}$ are the mean and standard deviation of $\ln IM | DS_i$, respectively. For mutually exclusive damage states that are defined in a discrete manner, the probability of being in ds_i is given by:

$$p(ds_i | im) = P(DS \geq ds_i | im) - P(DS \geq ds_{i+1} | im) \quad (3)$$

Note that ds_{i+1} is severer than ds_i (i.e. $P(DS \geq ds_{i+1} | im) < P(DS \geq ds_i | im)$). For each building, probabilities of attaining particular damage states $p(ds_i | im)$ can be estimated. By taking into account variability of source models (for a given scenario magnitude), the cumulative distribution functions of aggregate tsunami risk metrics, such as the number of buildings falling into a specific damage state, can be evaluated through Monte Carlo sampling of damage states for the buildings of interest (Goda and Song, 2016).

NHESSD

3, 7487–7525, 2015

Effects of inaccurate seismic information on tsunami loss

K. Goda and K. Abilova

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Finally, by incorporating the cost models for different buildings (Sect. 2.4), the tsunami damage information can be transformed into tsunami loss information for individual buildings as well as building portfolios. The loss ratios in terms of replacement cost of a damaged building for the seven damage levels (i.e. from no damage to wash-away) can be assigned as: 0.0, 0.05, 0.2, 0.4, 0.6, 1.0, and 1.0 (MLIT 2014). Using the damage state probability $p(ds)$ and loss ratio $R_L(ds)$, tsunami damage cost for a given tsunami hazard intensity can be calculated as (for discrete cases):

$$L = C_R \sum_{i=1}^7 p(ds_i) \times R_L(ds_i) \quad (4)$$

where C_R is the replacement cost of a building. The tsunami loss curve can be used for deciding upon various tsunami risk mitigation actions. In the context of tsunami warning, differences of the loss curves for different scenario magnitudes are the quantitative estimates of the errors due to inaccurate source information. Moreover, the tsunami loss curve can be used to define critical scenarios for tsunami hazard mapping purposes. These are investigated quantitatively in Sect. 3.

3 Application to major tsunami events in the Tohoku region of Japan

Focusing on the building portfolio in Miyagi Prefecture, the effects of underestimation/errors of earthquake magnitude are investigated in the context of tsunami early warning and tsunami risk assessment. The investigations are conducted using the probabilistic tsunami loss estimation tool that is developed in Sect. 2. In total, six scenario magnitudes from $M_w = 8.0$ to $M_w = 9.0$ are considered, and for each magnitude 100 stochastic source models are generated to represent the within-scenario uncertainty of the earthquake rupture. In Sect. 3.1, two questions are mainly concerned: when the magnitude is in error, what would be the impact in terms of tsunami loss prediction? And what is the uncertainty of predicted tsunami loss given

Effects of inaccurate seismic information on tsunami loss

K. Goda and K. Abilova

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏮

⏭

⏪

⏩

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



a moment magnitude and hypocentre location? The former is relevant when the warnings need to be given shortly after a very large seismic event, whereas the latter is always present in issuing tsunami early warnings. Comparison of the two cases will provide emergency officers with valuable insights related to their challenging tasks in an extreme situation. In Sect. 3.2, usefulness of rigorous tsunami risk assessment is discussed in defining critical hazard scenarios based on potential consequences due to tsunami disasters.

3.1 Tsunami loss curves for different earthquake scenarios

The developed loss estimation tools can produce various results of tsunami risk assessment. Figure 6, for instance, displays probability distributions of the number of buildings that are in the wash-way damage state for different scenario magnitudes by distinguishing building material types. The results are shown in terms of damage ratio (i.e. percentage of damaged buildings with respect to all buildings for each material type). The results clearly indicate that for all material types the occurrence of wash-away damage in the considered building portfolio becomes increasingly more frequent. It is noteworthy that although appearances of these damage ratio curves for different material types are similar (i.e. how relative positions of these curves change with the increase in M_w), the horizontal axes of Fig. 6 (i.e. damage ratio values) are different for the four material types. The maximum range of the damage ratio for wood structures is greater than those for other structures, reflecting the higher vulnerability of these structures (Fig. 5b; note: spatial distribution of the buildings also has influence). The observations regarding the changes of the damage ratio curves with respect to earthquake magnitude (as in Fig. 6) are applicable to different damage states.

To evaluate the economic consequences due to tsunami events with different scenario magnitudes, probability distributions of tsunami loss for the building portfolio are obtained for different magnitude values and for different material types. The results are shown in Fig. 7. One notable difference of the results shown in Figs. 6 and 7 (apart from the incorporation of damage cost models) is that the tsunami loss curve

Effects of inaccurate seismic information on tsunami loss

K. Goda and K. Abilova

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



includes all buildings with different damage states by weighting their relative impact based on the tsunami damage cost, whereas only a subset of buildings that sustain a specific damage state is considered in developing the damage ratio curve. Hence, the tsunami loss curve is more useful for assessing overall tsunami impact for the building portfolio. Inspection of Fig. 7 suggests that for all material types, the tsunami loss curves become more severe with increasing magnitude, noting that the horizontal axes of Fig. 7 are logarithmic with base 10. This indicates that the tsunami loss generation is an exponential process with respect to earthquake magnitude.

To discuss the effects of underestimation/errors of earthquake magnitude on total tsunami loss, tsunami loss curves for the entire building portfolio are shown in Fig. 8 by considering different earthquake scenario magnitudes. It is obvious that the tsunami loss curve shifts towards right with the increase in M_w , and its increment per magnitude change is approximately constant or slightly increasing (to conclude this definitely, more simulations are necessary). For example, at the median probability level, the tsunami loss increases by about a factor of 100 from M_w 8.0 to M_w 9.0 scenarios. Practically, this means that the over-/underestimation of earthquake magnitude by certain units in the tsunami warning might correspond to very different situations in terms of potential consequences. In case there is a possibility that the estimated earthquake information, which is obtained quickly, is in error or biased, the risk manager may wish to issue tsunami warnings by taking into account the uncertainty associated with risk predictions.

On the other hand, the within-scenario variability of the tsunami loss curve is caused by the uncertainty associated with detailed earthquake slip characteristics that are not captured by the macroscopic earthquake information. The results shown in Fig. 8 indicate that this variability is significant, and the main contributor of the variability is the spatial slip distribution, especially the location and extent of major asperities with respect to the building portfolio. For instance, the range between the minimum and maximum loss scenarios can be as large as a factor of 100 for the M_w 8.0 case, and it tends to decrease gradually as the scenario magnitude increases. Because the position

Effects of inaccurate seismic information on tsunami loss

K. Goda and K. Abilova

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

[I◀](#)

[▶I](#)

[◀](#)

[▶](#)

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



of the fault rupture plane has more influence on tsunami loss when the earthquake size is small, the within-scenario variability of tsunami loss is greater for smaller earthquake magnitudes. The within-scenario variability of tsunami loss is grossly comparable with the tsunami loss differences caused by the biases in earthquake magnitude (depending on the probability levels of that are referred to in the tsunami loss curves). This highlights the importance of the earthquake rupture process and slip distribution for accurate tsunami risk prediction. The results suggest that the further deployment of deep ocean-bottom sensors near the source areas (e.g. Iinuma et al., 2012) will not only improve the early detection of tsunami waves but only help constrain the earthquake rupture process more rapidly.

3.2 Critical tsunami loss scenarios and corresponding source and inundation maps

An integrated understanding of the quantitative tsunami loss results is useful for defining critical scenarios for tsunami hazard mapping and risk management purposes, and thus enhances the resilience of coastal communities against catastrophic tsunami disasters. This section aims at demonstrating the advantages that can be gained from such rigorous risk assessments.

Figure 9 illustrates a procedure to develop inundation hazard maps that are based on a critical tsunami loss scenario. The top-left panel of Fig. 9 shows the tsunami loss curves for the M_w 9.0 scenario (same as those shown in Figs. 7 and 8). It is noteworthy that each point of the loss curve corresponds to a specific source model and inundation results. For example, the median case in terms of tsunami loss distribution for the entire building portfolio is focused on (which is indicated by a circle). The tsunami loss is estimated as USD 3581 million. The earthquake source model that causes the median tsunami loss is shown in the top-right panel of Fig. 9. The source model has large concentrations of earthquake slips in the shallow segments of the fault plane. Furthermore, two maximum tsunami wave height contours for Soma to Sendai and for Ishinomaki to Minami Sanriku that correspond to the source model shown in the

Effects of inaccurate seismic information on tsunami loss

K. Goda and K. Abilova

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

[◀](#)

[▶](#)

[◀](#)

[▶](#)

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



Effects of inaccurate seismic information on tsunami loss

K. Goda and K. Abilova

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



top-right panel are presented in the bottom-left and bottom-right panels, respectively. It can be observed from the inundation maps that the tsunami loss is generated in the coastal plain areas (south of Sendai), low-lying parts of Ishinomaki, and locations along the ria coast in northern Miyagi Prefecture. The source models and inundation maps that are identified through the loss calculations are useful because the scenario and hazard information is directly associated with the tsunami loss percentile (i.e. median loss for the M_w 9.0 scenario). It is noted that the hazard maps based on critical tsunami loss are different from conventional tsunami hazard maps that are prepared for coastal cities and towns. The conventional tsunami hazard maps lack the link with the potential consequences and, importantly, the assessment of the uncertainty. The proposed tsunami hazard mapping method, although it requires much significant calculations, is more transparent and meaningful for communicating the tsunami risk with stakeholders. Therefore, it can be used as decision-support systems for tsunami risk reduction.

To further demonstrate how the proposed tsunami hazard mapping method can be used for various situations, earthquake source models and inundation height maps in Soma-Sendai and Ishinomaki-Minami Sanriku areas are developed by considering three scenario magnitudes (i.e. $M_w = 8.2$, $M_w = 8.6$, and $M_w = 9.0$) and two loss percentiles (i.e. 50th and 90th percentiles); the loss curves that are referred to are shown in Fig. 8. The results are shown in Figs. 10–12. The source models for different scenarios and loss percentiles (Fig. 10) clearly show that both rupture area and slip statistics increase significantly with the scenario magnitude and with the loss percentile. Furthermore, it can be observed that with the increase in the loss percentile, the location of the asperities tends to be positioned directly across the areas where the building portfolio is distributed (i.e. between Soma and Minami Sanriku); thus larger tsunami waves are radiated towards the buildings of interest. The effects of greater tsunami waves can be appreciated by inspecting the tsunami inundation maps for the two local areas. In the Soma-Sendai areas (Fig. 11), the maximum tsunami wave heights near the coastal line and in the inundated areas increase rapidly with

more severe tsunami scenarios. In the Ishinomaki-Minami Sanriku areas (Fig. 12), two features can be seen in different topographical regions. In the ria coast, the maximum tsunami wave heights become larger but the spatial extent of the inundation does not change significantly when more severe tsunami scenarios are considered. On the other hand, in the coastal plain of Ishinomaki, both maximum tsunami wave heights and inundated areas increase with more severe tsunami scenarios, similar to the cases for the Soma-Sendai areas.

4 Conclusions

Issuing accurate and prompt tsunami warnings is vital for reducing the potential consequences due to catastrophic tsunami disasters. Recognizing the unavoidable uncertainty in the estimation of earthquake information that is used for tsunami early warnings as well as the uncertainty of the earthquake rupture process (e.g. slip distribution), it is important to evaluate the effects of such uncertainties on the tsunami risk predictions quantitatively. For this purpose, a case study focusing on tsunamigenic events in the Tohoku region of Japan was set up to illustrate the significance of the problems. The new comprehensive probabilistic tsunami loss model was developed by implementing various scaling relationships for the key source parameters and stochastic spectral methods of synthesizing the spatial earthquake slip distribution. The generated stochastic source models for different scenario magnitudes were used as input in Monte Carlo tsunami inundation simulation and subsequent tsunami damage assessments. The developed tsunami risk assessment tool can produce tsunami loss curves for a range of scenario magnitudes. Focusing on the building portfolio in Miyagi Prefecture, the effects of underestimation/errors of earthquake magnitude were investigated in the context of tsunami early warning and tsunami risk assessment, and were compared with the within-scenario variability of the tsunami loss due to the uncertain earthquake rupture process. In addition, a procedure to define critical hazard

Effects of inaccurate seismic information on tsunami loss

K. Goda and K. Abilova

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



scenarios based on potential consequences of tsunami disasters was suggested to promote more transparency and effectiveness in communicating tsunami risks.

The main conclusions of this study are:

- The tsunami loss generation process is exponential with respect to earthquake magnitude. Therefore, biases/errors in earthquake source information (magnitude and hypocenter location) can have major influence on the potential consequences of the tsunami event in the context of tsunami early warning and risk prediction.
- At the median probability level, for instance, total tsunami loss increases by about a factor of 100 from M_w 8.0 to M_w 9.0 scenarios (note: various loss quantities can be extracted from the calculated loss curves). Such quantitative information of predicted tsunami risk is useful for risk managers who decide to issue warnings and evacuation orders.
- For a given scenario magnitude, tsunami loss curves vary significantly due to uncertain earthquake rupture characteristics that are not captured by the macroscopic earthquake information. The within-scenario variability of tsunami loss is comparable with the tsunami loss differences caused by the biases in earthquake magnitude.
- The definition of critical tsunami scenarios based on probabilistic tsunami loss calculations are useful for more effective tsunami hazard mapping and risk management. The deficiency of current tsunami hazard maps can be addressed by explicitly taking into account uncertainty associated with hazard scenarios and their characteristics.

Acknowledgements. The bathymetry and elevation data for the Tohoku region were provided by the Miyagi prefectural government. The tsunami damage data for the 2011 Tohoku earthquake were obtained from the Ministry of Land, Infrastructure, and Transportation (<http://www.mlit.go.jp/toshi/toshi-hukkou-arkaibu.html>). This work was supported by the Natural Environment Research Council through the Consortium on Risk in the Environment: Diagnostics, Integration,

Effects of inaccurate seismic information on tsunami loss

K. Goda and K. Abilova

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



References

5 Cyranoski, D.: Japan's tsunami warning system retreats, Nature, doi:10.1038/news.2011.477, 2011.

Fraser, S., Pomonis, A., Raby, A., Goda, K., Chian, S. C., Macabuag, J., Offord, M., Saito, K., and Sammonds, P.: Tsunami damage to coastal defences and buildings in the March 11th 2011 M_w 9.0 Great East Japan earthquake and tsunami, B. Earthq. Eng., 11, 205–239, 2013.

10 Fukutani, Y., Suppasri, A., and Imamura, F.: Stochastic analysis and uncertainty assessment of tsunami wave height using a random source parameter model that targets a Tohoku-type earthquake fault, Stoch. Env. Res. Risk A., 29, 1763–1779, 2015.

Geist, E. L. and Parsons, T.: Probabilistic analysis of tsunami hazards, Nat. Hazards, 37, 277–314, 2006.

15 Goda, K. and Song, J.: Uncertainty modeling and visualization for tsunami hazard and risk mapping: a case study for the 2011 Tohoku earthquake, Stoch. Env. Res. Risk A., doi:10.1007/s00477-015-1146-x, online first, 2016.

Goda, K., Mai, P. M., Yasuda, T., and Mori, N.: Sensitivity of tsunami wave profiles and inundation simulations to earthquake slip and fault geometry for the, 2011 Tohoku earthquake, Earth Planets Space, 66, 1–20, doi:10.1186/1880-5981-66-105, 2014.

20 Goda, K., Yasuda, T., Mori, N., and Mai, P. M.: Variability of tsunami inundation footprints considering stochastic scenarios based on a single rupture model: application to the 2011 Tohoku earthquake, J. Geophys. Res.-Oceans, 120, 4552–4575, 2015.

Goto, C., Ogawa, Y., Shuto, N., and Imamura, F.: Numerical Method of Tsunami Simulation with the Leap-Frog Scheme, IOC Manual, UNESCO, No. 35, Paris, France, 1997.

25 Horspool, N., Pranantyo, I., Griffin, J., Latief, H., Natawidjaja, D. H., Kongko, W., Cipta, A., Bustaman, B., Anugrah, S. D., and Thio, H. K.: A probabilistic tsunami hazard assessment for Indonesia, Nat. Hazards Earth Syst. Sci., 14, 3105–3122, doi:10.5194/nhess-14-3105-2014, 2014.

Effects of inaccurate seismic information on tsunami loss

K. Goda and K. Abilova

Title Page

AbstractIntroduction

ConclusionsReferences

TablesFigures

⏮⏭

⏪⏩

BackClose

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Effects of inaccurate seismic information on tsunami loss

K. Goda and K. Abilova

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏮

⏭

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



- Hoshiba, M. and Ozaki, T.: Earthquake early warning and tsunami warning of the Japan Meteorological Agency, and their performance in the 2011 off the Pacific Coast of Tohoku earthquake (M_w 9.0), in: *Early Warning for Geological Disasters*, edited by: Wenzel, F. and Zschau, J., Springer-Verlag Berlin Heidelberg, Heidelberg, Germany, 1–28, 2014.
- 5 Inuma, T., Hino, R., Kido, M., Inazu, D., Osada, Y., Ito, Y., Ohzono, M., Tsushima, H., Suzuki, S., Fujimoto, H., and Miura, S.: Coseismic slip distribution of the 2011 off the Pacific Coast of Tohoku Earthquake (M 9.0) refined by means of seafloor geodetic data. *J. Geophys. Res.*, 117, B07409, doi:10.1029/2012JB009186, 2012.
- Kagan, Y. and Jackson, D. D.: Tohoku earthquake: a surprise?, *B. Seismol. Soc. Am.*, 103, 1181–1194, 2013.
- 10 Koshimura, S., Oie, T., Yanagisawa, H., and Imamura, F.: Developing fragility functions for tsunami damage estimation using numerical model and post-tsunami data from Banda Aceh, Indonesia, *Coast. Eng. J.*, 51, 243–273, 2009.
- Mai, P. M. and Beroza, G. C.: A spatial random field model to characterize complexity in earthquake slip, *J. Geophys. Res.*, 107, 2308, doi:10.1029/2001JB000588, 2002.
- 15 Mai, P. M., Spudich, P., and Boatwright, J.: Hypocenter locations in finite-source rupture models, *B. Seismol. Soc. Am.*, 95, 965–980, 2005.
- Ministry of Land Infrastructure and Transportation: Survey of Tsunami Damage Condition, available at: <http://www.mlit.go.jp/toshi/toshi-hukkou-arkaibu.html> (last access: 1 July 2014), 2014.
- 20 Mueller, C., Power, W. L., Fraser, S., and Wang, X.: Effects of rupture complexity on local tsunami inundation: implications for probabilistic tsunami hazard assessment by example, *J. Geophys. Res.-Sol. Ea.*, 120, 488–502, doi:10.1002/2014JB011301, 2015.
- Murata, S., Imamura, F., Kato, K., Kawata, Y., Takahashi, S., and Takayama, T.: *Tsunami: To Survive From Tsunami*, World Scientific Publishing, New Jersey, 2010.
- 25 Murotani, S., Satake, K., and Fujii, Y.: Scaling relations of seismic moment, rupture area, average slip, and asperity size for $M \sim 9$ subduction-zone earthquakes, *Geophys. Res. Lett.*, 40, 5070–5074, 2013.
- Okada, Y.: Surface deformation due to shear and tensile faults in a half-space, *B. Seismol. Soc. Am.*, 75, 1135–1154, 1985.
- 30 Pardo-Iguzquiza, E. and Chica-Olmo, M.: The Fourier integral method: an efficient spectral method for simulation of random fields, *Math. Geol.*, 25, 177–217, 1993.

- Satake, K., Fujii, Y., Harada, T., and Namegaya, Y.: Time and space distribution of coseismic slip of the 2011 Tohoku earthquake as inferred from tsunami waveform data, *B. Seismol. Soc. Am.*, 103, 1473–1492, 2013.
- Suppasri, A., Mas, E., Charvet, I., Gunasekera, R., Imai, K., Fukutani, Y., Abe, Y., and Imamura, F.: Building damage characteristics based on surveyed data and fragility curves of the 2011 Great East Japan tsunami, *Nat. Hazards*, 66, 319–341, 2013.
- Tanioka, Y. and Satake, K.: Tsunami generation by horizontal displacement of ocean bottom, *Geophys. Res. Lett.*, 23, 861–864, 1996.
- Tarbotton, C., Dall'Osso, F., Dominey-Howes, D., and Goff, J.: The use of empirical vulnerability functions to assess the response of buildings to tsunami impact: comparative review and summary of best practice, *Earth-Sci. Rev.*, 142, 120–134, 2015.
- Thingbaijam, K. K. S. and Mai, P. M.: Evidence for truncated exponential probability distribution of earthquake slip, *B. Seismol. Soc. Am.*, in review, 2015.
- Wells, D. L. and Coppersmith, K. J.: New empirical relationships among magnitude, rupture length, rupture width, rupture area, and surface displacement, *B. Seismol. Soc. Am.*, 84, 974–1002, 1994.
- Wiebe, D. M. and Cox, D. T.: Application of fragility curves to estimate building damage and economic loss at a community scale: a case study of Seaside, Oregon, *Nat. Hazards*, 71, 2043–2061, 2014.

NHESSD

3, 7487–7525, 2015

Effects of inaccurate seismic information on tsunami loss

K. Goda and K. Abilova

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

[I◀](#)

[▶I](#)

[◀](#)

[▶](#)

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



Effects of inaccurate seismic information on tsunami loss

K. Goda and K. Abilova

Table 1. Summary of empirical scaling laws and probabilistic information of fault geometry and stochastic source parameters adopted in this study. $N(0,1)$ represents the standard normal random variable, whereas $U(a,b)$ represents the uniform random variable with lower and upper limits of a and b , respectively.

Parameter	Equation	Reference
Surface area S (km ²)	$\log_{10}S = -9.8729 + (2/3)M_o + 0.1875N(0,1)$	Murotani et al. (2013)
Aspect ratio L/W	$L/W = U(1.5, 3.0)$	Goda et al. (2014)
Average slip D_{ave} (m)	$\log_{10}D_{\text{ave}} = -6.7799 + (1/3)M_o + 0.2148N(0,1)$	Murotani et al. (2013)
Maximum slip D_{max} (m)	$\log_{10}D_{\text{max}} = 0.624 + 0.948 \times \log_{10}(D_{\text{ave}}) + 0.10N(0,1)$	Thingbaijam and Mai (2015)
Hurst number H	$H = 0.75 + 0.23N(0,1)$	Mai and Beroza (2002)
Correlation length along dip A_z (km)	$\log_{10}A_z = -1.79 + 0.38M_w + 0.17N(0,1)$	Mai and Beroza (2002)
Correlation length along strike A_x (km)	$\log_{10}A_x = -2.43 + 0.49M_w + 0.15N(0,1)$	Mai and Beroza (2002)
Box–Cox parameter λ	$\lambda = U(0.1, 0.3)$	Goda et al. (2014)

[Title Page](#)
[Abstract](#)
[Introduction](#)
[Conclusions](#)
[References](#)
[Tables](#)
[Figures](#)
[I◀](#)
[▶I](#)
[◀](#)
[▶](#)
[Back](#)
[Close](#)
[Full Screen / Esc](#)
[Printer-friendly Version](#)
[Interactive Discussion](#)


Effects of inaccurate seismic information on tsunami loss

K. Goda and K. Abilova

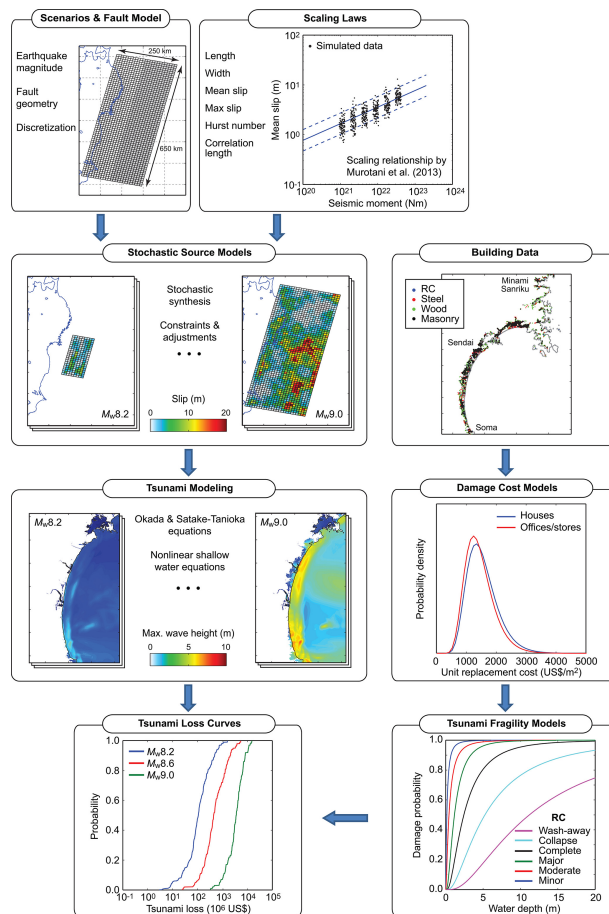


Figure 1. Probabilistic tsunami hazard and risk analysis.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Effects of inaccurate seismic information on tsunami loss

K. Goda and K. Abilova

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)



[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)

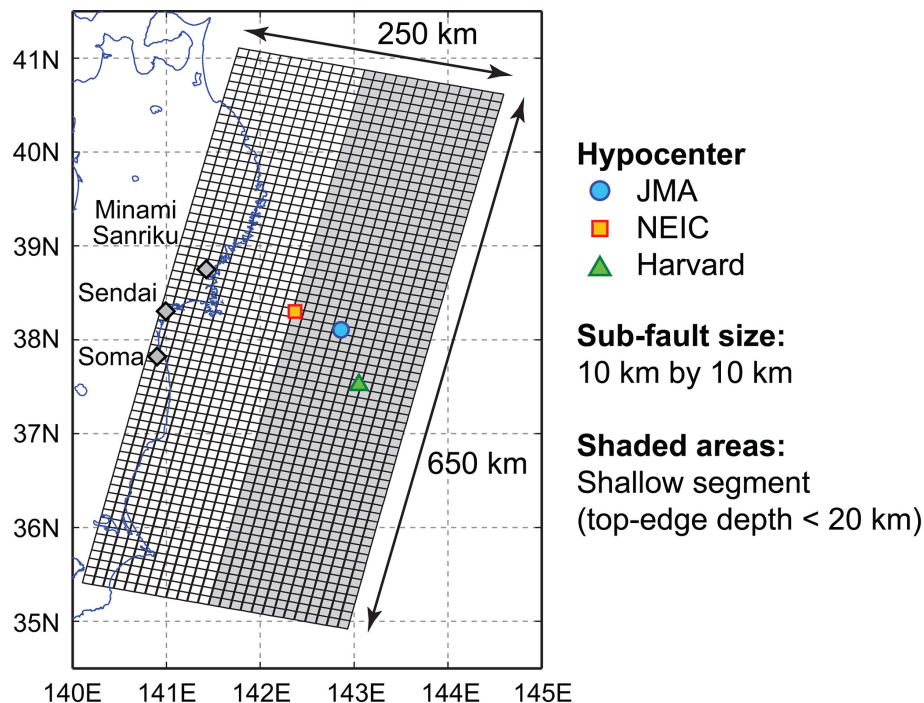


Figure 2. Tsunami source region off the Tohoku coast of Japan.

Effects of inaccurate seismic information on tsunami loss

K. Goda and K. Abilova

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)



[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)

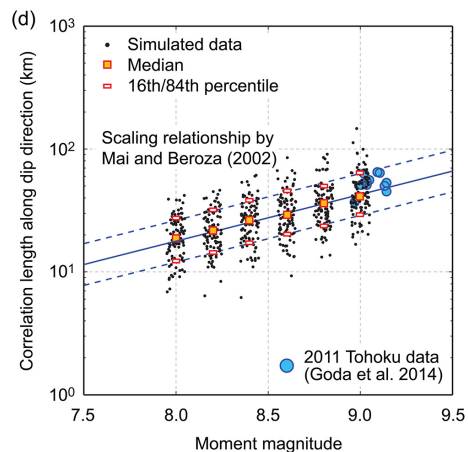
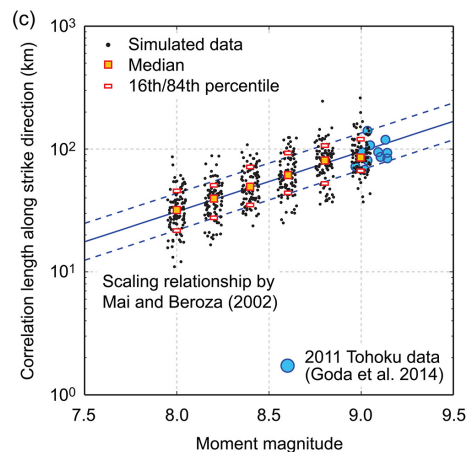
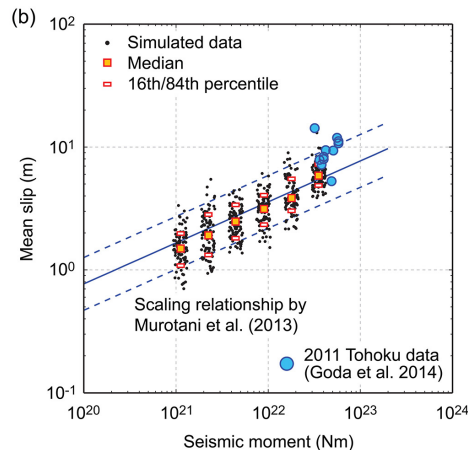
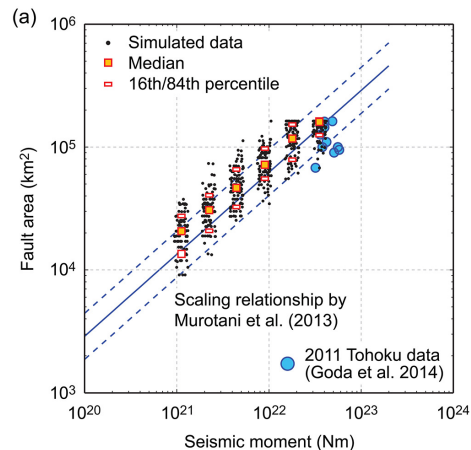


Figure 3. Scaling relationships and simulated parameters in stochastic scenario generation: **(a)** seismic moment – fault area, **(b)** seismic moment – mean slip, **(c)** moment magnitude – correlation length along strike direction, and **(d)** moment magnitude – correlation length along dip direction.

Effects of inaccurate seismic information on tsunami loss

K. Goda and K. Abilova

Title Page

AbstractIntroduction

ConclusionsReferences

TablesFigures

I◀▶I

◀▶

BackClose

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



K. Goda and K. Abilova

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

[Back](#)

Close

Full Screen / Esc

[Printer-friendly Version](#)

Interactive Discussion

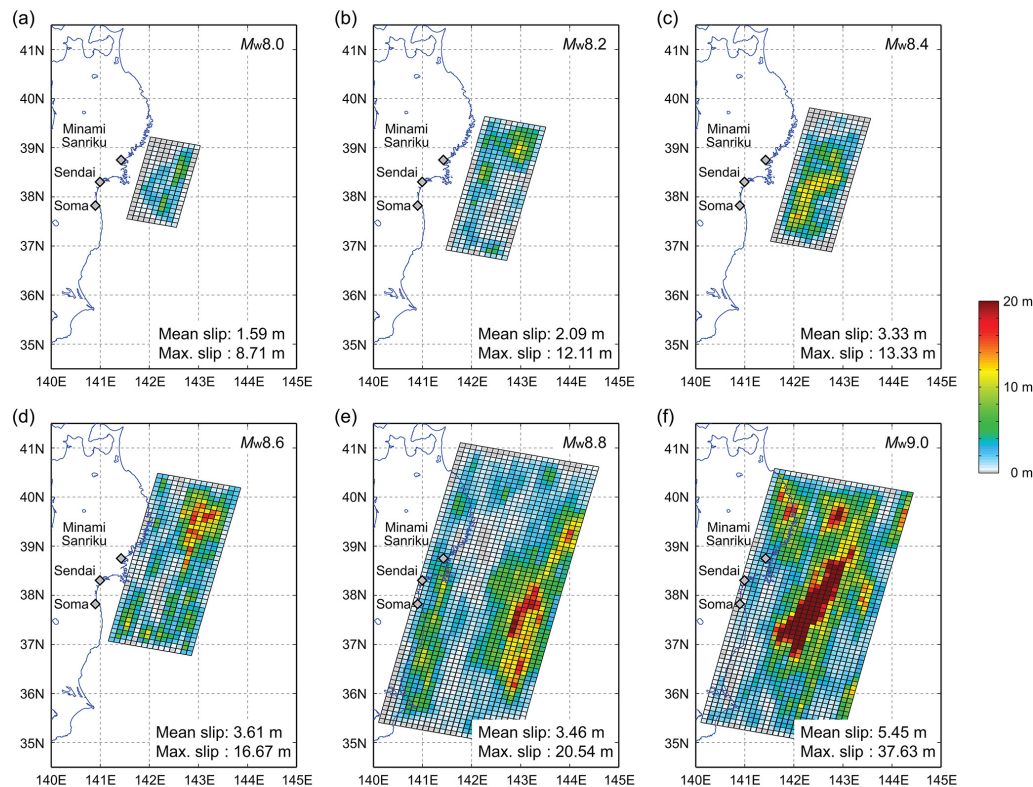


Figure 4. Synthesized earthquake source models: **(a)** $M_w = 8.0$, **(b)** $M_w = 8.2$, **(c)** $M_w = 8.4$, **(d)** $M_w = 8.6$, **(e)** $M_w = 8.8$, and **(f)** $M_w = 9.0$.

Effects of inaccurate seismic information on tsunami loss

K. Goda and K. Abilova

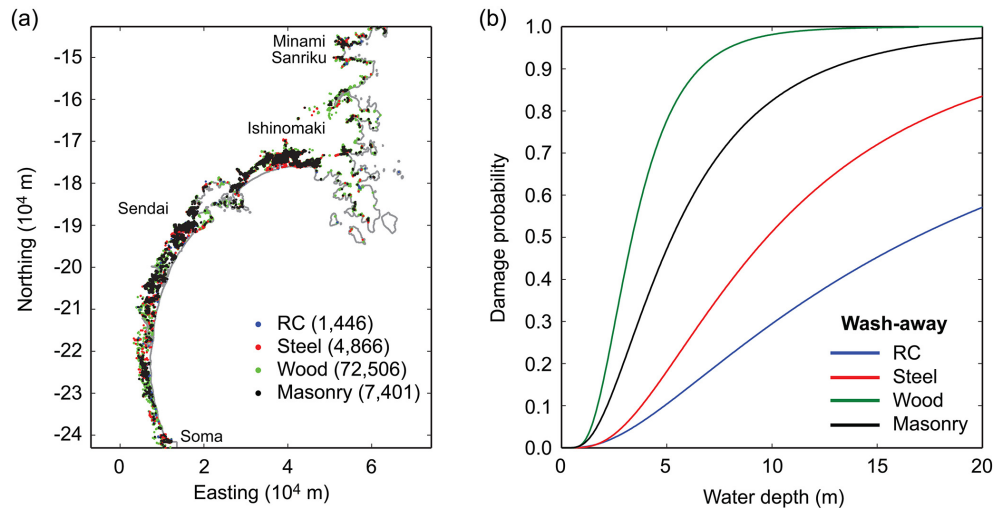


Figure 5. (a) Spatial distribution of buildings in Miyagi Prefecture, and (b) tsunami fragility curves for wash-away damage state.

Effects of inaccurate seismic information on tsunami loss

K. Goda and K. Abilova

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

▶

[Back](#)

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

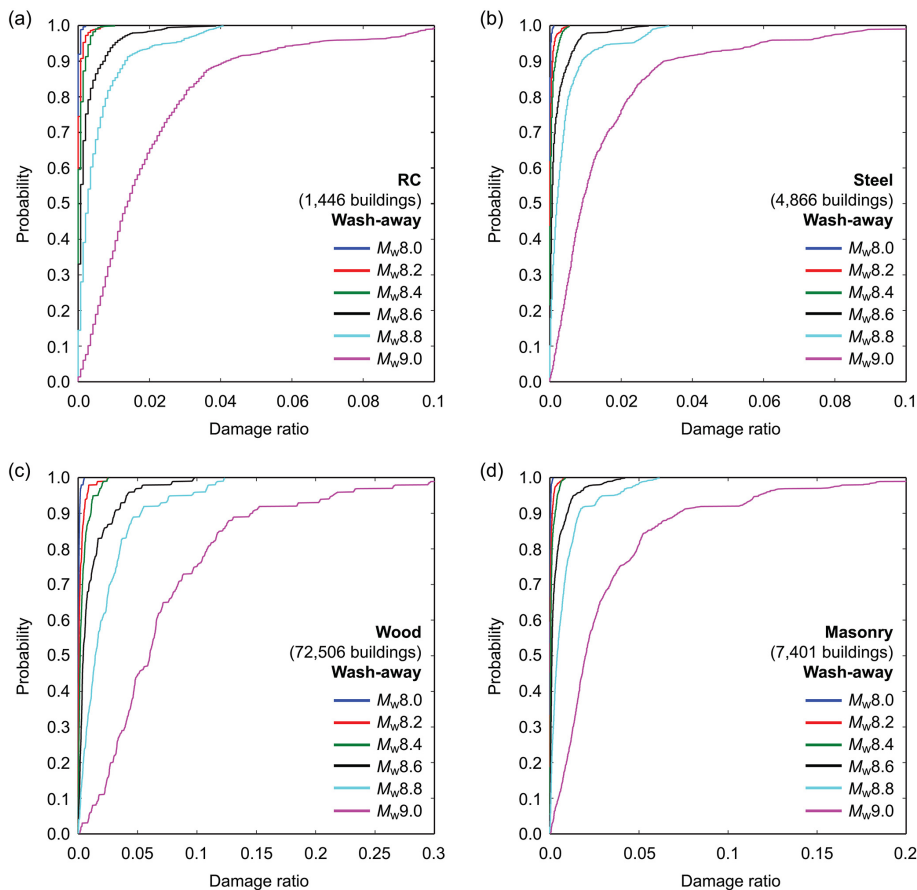


Figure 6. Probability distributions of wash-way damage ratios (i.e. percentages of damaged buildings to all buildings) for different earthquake scenarios by distinguishing material types: **(a)** RC, **(b)** steel, **(c)** wood, and **(d)** masonry.

Effects of inaccurate seismic information on tsunami loss

K. Goda and K. Abilova

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)



[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)

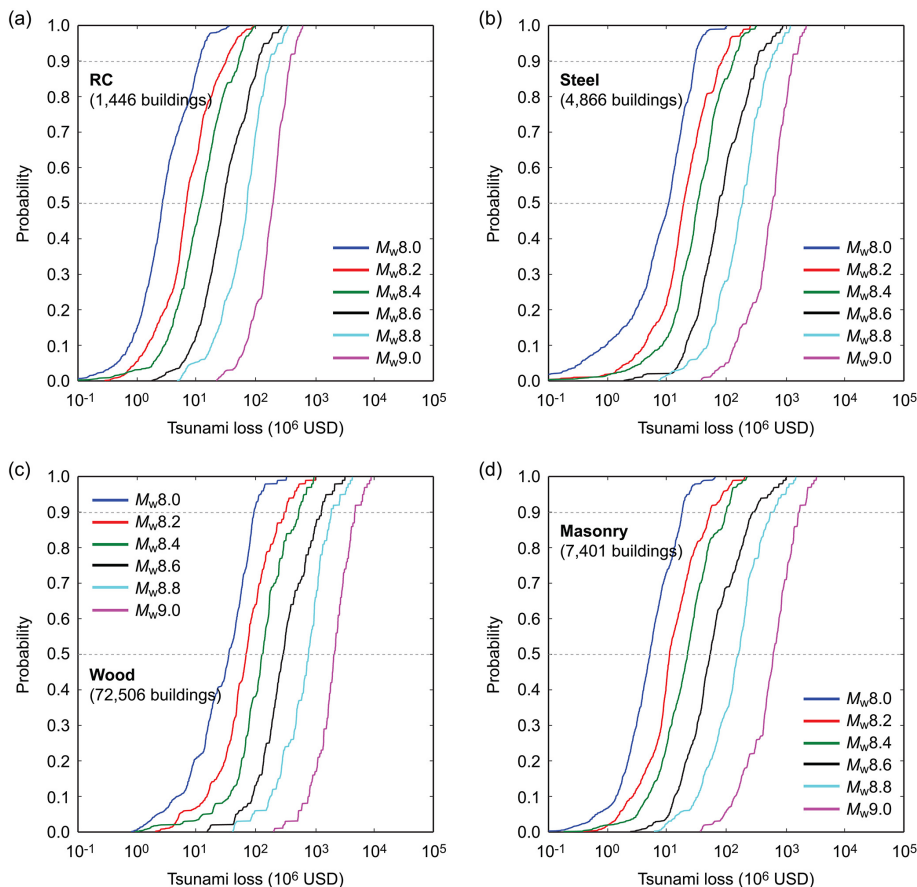


Figure 7. Probability distributions of tsunami loss for different earthquake scenarios by distinguishing material types: (a) RC, (b) steel, (c) wood, and (d) masonry.

Effects of inaccurate seismic information on tsunami loss

K. Goda and K. Abilova

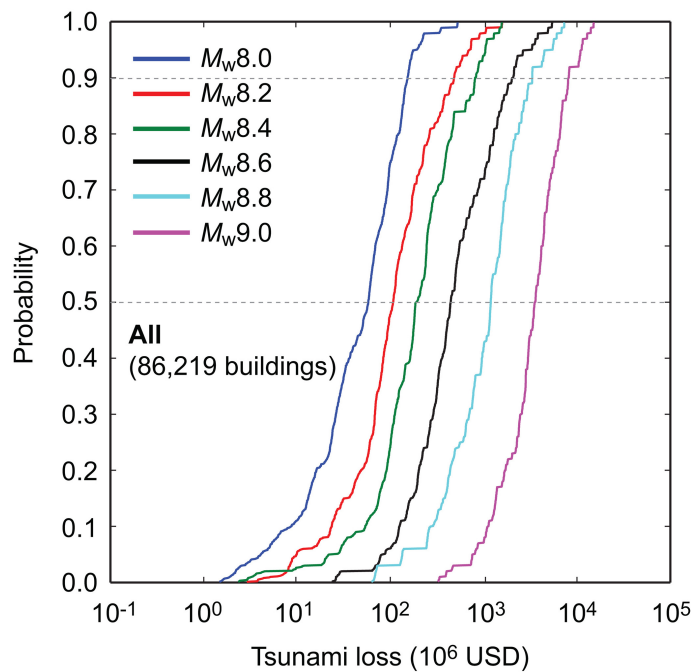
[Title Page](#)[Abstract](#)[Introduction](#)[Conclusions](#)[References](#)[Tables](#)[Figures](#)[◀](#)[▶](#)[◀](#)[▶](#)[Back](#)[Close](#)[Full Screen / Esc](#)[Printer-friendly Version](#)[Interactive Discussion](#)

Figure 8. Probability distributions of total tsunami loss for different earthquake scenarios.

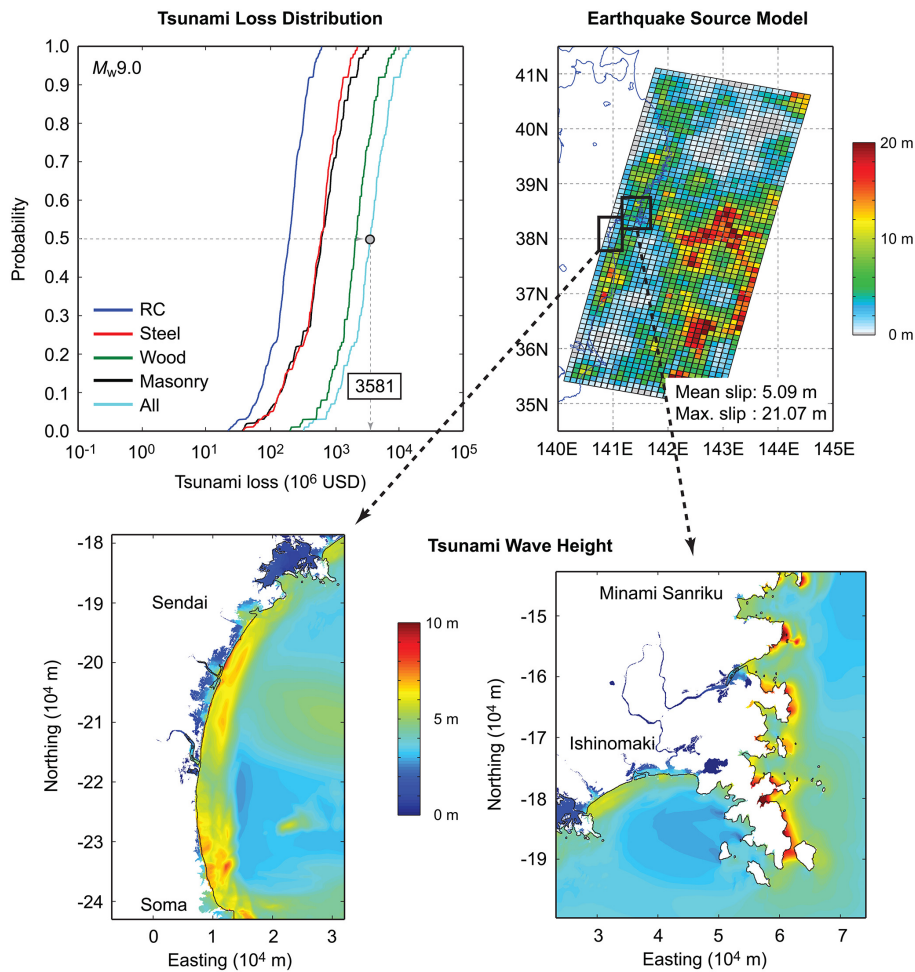


Figure 9. Earthquake source model and inundation height maps that corresponding to a critical tsunami loss scenario.

Effects of inaccurate seismic information on tsunami loss

K. Goda and K. Abilova

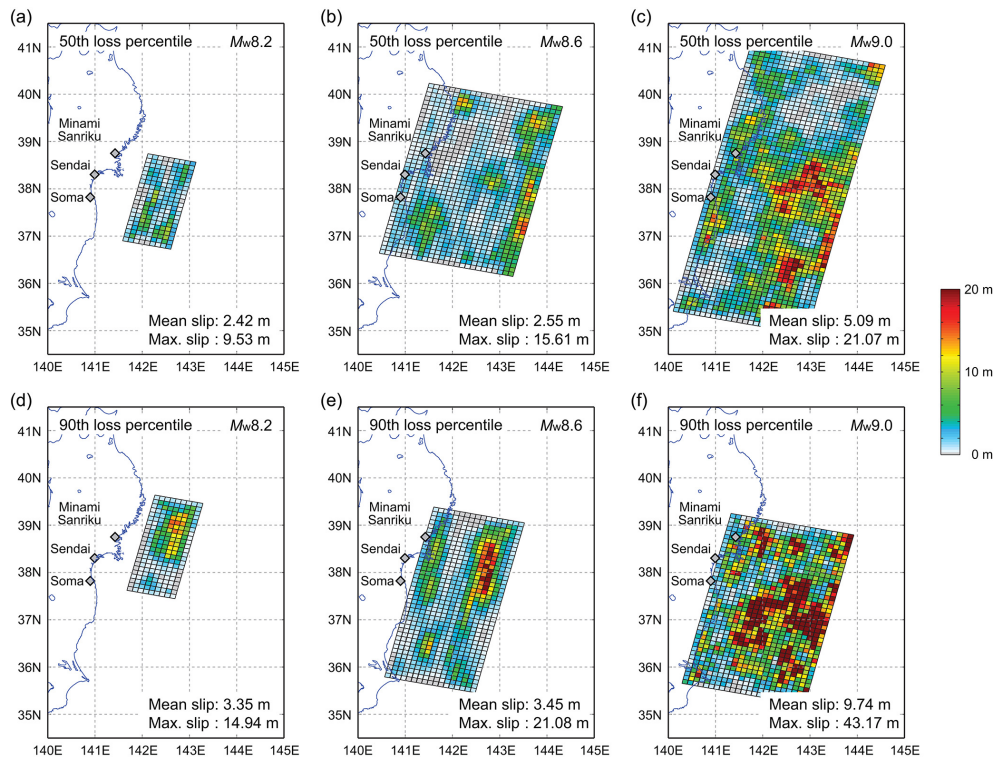


Figure 10. Earthquake source models corresponding to critical loss scenarios: **(a)** 50th loss percentile for $M_w = 8.2$, **(b)** 50th loss percentile for $M_w = 8.6$, **(c)** 50th loss percentile for $M_w = 9.0$, **(d)** 90th loss percentile for $M_w = 8.2$, **(e)** 90th loss percentile for $M_w = 8.6$, **(f)** 90th loss percentile for $M_w = 9.0$.

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)

[◀](#)

[▶](#)

[◀](#)

[▶](#)

[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)



Effects of inaccurate seismic information on tsunami loss

K. Goda and K. Abilova

[Title Page](#)

[Abstract](#)

[Introduction](#)

[Conclusions](#)

[References](#)

[Tables](#)

[Figures](#)



[Back](#)

[Close](#)

[Full Screen / Esc](#)

[Printer-friendly Version](#)

[Interactive Discussion](#)

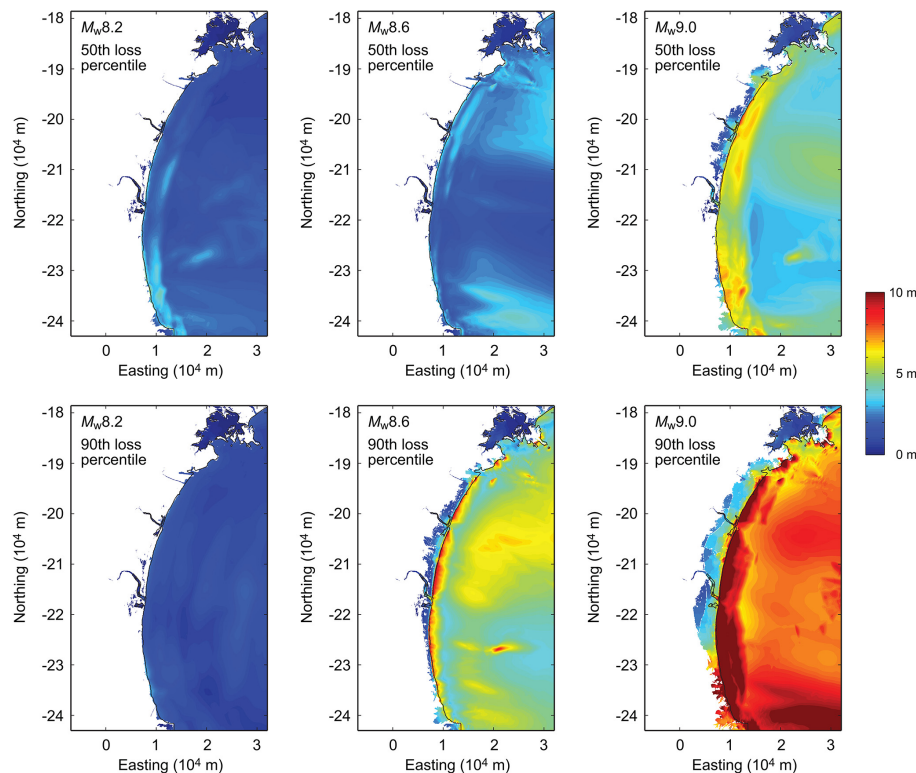


Figure 11. Inundation height maps in Sendai-Soma areas corresponding to critical loss scenarios: **(a)** 50th loss percentile for $M_w = 8.2$, **(b)** 50th loss percentile for $M_w = 8.6$, **(c)** 50th loss percentile for $M_w = 9.0$, **(d)** 90th loss percentile for $M_w = 8.2$, **(e)** 90th loss percentile for $M_w = 8.6$, **(f)** 90th loss percentile for $M_w = 9.0$.

Effects of inaccurate seismic information on tsunami loss

K. Goda and K. Abilova

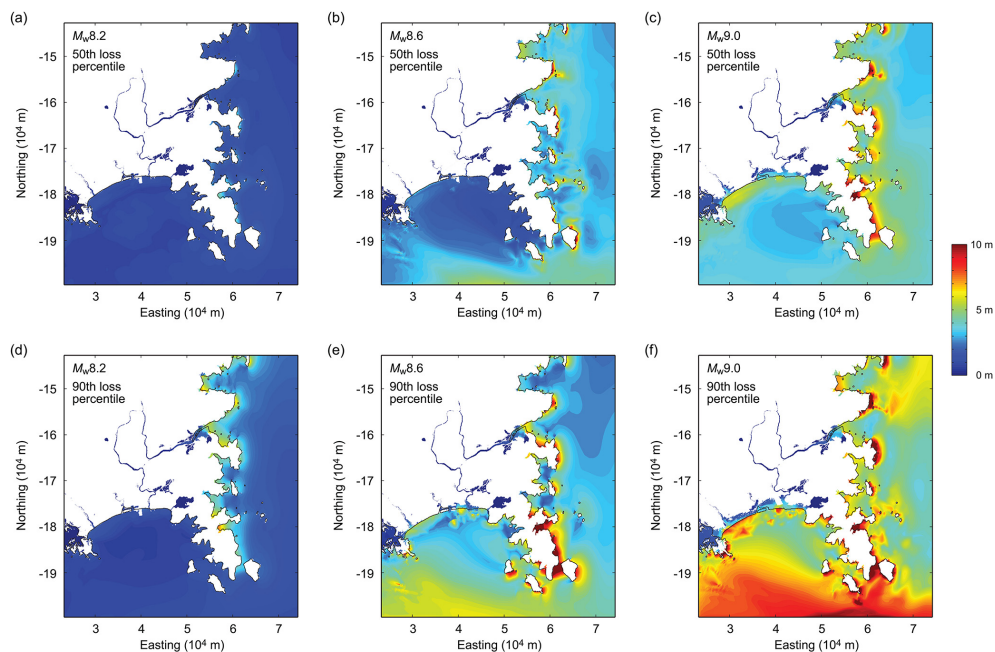


Figure 12. Inundation height maps in Ishinomaki-Minami Sanriku areas corresponding to critical loss scenarios: **(a)** 50th loss percentile for $M_w = 8.2$, **(b)** 50th loss percentile for $M_w = 8.6$, **(c)** 50th loss percentile for $M_w = 9.0$, **(d)** 90th loss percentile for $M_w = 8.0$, **(e)** 90th loss percentile for $M_w = 8.6$, **(f)** 90th loss percentile for $M_w = 9.0$.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

