



This discussion paper is/has been under review for the journal Natural Hazards and Earth System Sciences (NHESD). Please refer to the corresponding final paper in NHESD if available.

# On the inclusion of GPS precipitable water vapour in the nowcasting of rainfall

P. Benevides, J. Catalao, and P. M. A. Miranda

Instituto Dom Luiz (IDL), Faculdade de Ciências, University of Lisbon, Lisbon, Portugal

Received: 26 April 2015 – Accepted: 21 May 2015 – Published: 12 June 2015

Correspondence to: P. Benevides (pjbenevides@gmail.com)

Published by Copernicus Publications on behalf of the European Geosciences Union.

**NHESD**

3, 3861–3895, 2015

**On the inclusion of  
GPS precipitable  
water vapour in the  
nowcasting of rainfall**

P. Benevides et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



## Abstract

The temporal behaviour of Precipitable Water Vapour (PWV) retrieved from GPS delay data is analysed in a number of case studies of intense precipitation in the Lisbon area, in the period 2010–2012, and in a continuous annual cycle of 2012 observations. Such behaviour is found to correlate positively with the probability of precipitation, especially in cases of severe rainfall. The evolution of the GPS PWV in a few stations is analysed by a least-squares fitting of a broken line tendency, made by a temporal sequence of ascents and descents over the data. It is found that most severe rainfall event occurs in descending trends after a long ascending period, and that the most intense events occur after steep ascents in PWV. A simple algorithm, forecasting rain in the 6 h after a steep ascent of the GPS PWV in a single station is found to produce reasonable forecasts of the occurrence of precipitation in the nearby region, without significant misses in what concerns larger rain events, but with a substantial amount of false alarms. It is suggested that this method could be improved by the analysis of 2-D or 3-D time varying GPS PWV fields, or by its joint use with other meteorological data relevant to nowcast precipitation.

## 1 Introduction

Atmospheric water vapour is a very heterogeneous and often rapidly varying meteorological field, and one that is notoriously difficult to monitor. Direct observations of that variable, by surface stations and by radiosondes are unable to do a sufficient time and space sampling of its distribution. Remote sensing of water vapour by different space-born platforms, namely geostationary and polar orbiting sensors, also suffer from severe time and/or spatial sampling problems. In recent years, GNSS (Global Navigation Satellite System) data, mostly that associated with the more popular GPS (Global Positioning System) system, obtained from fixed ground based stations, started to offer an alternative image of the distribution of the vertically integrated water vapour (Pre-

**NHESSD**

3, 3861–3895, 2015

### On the inclusion of GPS precipitable water vapour in the nowcasting of rainfall

P. Benevides et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



5 cipitable Water Vapour, PWV), and that information was found to contribute positively to atmospheric analysis for weather forecast (Bevis et al., 1994; Baker et al., 2001; Vedel et al., 2004; Bock et al., 2007; Seco et al., 2012). The rapid increase in the density of such networks in some regions, has been motivating the exploration of GNSS data for other meteorological applications, including three-dimensional water vapour tomography from short term field experiments (Champollion et al., 2005), or from the analysis of country-wide networks (Bender et al., 2011), and even the deployment of high-density GNSS systems specifically designed for the monitoring of atmospheric convection (Adams et al., 2011).

10 Because of the strong interest in the use of GNSS data for meteorology, coming from the low cost of the sensors and from the high sampling rate they can provide, but mostly from the critical relevance of water vapour distribution in the dynamics of moist atmospheric processes, it is important to understand the potential of such data in different meteorological applications. While its usefulness is now well established in what concerns atmospheric analysis, and is routinely done in the major global weather forecast centres, there are suggestions that it may be used at much higher resolution for process studies and for meteorological nowcasting (Haase et al., 2003; Brenot et al., 2006; Yan et al., 2009; Karabatic et al., 2011).

20 Champollion et al. (2004) show the relevance of GNSS data in the analysis of a case study of torrential precipitation in France, where retrieved PWV fields indicate that small scale variability of water vapour may have a crucial role in the triggering of deep convective processes. In mountainous areas, both shallow and deep convection processes may be enabled by the redistribution of water vapour in local circulations, which may equally be assessed by GNSS data (Iwasaki and Miki, 2001). Coastal areas, especially with topographic features, are also known to be characterized by important spatial gradients of the water vapour distribution, leading to specific atmospheric circulations, with cloud and precipitation patterning (Champollion et al., 2004; Brenot et al., 2006; Bastin et al., 2007; Bock et al., 2007; Van Baelen et al., 2011). Most of the torrential rainfall events in coastal regions are driven by large advection of humidity from the ocean,

**On the inclusion of  
GPS precipitable  
water vapour in the  
nowcasting of rainfall**

P. Benevides et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



## On the inclusion of GPS precipitable water vapour in the nowcasting of rainfall

P. Benevides et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



especially near warm waters, as can be found in the Mediterranean coast (Vedel et al., 2004). If this warm and moist air encounters cold polar air transported southward in the mid and high troposphere, as frequently occurs in that region in the autumn, these are conditions that favour static instability, which will lead to convection, especially in places with topographic forcing, initiating deep convective storms (Champollion et al., 2004). In all these, and in many other cases of interest, a better analysis of the distribution of water vapour is a key factor to improve our understanding of the initiation of precipitation events, and our ability to forecast such events.

The most popular GNSS systems are the present GPS and GLONASS and the future Galileo and Beidou. In particular the GPS has changed world navigation in the past 20 years. The precision of its information has generally been limited by changes in atmospheric properties, affecting the propagation of the signal. The “atmospheric noise” affecting GNSS geodetic accuracy, is however a signal in itself, as recognized by Bevis et al. (1992) in a paper that coined the term “GPS meteorology”, and which proposed a methodology. This “noise” has a time varying characteristic that can be observed from each ground-based GPS receiver and transformed into an estimate of PWV. The electromagnetic signal transmitted in the microwave frequency by the GNSS, suffers a delay in its atmospheric propagation. Its pathway departs from the satellites to the station receivers at the speed of light, but alterations are induced in its course because of density differences in the medium causing refraction. Clouds, moisture, temperature and pressure gradients, mainly caused by the water vapour, provoke delay and bending in the signal path travel. This delay can be used to estimate the integrated water vapour column in the troposphere above each station location, which is closely related to the PWV (Bevis et al., 1992).

Several studies have shown that the GPS atmospheric products regarding water vapour are comparable in precision with classical measurements like radiosonde, radiometer, lidar or radar (Bevis et al., 1992; Rocken et al., 1995; Tregoning et al., 1998; Haase et al., 2003; Snajdrova et al., 2006; Champollion et al., 2009). These estimates are typically achieved with an accuracy of the order of a few millimetres (Tregonin et al.,

## On the inclusion of GPS precipitable water vapour in the nowcasting of rainfall

P. Benevides et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



1998; Snajdrova et al., 2006; Bastin et al., 2007; Jin et al., 2007; Byun and Bar-Sever, 2009; Adams et al., 2011). The accuracy of the integrated water vapour measurements based on GPS delay has been evaluated using comparisons with respect to the previous enunciated techniques, leading in differences from 1 to 2 mm ( $\text{kg m}^{-2}$ ) (Bevis et al., 1992; Baker et al., 2001; Niell, 2001; Brenot et al., 2006; Bastin et al., 2007), although some studies reach a bias of  $3 \text{ kg m}^{-2}$  or more (Tregoning et al., 1998; Bock et al., 2007; Boniface et al., 2012).

The objective of this paper is to analyse the water vapour content given by GPS atmospheric processing, with complementary meteorological data, in order to study precipitation events and provide useful information for its nowcasting. The aim is finding a relationship between the time evolution of the GPS delay and precipitation, for different rainfall events, with emphasis on those associated with torrential rainfall. Three years (2010 to 2012) of hourly accumulated precipitation data were collected from several classical meteorological stations in the vicinity of Lisbon, Portugal, and the nearest GNSS stations were processed in order to obtain a PWV time series. This region has a Mediterranean climate with strong Atlantic influence, with frequent episodes of heavy rainfall associated with large horizontal gradients in the humidity fields. Four case studies are analysed in some detailed, to justify a simple conceptual model between the PWV signal and precipitation. A full year of continuous hourly observations of both GPS delay and precipitation is then analysed, and a simple forecast model is tested against these data.

## 2 GPS atmospheric processing

The propagation of the GPS signal is affected by atmospheric effects both in high levels, at the ionosphere, and in the lower, at the troposphere. The ionosphere is a dispersive medium causing a delay that can be practically cancelled through a ~~double differentiated~~ linear combination of the GPS signal frequencies (L1, 1575.42 MHz and L2, 1227.60 MHz). The remaining atmospheric delay is mainly caused by the water vapour



variable and hard to model, given the variability of the water vapour and the current deficiencies in its observation.

Hence, ZTD is the sum of two components, ZWD plus ZHD. Estimation of the ZHD can be done accurately using surface pressure measurements at the GPS station, following Saastamoinen (1972)

$$\text{ZHD} = \frac{0.002277P_0}{1 - 0.00266 \cos(2\phi) - 0.00028H_{\text{ref}}} \quad (1)$$

where  $P_0$  is the surface pressure (hPa),  $\phi$  is the geodetic latitude, and  $H_{\text{ref}}$  represents the height (km) above the geoid. Therefore, ZHD is proportional to  $P_0$ . A priori zenith hydrostatic delay error estimates are about 0.2 mm for a pressure measurement accuracy of 1 hPa (Tregoning and Herring, 2006). After the determination of ZHD, ZWD is computed by subtracting ZHD from ZTD.

ZWD computed from the GPS delay, can be related with a more common representation of the integrated humidity profile, the previously referred PWV, representing the total mass of water vapour in an atmospheric column with unit area. This quantity is measured in  $\text{kg m}^{-2}$ , although it is generally expressed in the equivalent practical unit of millimetres (the height of an equivalent column of liquid water). The empirical relation between PWV and ZWD was proposed by Bevis et al. (1992)

$$\text{PWV} = \kappa \text{ZWD}, \quad \kappa = \frac{10^6}{\left(\frac{k_3}{T_m} + k'_2\right) R_v \rho} \quad (2)$$

where  $k_3$  and  $k'_2$  are empirical constants,  $R_v$  is the specific gas constant for water vapour,  $\rho$  is the liquid water density, and  $T_m$  is a mean temperature of the atmospheric column. In practice  $T_m$  is often computed from the observed surface temperature, through an empirical relation constrained by a sufficient set of radiosonde or reanalysis data (Bevis et al., 1994). In the present study the estimation of  $T_m$  was based on a yearly set of radiosondes in Lisbon (Mateus et al., 2014). The sensitivity of PWV

**On the inclusion of GPS precipitable water vapour in the nowcasting of rainfall**

P. Benevides et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



estimation relatively to the uncertainty in  $\kappa$  has been estimated by Bevis et al. (1994) to be of the order of 1 or 2 %. Brenot et al. (2006) also evaluated different conversion factors and estimated that they lead to discrepancies in PWV smaller than  $0.3 \text{ kg m}^{-2}$ , which is less than the expected error from direct meteorological PWV measurements ( $1\text{--}2 \text{ kg m}^{-2}$ ).

### 3 Location and data

The Greater Lisbon area is characterized by large inter annual variability and spatial precipitation heterogeneity (Soares et al., 2012). Annual mean precipitation ranges from 600 to 800 mm, and is mostly concentrated in the colder months (November to February), and essentially absent in summer. Located in the western sector of the Iberian Peninsula, it has a Mediterranean climate, strongly modulated in wintertime by the North Atlantic Oscillation (NAO) (Trigo et al., 2005). In this experiment, the GPS data was collected from a GNSS mesoscale network composed by 15 permanent stations regionally distributed around Lisbon, covering an area of about  $100 \text{ km} \times 150 \text{ km}$ . Such stations are part of the permanent national networks of the Portuguese Geographic Institute (IGP) and of the Army Geographic Institute of Portugal (IGeoE). Meteorological data was provided by the Portuguese Institute of Sea and Atmosphere (IPMA). Figure 1 shows the geographical distribution of the stations belonging to the GNSS network with a closer zoom around the Lisbon centre, jointly with a digital terrain model with darker to lighter tons corresponding to lower to higher elevations, and it also shows the location of the meteorological stations as well as the radiosonde site used for the experiment.

The altitudes of the GNSS stations vary from 22 m in PACO to 356 m at ARRA station. Regional relief is not steep but exhibits some complexity, being relatively flat only on the areas around the Tagus basin, which are located on the eastward of ALCO station. The coastal configuration is rather complex and is marked by the large Tagus (south from FCUL, IGP0, IGEO and west from ALCO) and Sado estuaries (southeast

## On the inclusion of GPS precipitable water vapour in the nowcasting of rainfall

P. Benevides et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion





from ARRA and PAML). The geographical setup favours the penetration of westerly marine air masses and its fast topographic transformation in various temporal and spatial scales, occasionally leading to torrential rainfall (Champollion et al., 2004; Bastin et al., 2007).

## 4 Methods

The GPS data was processed using the GAMIT/GLOBK software (v10.5) (Herring et al., 2010) in daily double-difference processing sessions on a weekly basis at least, tightly constraining the stations to the ITRF08 reference frame, adding several International GNSS Service (IGS) stations and using IGS precise final orbits to constrain the system. IGS stations around the world are selected to provide a better coordinate estimate and to reduce the correlation of tropospheric parameters between nearby stations within the network (Rocken et al., 1995). A second step is performed only running GAMIT, fixing the precise coordinates estimated in the first step and configuring some software options toward the enhancement of the atmospheric estimates. To reduce an effect of the ZTD discrepancy between daily estimates, a time overlap window strategy (Haase et al., 2003) was adopted in the second step of the GPS processing. The first and last values of the daily window of the GPS data processing have an edge effect caused by the stochastic parameter determination, which can result on several millimetres gap discrepancy (Jin et al., 2007). The time overlap window strategy consists in performing 4 processing sessions on each day with a 12 h duration (21:00–09:00, 03:00–15:00, 09:00–21:00, 15:00–03:00 UTC), extracting the middle 6 h on each time window, creating the complete 24 h set of a day. To avoid the orbit adjustment starting from the final hours of the previous day, orbits adjusted in the first daily processing step are used. ZTD is parameterized on GAMIT as a stochastic function variation of the ZHD using piecewise linear interpolation between temporal nodes, constrained to a Gauss–Markov process that is parameterized with a power density function of  $1 \text{ cm h}^{1/2}$  for the atmospheric zenith parameters and  $2 \text{ cm h}^{1/2}$  for the gradient parameters. There-

### On the inclusion of GPS precipitable water vapour in the nowcasting of rainfall

P. Benevides et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



## On the inclusion of GPS precipitable water vapour in the nowcasting of rainfall

P. Benevides et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



fore, ZTD are generated within a time interval of 15 min and the respective horizontal variation gradients within 30 min, therefore creating equilibrium between the temporal variation coverage of the atmospheric delays and the software processing time consumption (Herring et al., 2010). A 7° elevation angle cut-off was fixed together with the VMF1 global mapping functions, for mapping the slant path directions of the GPS from each satellite elevation angle to the station zenith position, taking into account different factors such as the Earth curvature at different latitudes and seasonal changes (Boehm et al., 2006). Measurements of the atmospheric pressure on the GPS station provide superior precision on the delay determination and minimization on height station errors throughout the process (Tregoning and Herring, 2006), but unfortunately most of those in this dataset do not possess coupled meteorological sensors (except CASC). As a consequence, ZHD was modelled throughout a global grid data employing the VMF1 mapping functions and containing precise surface pressure data, with 6 h frequency values, calculated from the ECMWF meteorological reanalysis. The temperature at the surface is obtained from the Global Pressure and Temperature model (GPT), which has a coarser temporal resolution than the pressure values obtained from the VMF1 data (Boehm et al., 2007). An ocean loading model derived from tides is also used (FES2004), being recommended for the precise calculation of the station heights and tropospheric delays, together with an atmospheric pressure loading model from NCEP (Tregoning and van Dam, 2005).

## 5 Results

In order to verify the possible contribution of high temporal resolution GPS PWV estimates to nowcast severe rainfall episodes, GPS and meteorological data from 2010 to 2012 are here analysed. The latter year was analysed in a continuous mode, to justify a statistical analysis of a full annual cycle. Outside 2012 the analysis looked at 12 series of data, containing each one or more rainfall episodes in consecutive days, being

selected from days with accumulated precipitation above 25 mm, in at least one of the observed meteorological stations.

The IDL station, a very well maintained meteorological observatory that includes a classical rain gauge and a modern digital system, is the closest to the IGP0 GPS receiver, at a distance of about 1 km, and constitutes the best a priori match for the rainfall analysis. However, the verification of the PWV data can only be done at the radiosonde station (Fig. 1), located in the Lisbon Airport, which is distanced at about 6 km from the receiver.

## 5.1 The annual cycle of PWV

A characterization of the annual PWV variability is presented in Fig. 2, showing the 2012 yearly series of the hourly GPS atmospheric data for the IGP0 station. PWV is characterized by a clear annual cycle, which amplitude and behaviour is a function of the local climate (Haase et al., 2003; Jin et al., 2007; Byun and Bar-Sever; 2009). Hourly PWV values range between 5 mm, in winter, and up to almost 45 mm in summer and early autumn. Monthly mean PWV range between 7 mm in February and around 20 mm from June to November. The record signal also shows evidence of strong synoptic variability, responding to the passage of water vapour carrying meteorological systems.

In the Lisbon area, most of the seasonal cycle of ZTD is associated with the wet component, ZWD, as ZHD shows little variability and a weak seasonal cycle (Fernandes et al., 2013). On the other hand, the level of variability shown in Fig. 2 is consistent with that found in coastal Mediterranean regions (Jin et al., 2007), where due to its low altitude and consequently high mean humidity and humidity variability, large values of standard deviation of the GPS measurements are generally found (Haase et al., 2003). In the region of Lisbon, higher values of PWV are expected in the presence of south-westerly flows bringing maritime tropical air masses over a warmer summer-to-autumn ocean.

## On the inclusion of GPS precipitable water vapour in the nowcasting of rainfall

P. Benevides et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Figure 3 compares the GPS PWV retrievals with direct PWV measurements made by radiosondes from Lisbon, mostly at 12:00 UTC. Results are overall excellent, with a 0.99 correlation between the two datasets, and a very small negative bias in the GPS signal (about 0.1 mm), corroborating other published comparisons (namely, Seco et al. (2012) and Galisteo et al. (2014), both concerning data in Spain).

## 5.2 Events of severe rain

To characterize the behaviour of PWV retrievals in the presence of severe rainfall, all episodes with observed rain above  $25 \text{ mm day}^{-1}$  in the period 2010–2012 were selected, corresponding to a total of 12 time segments, each containing one or more rain episodes and the adjacent days. Here the analysis will be restricted to IGP0 GPS data comparing with all the meteorological stations following a longitudinal axis around Lisbon, except for Setubal which is located further south (Fig. 1). A number of 4 cases, the 3 with the highest recorded rain rate, and a fourth with also a high rain rate but where an important feature of some PWV signals can be explained.

Figure 4a shows data for 28 to 30 October 2010, which includes the strongest event in that period with rain rate up to  $38 \text{ mm h}^{-1}$ . In this case, there is a very clear and simple relation between the evolution of the GPS PWV and rainfall. Two episodes of intense rain occur, each after a build-up of PWV, from about 15 to 35 mm, and both initiate a sharp reduction in PWV during the following hours. In each episode, the build-up phase takes much longer than the subsequent PWV reduction, and the peak of rain lags the peak in PWV. Two cold fronts passages were observed during this period, with embedded convection provoking severe flooding in the centre of Lisbon on 29 October.

The second strongest event occurred on the 23 September 2012, with maximum observed rain rate around  $22 \text{ mm h}^{-1}$ , as shown in Fig. 4b. Here the analysis is extended to 9 days, because there is significant structure in the time series of PWV along the full period. The severe rain event occurred just after the largest PWV peak (at 00:00 UTC on 23 September), with a maximum PWV around 43 mm. Rain in Lisbon (IDL) occurred 2 h after the peak, whereas at Cabo Raso (at the coast, to the west of Lisbon, see

### On the inclusion of GPS precipitable water vapour in the nowcasting of rainfall

P. Benevides et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

⏪

⏩

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion





## On the inclusion of GPS precipitable water vapour in the nowcasting of rainfall

P. Benevides et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



during severe weather events, one often observes a pattern of heavy rain occurring after a peak in PWV, and leading to a subsequent sharp decrease of the latter variable. The relation is not one-to-one, though, with large variations if PWV occurring without an (observed) rain event, indicating cases where the horizontal transport of PWV is responsible for its local reduction, or where rain occurred in non-observed locations. To assess the relative importance of these different situations, one will now look at 1 continuous year of GPS data and its relation with the rainfall meteorological data at a group of paired stations. The pairs GNSS-Meteorological stations are IGP0-IDL (distanced 1 km), CASC – Cabo Raso (distanced 7.5 km), PAML – Setubal (distanced 3 km), and FCUL – Airport (distanced 3.5 km) (see Fig. 1 for geographical distribution within the region of study). The analysis uses the 2012 data.

In this analysis, the evolution of the hourly PWV retrieved from the GPS signal is analysed by linear fitting of the PWV signal to a broken line. A continuous time analysis was performed over the PWV signal observed in a station, grouping in lines a continuously hourly increasing or decreasing of its values, breaking the line when the linear fit performed over the previous 6 h reverses its trend signal. Thereby the PWV hourly variations are approximated by segments of broken lines or ramps monotonically changing in the significant peaks, where a ramp signal inversion is observed. A 6 h time interval for the minimum broken line length was set empirically in order to enable the linear fitting algorithm to perform a better discretization of the PWV signal characteristics without being affected by the noisy features that are often verified between two consecutive hourly measurements. This also provides a reasonable time interval to be meaningful in the framework of the rain nowcasting. Observing the example of the pair IGP0-IDL, a total of 8636 of hourly GPS observations at IGP0 were included in the analysis with some hourly gaps between the start and ending of the year due to GPS processing issues discussed above. The aggregated time series contains 1186 ascending and descending ramps.

The case studies presented in the previous section suggest that rain events are likely to occur in descending PWV ramps, a few hours after a significant PWV peak. Such



is a change in mean rain rate by a factor of 11. Classes C and D show intermediate results, with class C, corresponding to 11 % of total time, presenting a mean rain rate 50 % larger than the annual average, and class D, the longest class with 41 % of the time, at less than half of the annual mean rain rate (the same as class A).

Table 2 uses the same 2012 data to look at the relation between the ramp type and rain intensity, already suggested by Fig. 5. The first main result, not unexpected, is that most of long ascending ramps (657 in class A) did not give rise to observed rain; on average, these ramps followed by no rain were, however, weak, leading to 74 % of false positive cases when measured by the tendency of PWV. The remaining 26 % of the long ascending ramps (227 in 884) were followed by rain, and only in about 5 % (41 in 884) that rain exceeds 5 mm in 6 h. Nevertheless, almost all the rain events larger than 10 mm (82 % or 22 in 27) occurs after long ascending ramps. Considering all events of severe rain in the three year period 2010–2012 (last row in Table 2) for the IGP0-IDL stations case, 92 % (24 in 26) of those events of torrential rainfall occurred after long ascending ramps with large prior tendencies of PWV.

Both Tables 1 and 2 indicate that there is important information in the local PWV signal directly retrieved from GPS data, at the high temporal resolution that it permits, even if that such information is incomplete as it overlooks the 3-D structure of the water vapour field.

#### 5.4 A simple forecast algorithm

The results shown in Fig. 5, and in the tables, suggest the possibility of using the time evolution of GPS PWV data as an element in the nowcasting of rain. Rain occurs in events of different intensity and duration, and a forecaster is mostly interested in those that either contributes with a large fraction of the total annual rain, or that exceed relevant thresholds in rain rate. In the case of the Lisbon centre (IGP0-IDL station case) 2012 observations, a total of 614 mm of rain was observed (climate normal is near 750 mm), of these 594 mm were accumulated in 108 events, with rain rates above

## On the inclusion of GPS precipitable water vapour in the nowcasting of rainfall

P. Benevides et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion







recovers about 75 % of the total rain, and more than 90 % of the severe rain, with a rate of false alarms of 60 to 70 %. At  $2.5 \text{ mm h}^{-1}$ , the system still recovers 75 % of the severe rain, with a false alarm ratio of about 40 %, but only forecasts 41 % of the total rain. Note that the false alarm rate was computed in two slightly different ways, as explained in the caption of Fig. 7. Figure 7 also shows the mean accumulated rain in the well forecasted events (black line with triangles), indicating that values of  $\partial \text{PWV} / \partial t$  between 2 and  $2.5 \text{ mm h}^{-1}$  lead to the highest values of mean forecasted rain.

Considering that the proposed algorithm only relies on the GPS data in a single station, this seems a promising result, meriting further studies with more data in more locations.

## 6 Discussion and conclusions

Previously published case studies, by different authors, have reported consistent and similar results in different case studies, supporting the existence of positive correlation between PWV and rain, with anomalously positive water vapour content before and during precipitation, but always stressing that not all PWV peaks lead to precipitation (Champollion et al., 2004; Bastin et al., 2007; Yan et al., 2009; Brenot et al., 2014). Some of the apparent mismatch between PWV data and precipitation may be due to inadequate sampling of a very heterogeneous rain field by a relatively sparse rain gauge network, e.g. to cases when precipitation did occur in localized spots but was not observed by the network. However, it is very likely that most of those discrepancies are due to the 3-D nature of the PWV field, which is not accessible in a single GPS station.

Some hints of a possible way of addressing that issue are displayed in Fig. 8, showing the hourly evolution of 2-D fields of PWV retrieved from interpolated GPS observations over a wider area, based on the larger set of GNSS stations on Fig. 1, during the two main PWV peaks observed in Fig. 4d. In the top row, corresponding to the first non-precipitating peak (more precisely, without observed precipitation) there is evidence of

## On the inclusion of GPS precipitable water vapour in the nowcasting of rainfall

P. Benevides et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion







time) is required to produce a consistent mass balance algorithm to support the use of retrieved PWV fields for weather nowcasting. A full 4-D tomography analysis, may be desirable, and should be tested. Longer time series of GPS and rain data for different regional locations, need also to be analysed in order to understand the dependence of parameters such the best threshold for the tendency of PWV on a specific local climate.

*Acknowledgements.* This study was funded by the Portuguese Science Foundation FCT, under grants PTDC/CTE-ATM/119922/2010 and SFRH/BD/80288/2011.

## References

- Adams, D. K., Fernandes, R., Kursinski, E. R., Maia, J. M., Sapucci, L. F., Machado, L. A., Vitorello, I., Monico, J. F. G., Holub, K. L., Gutman, S. I., Filizola, N., and Bennett, R. A.: A dense GNSS meteorological network for observing deep convection in the Amazon, *Atmos. Sci. Lett.*, 12, 207–212, doi:10.1002/asl.312, 2011.
- Baker, H. C., Dodson, A. H., Penna, N. T., Higgins, M., and Offiler, D.: Ground-based GPS water vapour estimation: potential for meteorological forecasting, *J. Atmos. Sol.-Terr. Phy.*, 63, 1305–1314, 2001.
- Bastin, S., Champollion, C., Bock, O., Drobinski, P., and Masson, F.: Diurnal cycle of water vapor as documented by a dense GPS network in a coastal area during ESCOMPTE IOP2, *J. Appl. Meteorol. Clim.*, 46, 167–182, 2007.
- Bender, M. and Raabe, A.: Preconditions to ground based GPS water vapour tomography, *Ann. Geophys.*, 25, 1727–1734, doi:10.5194/angeo-25-1727-2007, 2007.
- Bender, M., Dick, G., Ge, M., Deng, Z., Wickert, J., Kahle, H. G., Raabe, A., and Tetzlaff, G.: Development of a GNSS water vapour tomography system using algebraic reconstruction techniques, *Adv. Space Res.*, 47, 1704–1720, 2011.
- Benevides, P., Catalao, J., Miranda, P., and Chinita, M. J.: Analysis of the relation between GPS tropospheric delay and intense precipitation, in: SPIE Remote Sensing, International Society for Optics and Photonics, Proceedings of SPIE, Dresden, Germany, Vol. 8890, 88900Y, doi:10.1117/12.2028732, 2013.

## On the inclusion of GPS precipitable water vapour in the nowcasting of rainfall

P. Benevides et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



---

**On the inclusion of  
GPS precipitable  
water vapour in the  
nowcasting of rainfall**

---

P. Benevides et al.

---

Title Page	
Abstract	Introduction
Conclusions	References
Tables	Figures
◀	▶
◀	▶
Back	Close
Full Screen / Esc	
Printer-friendly Version	
Interactive Discussion	

Bevis, M., Businger, S., Herring, T. A., Rocken, C., Anthes, R. A., and Ware, R. H.: GPS meteorology: remote sensing of atmospheric water vapor using the Global Positioning System, *J. Geophys. Res.-Atmos.*, 97, 15787–15801, 1992.

Bevis, M., Businger, S., Chiswell, S., Herring, T. A., Anthes, R. A., Rocken, C., and Ware, R. H.: GPS meteorology: mapping zenith wet delays onto precipitable water, *J. Appl. Meteorol.*, 33, 379–386, 1994.

Bock, O., Bouin, M. N., Walpersdorf, A., Lafore, J. P., Janicot, S., Guichard, F., and Agustí-Panareda, A.: Comparison of ground-based GPS precipitable water vapour to independent observations and NWP model reanalyses over Africa, *Q. J. Roy. Meteorol. Soc.*, 133, 2011–2027, 2007.

Boehm, J., Werl, B., and Schuh, H.: Troposphere mapping functions for GPS and very long baseline interferometry from European Centre for Medium-Range Weather Forecasts operational analysis data, *J. Geophys. Res.*, 111, B02406, doi:10.1029/2005JB003629, 2006.

Boehm, J., Heinkelmann, R., and Schuh, H.: Short note: a global model of pressure and temperature for geodetic applications, *J. Geodesy*, 81, 679–683, 2007.

Boniface, K., Champollion, C., Chery, J., Ducrocq, V., Rocken, C., Doerflinger, E., and Collard, P.: Potential of shipborne GPS atmospheric delay data for prediction of Mediterranean intense weather events, *Atmos. Sci. Lett.*, 13, 250–256, 2012.

Brenot, H., Ducrocq, V., Walpersdorf, A., Champollion, C., and Caumont, O.: GPS zenith delay sensitivity evaluated from high-resolution numerical weather prediction simulations of the 8–9 September 2002 flash flood over southeastern France, *J. Geophys. Res.-Atmos.*, 111, D15105, doi:10.1029/2004JD005726, 2006.

Brenot, H., Walpersdorf, A., Reverdy, M., van Baelen, J., Ducrocq, V., Champollion, C., Masson, F., Doerflinger, E., Collard, P., and Giroux, P.: A GPS network for tropospheric tomography in the framework of the Mediterranean hydrometeorological observatory Cévennes-Vivarais (southeastern France), *Atmos. Meas. Tech.*, 7, 553–578, doi:10.5194/amt-7-553-2014, 2014.

Byun, S. H. and Bar-Sever, Y. E.: A new type of troposphere zenith path delay product of the international GNSS service, *J. Geodesy*, 83, 1–7, 2009.

Champollion, C., Masson, F., Van Baelen, J., Walpersdorf, A., Chéry, J., and Doerflinger, E.: GPS monitoring of the tropospheric water vapor distribution and variation during the 9 September 2002 torrential precipitation episode in the Cévennes (southern France), *J. Geophys. Res.-Atmos.*, 109, D24102, doi:10.1029/2004JD004897, 2004.



## On the inclusion of GPS precipitable water vapour in the nowcasting of rainfall

P. Benevides et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures



Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Champollion, C., Masson, F., Bouin, M. N., Walpersdorf, A., Doerflinger, E., Bock, O., and Van Baelen, J.: GPS water vapour tomography: preliminary results from the ESCOMPTE field experiment, *Atmos. Res.*, 74, 253–274, 2005.

Champollion, C., Flamant, C., Bock, O., Masson, F., Turner, D. D., and Weckwerth, T.: Mesoscale GPS tomography applied to the 12 June 2002 convective initiation event of IHOP2002, *Q. J. Roy. Meteorol. Soc.*, 135, 645–662, 2009.

Cucurull, L., Vandenberghe, F., Barker, D., Vilaclara, E., and Rius, A.: Three-dimensional variational data assimilation of ground-based GPS ZTD and meteorological observations during the 14 December 2001 storm event over the western Mediterranean Sea, *Mon. Weather Rev.*, 132, 749–763, 2004.

Emardson, T. R., Elgered, G., and Johansson, J. M.: Three months of continuous monitoring of atmospheric water vapor with a network of Global Positioning System receivers, *J. Geophys. Res.-Atmos.*, 103, 1807–1820, 1998.

Fernandes, M. J., Pires, N., Lazaro, C., and Nunes, A. L.: Tropospheric delays from GNSS for application in coastal altimetry, *Adv. Space Res.*, 51, 1352–1368, 2013.

Haase, J., Ge, M., Vedel, H., and Calais, E.: Accuracy and variability of GPS tropospheric delay measurements of water vapor in the western Mediterranean, *J. Appl. Meteorol.*, 42, 1547–1568, 2003.

Herring, T., King, R. W., and McClusky, S. C.: GAMIT Reference Manual – GPS Analysis at MIT – Release 10.4, Dep. of Earth, Atm., and Planetary Sciences, MIT, 2010.

Inoue, H. Y. and Inoue, T.: Characteristics of the water-vapor field over the Kanto District associated with summer thunderstorm activities, *Scient. Online Lett. Atmos.*, 3, 101–104, doi:10.2151/sola.2007-026, 2007.

Iwasaki, H. and Miki, T.: Observational study on the diurnal variation in precipitable water associated with the thermally induced local circulation over the “Semi-Basin” around Maebashi using GPS data, *J. Meteorol. Soc. Jpn.*, 79, 1077–1091, 2001.

Jin, S., Park, J. U., Cho, J. H., and Park, P. H.: Seasonal variability of GPS-derived zenith tropospheric delay (1994–2006) and climate implications, *J. Geophys. Res.-Atmos.*, 112, D09110, doi:10.1029/2006JD007772, 2007.

Karabatić, A., Weber, R., and Haiden, T.: Near real-time estimation of tropospheric water vapour content from ground based GNSS data and its potential contribution to weather now-casting in Austria, *Adv. Space Res.*, 47, 1691–1703, 2011.

## On the inclusion of GPS precipitable water vapour in the nowcasting of rainfall

P. Benevides et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Koulali, A., Ouazar, D., Bock, O., and Fadil, A.: Study of seasonal-scale atmospheric water cycle with ground-based GPS receivers, radiosondes and NWP models over Morocco, *Atmos. Res.*, 104, 273–291, 2012.

Mateus, P., Nico, G., and Catalao, J.: Maps of PWV temporal changes by SAR interferometry: a study on the properties of atmosphere's temperature profiles, *IEEE Geosci. Remote S.*, 11, 2065–2069, doi:10.1109/LGRS.2014.2318993, 2014.

Niell, A. E.: Preliminary evaluation of atmospheric mapping functions based on numerical weather models, *Phys. Chem. Earth A*, 26, 475–480, 2001.

Ortiz de Galisteo, J. P., Bennouna, Y., Toledano, C., Cachorro, V., Romero, P., Andrés, M. I., and Torres, B.: Analysis of the annual cycle of the precipitable water vapour over Spain from 10-year homogenized series of GPS data, *Q. J. Roy. Meteorol. Soc.*, 140, 397–406, 2014.

Rocken, C., Hove, T. V., Johnson, J., Solheim, F., Ware, R., Bevis, M., Chiswell, S., and Businger, S.: GPS/STORM-GPS sensing of atmospheric water vapor for meteorology, *J. Atmos. Ocean. Tech.*, 12, 468–478, 1995.

Saastamoinen, J.: Atmospheric correction for the troposphere and stratosphere in radio ranging of satellites, in: *The Use of Artificial Satellites for Geodesy*, Geophys. Monogr. Ser., Vol. 15, edited by: Henriksen, S. W., Mancini, A., and Chovitz, B. H., AGU, Washington, D.C., 247–251, 1972.

Seco, A., Ramírez, F., Serna, E., Prieto, E., García, R., Moreno, A., Cantera, J. C., Miqueleiz, L., and Priego, J. E.: Rain pattern analysis and forecast model based on GPS estimated atmospheric water vapor content, *Atmos. Environ.*, 49, 85–93, 2012.

Shoji, Y.: Retrieval of water vapor inhomogeneity using the Japanese nationwide GPS array and its potential for prediction of convective precipitation, *J. Meteorol. Soc. Jpn.*, 91, 43–62, 2013.

Soares, P. M., Cardoso, R. M., Miranda, P. M., de Medeiros, J., Belo-Pereira, M., and Espirito-Santo, F.: WRF high resolution dynamical downscaling of ERA-interim for Portugal, *Clim. Dynam.*, 39, 2497–2522, 2012.

Snajdrova, K., Boehm, J., Willis, P., Haas, R., and Schuh, H.: Multi-technique comparison of tropospheric zenith delays derived during the CONT02 campaign, *J. Geodesy*, 79, 613–623, 2006.



---

## On the inclusion of GPS precipitable water vapour in the nowcasting of rainfall

---

P. Benevides et al.

---

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Tregoning, P. and van Dam, T.: Atmospheric pressure loading corrections applied to GPS data at the observation level, *Geophys. Res. Lett.*, 32, L22310, doi:10.1029/2005GL024104, 2005.

5 Tregoning, P. and Herring, T.: Impact of a priori zenith hydrostatic delay errors on GPS estimates of station heights and zenith total delays, *Geophys. Res. Lett.*, 33, L23303, doi:10.1029/2006GL027706, 2006.

Tregoning, P., Boers, R., O'Brien, D., and Hendy, M.: Accuracy of absolute precipitable water vapor estimates from GPS observations, *J. Geophys. Res.-Atmos.*, 103, 28701–28710, 1998.

10 Trigo, R. M., Zêzere, J. L., Rodrigues, M. L., and Trigo, I. F.: The influence of the North Atlantic Oscillation on rainfall triggering of landslides near Lisbon, *Nat. Hazards*, 36, 331–354, 2005.

Van Baelen, J., Reverdy, M., Tridon, F., Labbouz, L., Dick, G., Bender, M., and Hagen, M.: On the relationship between water vapour field evolution and the life cycle of precipitation systems, *Q. J. Roy. Meteorol. Soc.*, 137, 204–223, 2011.

15 Vedel, H., Huang, X. Y., Haase, J., Ge, M., and Calais, E.: Impact of GPS zenith tropospheric delay data on precipitation forecasts in Mediterranean France and Spain, *Geophys. Res. Lett.*, 31, L02102, doi:10.1029/2003GL017715, 2004.


20 Yan, X., Ducrocq, V., Poli, P., Hakam, M., Jaubert, G., and Walpersdorf, A.: Impact of GPS zenith delay assimilation on convective-scale prediction of Mediterranean heavy rainfall, *J. Geophys. Res.-Atmos.*, 114, D03104, doi:10.1029/2008JD011036, 2009.





## On the inclusion of GPS precipitable water vapour in the nowcasting of rainfall

P. Benevides et al.

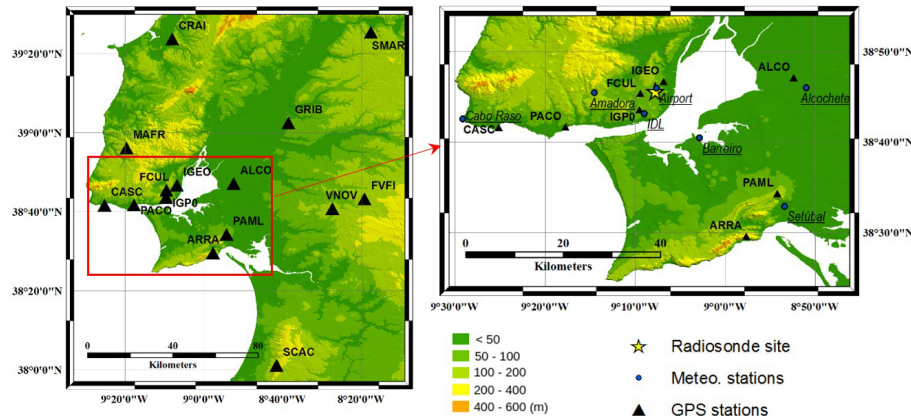

**Figure 1.** Location of GNSS, radiosonde and meteorological stations in the regional Lisbon area with a zoom over the city area. Shading according to the terrain elevation.

Title Page

Abstract Introduction

Conclusions References

Tables Figures

◀ ▶

◀ ▶

Back Close

Full Screen / Esc

Printer-friendly Version


Interactive Discussion



---

**On the inclusion of  
GPS precipitable  
water vapour in the  
nowcasting of rainfall**P. Benevides et al.

---

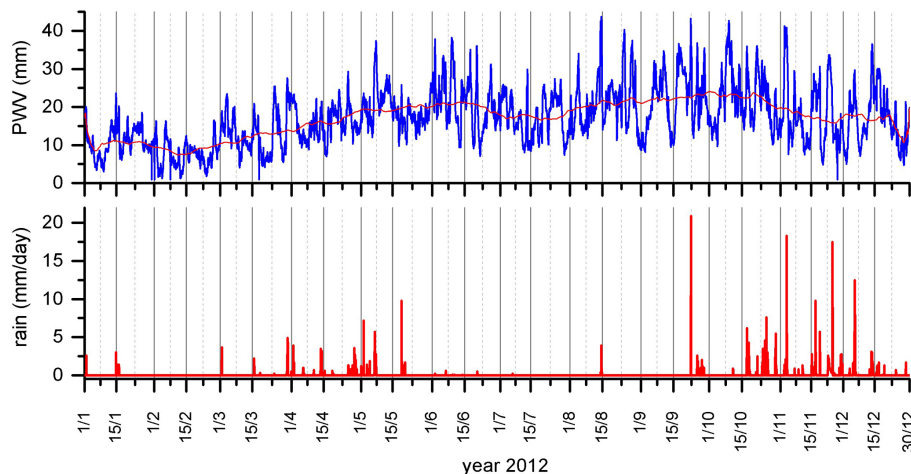


**Figure 2.** PWV continuous 2012 series at station IGP0 (top panel). Blue line represents absolute value while the red line is a 30 day average mean. Daily accumulated precipitation in IDL is represented in red (bottom panel).

[Title Page](#)[Abstract](#)[Introduction](#)[Conclusions](#)[References](#)[Tables](#)[Figures](#)[Back](#)[Close](#)[Full Screen / Esc](#)[Printer-friendly Version](#)[Interactive Discussion](#)



## On the inclusion of GPS precipitable water vapour in the nowcasting of rainfall


P. Benevides et al.

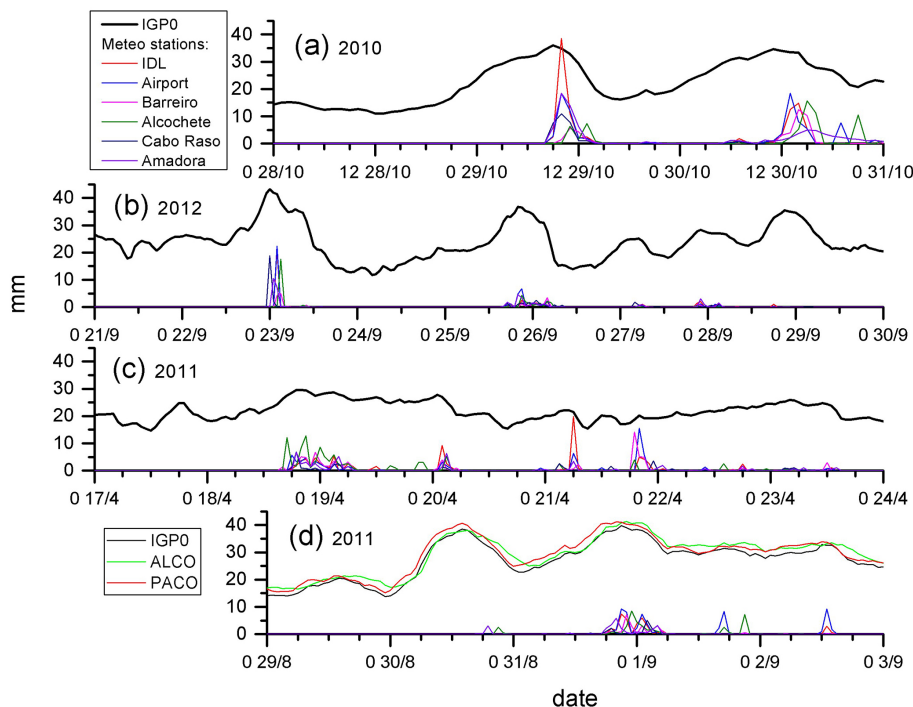

**Figure 4.** PWV and hourly accumulated rain **(a)** 28 to 30 October 2010, **(b)** 21 to 29 September 2012, **(c)** 17 to 23 April 2011, GPS PWV from IGPO station in black, hourly precipitation from IDL reference station in red, other lines represent rain in nearby stations. **(d)** 29 August to 2 September 2011, with GPS PWV from 2 additional stations; ALCO in green and PACO in red. Date is presented in hour day/month.

## On the inclusion of GPS precipitable water vapour in the nowcasting of rainfall

P. Benevides et al.

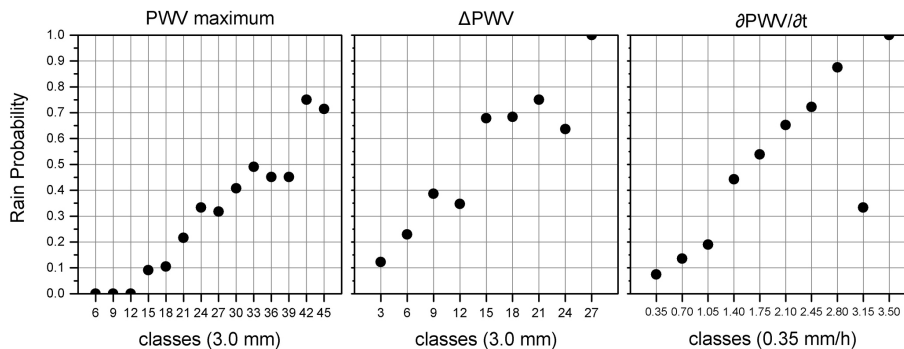


**Figure 5.** Probability of rain in the 2012 dataset as a function of PWV maximum (left panel), PWV maximum increase ( $\Delta$ PWV, middle panel) and PWV rate of change ( $\partial$ PWV/ $\partial t$ , right panel). The  $x$  axis is represented by the top upper interval limit of the class, where the interval is 3.0, 3.0 mm and  $0.35 \text{ mm h}^{-1}$  respectively.





## On the inclusion of GPS precipitable water vapour in the nowcasting of rainfall

P. Benevides et al.

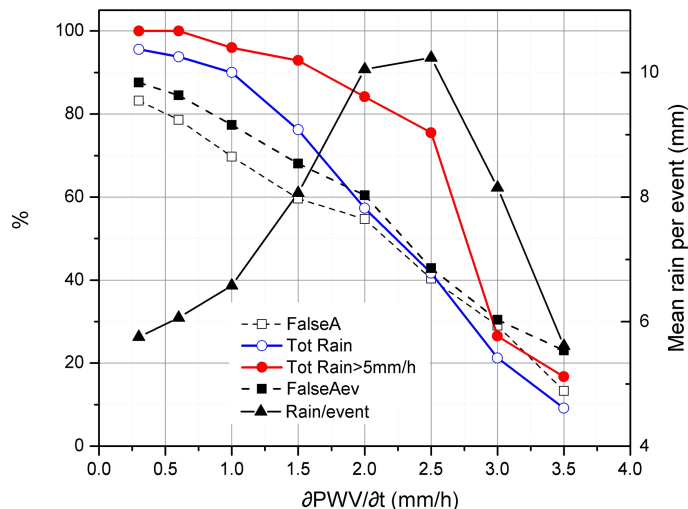

**Figure 7.** Evaluation of the success of hourly forecasts of rain, when forecasts are issued by the exceedance of a threshold in the rate of change of PWV. Dashed line (solid squares) represents the ratio of hourly false alarms (a forecast of rain leads to no rain in the following 6 h), dotted line (hollow squares) represents the ratio of false alarm events (consecutive forecasts are aggregated). The blue line (hollow circles) indicates the fraction of rain well predicted. The red line (solid circles) indicates the fraction of severe rain ( $> 5 \text{ mm h}^{-1}$ ) well forecasted. The solid black line (triangles) shows the mean accumulated rain in the well forecasted events.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc


Printer-friendly Version

Interactive Discussion



## On the inclusion of GPS precipitable water vapour in the nowcasting of rainfall

P. Benevides et al.

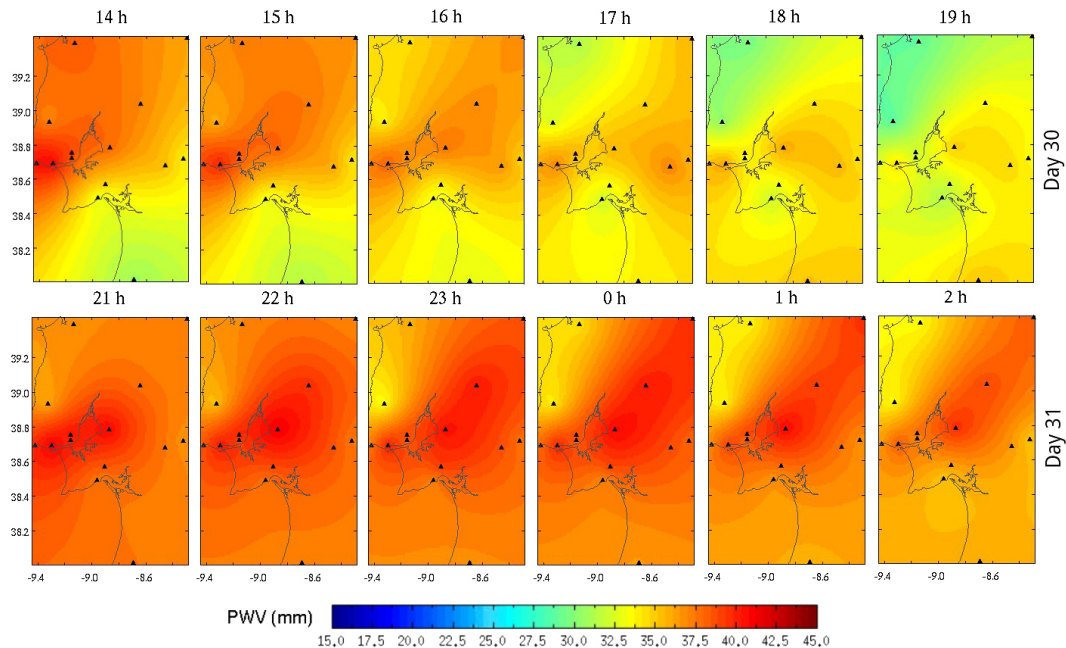

**Figure 8.** Hourly 2-D fields of GPS PWV around the 2 main PWV peaks on Fig. 4d. Black triangles represent the stations from the GNSS network.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

◀

▶

◀

▶

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion

