

Classification of Karst Springs For Flash Flood-Prone Areas in Western Turkey

M. Demiroglu

5 Department of Geological Engineering, Istanbul Technical University, 34469, Istanbul Turkey

Correspondence to: M. Demiroglu (demiroglum@itu.edu.tr)

Abstract

Flash floods are the result of very intensive rainfall events and karst plays an important role in flash floods.

10 A study ,using a hydrogeochemical approach, assessing data from several springs of different carbonate rocks in
Western Turkey was made to classify karst aquifers' response to heavy rain events. Physicochemical
measurements in wet and dry seasons and discharge rates were compared in order to explain aquifer
characteristics. The groundwaters have pH values ranging from 6.3 to 8.9, temperatures (T) vary from 7 to 35°C,
15 and electrical conductivity (EC) values go from 140 to 998 $\mu\text{S}/\text{cm}$. The groups that have high EC, high T, and low
dissolved oxygen (DO) values represent the deep circulating waters. Low EC, low T and high DO values represent
the shallow circulating waters. Low variations of the measurements in both the wet and dry seasons reveal that
fracture permeability is predominantly controlled by diffused groundwater flow with low or high storage and
conduit permeability with high storage. High variations of the measurements show conduit permeability with
20 low storage but high transfer capability is predominantly controlled by turbulent groundwater flow which
effective in flash floods.

Keywords: Flash flood, Karst, hydrogeochemistry

1. Introduction

25 Flash floods are the result of very intensive rainfall events and karst plays an important role in flash floods. The
characteristics of all flash floods are their short duration, small areal extent, high flood peaks and rapid flows,
and heavy loss of life and property. Karst flash floods have specific characteristics due to special conditions for
water circulation which exist in karst terrains (Bonacci et al. 2006).

30 This study tries to classify karst aquifer types for karst flash flood investigation in order to define flood –prone
areas by using the physicochemical properties and yields of karst springs. The recharge of karst aquifers is
described as water flow into the groundwater level and deep inflow to create a groundwater reservoir.
Infiltration forms in two ways, areal or spatial diffusive infiltration of water directly flow into the groundwater
reservoir, and point infiltration via karst structures such as caves, sinkholes, joints. Spatial groundwater
recharge process is diffusive in which water is reaching the groundwater table throughout the intergranular of
35 the unfractured bedrock and fractures. The other recharge form (the point infiltration) depends on the pipe-like
structures (conduits) in which water flow is laminar or turbulent within conduits. Chemical characteristics of the
aquifer are functions of residence time and flow conditions (Freeze and Cherry, 1979). The study of
groundwater temperature and chemical properties are the best and most reliable tools to understand aquifers.
They provide initial, simple, cheap steps to determine the storage and flow conditions.

In general, precipitation and the frequency or intensity of heavy precipitation events have increased since 1901 (medium confidence before and high confidence after 1951) over the mid-latitude land areas of the Northern Hemisphere (SPM, 2013). According to the country report presented by the Turkish government and the United Nations Development Programme (UNDP), precipitation decreases along the Aegean and Mediterranean coasts and increases along the Black Sea coast of Turkey. Central Anatolia shows little or no change in precipitation. The most prominent result of the climate change data is that the number of days with excessive precipitation has been increasing in Turkey and this usually causes extreme floods. Precipitation factors, which directly affect the recharge, are durations of precipitation, altitude and rainfall intensity and its type (Sutcliffe, 2004). In karst regions point infiltration and sudden rainfalls are correspondingly effective. Studies indicate that less than 5% of annual effective rainfall becomes groundwater recharge, whereas recharge to karst aquifers is in excess of 80% of effective rainfall. For instance, in karst regions in Saudi Arabia, 47% of the average rainfall runoff disappeared at the intersections of dolines and cracks (Milanovic, 1981). According to De Vries et al. (2000), in Portugal, which represents a dry, hot summer, in karstic dolomite and marly regions 150-300 mm of the annual precipitation (550 mm) is infiltrated. Similar values are reported for karstic aquifers located in Israel representing a Mediterranean climate (Issar et al, 1990). In different regions of the former Yugoslavia, values of infiltration are calculated between 70% and 90% by means of spring discharges (Milanovic, 1981). In Turkey, in Tecer limestones (Sivas-Ulaş region) infiltration percentage is defined as 55% (Ekemen et al., 2001). Therefore, it can be mentioned that higher recharge in Mediterranean region limestones is due to the point infiltration coming from well-developed karstic structures. Despite a year in which cumulative precipitation increases, the total amount of recharge may be less in aquifers dominated by diffused flow. This research reinforces the hypothesis that aquifers controlled by conduit permeability will have higher recharge and discharge rates. Developed karst sinkholes allow fast percolation into the aquifer, up to 80% of heavy rainfalls. However, the very low storage combined with the high transmissivities means that much of the recharge will not be 'retained' by the karst system, but will rapidly flow out (to springs, rivers, lakes, sea). The large water level responses to rainfall combined with the capability of karst systems to transmit groundwater quickly will increase flooding (Williams and Lee, 2007). Due to the characteristics of groundwater flow in karst terrain, flash flooding in such a context is strongly different from that in non-karst terrain, the groundwater volume being much larger. Such phenomena may cause serious damage, including the loss of life. For this reason, karst flash-flooding has been identified as one of the main hazards in karst terrains. It is directly linked to the structure and hydraulic properties of karst aquifers (Fleury et al, 2013). The main structure and hydraulic properties causes of karst-flash-flood can be summarized as the high point infiltration rate, fast turbulence groundwater flow and small storage capacity of the karst aquifer.

35

Material and Method

Some karstic aquifers, Paleozoic marbles, Mesozoic limestones and the Neocene limestones were chosen in Western Turkey to define the aquifer characteristics (Figure 1 and Table 1). Data used from previous studies (Atilla, 1996; Aydın, 2005; Demiroğlu, 2008) and additional data are obtained from State Hydraulic Works. Some (S3, S9, S10, S18) springs recharge, circulate and discharge from Paleozoic Marbles, some (S1, S2, S11, S12, S13, S16, S17, S19, S20) recharge, circulate and discharge from Mesozoic limestones and some (S4, S5, S6, S7, S8, S14, S15, S18) recharge, circulate in marbles and circulate and discharge from Neogene limestones and

40

sediments. Measurements in wet and dry seasons and discharge rates were compared in order to explain aquifer characteristics. High discharge rates (Q_{max}/Q_{min}), rapid chemical composition change and temperatures reveal turbulence flow conditions and developed karstic structures. Low variations of the measurements in both the wet and dry seasons reveal that fracture permeability is dominated by diffused controlled groundwater flow with low or high storage and conduit permeability with high storage. High variations of the measurements show conduit permeability with low storage is dominated by turbulent groundwater flow (Aydın, 2005; Demiroğlu, 2008). Springs in the study area are classified according to **this principle** and springs defined which have high response ability to heavy precipitation.

10 3. Geology and Hydrogeochemistry

First group springs (S1 Döşkaya, S2 Nardin) are located in the Central Sakarya Basin (Fig. 2). Recharge and discharges from Jurassic Bilecik limestone in this area, the Harmanköy – Beyyayla Karst System (HBKS) studied by Aydın (2005), forms the highlands in the Central Sakarya Basin. The HBKS, which is composed of Jurassic Bilecik limestone, is located within the province boundaries of Bilecik and Eskişehir and extends over a surface area of 49.5 km². The re-crystallized and cherty carbonate rocks are known as Jurassic Age Bilecik Limestone. Bilecik Limestone that overlays the metamorphic basement and has a thickness of approximately 100 m of karstified layers and then a fractured layer (Aydın, 2013). Bilecik limestones have well-developed pipe-like karstic structures ranging from 1 cm to a few tens of meters where groundwater flows in conduits in a turbulent regime. **Two years of dry and wet season's in situ measurements and chemical analyses data show rapid chemical composition change and temperatures. High variation of measurements and high discharge rates (Q_{max}/Q_{min}) (Table 2, 4) reveal that conduit permeability with low storage is dominantly controlled by turbulent groundwater flow. Therefore, these aquifers can be classified as Flash Flood-Prone areas**

Second group springs are located in Çifteler and Günyüzü subbasin within the Sakarya basin, Sivrihisar – Eskişehir (Fig. 3). Sakarbaşı springs and Kaymaz spring (S3, S4) were studied by Güner and Güner (2002) who determined little or no change in the in situ measurements during 3 seasons of sampling (Table 3). Sakarbaşı springs (Sadıroğlu, Eminekin, Başkurt, Ilıcabaşı and Pınarbaşı) reservoir rocks are marbles and are named as the Gökçeayla formation. The Gökçeayla formation is primarily shelf-type carbonates that were deposited during the Triassic - Upper Cretaceous. Dolomitic limestones are dominant in the lower section of the unit, while the upper section is mostly cherty limestones (Günay, 2006). Günyüzü springs, located in the Sakarya River catchment area to the SW of Eskişehir, were studied by Demiroğlu (2008) (Fig. 3). Paleozoic marbles, which are main reservoir rocks for hot and cold water, are bordered by impermeable diabase dykes at the sides and by impermeable granites and schists. Marbles, at the top of the metamorphic series, at higher elevations of the basin represent the upper part of the aquifer system. The spring listed in Table 2, S8 (Çukurçeşme) recharges, circulates and discharges from this system. This shallow circulation of water has laminar flow conditions. Other shallow circulated water (S5 Babadat and S6 Nasrettin Hoca) mostly recharges from the marbles but discharges from Neogene units. Marbles at the bottom of the basin with faults, recharge and store deep circulating water where fracture permeability and diffuse infiltration (laminar flow conditions) control groundwater flow (S7 Çardak hamamı, S9 Subaşı and S10 Yeniçıkırı), This deep circulating water discharges from Neogene units as well. However, partly developed conduit permeability and point infiltration from old karstic structures (sinkholes), fractures and joints in the marbles reveal a turbulent regime in the vadose zone where reflections of these on discharge rates of the Subaşı spring (S9) have been observed (Demiroğlu, 2008). EC results show that variations depend not only on circulation depth but also on lithology. For example, S4 and S8 have nearly the same

temperature and DO (26,7 – 30 °C / 4,36 - 4,81 mg/l) which represent approximately the same circulation depth and residence time. But EC value differences (350, 798 µS/cm) stem from lithology differences. S4 recharges, circulates and discharges from Paleozoic marbles, whereas, S8 recharges and circulates in marbles, then circulates and discharges from Neogene limestones and sediments.

5 It has seen that springs (S3, S4, S5, S6, S7, S10) display nearly constant temperature, low variations in chemical composition and low variations for the measurements both dry and wet season while springs (S8) display high measurement variations when all data are considered (Table 2, 5). S8 (Subaşı) spring is classified as having high response ability to heavy precipitation.

10 Third group springs are located in the Lake district (Fig. 4). Mesozoic limestones are the most common unit around the lake. These units belong to different time frames. Middle Upper Triassic dolomitic limestone containing different lithofacies from thin layer to medium thick bedded levels are the oldest part of the Mesozoic series. Jurassic-Cretaceous period that gray limestone contains marine sediments from the deep to shallow marine environment. Thinly bedded cherty micritic levels are also observed. Mesozoic rocks have tectonic sliced structure. Slices are showing the ophiolitic mélange feature at the bottom of this structure.

15 **Mesozoic age marine limestones are on the olistostromal limestones.** A lot of springs discharge from these carbonates.

The most important spring groups are called Kirkgözler springs (S19, S20) which are very important for Antalya region for drinking water and irrigation. Kirkgozler springs group discharges from the boundary between Beydagları autochthonous limestones and the impermeable ophiolite rocks (Fig. 4) located at 300 m elevation.

20 They are characterized by a highly regulated flow regime (Özyurt 2008). It can be said that all springs except for the Kirkgozler group have high response capability to heavy precipitation when the dry and wet seasons in situ measurements of springs are considered (Tables 4 & 5).

Sagalassos spring (S18) has high response capability to heavy precipitation takes place in the ancient city. Surprisingly, the natural flood risks were taken into account in Roman times at Sagalassos ancient city.

25 Excavations indicate that the large open areas were carefully situated within the urban fabric to collect and drain the natural floods flushing down the mountains, hence protecting the buildings from damage (UNESCO 2009).

The Sütcüler town located on the Olistostromal Limestone had flood disasters in November 1995 and again in October 2011 (Fig. 5). The area was studied by Karagüzel (1998) after flooding. The Ophiolite complex consists

30 of the ultrabasic and sedimentary rocks at the base with the Jurassic-Cretaceous carbonate mass spread over a wide area and overlapped the ophiolitic rocks. Erenler Mountain, located in the north of Sütcüler, is composed of those limestones and has developed karstic structures (sinkholes, dolines) on the Ophiolite complex. Pliokuaterner travertines are exposed in the town and sand, gravel and block-size debris piles up at the base of steep slopes (Fig. 5). The town center is mainly founded on the travertine and ophiolite complex. There is no

35 permanent surface water flowing in the region. Springs discharge from the limestone - ophiolite contact. There are no regular yield and water chemistry measurements on these springs. These springs activated with sudden rise of groundwater. Here, heavy rainfall combined with the capability of the karst system. During karst flash floods a sudden rise of groundwater levels occurs, which causes the appearance of numerous, unexpected, abundant and temporary karst springs (Bonacci et al. 2006).

40 Taking these springs into account, which have high response capability to heavy precipitation, drainage systems must be developed.

4. Results and Discussions

In situ measurements are the signatures of karst aquifers. The groundwater has pH values ranging from 6.3 to 8.9, temperatures (T) vary from 7 to 35°C, and electrical conductivity (EC) values go from 140 to 998 $\mu\text{S}/\text{cm}$. Average Ca and EC values were defined as 3.8 meq/L and 330 $\mu\text{S}/\text{cm}$, respectively, in cold water discharges from Paleozoic Marbles in Gunyuzu basin (S5, S6, S9). These values were measured as 5.7 meq/L and 988 $\mu\text{S}/\text{cm}$ in the Kirkgozler spring discharge from Antalya Jurassic limestone (Atilla, 1996) and as 6.4 meq/L and 596 $\mu\text{S}/\text{cm}$ in the Nardin spring discharges from the Jurassic limestone (Aydin, 2005). The average EC value of 350 $\mu\text{S}/\text{cm}$ was measured in the Kaymaz spring, which discharges from Paleozoic marbles at the beginning of the Sakarya River in the Sakarya basin (Günay, 2006). According to these results, it has been mentioned that Paleozoic marbles in the Günyüzü basin and Mesozoic marbles in the Çifteler basin have similar characteristics. Besides, marbles are less soluble than limestone. The EC-Temperature and DO relationships indicate the existence of water with different origins. The groups with high EC, high T, and low DO values represent the deep circulating waters (S3, S7, S8). Low EC, low T and high DO values represent the shallow circulating waters (S1, S2, S5, S6, S8, S9). EC results show that variations depend not only on circulation depth but also on lithology. For example, S4 and S8 have nearly the same temperature and DO (26, 30°C and 4,36, 4,81 mg/l) which represent approximately the same circulation depth and residence time, but EC value differences (350 and 798 $\mu\text{S}/\text{cm}$) stem from lithology differences. S4 recharges, circulates and discharges from Paleozoic marbles, whereas, S8 recharges and circulates in marbles, moreover, circulates and discharges from Neogene limestones and sediments. Springs (S3, S4, S5, S6, S7, S8, S10, S19, S20) in the study area display nearly constant temperature, low variations in chemical composition and low variations for the measurements in both dry and wet season. Springs developed in karstic structures allow fast recharge and discharge representing high discharges rates ($Q_{\text{max}}/Q_{\text{min}}$) and rapid changing chemical composition (S1, S2, S9, S11-S18). Heavy rainfalls directly affect this kind of karstic areas.

The most prominent result of the climate change data is that the number of days with excessive precipitation has been increasing in Turkey, and the amount of rain falling in heavy precipitation events is likely to increase and to be more frequent. There is a general lack of awareness of the impact of karstic springs on flooding. The impact of karstic discharges on flooding (Karagüzel, 1998) is defined in Sütçüler. General Directorate of Combating Desertification and Erosion under the Ministry of Forestry and Water Affairs of Republic of Turkey, finished a project financed by the World Bank on combating against desertification and land degradation in 1999 in the Sütçüler region. Under the project, 2602 hectares of erosion control and 490 hectares of pasture improvement works were realized. Despite to these measures taken, a flood occurred again on December 25th, 2011 in the Sütçüler region. The drainage system must be developed taking into account these karstic springs which have high transfer capability with heavy precipitation. This research is an important step for the defining of effective karstic springs in flash floods. This approach for the identification of flood-prone areas provides a valuable tool for recognizing studies of large regions, but representative and organized sampling requires at least twice in wet and dry seasons. In this study, the first and second group of data are enough for a precise and accurate prediction of aquifer properties, but in the lake districts, except for Kirkgözler springs, steady and organized sampling is needed.

References

- 5 Atilla, A.Ö., (1996) Çok Değişkenli istatistiksel analiz teknikleri kullanılarak hidrojeokimyasal verilerin değerlendirilmesi (The evaluate of the hydrogeochemical data using multivariate statistical analysis techniques), Master's Thesis, Hacettepe University, Institute of Science and Technology (In Turkish with English summary).
- Aydın H., (2005) Harmanköy-Belyayla (Bilecik) Investigation of morphology- hydrogeology relations in
10 Harmankoy-Beyyayla (Bilecik) karst system, PhD Thesis, Hacettepe University, Institute of Science and Technology (In Turkish with English summary)
- Aydın H., Ekmekci M., Soylu M. E., (2013) Characterization and conceptualization of a relict karst aquifer (Bilecik, Turkey) *Acta carsologica*, 42/1, 7-92
- Bonacci, O., Ljubenkov, I. and Roje-Bonacci, T. (2006) Karst flash floods: an example from Dinaric karst (Croatia).
15 *Nat. Hazards Earth Syst. Sci.*, 6, 195–203
- Davraz A., Sener E., Seyman F., Sener S. (2008) Hydrogeology of karst aquifer systems in SW Turkey and an assessment of water quality and contamination problems, *Environ. Geol.*,58, 973-988.
- Değirmenci M., (1989) Köprüçay havzası ve dolayının (Antalya) karst Hidrojeoloji incelemesi, PhD Thesis, Hacettepe University, Institute of Science and Technology (In Turkish with English summary)
- 20 Demiroğlu M, Yalçın T, Örgün Y, Yaltırak C, and Akdeniz U (2007) Hydrogeochemical characteristics of groundwater in Günyüzü basin (Sivrihisar-Eskişehir) Western Turkey. The 23rd International Applied Geochemistry Symposium, Extended Abstracts, Oviedo, Spain. p 129.
- Demiroğlu M (2008) Hydrogeology and Hydrochemistry of Eskişehir-Sivrihisar-Günyüzü Basin. PhD Thesis, Istanbul Technical University, Institute of Science and Technology (In Turkish with English summary).
- 25 De Vries, JJ., and Simmers I., (2002) Grounwater recharge: an overview of processes and challenges, *Hydrogeology Journal* vol. 10 p. 5-17
- Ekemen T., Kaçaroğlu, F., (2001) Tacer Dağı (Sivas-Ulaş) kaynaklarının hidrojeolojisi, Cumhuriyet Üniversitesi Mühendislik Fakültesi Dergisi, Seri A, .2, p. 87-102.
- 30 Güner, F and Güner, İ. N., (2002) Determination of hydrogeology of the karstic springs of Sakabası by using hydrochemistry and environmental isotope techniques, Hidrolojide izotop tekniklerinin kullanılması sempozyumu, DSi, ADANA (http://www2.dsi.gov.tr/sempozyum_kitap/izotop_kitap/1.ulusal_hidrolojide_izotop_teknikleri_sempozyumu)
- Günay G., (2006) Hydrology and hydrogeology of Sakaryabaşı karstic springs, Çifteler, Turkey. *Environmental Geology* 51: 229-240
35
- Karagüzel R., Akıncı Ö.T., (1998) Influence between geological environment and the settlement area; Isparta case, Kentleşme ve Jeoloji sempozyumu, p. 61-75, 19-20 November, Istanbul
- Mazor E., (1991) Applied chemical and isotopic groundwater hydrology, Open University Pres, Celtic Court 22, Ballmoor Buckingham
- 40 Milanovic, P.T.,(1981) Karst hydrogeology, Water Resources Publication, Littleton,Colorado, USA, p. 434.
- Özyurt N. N., (2008) Residence time distribution in the Kirkgoz karst springs (Antalya-Turkey) as a tool for contamination vulnerability assessment, *Environ Geol.*, 53:1571–1583

- Soyaslan I (2004) Hydrogeological investigations of Eastern Egirdir lake and groundwater modeling. PhD thesis, Suleyman Demirel University, Isparta, Turkey, 261 pp.
- Shurbaji A.-R., Campbell A.R., (1997) Study of evaporation and recharge in desert soil using environmental tracers, New Mexico, USA. *Engineering Geology*, 29 (3/4) p. 147-151.
- 5 Shuster, E.T., White, W.B., (1971) Seasonal fluctuations in the chemistry of limestone springs: a possible means of characterising carbonate aquifers. *J. Hydrol.* vol. 14, p. 93-128.
- Sutcliffe, J.V., (2004) *Hydrology: a Question of Balance*, IAHS Press, Centre for Ecology and Hydrology, Wallingford, Oxfordshire OX10 8BB, UK p. 1, p. 99.
- White, W. B., (2002) Karst hydrology; recent developments and open questions. *Engineering Geology*, vol. 65 (2-3), pp. 85-105.
- 10 SPM, Summary for Policymakers,(2013) <http://www.climatechange2013.org/images/report/WG1AR5SPMFINAL.pdf>, www.oecd.org/env/resources/waterandclimatechange.htm. Climate change impacts on water systems in Turkey
- 15 Williams N., H., and Lee M., (2007) Ireland at risk – Possible implications for groundwater resources of climate change, Groundwater Section, Geological Survey of Ireland www.iae.ie/publications/publication/part-6-groundwater.../document.
- Fleury, P., Maréchal, J.C. and Ladouche, B. (2013) - Karst flash-flood forecasting in the city of Nîmes (southern France), *Engineering Geology* 164: 26-35.
- UNESCO, (2009), Archaeological Site of Sagalassos, <http://whc.unesco.org/en/tentativelists/5409>

20





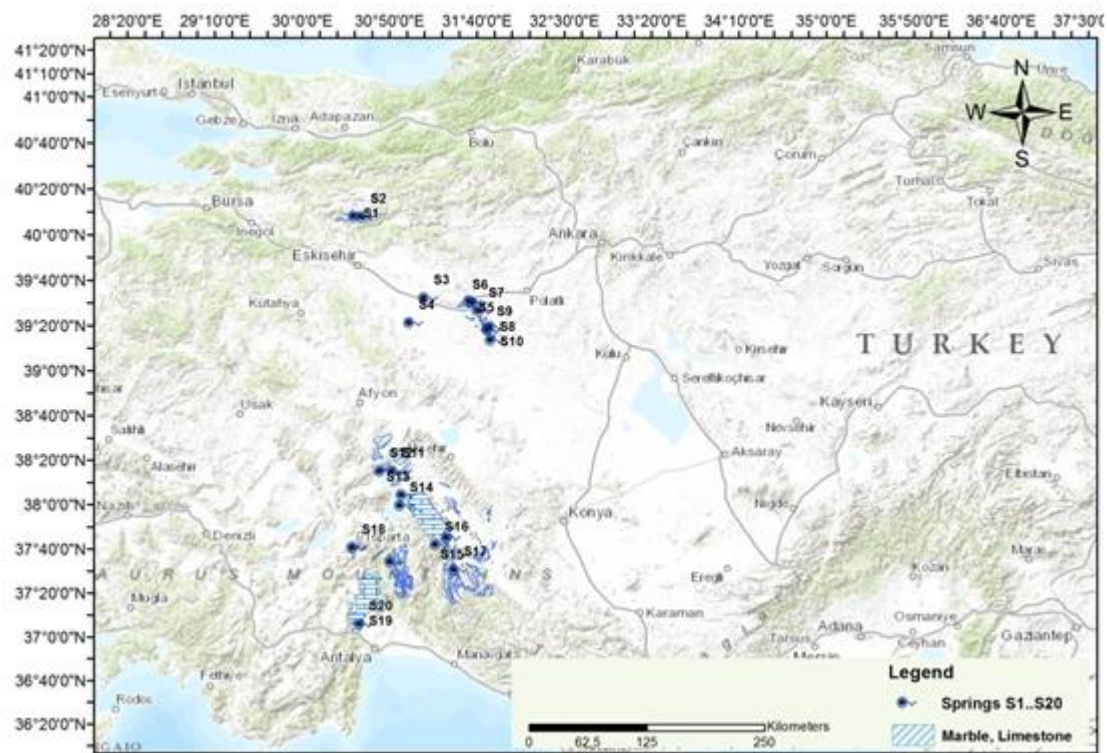


Figure1. The location map of the study area.

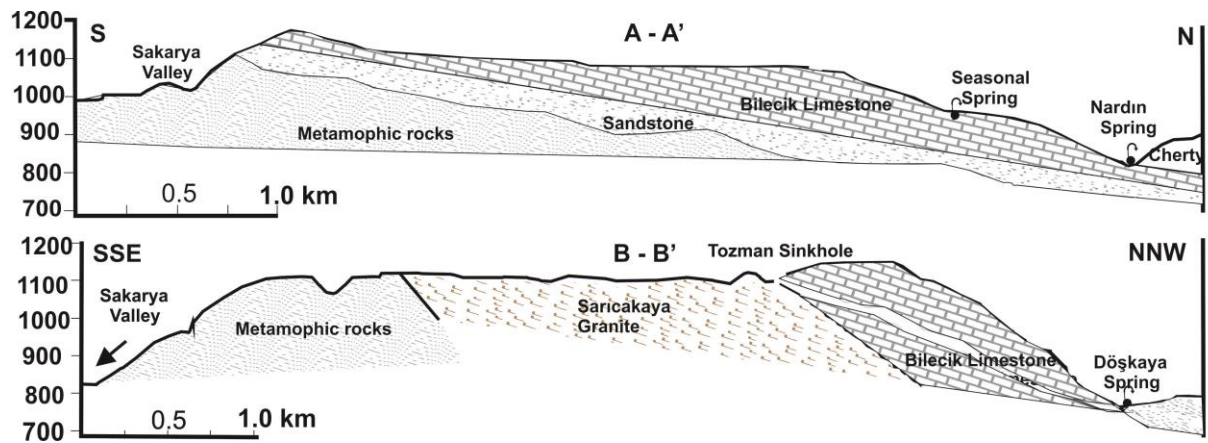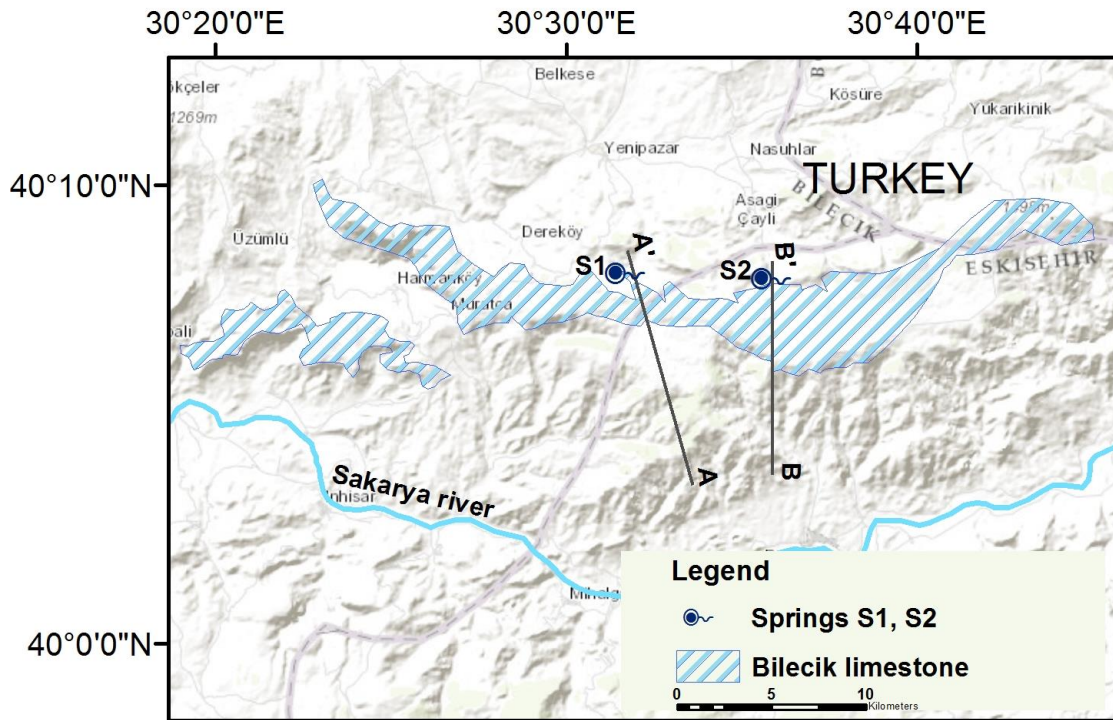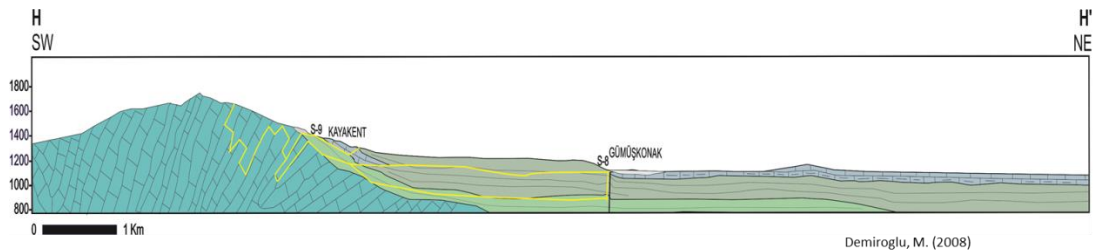

5 Figure 2 a) Bilecik limestones (Jkb) b) The geological cross- section of Nardin and Döşkaya springs (modified by Aydın 2013)

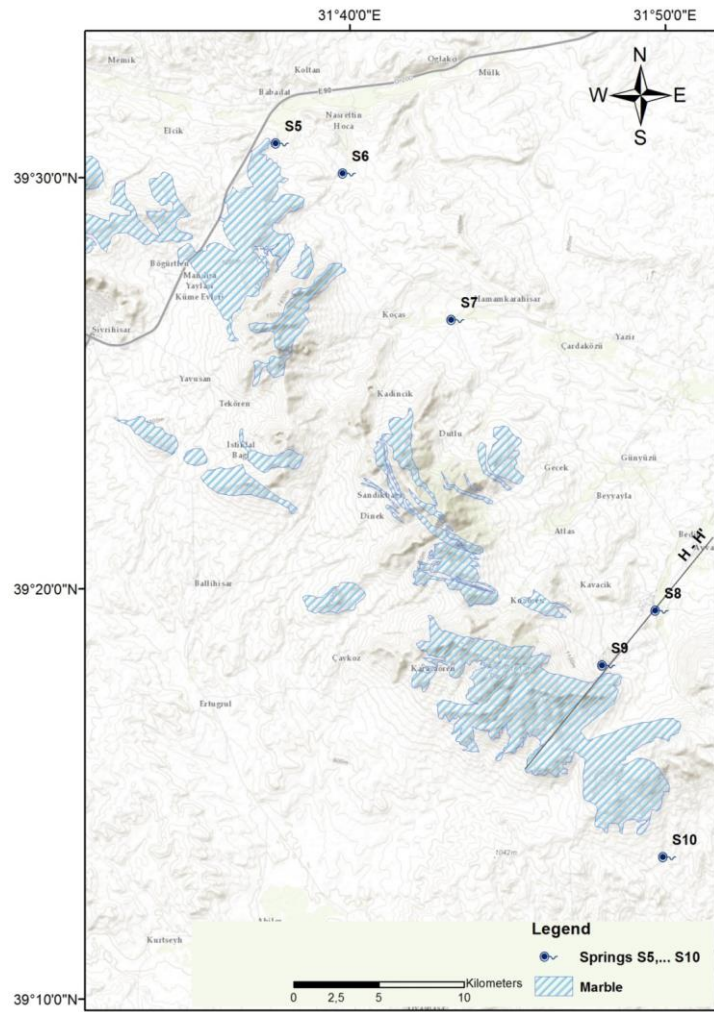

Demiroglu, M. (2008)

Figure 3 a) Gunyuzu marbles b) The geological cross- section of Gunyuzu springs (Demiroğlu 2008)




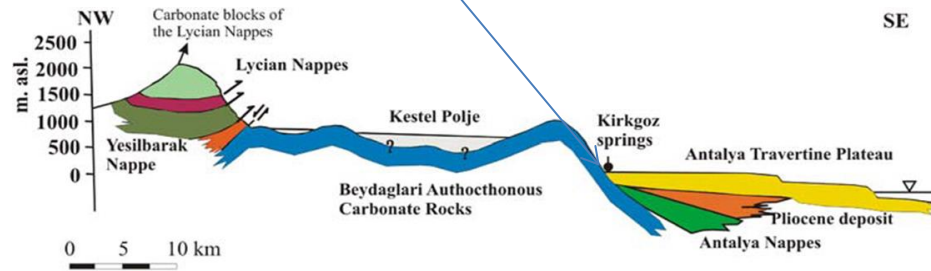


Figure 4 a) Lake district marble and limestones b) The geological cross-section of Kirkgoz karst springs, Southern Turkey (Ekmekci, 2005).

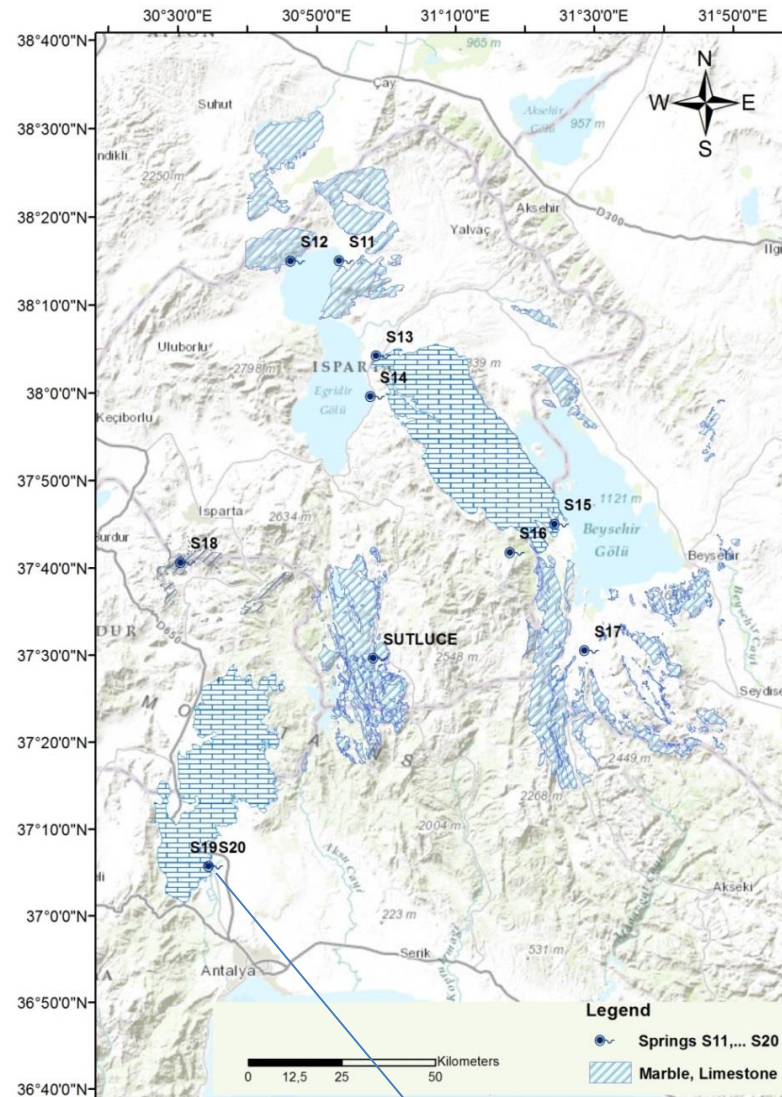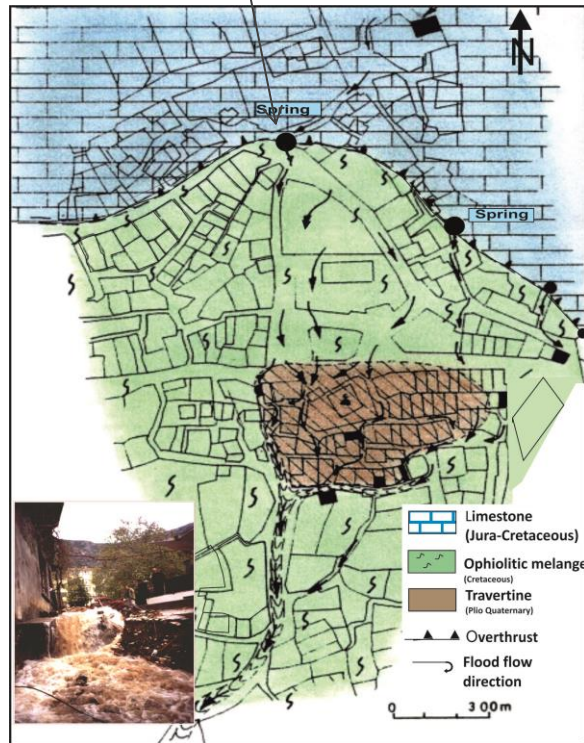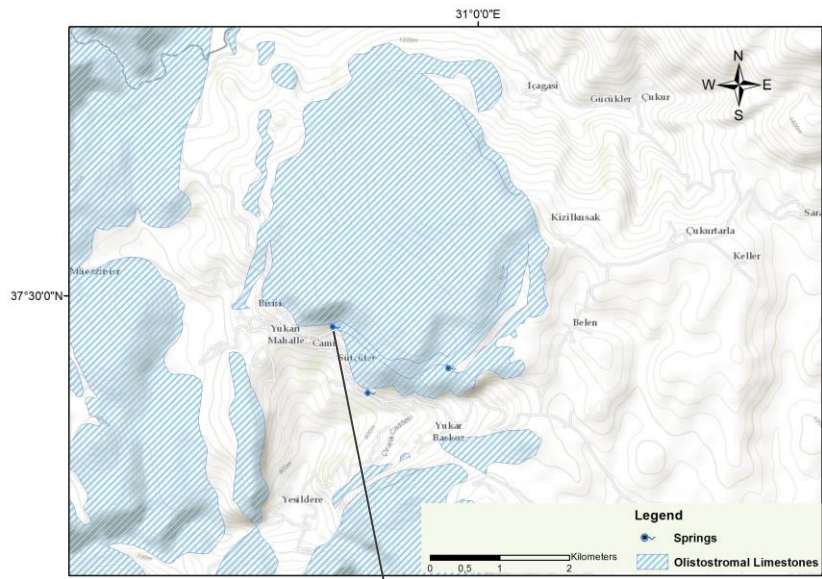

5

Figure 5. Map of flooding road in Sütcüler settlements (modified by Karagüzel 1998)

Table 1. The location of springs (S1..... S20).

| No. | | X | Y | Z |
|-----|----------------------|--------|---------|------|
| 5 | S1 Döşkaya | 289415 | 4445794 | 801 |
| | S2 Nardın | 295328 | 4445399 | 926 |
| | S3 Kaymaz | 345373 | 4378055 | 1015 |
| | S4 Sakarbası | 332776 | 4357779 | 860 |
| | S5 Babadat | 382267 | 4374873 | 917 |
| | S6 Nasrettin hoca | 385292 | 4373481 | 943 |
| 10 | S7 Çardak hamamı | 390127 | 4366839 | 925 |
| | S8 Subası | 399217 | 4353611 | 961 |
| | S9 Çukurçeşme | 396769 | 4351171 | 1011 |
| | S10 Yeniçıkırı | 399431 | 4342506 | 887 |
| | S11 Tırtar | 316187 | 4235908 | 926 |
| | S12 Gençali | 306013 | 4236098 | 926 |
| 15 | S13 Yenice | 323511 | 4215749 | 925 |
| | S14 Yeşilköy | 322084 | 4207189 | 952 |
| | S15 Pınarbası | 360494 | 4179515 | 1127 |
| | S16 Pınargözü | 350959 | 4173656 | 1536 |
| | S17 Adakoy-Pınarbası | 366447 | 4152589 | 1138 |
| 20 | S18 Sagalası | 281152 | 4173099 | 1591 |
| | S19 KGM Kırkgözler | 285415 | 4108347 | 300 |
| | S20 KGI Kırkgözler | 285415 | 4108347 | 300 |

Table 2. Physicochemical data of S1 and S2 springs (Nardın and Döşkaya spring).

| Dry season | T (°C) | pH | Ec (µS/cm) | DO (mg/l) | Ca (meq/l) |
|------------|--------|------|------------|-----------|------------|
| S1 | 11,9 | 7,23 | 512 | 10,14 | 8,4 |
| S2 | 22,7 | 6,97 | 402 | 7,77 | 7,14 |
| Wet season | | | | | |
| S1 | 9,59 | 6,84 | 455 | 11 | 2,2 |
| S2 | 13,7 | 6,38 | 483 | 7,12 | 5,59 |

5

Table 3. Physicochemical data of Çifteler and Günyüzü springs

| Dry season | T (°C) | pH | Ec (µS/cm) | DO (mg/l) | Ca (meq/l) |
|------------|--------|------|------------|-----------|------------|
| S3 | 26,6 | 7,37 | 398 | 4,36 | 4,90 |
| S4 | 23 | 7,28 | 820 | ND | ND |
| S5 | 18 | 8,9 | 405 | 8,06 | 3,11 |
| S6 | 22,75 | 7,17 | 403 | 7,68 | 3,21 |
| S7 | 34,75 | 6,93 | 935 | 2,89 | 3,89 |
| S8 | 30 | 6,94 | 778 | 4,81 | 4,65 |
| S9 | 14,02 | 6,59 | 346 | 9,11 | 2,60 |
| S10 | 22,82 | 7,08 | 590 | 7,49 | 3,58 |
| Wet season | | | | | |
| S3 | 27,5 | 7,57 | 350 | ND | ND |
| S4 | 18,7 | 7,28 | 750 | ND | ND |
| S5 | 20,46 | 7,09 | 415,5 | 7,75 | 3,18 |
| S6 | 22,18 | 7,16 | 404,5 | 7,36 | 3,12 |
| S7 | 34,44 | 7,02 | 958,5 | 2,21 | 4,7 |
| S8 | 29,92 | 6,86 | 798 | 4,46 | 4,69 |
| S9 | 13,49 | 7,21 | 331 | 8,89 | 2,54 |
| S10 | 22,91 | 6,96 | 603 | 4,9 | 3,89 |

Table 4. Spring's yield, Qmax/Qmin and variation of the measurements.

| No | Qmax. (l/s) | Qmin. (l/s) | Qmax/ Qmin | CV _Q | CV _{EC} | CV _{ca} |
|-----|-------------|-------------|---------------|-----------------|------------------|------------------|
| S1 | 395,8 | 0 | ∞ | 74,8 | 10,81 | 7,3 |
| S2 | 208,9 | 1,5 | 139,3 | 148,8 | 38,58 | 36,6 |
| S3 | 1447 | 2490 | 1,72 | 13,9 | | |
| S5 | 100 | 68 | 1,47 | 22,6 | 4,96 | 6,01 |
| S6 | 219 | 152 | 1,44 | 13,48 | 3,96 | 6,63 |
| S7 | 140 | 39 | 3,58 | 29,39 | 12,3 | 4,2 |
| S8 | 181 | 112 | 1,61 | 50,6 | 11,9 | 8,9 |
| S10 | 108 | 49 | 2,2 | 36,4 | 10,3 | 8,04 |
| S16 | 4078 | 4 | 0,001 | 103 | ND | ND |
| S20 | 22000 | 10000 | 2,2 | ND | 0,3 | 0,31 |

40

Table 5. Physicochemical data of Lake District springs

| Dry season | T(oC) | pH | Ec (µS/cm) | DO (mg/l) | Ca (meq/l) |
|------------|-------|-----|------------|-----------|------------|
| S11 | 14 | 7,6 | 600 | ND | 2,66 |
| S12 | 17,2 | 7,7 | 630 | ND | 3,21 |
| S13 | 13 | 7,8 | 443 | ND | 4,19 |
| S14 | 22,7 | 8,4 | 787 | ND | 2,68 |
| S15 | 18,7 | 8,9 | 381 | ND | 4,9 |
| S16 | 6,8 | 8,9 | 140 | ND | 1,5 |
| S17 | 10,4 | 8,4 | 300 | ND | 3,05 |
| S18 | 16,6 | 8,8 | 191 | ND | 2,6 |
| S19 | 16,7 | 6,6 | 988 | 4,2 | 7,8 |
| S20 | 16,8 | 6,5 | 998 | 4,4 | 7,8 |
| Wet season | | | | | |
| S11 | 12,7 | 7,8 | 500 | ND | 2,54 |
| S12 | 11,2 | 8,2 | 480 | ND | 2,47 |
| S13 | 13,8 | 7,7 | 586 | ND | 2,63 |
| S14 | 11,4 | 8,4 | 410 | ND | ND |
| S15 | 11 | 8,2 | 357 | ND | 1,21 |
| S16 | 7,2 | 9,2 | 154 | ND | ND |
| S17 | 11 | 8,5 | 320 | ND | ND |
| S18 | 10,5 | 8,4 | 214 | ND | 1,95 |
| S19 | 16,7 | 7 | 969 | 6 | 7,44 |
| S20 | 17,9 | 7,1 | 936 | 8,9 | 7,14 |