

## Reply for review comments

Reviewer 1 (Prof. Carlo Gregoretti)

We sincerely thank you for the efforts you have made to improve our submission to *Natural Hazards and Earth System Sciences*. As replied later, we have removed many sections that were not very important in this paper. We think focus of the revised paper is clearer than that of previous version of the paper. We have responded to all review comments and have made appropriate modifications to our manuscript related to these comments as detailed in the following paragraphs. The blue-highlighted sentences are the review comments; sentences in black represent our responses to these review comments.

### Overview

The authors improved their work but there are still some deficiencies:

1) The work, even if valuable, is yet not well explained. The paper, even if improved in some parts, is still hard to read. A clear or direct focus is missing and the parts seem untied. As a example, the analyze of the bed profile should be directly linked to the proof and determination of the angles  $\alpha_i$ . Moreover, the paper should be written in a more concise form.

The linkage between theoretical channel gradients ( $\alpha_1$  and  $\alpha_2$ ) and real channel gradient was presented in the last part of the section 5.3. However, as pointed out in comment 15, statements on the comparison between theoretical channel gradients and real channel gradient was not clear. We have rewritten the section. Now statement is much clearer than the previous version of the manuscript (pg. 20, line 14 - pg. 21, line 9). In addition, as replied to comment 3), we have removed many sentences to focus our results and discussion on the temporal changes in the channel gradient.

2) The writer does not the share the authors approach on the limiting slope angles because it is uncorrected and misleading as it is shown. The triggering of debris flow along channel is mostly due to runoff. Unfortunately, as we do not know runoff, we cannot incorporate it in the scheme based on a static equilibrium-based relationship (equation 5). Therefore, the justifications of the authors appears physically uncorrected.

Moreover, you can have debris flow with slope angle smaller than that given by equation (5) due to runoff. I suggest the authors to rewrite this part, justifying their approach with the impracticality of introducing the runoff contribute in the equilibrium relationship. The limiting inferior angles could be that given by flume laboratory experiments ( $15^\circ$  according to Takahashi, 1978).

We also think that many debris flows are triggered by surface runoff. As the reviewer points out, debris flows do not satisfy solid concentration expressed by equations based on static force, especially in their initial stage of the development. We agree that sediment transport type is not completely determined by the slope gradient. At the same time, even if our model is not strict and sometimes incorrect, we think it

is important to apply simple models to complex debris flow in the field when we figure out overall processes in the debris flow initiation zone. Before we start to discuss debris flow, we have explained the reason why we apply a simple static model (p.4, lines 16-28). We also added statements on the lower boundary of the channel gradient that the equation for equilibrium concentration of debris flow (Eq. (6)) is applicable (pg. 5, lines 9-13).

3) The second part of the text (from subsection 4.3), is again not fluid but very hard to read. Moreover, because in some parts it is too detailed, it is not readable.

We have removed sentences which were not closely related to focus of this paper. Location of removed sentences are highlight green in the manuscript (pg. 11, line 18; pg. 15, line 8; pg. 15, line 9; pg. 15, line 11; pg. 17, line 17; pg. 22, line 4, pg. 22, line 7; pg. 22, line 14; pg. 23, line 8; pg. 23, line 10). In addition, we reconstructed structure of the sections 4.3 and 5.3.

4) In subsection 4.3 the writer does not understand the technique used for the topographical measurement? Photographs or ALS. This part should be rewritten in a clear form. Moreover, what is it the meaning of “**estimated from terrain by ALS**”? Finally, I suggest the authors to initially and briefly summarize all the techniques they used and the scope.

We have rewritten section 4.3. Explanation of the method has been summarized. “estimated from terrain by ALS” meant that bedrock topography under the storage was estimated from terrains obtained by ALS in 2011 and 2012 when sediment storage was almost absent (pg. 11, lines 13-18).

5) In subsection 5.3 analyzing the bed profile after two events the authors observe that in the medium part it remains unchanged. They explain this by the absence of deposition. A consequence of this explanation is that in the upstream and downstream reaches there is deposition. This fact means that the considered reach is not the initiation area where entrainment should occur rather deposition. In this case the scheme proposed by the authors at section 2 cannot be applied here.

The channel section, in which longitudinal profile of the channel were analyzed, is the initiation zone of debris flow, because initial movement of the sediment mass (debris flow) have been monitored by video cameras and TLCs in this section. Both erosion and deposition occurs in the lowermost and uppermost reaches by the occurrence of debris flows. Sediment supply from hillslopes also cause deposition in these sections. We have added these information at the beginning of the subsection (pg. 17, lines 10-13). We also improve the sentence pg. 17, line 29 to prevent misunderstanding by readers.

The following are the detailed comments and specifications.

1. Page 1 – line 12: perhaps usually is better than often.

As suggested by the reviewer, we have replaced often with usually (pg. 1, line 12).

2. Page 1 - line 23: The sentence “The small-scale channel...” should be rewritten. At the beginning it

should be specify that debris flows form some channel within the bed. If the writer hasg understanden what the authors mean.

We have revised the sentence. We hope the meaning of the sentence is clear now (pg.1, line 22).

3. Page 2 - line 22: the reference Gregoretti and Dalla Fontana, (2008) should be placed here and not at line 26.

We have moved the reference to the former sentence. (pg. 2 line 21)

4. Page 4 – line 15: terrain with a slope smaller than is better.

We have revised as suggested by the reviewer (pg. 4, line 15).

5. Page 4 - lines 15-19: this sentence could be neglected.

We have removed the sentence (pg. 4, line 15).

6. Page 5 – line 5: the reference Gregoretti, 2000 could be substituted by Gregoretti, 2008.

We think the reviewer intended to point out the reference in pg. 5, line 23 in the previous version of the manuscript. We have substituted the reference (pg 4, line 19).

7. Page 7 – line 2: perhaps it is better “is” rather than “was”;

We have replaced “was” with “is” (pg. 7, lines 1)

8. Page 7 – line 2: place there is before a

We have added “there is” in the text (pg. 7, lines 1-2)

9. Page 7 – line 3: place is after bedrock

We have added “is” after bedrock (pg. 7, line 2)

10. Page 7 – line 7: decreased?

We also think “decreased” is better. We have revised (pg. 7, line 6).

11. Page 8 – line 9: please mark the position of the monitoring station on the map.

Sensors, cameras, and data loggers were not located at one specific site, but located one (or two) sites in the section between P1 to P3. We specified that in the first sentence of the section (pg. 8, lines 3-4). Location of each sensors are specified in the explanation of each sensor in section 4.1.

12. Page 8 – line 11: then moved upstream to P2 is better.

We have added “upstream” after ”moved” (pg. 8, line 5).

13. Page 9 – line 13: is runoff increasing or decreasing slowly?

Runoff (water height and water pressure) without debris flow increased and decreased slowly (over ten minutes to several hours), while that during debris flow events abruptly changes within 1 minute (Fig. 6). We have revised the sentence to specify such changes (pg. 9, line 5).

14. Page 19 – lines 19-20: In this sentence it is stated that in the middle part the bed is unchanged because there is no deposition. This indirectly states that changes in the upper and lowest are only due to deposition. In other words in the upper and lower reaches there is only deposition and no entrainment. Is this correct? Authors should introduce this information at the beginning of the subsection.

In upper and lower reaches, active erosion, deposition and entrainment of sediment occur. We have added such information in the first paragraph of the subsection (pg. 17, lines 10-13). We have replaced “deposition” with “accumulation of storage” to prevent misunderstanding by readers (pg. 17, line 29).

15. Page 23 – lines 1-8: Confused sentences: the writer does not understand their meaning.

We have rewritten the sentences by simple words (pg. 20, line 14- pg. 21, line 9). We hope the sentences are clear now.

16. Page 23 – line 13: overall and sometimes cannot be in the same sentence that results confused.

We have removed “overall” in front of “debris flow” (pg. 21, line 14).

17. Page 23 – lines 19-20. This sentence contradicts what written at line 25 of page 13.

We have changed the sentence pg. 23 line 19 in previous version of the manuscript to the same expression as pg. 13 line 25 (pg. 21, line 20).

18. Pag. 24 – lines 3-7. The writer agrees with the authors that the amount of storage influence the type of debris flow front (partially or fully saturated) but not the rainfall. In Rovina di Cancia, in the summer two debris flows were triggered by two convective storms of nearly equal duration. The front of the first debris flow was partially saturated while the second was fully saturated (Gregoretto et al., 2016). This means that rainfall type in the determination of the front type could be secondary respect to the available storage volume.

The sentence in pg 24 line 3-5 in previous version of the manuscript is not our finding, but results reported in Okano et al. (2012). We have revised the sentence to make it clear (pg. 22, lines 4-6). Some studies have pointed out relationship between rainfall patterns and flow characteristics (Okano et al., 2012; Kean et al., 2013; Hürlimann et al., 2014). At the same time, as pointed out by the reviewer, different flow types appear even if the pattern of rainfall is similar. Therefore, we have revised the sentence to prevent misunderstandings (pg. 22, lines 4-7). In addition, we have removed sentence in pg. 24 lines 6-11 (in the previous version of the manuscript), which explained how rainfall pattern affects the debris flow type.

Caption of Figure 1: please substitute water table with water level.

We have replaced “table” with “level” as suggested by the reviewer (Fig. 1 caption).

## Reviewer 2 (Prof. Michel Jaboyedoff)

We sincerely thank you for the efforts you have made to improve our submission to *Natural Hazards and Earth System Sciences*. We have responded to all review comments and have made appropriate modifications to our manuscript related to these comments as detailed in the following paragraphs. The blue-highlighted sentences are the review comments; sentences in black represent our responses to these review comments.

The paper has been greatly improved, the authors made it easier to follow. Nevertheless, some points have to be clarified:

- As  $\alpha_1$  and  $\alpha_2$  are described in section 2, it will be nice to remind their meaning later within text, or change their name like:  $\alpha_d$  (for dry) and  $\alpha_{fs}$  (for fully saturated), this will be easier for the reader to remember.

Thank you for your suggestion.  $\alpha_2$  is the boundary between partly and fully saturated flows. Readers may misunderstand that the slope gradient relates to just one of the two flow types if we add suffix of a specific flow type. Thus, we have reminded of the meaning in the latter half of the paper (pg. 20, line 10, pg. 21, lines 2, 3, 16).

- In figure 2, I still do not understand where the Ohya landslide is? If I look at the figure landslide = catchment area, which is strange for me.

Ohya landslide is a huge landslide with a length and a width of 1.8 and 1 km, respectively. The landslide is surrounded by black solid line in Fig. 2a. We have noted that in figure caption.

In addition, we have stated that Ohya-landslide is currently composed of some sub-catchments (pg. 6, line 14-15).

- P11 line 17: linear instead of liner?

We have replaced “liner” with “linear” (pg. 10, line 22)

- Legend figure 6: “hydrograph” appears only here in the caption could you make the link with the text (ultrasonic sensor?) and remind where it was located P1 or P2?

The hydrograph is obtained from video camera images. We have noted location of video cameras in the figure captions (Fig. 6). We have added statements on the hydrograph in the text, as suggested by the reviewer (pg. 12, lines 19-20).

- P18 section 5.3: In my opinion, you must clarify about the term “Bed profile”, “longitudinal channel profile”. To which type of profile do you refer always the longitudinal one?

Now we use a consistent word “longitudinal channel profile” (pg. 17 lines 4, 9, 15, caption of Fig. 10). This is the profile in the section between points A and G (pg. 17 line 4). In order to focus on the longitudinal profile, we removed statements on the cross-sectional profile in this section. At the same

time, we renamed points along the longitudinal profile.

- Table 3: the gradient are in degrees. If so please add the “°”

Left tables are standard deviation of slope gradient. Therefore, we have added “(°)” as suggested by the reviewer (Table 3).

If the the authors solved these problems in my opinion the paper will be a nice contribution to the scientific debate on debris-flow initiation.

Thank you again for your comments improving our manuscript.

### Reviewer 3

We sincerely thank you for the efforts you have made to improve our submission to *Natural Hazards and Earth System Sciences*. We have responded to all review comments and have made appropriate modifications to our manuscript related to these comments as detailed in the following paragraphs. The blue-highlighted sentences are the review comments; sentences in black represent our responses to these review comments. As we replied to the first comment, we have removed many sentences that were not directly related to core findings in this manuscript.

The paper may reveal some valuable facts related to the initiation of debris flows in the upper stream. The long-term observation data are useful for understanding the initiation mechanism of debris flows. But the core findings are covered by too many trivial details. The authors use too many words to describe the background information. I think the manuscript could be accepted by the journal if major revisions are made, especially reducing some of unimportant content.

Thank you for reviewing our manuscript. We have received similar comments from the other reviewer. We have removed many sentences that were not closely related to core findings in this manuscript (pg. 11, line 18; pg. 15, line 8; pg. 15, line 9; pg. 15, line 11; pg. 17, line 17; pg. 22, line 4, pg. 22, line 7; pg. 22, line 14; pg. 23, line 8; pg. 23, line 10). Location of these sentences are highlighted green in the revised manuscript. We think structure of the revised manuscript is simpler and clearer compared to previous version of the manuscript.

#### Specific Comments

1. I think the title is not appropriate, “Interactions between the accumulation of sediment storage and debris flow characteristics in a debris-flow initiation zone, Ohya landslide body, Japan”. The paper did not present the “interactions”. May be connections or relationship is better.

As suggested by the reviewer, we have replaced “interaction” with “relationships” in the title. We also replaced “interactions” in the text with “relationships” (pg. 1, line 16; pg. 3, line 6; pg. 24, lines 2, 21).

2. Page3 Line 6: “Similarly, shear stress needs to exceed shear strength at the bottom of a traveling sediment mass for the continuity of travel.”

Once the debris mass initiates, the shear stress need to keep it moving is equal to or even less than the shear strength sometimes. I think the sentence could be revised.

As the reviewer points out, shear strength in dynamic state is sometimes lower than that in static state. In such cases, shear stress needed for continuity of travel is lower than that needed for initial movement. We have revised the sentence (pg. 3, lines 16-18).

3. The angle is denoted with theta in figure 1a, but it is alpha in the text.



We have replaced  $\theta$  with  $\alpha$  in the figure (Fig. 1).

4. It is better if the images in figures such as Figure 3 have a scale.

As suggested by the reviewer, we have added a scale in Fig 3a.

5. 4.1 and 4.2 sections are too long. I think a brief description of the monitoring and TLS measuring can make readers focus on the topic.

We have shortened length of sentences to make the section shorter (pg. 8, lines 4, 13, 16; pg.10, lines 8). Current length of the sections may be still long for the reviewer. However, many of information in these sections were requested by the other reviewers in previous stage of the review process. We think such information should not be removed. Instead, we simplified section 4.3 based on the comment by another reviewer. Total length of chapter 4 in the revised manuscript is much shorter than that in the previous version of the manuscript.

6. Some discussions should be cautious. For example, Page 20 Line 21: “The proportional duration of partly saturated flow in the overall surges had a positive relationship with the volume of storage (Fig. 6). Thus, the volume of storage was a factor controlling not only the initiation of the debris flow, particularly in the supply limited basin (Bovis and Jakob, 1999; Jakob et al., 2005), but also the debris flow characteristics.”

I think the fact of “The proportional duration of partly saturated flow in the overall surges had a positive relationship with the volume of storage” cannot deduce the inevitable conclusion. I suggest “It indicates that” in place of “Thus”.

As the reviewer points out, the relationship between flow type and volume of storage may not strongly support the idea that the volume of storage control flow characteristics. We replaced “thus” with “it indicates that” (pg. 21, line 21). We have carefully checked all expressions in the discussion again, and revised sentences which were not appropriate (pg. 21, line 30, 31; pg.22, lines 6-7; pg. 23, line 11)

# Relationship between the accumulation of sediment storage and debris flow characteristics in a debris-flow initiation zone, Ohya landslide body, Japan

5 Fumitoshi Imaizumi<sup>1</sup>, Yuichi S. Hayakawa<sup>2</sup>, Norifumi Hotta<sup>3</sup>, Haruka Tsunetaka<sup>4</sup>, Okihiro Ohsaka<sup>1</sup>,  
Satoshi Tsuchiya<sup>1</sup>

<sup>1</sup>Faculty of Agriculture, Shizuoka University, Shizuoka, 422-8529, Japan

<sup>2</sup>Centre for Spatial Information Science, The University of Tokyo, Kashiwa, 277-0871, Japan

<sup>3</sup>Faculty of Life and Environmental sciences, University of Tsukuba, Tsukuba, 305-8572, Japan

<sup>4</sup>Graduate School of Life and Environmental sciences, University of Tsukuba, Tsukuba, 305-8572, Japan

10 *Correspondence to:* Fumitoshi Imaizumi (imaizumi@shizuoka.ac.jp)

**Abstract.** Debris flows usually occur in steep mountain channels, and can be extremely hazardous as a result of their destructive power, long travel distance, and high velocity. However, their characteristics in the initiation zones, which could possibly be affected by temporal changes in the accumulation conditions of the storage (i.e., channel gradient and volume of storage) associated with sediment supply from hillslopes and the evacuation of sediment by debris flows, are poorly understood. Thus, we studied the relationship between the flow characteristics and the accumulation conditions of the storage in an initiation zone of debris flow at the Ohya landslide body in Japan using a variety of methods, including a physical analysis, a periodical terrestrial laser scanning (TLS) survey, and field monitoring. Our study clarified that both partly and fully saturated debris flows are important hydrogeomorphic processes in the initiation zones of debris flow because of the steep terrain. The predominant type of flow varied temporally and was affected by the volume of storage and rainfall patterns. Fully saturated flow dominated when total volume of storage < 10,000 m<sup>3</sup>, while partly saturated flow dominated when total of the storage > 15,000 m<sup>3</sup>. Debris flows form channel topography which reflects the predominant flow types during debris flow events. Partly saturated debris flow tended to form steeper channel sections (22.2 – 37.3°), while fully saturated debris flow tended to form gentler channel sections (<22.2°). Such relationship between the flow type and the channel gradient could be explained by a simple analysis of the static force at the bottom of the sediment mass.

## 1 Introduction

Debris flows often occur in steep mountain channels and can be extremely hazardous as a result of their destructive power, long travel distance, and high velocity (Lin et al., 2002; Cui et al., 2011). To lower the hazard of debris flow, field monitoring has been conducted in many torrents in the world including Switzerland (McArdell et al., 2007; Berger et al., 2011b), Italy

(Arattano, 1999; March et al., 2002; Arattano et al., 2012), the United States (McCoy et al., 2010; Kean et al., 2013), and China (Zhang, 1993; Hu et al., 2011). Many of these monitoring activities have been undertaken in the transportation zones of the debris flows, with only a few observations undertaken in their initiation zones, where the unstable sediment start to move (Berti et al., 1999; McCoy et al., 2012; Kean et al., 2013). Thus, factors affecting debris-flow characteristics in the initiation zone (e.g., temporal changes in the solid fraction) is still unclear.

Debris flows can be classified into various types according to their flow dynamics, solid fractions, and material types (Coussot and Meunier, 1996; Hungr, 2005; Takahashi, 2007). Multiple flow types appear even in the same torrent (Imaizumi et al., 2005; Okano et al., 2012). However, in situ classification of debris flow type is mainly based on monitoring results obtained in the transportation zone. Field monitoring conducted at multiple sites along a debris flow torrent have revealed that flow characteristics (e.g., solid fraction and boulder size) and discharge change as the flow migrates downstream and is affected by erosion and deposition (Takahashi, 1991, Berger et al., 2011b; Arattano et al., 2012). Thus, flow characteristics in the transportation zone possibly differ from those in the initiation zone. In the initiation zone, flows containing an unsaturated layer have also been observed during field monitoring (Imaizumi et al., 2005; McArdeell et al., 2007; Imaizumi et al., 2016b). Such information is needed to explain the sequence of debris flow processes from initiation in the headwaters to termination at the debris flow fan.

The topography along debris flow torrents reflects the characteristics of a debris flow event (Whipple and Dunne, 1992; Coussot and Meunier, 1996; Imaizumi et al., 2016a). The curvature of the terrain can be used to determine the relationship between shear stress and shear strength (Staley et al., 2006). Many observations of the relationships between topography and flow characteristics have been made in the lower part of the debris flow torrents, while such findings are limited in the debris-flow initiation zone. In many cases, the channel gradient in the initiation zone is greater than 20° (VanDine 1985; Pareschi et al. 2002; Gregoretto and Dalla Fontana, 2008; McCoy et al., 2013; Hürlimann et al., 2015). In terms of debris flows caused by the transportation of loose sediment on the floor of a valley, both the volume and grain size of debris flow material (e.g., channel deposits and talus slope) change over time in association with the sediment supply from hillslopes, as well as the evacuation of sediment by debris flows and fluvial processes (Bovis and Jakob, 1999; Imaizumi et al., 2006; Berger et al., 2011a; Theule et al., 2012). Although some previous studies have investigated the relationship between characteristics of the debris flow material and initiation condition of a debris flow (Bovis and Jakob, 1999; Jakob et al., 2005; Schlunegger et al., 2009; Chen et al., 2012; Theule et al., 2012), only a few have considered the relationship between flow material and flow characteristics (Kean et al., 2013; Imaizumi et al., 2016b). The difficulty in monitoring debris flows in steep and dangerous initiation zones has prevented the collection of the field data needed to clarify the relationship between flow characteristics and flow material. In addition, the value of topographic indexes (e.g., slope gradient) are variable depending on the scale of the grid size used in the GIS analyses, because factors affecting the indexes are different among the scales of topography (Schmidt and Andrew, 2005; Loye et al., 2009; Pirotti and Tarolli, 2010; Drăguț and Eisank, 2011). Thus, appropriate grid size for the analysis should be understood prior to discuss relationship between accumulation condition of flow material and flow characteristics.

In the debris-flow initiation zone at the Ichinosawa catchment within the Ohya landslide, Japan, field monitoring has been undertaken since 1998 (Imaizumi et al., 2005; Imaizumi et al., 2006). This site is suitable for monitoring because of the high debris-flow frequency (about three or four events per year) that occur due to the mobilization of storage (i.e., talus cone and channel deposits) around the channel. In addition, detailed topographic measurements by terrestrial laser scanning (TLS) have been undertaken periodically since 2011 (Hayakawa et al., 2016).

The overall aim of this study is to clarify **relationship** between debris flow type (i.e., fully and partly saturated flows) and the accumulation conditions of storage (i.e., slope gradient and volume of storage). Our specific objectives were to explain the relationship between slope gradient and sediment transport type by a simple analysis of the static force, clarify effects of the accumulation conditions of storage and rainfall pattern on the debris flow type, find out representative slope gradient of geomorphic units (i.e., rock slope, talus slopes, and the channel) based on analysis of digital elevation models (DEMs) with various grid size, and clarify effects of the debris flow type on the channel morphology.

## 2 Slope gradient and type of sediment transport

In this section, we describe our analysis of the balance of static force at the bottom of a sediment mass to assess the relationship between slope gradient and the type of sediment transport, which is the essential to understand observation results and GIS analyses in this study. Shear stress at the bottom of a sediment mass needs to exceed shear strength for the sliding of a stable debris mass (Takahashi, 1991; Prancevic et al., 2014; Imaizumi et al., 2016c). **Similarly, shear stress needs to exceed shear strength at the bottom of a traveling sediment mass for the continuity of travel (Takahashi, 1991; Watanabe, 1994), although their magnitude is sometimes lower than the shear stress needed for initial movement of the stable mass.** Under the assumption that cohesion is negligible, shear stress  $\tau$  and shear strength  $\tau_r$  at the bottom of sediment mass can be given as follows:

$$\tau = \{(1 - \eta_w)[(1 - n)\gamma_s + nS\gamma_w] + \eta_w[(1 - n)\gamma_s + n\gamma_w]\}\sin\alpha, \quad (1)$$

$$\tau_r = \{(1 - \eta_w)[(1 - n)\gamma_s + nS\gamma_w] + \eta_w[(1 - n)(\gamma_s - \gamma_w)]\}\cos\alpha\tan\phi, \quad (2)$$

where  $\eta_w$  is the ratio of the depth of the saturated zone ( $h_w - z_1$ ) to the depth of the sediment mass ( $h - z_1$ ),  $h_w$  is the height of the water table,  $z_1$  and  $h$  are the height at the bottom and surface of the sediment mass, respectively,  $n$  is the porosity of sediment,  $\gamma_s$  is the force of gravity acting on a unit volume of sediment,  $\gamma_w$  is the force of gravity acting on a unit volume of water (or interstitial water for debris flow),  $S$  is the degree of saturation in the unsaturated zone,  $\alpha$  is the slope gradient, and  $\phi$  is the effective internal angle of friction (Fig. 1). Note that  $\alpha$  is the slope gradient of the potential sliding surface when we consider the initial movement of the stable mass, whereas it is the gradient of the surface topography when we consider the migration of the traveling sediment mass. The  $n$  in the moving sediment mass is similar to that of stable sediment when dispersion of the sediment particles is not significant, while  $n$  in the moving sediment mass greatly exceeds that of the stable sediment when the particle dispersion associated with collision among the particles is significant (e.g., fully saturated debris flow). Based on Eqs.(1) and (2), the critical condition for the movement of sediment mass ( $\tau_r = \tau$ ) can be given as follows (Imaizumi et al., 2016c):

$$\frac{\tan\alpha}{\tan\phi} = \frac{(1 - \eta_w)[(1 - n)\gamma_s + nS\gamma_w] + \eta_w[(1 - n)(\gamma_s - \gamma_w)]}{(1 - \eta_w)[(1 - n)\gamma_s + nS\gamma_w] + \eta_w[(1 - n)\gamma_s + n\gamma_w]} \quad (3)$$

Based on the  $\eta_w$ , three typical sediment transport types were considered: fully unsaturated ( $\eta_w = 0$ ), partly saturated ( $0 < \eta_w < 1$ ), and fully saturated ( $\eta_w = 1$ ). In case of  $\eta_w = 0$ , Eq. (3) is expressed as:

$$\tan\alpha = \tan\phi, \quad (4)$$

If the slope gradient  $\tan\alpha$  exceeds  $\tan\phi$ , the sediment mass can move without any saturation (Fig. 1a). In other words, Eq. (4) expresses the lowest boundary of the slope gradient for the movement of the fully unsaturated sediment mass (hereafter referred to as  $\alpha_1$ ). There are several types of sediment transport in fully unsaturated conditions, such as rockfall, dry granular flow, and dry ravel, which is the gravitational transport of ground surface materials by bouncing, rolling, and sliding (Carson, 1977; Dorren, 2003; Gabet, 2003). Although physical mechanisms between individual particles (i.e., rockfall and dry ravel) and flows of grains (i.e., dry granular flow) are different in terms of the interactions among particles, the slope gradient of talus slopes, which are formed by fully unsaturated sediment transport processes, are usually similar or slightly smaller than  $\phi$  regardless of the transport type (Kirkby and Statham, 1975; Carson, 1977; Mangeney et al., 2007). Field surveys and laboratory experiments showed that pyroclastic flow, which is a fluid composed of a mixture of air and particles, sometimes reaches terrain with a slope smaller than  $\phi$  (Yamashita and Miyamoto, 1993; Takahashi and Tsujimoto, 2000).

Next, we apply Eq. (3) to partly and fully saturated sediment transports including the debris flow. Field monitoring in many debris flow torrents, including Ohya landslide, showed that debris flows on debris deposits laid on the steep channels usually initiate by runoff as a surficial erosion (e.g., Coe et al., 2008; Gregoretti and Dalla Fontana, 2008; Degetto et al., 2015; Imaizumi et al., 2016b). In such cases, because sediment transport was affected by the hydrodynamic forces (Gregoretti, 2008; Gregoretti and Dalla Fontana, 2008; Prancevic et al., 2014), solid concentration of the debris flow in their initial stage cannot be determined by the static force. Dynamic force in the flow is also important to explain debris flow characteristics (Lanzoni et al., 2017). Therefore static models cannot strictly explain all sediment transport processes in the debris flow torrents. However, data related to flow dynamics and runoff discharge is limited in debris flow initiation zones because of their unstable and dangerous monitoring environments (McCoy et al., 2013). Complexity of sediment transport processes in the initiation zones, in which both fully and partly saturated sediment transports occur because of the steep channels (Imaizumi et al., 2005; Imaizumi et al., 2016c), also makes full explanation of processes difficult. Application of a simple static model (Eq. (3)) approximating such complex processes, similarly with Takahashi (2014) and Prancevic et al. (2014), is considered to provide us perspective to comprehend overall processes.

The relationship between slope gradient and the volumetric sediment concentration  $(1 - n)$  in a saturated sediment mass is given by substituting 1 into  $\eta_w$  in Eq. (3):

$$\tan\alpha = \frac{(1 - n)(\gamma_s - \gamma_w)}{(1 - n)\gamma_s + n\gamma_w} \tan\phi. \quad (5)$$

When we apply Eq. (5) to the debris flow, porosity  $n$  can be expressed as  $1 - C$  using solid fraction  $C$ . The  $n$  in the moving sediment mass becomes larger than the  $n$  of storage when sediment particles start to disperse by collision with other particles (Hung, 2005; Takahashi, 2014). By the transformation of Eq. (5), relationship between the solid concentration in the steady-state flow (called equilibrium concentration) and the slope gradient is obtained (Takahashi, 1991; Egashira et al., 2001, 5 Takahashi, 2014):

$$C = \frac{\gamma_w \tan \alpha}{(\gamma_s - \gamma_w)(\tan \phi - \tan \alpha)}, \quad (6)$$

An equation of the same structure of Eq. (6) can be obtained through the ratio between the basal bed shear stress and the basal normal stress that have a similar structure to the ratio between shear stress and strength (Lanzoni et al., 2017). Based on the 10 flume experiments, particles are dispersed throughout the depth with the solid concentration expressed by Eq. (6) when channel gradient is sufficiently high (i.e.,  $>15^\circ$ ) (Takahashi, 1978; 2014). At the same time, debris flows, in which particles are dispersed throughout the depth, are sometimes monitored in channels gentler than  $10^\circ$  (McArdell et al., 2007), indicating limitation of the static model in explanation of complex natural processes.

Equation (5) just considers shear strength and shear stress at the bottom of the sediment mass, but does not consider the 15 conditions of the fluid of the sediment mass. Thus, the sliding of the sediment mass without any fluid and the plug flow, of which the upper layer in the sediment mass is not fluid, also satisfies Eq. (5). By substituting the porosity of the storage into  $n$ , Eq. (5) expresses the boundary of the slope gradient between fully and partly saturated sediment transports, of which solid fraction is same as that of storage (hereafter referred to as  $\alpha_2$ ). When the slope gradient of the terrain ranges between  $\alpha_1$  and  $\alpha_2$ , the transportation of a partly saturated sediment mass occurs (Fig. 1b) (Watanabe, 1994; Imaizumi et al., 2005; Imaizumi 20 et al., 2016c). Partly saturated sediment transport has also been observed in channels gentler than  $\alpha_2$  (i.e., channel gradient  $< 10^\circ$ ) (McArdell et al., 2007; McCoy et al., 2010; Okano et al., 2012). However, the appearance of partly saturated sediment transport in such gentler channels is generally limited at the front of a surge. In torrents gentler than  $\alpha_2$ , the existence of surface flow over debris flow material is required for the initiation of debris flow when we just consider static force (Fig. 1c) (Takahashi, 1991; Imaizumi et al., 2016c). Once sediment starts to move, it spreads throughout the flow (Fig. 1d). Thus the volumetric 25 solid concentration is lower than that in sediment storage ( $1 - n$ ).

The explanations above (Eqs. (5) and (6)) are also applicable to the relationship between the solid fraction of the debris flow and the channel gradient formed by erosion and deposition during passage of the debris flow (Takahashi, 1991; 2014). If the amount of water in the sediment mass from the upper channel reaches is constant, the slope gradient of the terrain approaches the gradient given by the substitution of  $\eta_w$ ,  $n$ , and  $S$  of the sediment mass into Eq. (3) as a result of deposition and erosion.

30 In this study, we call any partly and fully saturated sediment transport processes as partly and fully saturated debris flows, respectively. Although some sediment transport processes at our monitoring site were not typical debris flows, such as those composed of a mixture of sediment and water (Takahashi, 1991; Coussot and Meunier, 1996), we believe the processes at our study site directly or indirectly contributed to the initiation of debris flow.

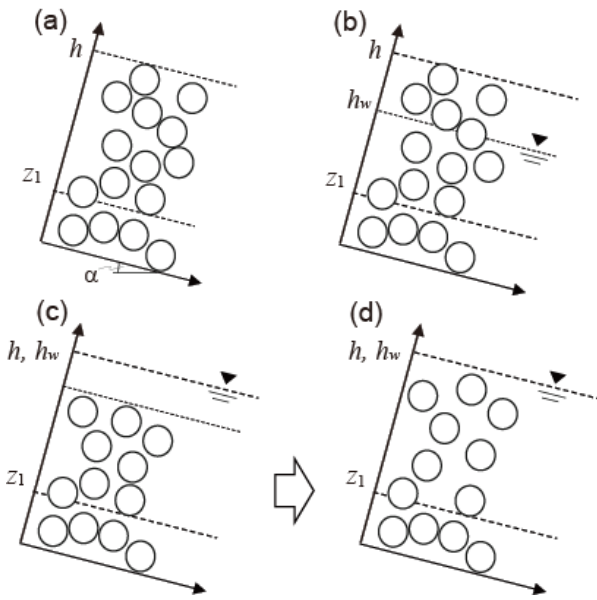


Figure 1: Schematic diagram of sediment transport types: (a) dry (fully unsaturated), (b) partly saturated, (c) surface flow over sediments, which triggers fully saturated sediment transport, (d) fully saturated sediment transport. The  $h$ ,  $h_w$ , and  $z_1$  in the figure indicate heights at surface of the sediment mass, water level, and bottom of the sediment mass, respectively.


### 3 Study site

We conducted field monitoring within the Ohya landslide in the Southern Japanese Alps (Fig. 2). The Ohya landslide has an estimated total volume of 120 million  $m^3$ , and was initiated during an earthquake in A.D. 1707 (Tsuchiya and Imaizumi, 2010). The climate at the site is characterized by a high annual precipitation (about 3,400 mm) (Imaizumi et al., 2005). Heavy rainfall (i.e., total rainfall  $> 100$  mm) occur during the rainy season from June to July and the autumn typhoon season (from August to October). The geological unit is Tertiary strata, which is composed of well-jointed sandstone and highly fractured shale. Unstable sediments have been supplied from outcrops into the channels in the landslide scar and have affected the initiation of debris flows since the original failure.

Ohya landslide is currently composed of some sub-catchments, and almost all of debris flows in the Ohya landslide occur one of sub-catchments called upper Ichinosawa catchment (Imaizumi et al., 2005). The total length of the channel is  $\approx 650$  m and the south-facing catchment (1,450 – 1,905 m a.s.l) has an area of 0.22  $km^2$ . Most of the basin is characterized by high and steep slopes (40 – 65°). Seventy percent of the slope is scree and outcrop, whereas the remaining 30% is covered with forest, shrubs, and tussocks. Anthropogenic influences are absent in the catchment because of the harsh environmental conditions.

Unconsolidated debris, ranging from sand particles to boulders (Imaizumi et al., 2016c), is located in the channel bed and talus cones, and is the source of debris flow material (Imaizumi et al., 2006). The thickness of debris deposits, including large boulders ( $> 1$  m), exceeds several meters in some sections. Freeze-thaw that promotes dry ravel and rockfalls are the

predominant sediment infilling of the channels (Imaizumi et al., 2006). Most of the channel is covered by sediment when there is a large volume of storage accumulated in the upper Ichinosawa, while bedrock is exposed in some channel sections when the storage volume is low. Volume of storage displays seasonal changes caused by sediment supply from hillslopes in winter and early spring, and the evacuation of storage due to the occurrence of debris flow in summer and autumn (Imaizumi et al., 2006). The stored sediment has never been completely eroded by debris flows. Changes in the volume of storage at longer time scales (several years) occurs by the timing of large debris flows with a volume > 15,000 m<sup>3</sup> that drastically decreased volume of storage (Imaizumi et al., 2016c).

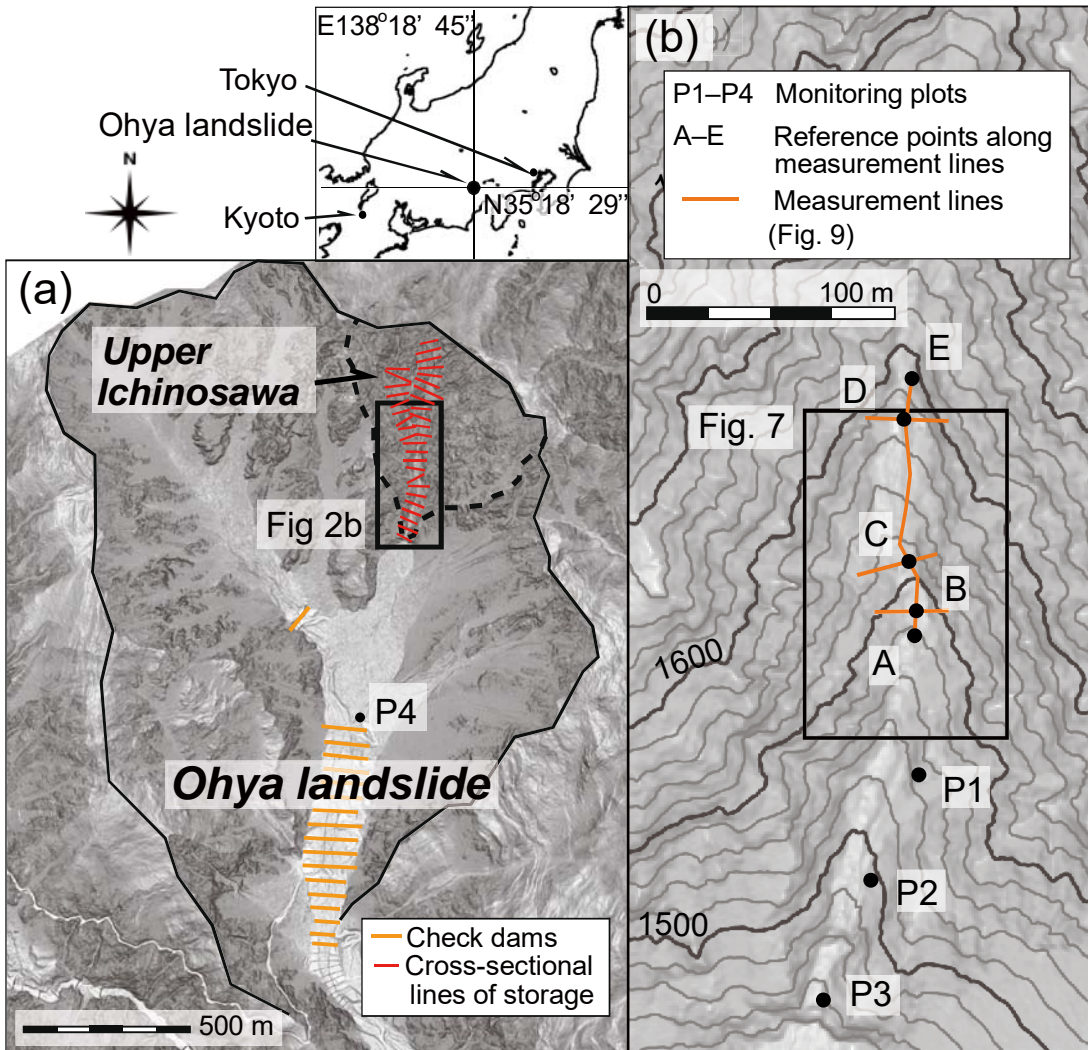

10 **Figure 2: Map of the Ohya landslide and upper Ichinosawa catchment: (a) entire Ohya landslide, which is surrounded by a black solid line, (b) monitoring sites in Ichinosawa upper catchment. Gentler and steeper terrains are expressed as light and dark colors, respectively. Cross-sectional lines used for estimation of volume of the storage are shown as red lines in Figure 2a.**



## 4 Methodology

### 4.1 Debris-flow Monitoring

The monitoring system was installed in the study site in spring 1998 and consisted of a rain gauge, ultrasonic sensors, water pressure sensors, and a video camera in the section between P1 to P3 (Fig. 2) (Imaizumi et al., 2005). The video camera was initially monitored at P4, then moved upstream to P2 in 2000 (Fig. 2). During the period of 1998 to 2001, the video camera was programmed to take 0.75 s clips of video every 5 min. In April 2001, this interval was shortened to 3 min to capture flow characteristics in more detail. In addition, continuous monitoring cameras, of which recording was initiated by wire motion sensors installed at several cross-sections in the channel, were initially installed at P1 in 2003, then at P3 and P2 in 2004 and 2005, respectively. The video camera system sometimes failed to capture debris flows because of their mechanical problems due to harsh site conditions. We identified timing of such debris flows based on changes in the topography observed by periodical photography with an interval of appropriately one week. Surface velocity of debris flows at 1 second intervals were obtained from time required for boulders on the flow surface to pass through fixed channel sections (2.0–5.0 m length) on the video images. The flow depth averaged velocity was estimated from surface velocity multiplied by 0.6, based on the velocity profile throughout the flows on movable beds obtained from a physically based model by Takahashi (1977, 2014). Flow depth of debris flows at 1 second intervals were also obtained from the video image analysis by reading level of the flow surface. Analysis points of the flow depth were set within the channel sections where changes in the channel bed topography were minimum. Changes in cross-sectional area of flow were calculated from changes in flow depth and cross-section measurement of the channel topography. Discharge of debris flows were estimated from the cross-section area multiplied by mean velocity of all layers.


Imaizumi et al. (2006) classified the flow phases during debris flow events into two primary types: flows that made of mainly muddy water and those made of mainly cobbles and boulders. The former flows are turbulent and are characterized by black surfaces due to high concentrations of silty sediment sourced from shale in the interstitial water (Fig. 3a). Because the matrix of boulders is filled with interstitial water, this flow is considered fully saturated (Fig. 1d). In contrast, the flow surface of the second type of flow is unsaturated, because muddy water is not identified in the matrix of the flow surface (Fig. 3b). Therefore, this type of flow is considered partly saturated (Fig. 1b). We visually identified temporal changes in the flow type during debris flow events from video images based on the existence of interstitial water on the flow surface.

Time-lapse cameras (TLCs; GardenWatchCam, Brino, Taipei City, Taiwan) were installed around P1 and P2 in April, 2013, as a backup for video camera monitoring. The number of cameras (1 to 6) differed among the various measurement periods. The intervals used for capturing images were also different among the measurement periods and for the various cameras, with a range from 1 s to 10 min.

To identify the arrival of debris flow, a semiconductor type water pressure sensors, which monitored hydrostatic pressures up to 49 kPa with an accuracy of  $\pm 3\%$ , were also placed in holes dug in the bedrock of the channel bed at P3. Because water pressure sensors were sometimes washed away by debris flow, ultrasonic sensors with a measuring range from 120 to 600 cm

(accuracy of  $\pm 0.4\%$ ) were installed to monitor the surface height of debris flows as the backup of water pressure sensors. Because the logging interval, which was set at 1 min for both types of sensors, was similar or longer than duration of debris flow surges (generally 20 s to 1 min), these sensors were used not to calculate the discharge, but to identify occurrence of debris flows. Water pressure and flow height monitored by these instruments showed intense and abrupt changes during the passage of debris flows, whereas they increased and decreased slowly during rainfall-runoff events without occurrence of debris flow.

Precipitation has been measured with logging interval of 1 min using a tipping bucket rain gauge (0.5 mm for one tip) located in an open area at P1 (Fig. 2b). We separated rainfall events by intermissions longer than 6 hr.

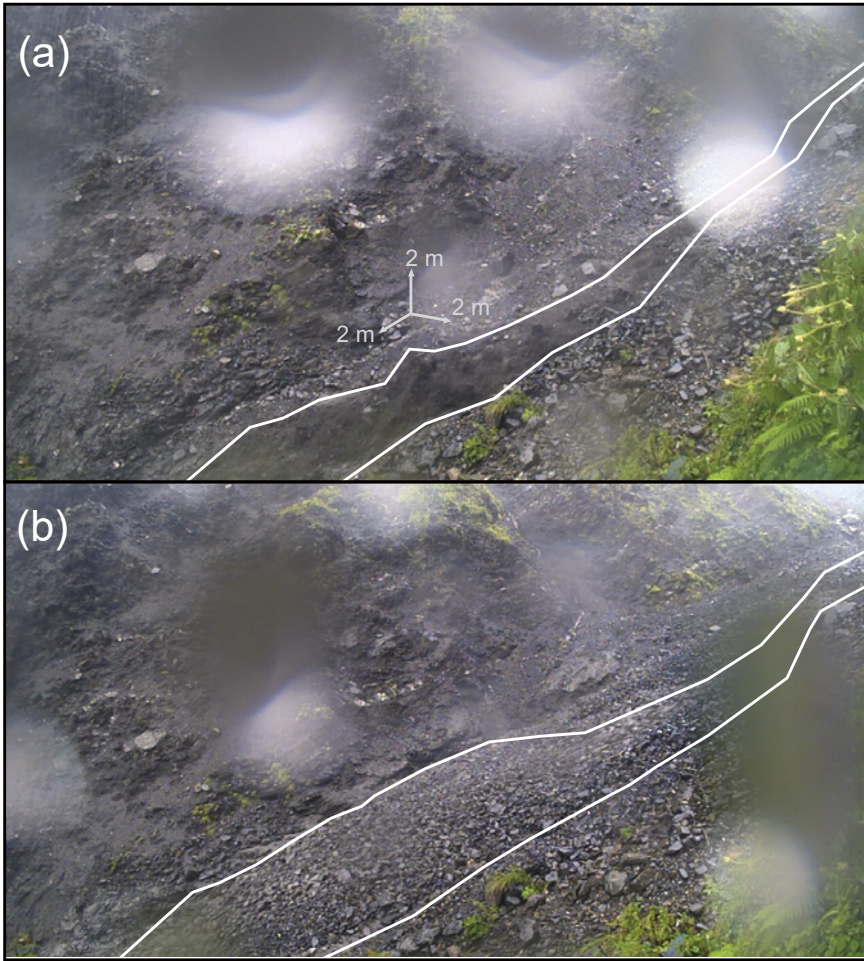

10  
Figure 3: Images of fully and partly saturated debris flows captured by a time-lapse camera (TLC) at plot P2 in Fig. 2. (a) Fully saturated debris flow captured 9 September 2015, 8:41 (LT). (b) Partly saturated debris flow captured at 9 September 2015, 7:43 (LT). Cobbles and boulders covers flow surface of the partly saturated debris flow (Imaizumi et al., 2016b).

## 4.2 Topographic Data Obtained by TLS

To clarify temporal changes in the micro channel bed topography associated with occurrence of debris flows, a TLS unit (GLS-1500 Topcon Co., Tokyo, Japan) was used to measure the topography of valley axis (Fig. 2) (Hayakawa et al., 2016). Based on the specifications, the maximum measurable distance of the TLS unit is 500 m (for target objects with a 90% reflectance), with accuracies of 6'' for angle and 4 mm for distance (at 150 m range). From November 2011, field measurements were undertaken in spring, summer, and autumn for 4 years (Table 1). For each measurement, the scanner was set at two positions and was correctly leveled with its internal tilt sensor (giving an angle accuracy of 6''). One was at the downstream side of the target area (P1 in Fig. 2), and the other at the upstream side of the target area (around point D in Fig. 2). The two point clouds measured from different scan positions were registered using at least five reference targets placed between the two scan positions with accuracies of 0.5–6 mm. The point spacing of cloud points ranged from 0.038 to 0.130 m (Table 1), thus the point densities ranged from 59.5 to 689.9 pts m<sup>-2</sup> (average 249.6 pts m<sup>-2</sup>). The geographic coordinates (Japan Plane Rectangular CS VIII, EPSG: 2450) of two targets, selected as georeference points, were measured with global navigation satellite system (GNSS) receivers (GeoXH 6000, Trimble, Sunnyvale, CA, USA or GRS-1, Topcon Co., Japan; accurate to a range of 10–63 mm in XY or Z). The baseline solution was calculated using data from GNSS base stations of GEONET, the Japanese GNSS network operated by the Geospatial Authority of Japan. The overall uncertainties of the point clouds, including scanning, registration, and georeferencing by GNSS, were considered in the order of centimeters to a decimeter (Hayakawa et al., 2016).

**Table 1: Date of TLS survey**


Year	Date of survey	Number of debris flow after previous scanning	Date of last debris flow event* <sup>1</sup>	Average point spacing of the cloud points (m)
2011	November 11	-	October 14	0.075
2012	May 14	0	-	0.077
	August 23	2	June 22	0.056
	November 21	3	September 30	0.038
2013	May 10	0	-	0.078
	August 16	0	-	0.040
	November 19	2	September 15	0.057
2014	May 16	0	-	0.094
	August 17	1	August 10	0.066
	November 28	2	October 5	0.085
2015	May 15	0	-	0.094
	August 23	4	August 17	0.083
	December 4	1	September 9	0.130

\*1 Date of the last debris flow event are not listed when debris flow had not occurred in the year, because the topography was possibly affected by the winter sediment supply rather than the last debris flow in the previous year.

After manually eliminating noise and unnecessary points, the point clouds obtained by the TLS measurement were converted into DEMs using a simple linear interpolation by triangulated irregular network (TIN) and resampling, because vegetation

cover was absent in the site. The resolution of the DEMs was set at 10 cm, which sufficiently covers the average point density of the point clouds. Areas with sparse point clouds (approximately  $<100$  point  $m^{-2}$ ), vegetated areas, and areas affected by the combination of various processes (e.g., talus slopes with the lower part eroded by stream flow) were excluded from the analyses.

The extent of typical geomorphic units in the TLS survey area, including three rock slopes, three talus slopes, and a channel around the monitoring plot P1, was mapped by field surveys (Fig. 4). Distribution of the slope gradient within these geomorphic units were calculated from TLS DEMs with various grid sizes. The mapping was conducted at the same time as each TLS survey because the area changed over time due to the sediment supply from outcrops and transportation of sediment by debris flows.

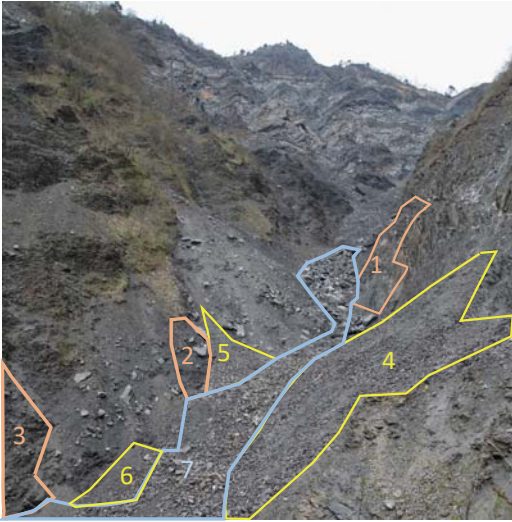

10 **Figure 4: Photograph of the typical geomorphic units seen from P1. The image shows the area of rock slopes (surrounded by red lines), talus slopes (surrounded by yellow lines), and a channel (surrounded by blue lines), for which the slope gradient was calculated from DEMs with various grid sizes. The numbering of the area corresponds to that used in Fig. 7.**

#### 4.3 Estimation of debris-flow volumes

We estimated the volume of storage from periodical photography and terrains obtained by airborne laser scanning (ALS) (Imaizumi et al., 2016a). Thirty-three cross-sectional areas of the storage were calculated from the bedrock topography along the cross-sectional lines, which was estimated from terrains by ALS in the periods when sediment storage was almost absent (i.e., in 2011 and 2012), and the location of both ends of the storage, which was interpreted on the photographs taken periodically at sites P1 and P4 (Fig. 2), under the assumption that surface topography of the storage was an inclined line connecting both ends of the storage. Total volume of the storage was calculated by sum of the cross-sectional area multiplied by the spacing of cross-sections (25 m). The root mean squared error (RMSE) of the procedure, which was obtained from comparison of the volumes of storage by the procedure and that by subtraction of ALS DEMs by estimated bedrock topography, was 5361  $m^3$  (Imaizumi et al., 2016a). This RMSE is larger than the volume of small debris flows ( $<2000$   $m^3$ ) but below the

sediment supply volume in each year ( $>10,000 \text{ m}^3$ ). This error may be similar or slightly larger than the errors in field surveys by Hungr et al. (2008), which estimated volume of the eroded sediment 17% apart from that of the deposited sediment.

## 5 Results

### 5.1 Debris flow monitoring

5 From 1998 to 2015, 59 debris flows, which went through or terminated in the reach between the sites P1 to P3, were observed by video cameras, field surveys, and water pressure sensors in the upper Ichinosawa catchment. In addition, the occurrence of some other debris flows, which terminated above site P1, were found by periodic photography and field surveys. We analyzed video images of seven flows that were clearly captured by video cameras. In addition, photographs of one debris flow taken by TLCs with an interval of 1 s was analysed (Table 2). We failed to obtain clear video images of other debris flows because  
10 of darkness at night and fog. Rainfall threshold for the occurrence of debris flow can be given by the 10-min rainfall intensity in the upper Ichinosawa catchment (Imaizumi et al., 2005). Comparison between duration of the rainfall event and the maximum 10-min rainfall intensity indicates that the rainfall threshold separating rainfall events with and without debris flows can be given by  $5.0 \text{ mm } 10\text{-min}^{-1}$  in case of rainfall duration  $\geq 10 \text{ h}$  (Fig. 5). In case of rainfall duration  $< 10 \text{ h}$ , the threshold can be obtained as a linear line in the double logarithmic plot (Fig. 5), as with that in other debris flow torrents (Coe et al.,  
15 2008; Badoux et al., 2008; Theule et al., 2012). Most of the rainfall events triggering debris flows in the study site can be classified into two groups: long-lasting rainfall events with high value of total rainfall depth, caused by typhoons and stationary fronts (rainfall duration  $> 5 \text{ h}$  and total rainfall depth  $> 50 \text{ mm}$ ), and short-duration convective rainfall events characterized by high intensity (rainfall duration  $< 5 \text{ h}$ , total rainfall depth  $< 50 \text{ mm}$ ; Table 2).

20 **Debris flow hydrographs obtained from video images show that debris flows are composed of many surges with duration of 20 s to 1 min (Fig. 6).** As noted above, two types of flow have been observed in the Ohya landslide: flow mainly composed of cobbles and boulders (partly saturated flow) and flow mainly composed of muddy water (fully saturated flow). The duration of each flow phase varied between the events. For example in the event of 5 August 2008, 88% of debris flow surges (percentage respect to the total event duration) was composed of partly saturated flow, while in the event of 30 August 2004 (Fig. 6), 90% in time of the phenomenon was composed of fully saturated flow. The proportional duration of the partly  
25 saturated debris flow in overall debris flow surges was generally high during convective rainfall events with high rainfall intensity and short rainfall duration (Fig. 5, Table 2). The proportional duration of the partly saturated debris flow also had a weak positive relationship with the volume of storage estimated from periodical photography ( $R^2 = 0.37$ ,  $p\text{-value} = 0.06$ ; Fig. 7).

**Table 2: Details of the rainfall and flow types examined using video camera and time-lapse camera (TLC) images during the debris flow events analyzed in this study.**

Date	Total rainfall (mm)	Maximum 10-min. rainfall intensity (mm/10min.)	Rainfall duration	Rainfall type	Type of camera	Location of camera	Proportional duration of partly saturated flow in overall debris flow surges
30 August 2004	281.5	7.5	55 h 37 min.	Typhoon	Video	P3	0.10 <sup>*a</sup>
19 July 2006	195.0	5.5	57 h 46 min.	Stationary front	Video	P2	0.65
6 September 2007	501.5	9.5	37 h 28 min.	Typhoon	Video	P2	0.49 <sup>*a</sup>
5 August 2008	41.0	13.5	4 h 55 min.	Convective	Video	P2	0.88
24 July 2010	21.0	13.0	51 min.	Convective	Video	P2	1.00
30 September 2012	86.0	6.5	7 h 29 min.	Typhoon	Video	P3	0.23 <sup>*a</sup>
6 August 2015	44.5	21.0	1 h 19 min.	Convective	Video	P1	0.99
9 September 2015	203.0	8.0	36 h 37 min.	Typhoon	TLC	P1	0.42

<sup>\*a</sup> Latter half of the debris flow event was not analyzed because of the darkness affected by the sunset. Therefore, latter half of the event is not included in this data.

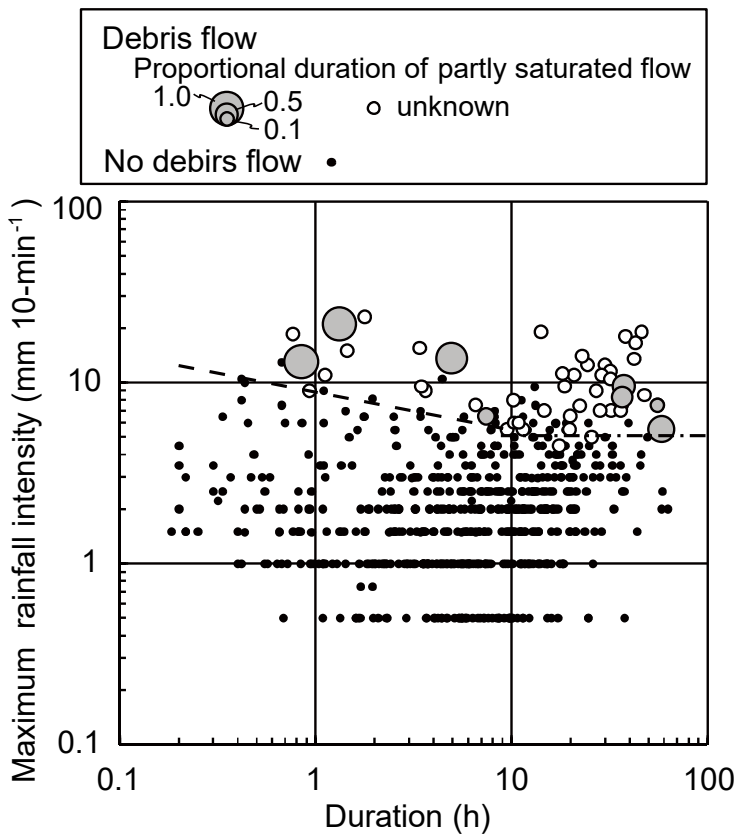


Figure 5: Comparison between rainfall duration and maximum 10-min rainfall intensity of rainfall events with total rainfall depth >2.0 mm and rainfall duration >10 min in the period from April 1998 to September 2015. Rainfall events with and without debris flows were potted using different markers. Size of the plot for debris flow events expresses proportional duration of partly saturated flow in overall debris flow surges. The rainfall intensity was calculated from rainfall data with a logging interval of 1 min. Rainfall events without 1-min interval data were not plotted. Dashed line, which can be expressed as  $\text{Intensity} = 8.86 (\text{Duration})^{-0.21}$ , indicates lower limit of the rainfall condition needed for occurrence of debris flows when rainfall duration < 10 hr. Dash-dot line indicates the maximum rainfall intensity equals to 5 mm per 10-min, which is the rainfall threshold for occurrence of debris flow when the rainfall duration  $\geq 10$  hr.

10

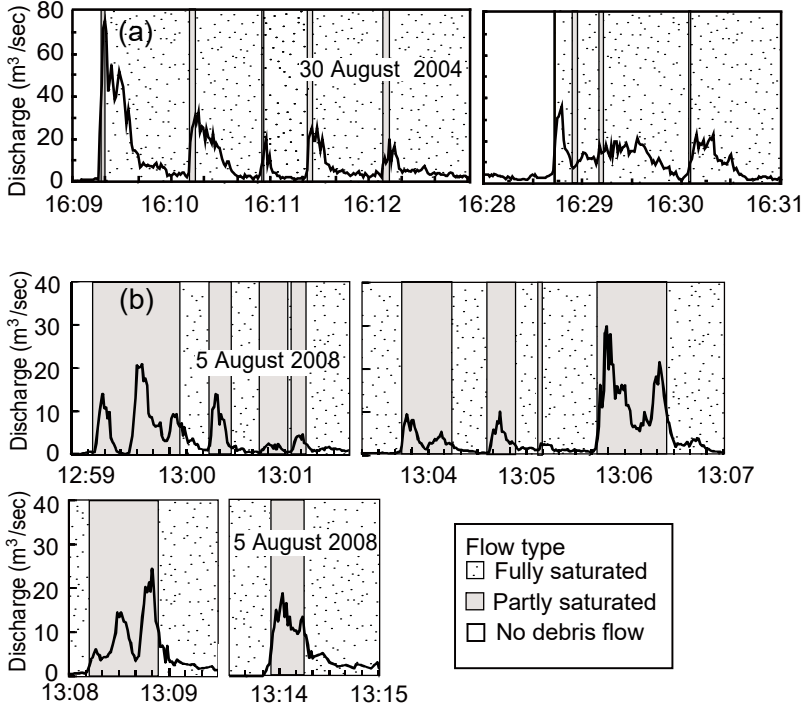


Figure 6: Hydrograph and the duration of each flow type during debris flow events. (a) Debris flow monitored at P3 on August 30, 2004, mainly consisting of fully saturated flow. (b) Debris flow monitored at P2 on August 5, 2008, mainly consisting of partly saturated flow.

15

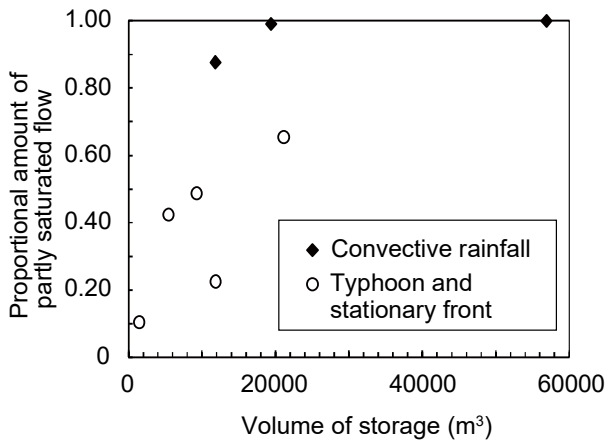


Figure 7: Comparison between the volume of storage and the duration of partly saturated flow as a proportion of the overall debris flow surges. Rainfall duration and total rainfall depth of the convective rainfall are <5 h, and <50 mm respectively, while those of typhoon and stationary fronts are >5 h, and >50 mm respectively.

## 5.2 Slope gradient of geomorphic units

Mapping of the three geomorphic units (rock slopes, talus slopes, and the channel) in the TLS survey area showed that the size of each unit changed with time due to sediment supply and transport processes. Slope gradient was calculated using 3x3 neighbourhood around each cell in the DEM with various grid size obtained by TLS (Horn, 1981; Fig. 8). Average and standard deviation of slope gradient in the three geomorphic units (rock slopes, talus slopes, and the channel) throughout the TLS monitoring period were calculated from DEMs with various grid size. As reported by previous studies (Loye et al., 2009), the average slope gradient of each geomorphic unit becomes gentler with an increase in the grid size, because small scale asperities of terrains (e.g., boulders) are smoothed when the grid size is larger (Fig. 9a). However, the relationship between grid size and slope gradient was slightly different among geomorphic units. For a grid size of  $\geq 1.0$  m, a histogram of the slope gradient in talus slopes was concentrated in a narrow range around the average value (i.e., >60% in the range between 34–40° for a grid size of 5.0 m; Fig. 9b). This slope angle is considered to represent  $\alpha_1$ , as reported in previous studies (Kirkby and Statham, 1975; Carson, 1977; Obanawa and Matsukura, 2008; Loye et al., 2009). The standard deviation of the slope gradient in the rock slope decreased with an increase in grid size when the grid size was smaller than the width of alternative strata in the study area (about 4.0 m; Imaizumi et al., 2015), and was almost constant when the grid size was larger than that. The standard deviation of the slope gradient in the channel also decreased with an increase in grid size when the grid size was smaller than 4.0 m, and was almost constant when the grid size was larger than 4.0 m. This inflection point of the trend (4.0 m) was the larger than the largest boulder size in the channel, changing with time from 1 to 2 m (Imaizumi et al., 2006; Imaizumi et al., 2016c).




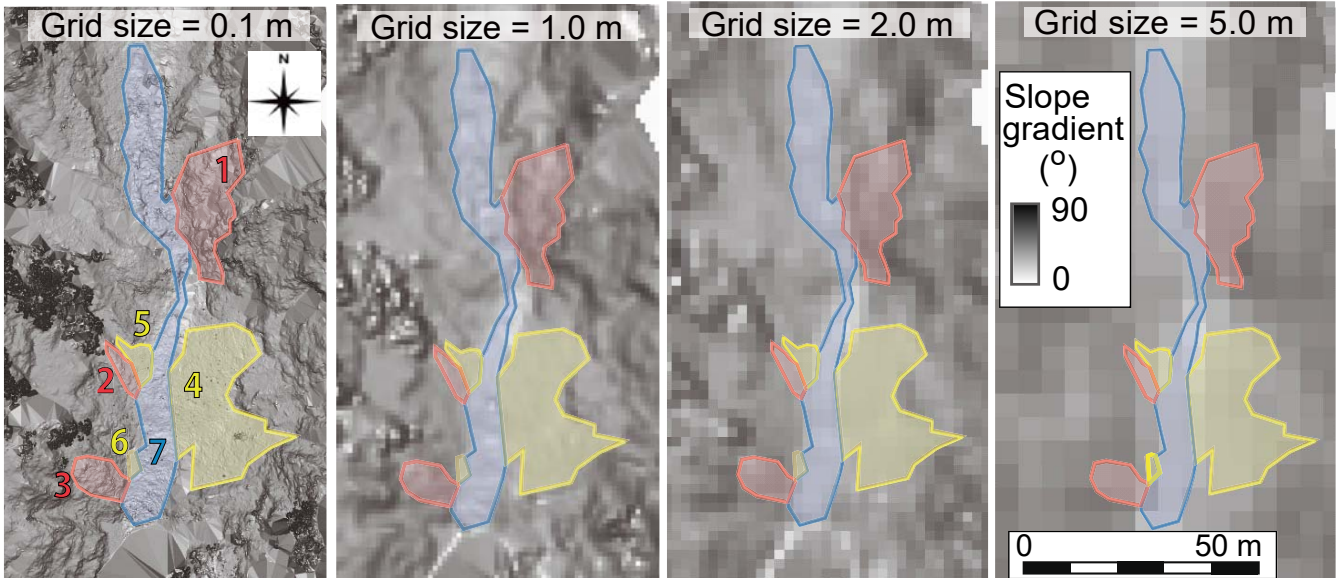


Figure 8: Slope gradient map calculated after using terrestrial laser scanning (TLS) data on 14 May 2014, with various grid sizes. The location of the analysis area is shown in Fig. 2. Areas colored red, yellow, and blue indicate rock slopes, talus slopes, and a channel, respectively

5

(a) Average slope gradient

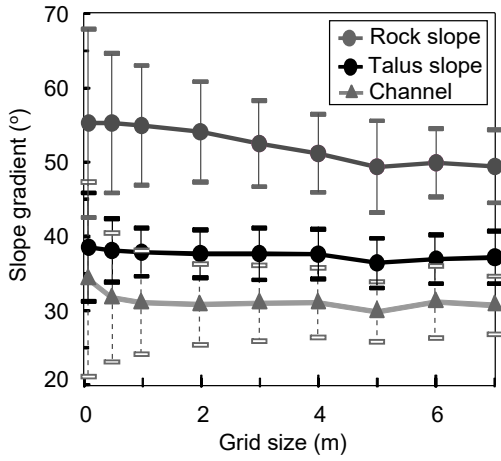

(b) Histogram

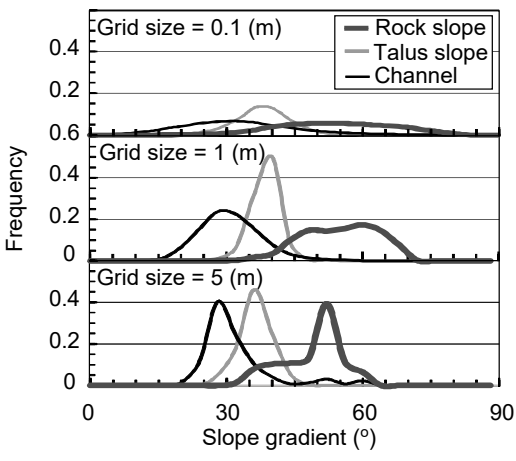


Figure 9: Slope gradient of typical geomorphic units calculated from terrestrial laser scanning (TLS) derived digital elevation maps (DEMs) with various grid sizes. Topographic data in all measurement periods were used in the statistical analysis. (a) Changes in the average slope gradient of each geomorphic unit with an increase in the grid size. The slope gradient in all periods was averaged. The bars attached to the plots indicate the range of the standard deviation. (b) Histogram of the slope gradient calculated from TLS DEMs, with grid sizes of 0.1, 1.0, and 5.0 m. Integrals of the frequency for each geomorphic unit in Fig. 8b, which are categorized with 2 degree step, are all 1.

10

### 5.3 Longitudinal channel topography

Longitudinal channel profiles obtained by the post-event surveys were analysed by GIS to find out the relationship between the debris flow type and channel gradient formed by the debris flow in the steep debris-flow initiation zone (Fig. 10). The longitudinal channel profile between points A and G (total length of 100 m; Fig. 2) on 21 November 2012 was mainly formed by a debris flow on 30 September 2012, which was dominated by fully saturated flow. In contrast, the channel topography on 23 August 2015, was mainly formed by a debris flow on 6 August 2015, which was dominated by partly saturated flow. A small debris flow on 17 August 2015, which transported storage with a volume of  $<3,000 \text{ m}^3$ , also affected a part of the channel topography measured on 23 August 2015; however, the affected area was limited (mostly a width of  $<5 \text{ m}$ ) because of its small discharge. Thus, we assumed that the longitudinal channel profile in the survey section on 23 August 2015 reflected characteristics of the debris flow on 6 August 2015, rather than that on 17 August 2015. Channel bed deformations over several meters, which were caused by sediment supply from hillslopes and erosion and deposition of sediment by debris flows, have been observed by the periodical TLS survey in the lowermost and uppermost reaches (from point A to B and from point E to F, respectively) (Hayakawa et al., 2016). In contrast, such channel bed deformations have not been observed in the middle reaches (from point C to D).

When we compared longitudinal channel profiles on 21 November 2012 and 23 August 2015, the channel bed level was clearly different ( $>3 \text{ m}$  in depth) at the lowermost and uppermost reaches (from point A to B and from point E to F, respectively). In contrast, there was almost no change in the longitudinal channel profile ( $<1 \text{ m}$ ) in the middle reaches. Regardless of the section length for analysis, the distribution of the channel gradient calculated on November 21, 2012 (mainly formed by fully saturated flow), was clearly wider than that on 23 August 2015 (mainly formed by partly saturated flow; Figs. 10b, 10c, 10d, Table 3a). The p-value obtained by an F-test of the difference in the dispersion of the channel gradient between the two periods was  $<0.001$ ,  $<0.001$  and  $0.065$  for each  $0.1$ ,  $1.0$  and  $5.0 \text{ m}$  section, respectively. Wide distribution of the slope gradient for each  $5.0 \text{ m}$  section on 21 November 2012 was mainly attributed to the step-pool topography formed by large boulders and the bedrock step-pool, while that for each  $1.0 \text{ m}$  section was attributed to such small-scale topographies together with the particle size of large boulders.

Such temporal changes in the channel gradient was more evident in the sections with clear changes in the channel bed topography (from point A to B and from point E to F) compared to those without clear changes in the channel bed topography (from point B to E and from point F to G) (Tables 3b, 3c). The cross-sectional topography in the reaches without active channel bed deformation was narrowed by the massive and steep rock cliffs at the left bank. High stream power attributed to the high flow depth in this section possibly restricted accumulation of the storage, resulting in inactive changes in the channel bed topography. The standard deviation of the channel gradient in the active channel bed deformation sections had a negative relationship with the volume of the storage (Fig. 11a). The p-values for the linear regressions with section lengths of  $0.1$ ,  $1.0$ , and  $5.0 \text{ m}$  were  $0.099$ ,  $0.026$ , and  $0.021$ , respectively. The average slope gradient in the section between A and E was not significantly different between the two periods ( $23.1^\circ$  and  $25.4^\circ$  for 21 November 2012, and 23 August 2015, respectively).

Periodic photography and field surveys after eight debris flows, which were successfully monitored by video cameras and TLCs, indicated that small-scale topography after debris flows mainly consisting of fully saturated flow are rugged compared to that after debris flows mainly consisting of partly saturated flow. This trend agrees with that observed by TLS surveys (Fig. 10, Table 3a).

5

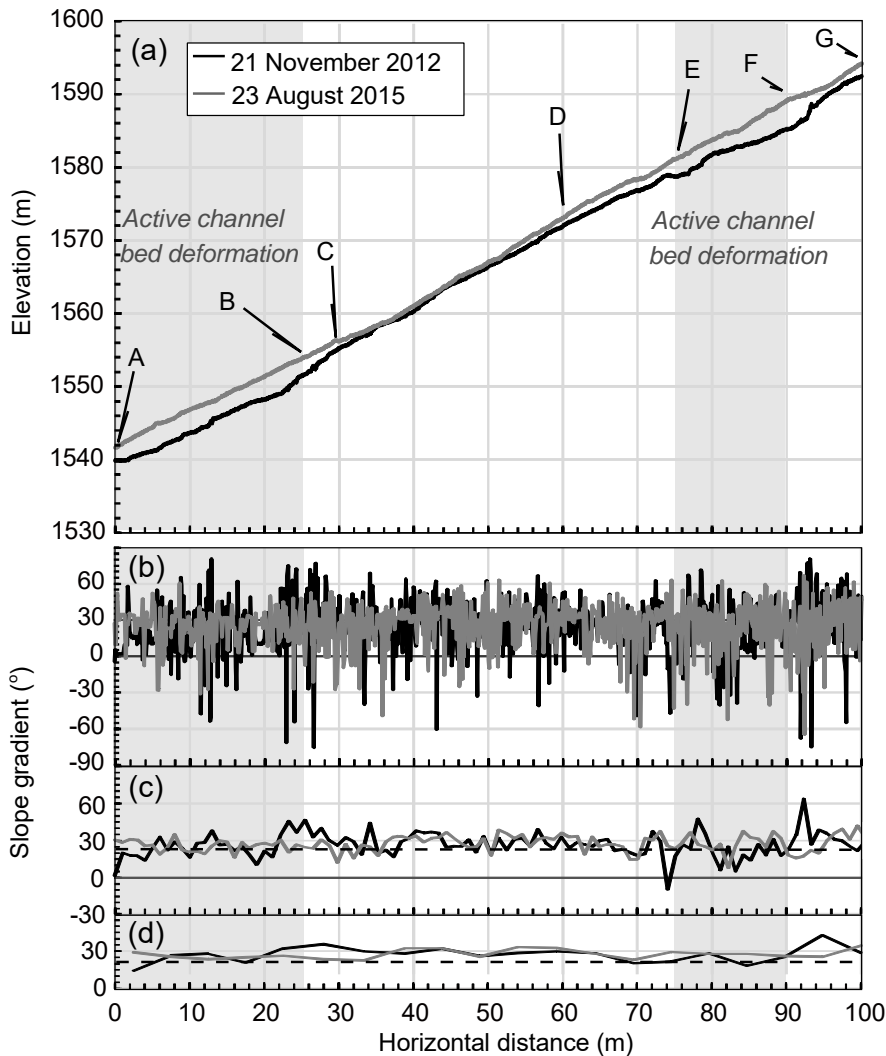


Figure 10: Longitudinal channel profiles and channel gradient mainly formed by fully saturated flow (measured on 21 November 2012 after the debris flow on 30 September 2012) and partly saturated flow (measured on 23 August 2015 after the debris flow on 6 August 2015), obtained from 0.1 m terrestrial laser scanning (TLS) derived digital elevation maps (DEMs). (a) Longitudinal channel profile in the section between A to E in Fig. 2. (b) Longitudinal changes in the channel gradient calculated for each section with a length of 0.1 m. (c) Longitudinal changes in the channel gradient calculated for each section with a length of 1.0 m. (d) Longitudinal changes in the channel gradient calculated for each section with a length of 5.0 m.

10

**Table 3 Standard deviation of the channel gradient and proportional amount of channel sections in which the gradient was in the range between  $\alpha_2$  and  $\alpha_1$  throughout the entire channel section.**

(a) Entire channel section between points A to G

Measurement date	Standard deviation of the channel gradient (°)			Proportion of all sections between $\alpha_1$ and $\alpha_2$		
	0.1 m interval	1.0 m interval	5.0 m interval	0.1 m interval	1.0 m interval	5.0 m interval
21 November 2012	23.7	10.3	5.8	0.31	0.52	0.80
23 August 2015	18.7	7.0	3.7	0.38	0.73	0.95

(b) Sections with active channel bed deformation (from point A to B and from point E to F).

Measurement date	Standard deviation of the channel gradient (°)			Proportion of all sections between $\alpha_1$ and $\alpha_2$		
	0.1 m interval	1.0 m interval	5.0 m interval	0.1 m interval	1.0 m interval	5.0 m interval
21 November 2012	27.0	11.4	6.3	0.30	0.38	0.44
23 August 2015	17.9	7.2	3.4	0.48	0.71	0.89

(c) Sections without active channel bed deformation (from point B to E and from point F to G).

Measurement date	Standard deviation of the channel gradient (°)			Proportion of all sections between $\alpha_1$ and $\alpha_2$		
	0.1 m interval	1.0 m interval	5.0 m interval	0.1 m interval	1.0 m interval	5.0 m interval
21 November 2012	20.9	8.6	5.1	0.34	0.61	0.90
23 August 2015	18.8	6.5	3.5	0.33	0.76	1.00

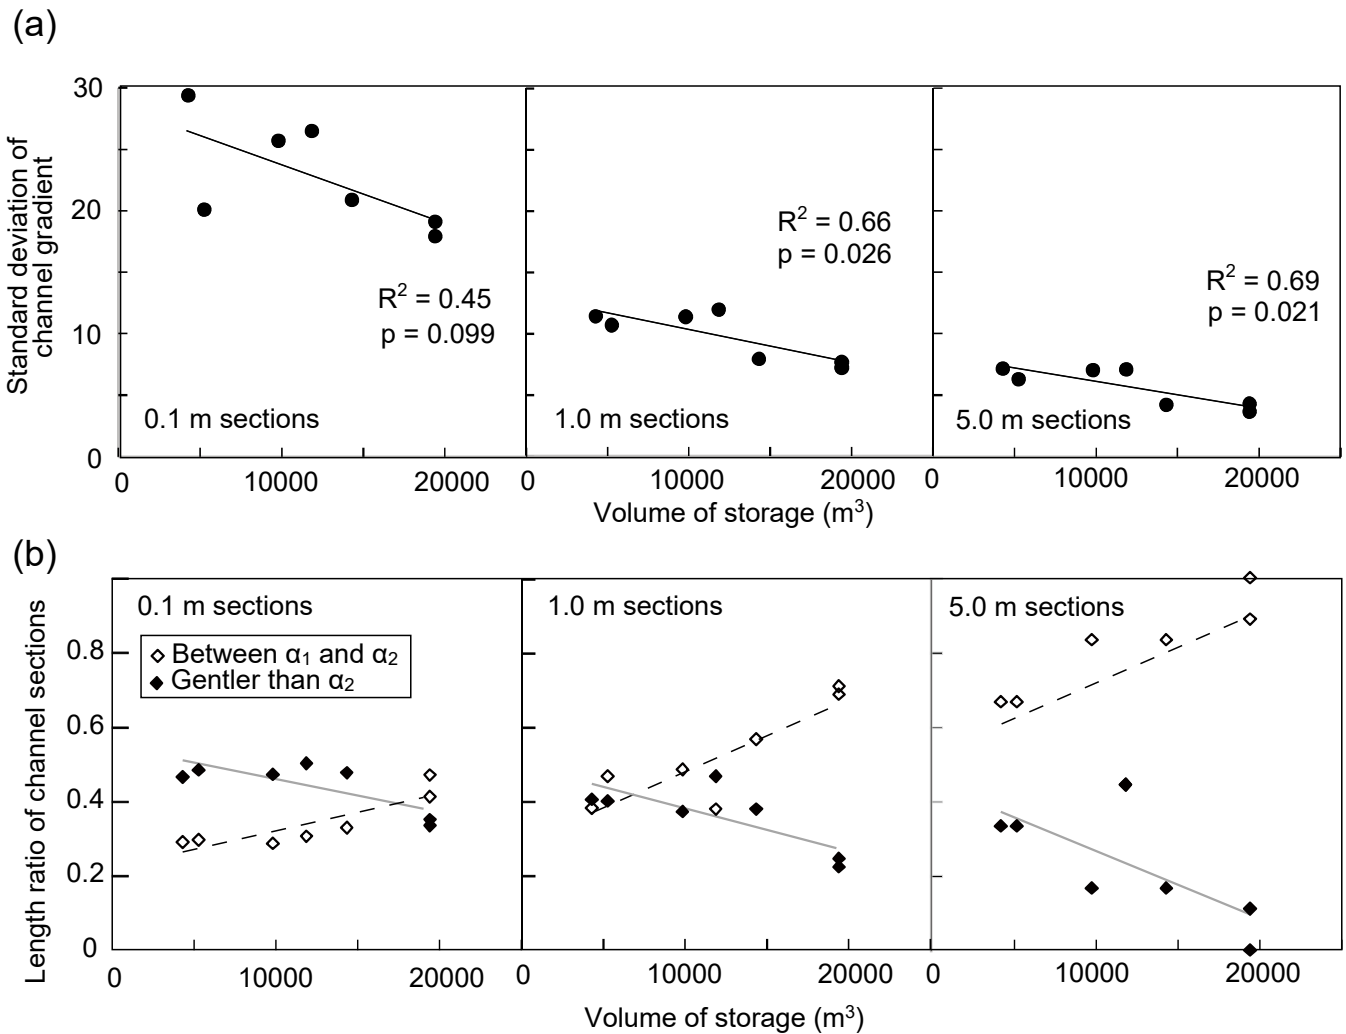


Figure 11: Comparison between the volume of storage and channel topography. (a) Comparison of the volume of storage with the standard deviation of the channel gradient for each 0.1, 1.0, and 5.0 m section in the active channel bed deformation zones (from point A to B and from point E to F). (b) Comparison of the volume of storage with the length ratio of the channel sections, in which the channel gradient ranged between  $\alpha_1$  and  $\alpha_2$  (theoretical channel gradient for partly saturated debris flow) and gentler than  $\alpha_2$  (theoretical channel gradient for fully saturated debris flow), in the active channel bed deformation zones. Topographic data before the first debris flow in each year were excluded from the analyses, because the channel gradient was possibly affected by the sediment supply from hillslopes, as well as the last debris flow of the previous year. The topography on August 17, 2014, was also excluded from the analysis because we failed to measure topography by terrestrial laser scanning (TLS) in the upper part of the active channel bed deformation zones because of fog. Linear regression lines for each relationship are also shown in the figure.

- 10 As noted above, the theoretical channel gradient dividing partly and fully saturated debris flows ( $\alpha_2$ ) can be obtained from Eq. (5). Because the dispersion of boulders in the partly saturated debris flows was not evident in video images, porosity (ratio of liquid and vapor phases, to be exact) in the partly saturated flow may not be higher than that in the saturated channel deposits. By assuming  $\phi = 37.3^\circ$  (average slope gradient of the talus slope for a grid size = 1.0 to 7.0 m),  $n = 0.3$  (same as the porosity of channel deposits),  $\gamma_s = 26000$ , and  $\gamma_w = 9800$ , the  $\alpha_2$  in the Ohya landslide was  $22.2^\circ$ . In order to validate if Eq. (3) is

applicable to the monitoring result, the proportional amount of channel sections in which the gradient was in the range between  $\alpha_2$  and  $\alpha_1$  (theoretical channel gradient for partly saturated flow) in the active channel deformation sections (total 40 m) was calculated (Table 3b, Fig. 11b). Based on Eq. (4), we approximate  $\phi$  ( $37.3^\circ$ ) as  $\alpha_1$  (theoretical slope gradient dividing fully unsaturated and partly saturated sediment transports). The proportional amount of channel sections between  $\alpha_2$  and  $\alpha_1$  on 23 August 2015 (after mainly formed by partly saturated flow) was higher than on 21 November 2012 (after mainly formed by fully saturated flow), regardless of the interval of channel section for the analyses (Table 3b). The proportional amount of channel sections between  $\alpha_2$  and  $\alpha_1$  was higher when the volume of storage was large (Fig. 11b). In contrast, the proportional amount of channel sections gentler than  $\alpha_2$  (theoretical channel gradient for fully saturated flow) decreased with an increase in the volume of sediment storage.

## 6. Discussion

### 6.1 Factors controlling the debris flow type

In contrast to debris-flow transportation zones in other torrents, in which partly saturated flow dominates just at the front of surges (McArdell et al., 2007; McCoy et al., 2010; Okano et al., 2012), our observations in the debris flow initiation zone of the upper Ichinosawa showed that debris flow surges were sometimes mainly composed of partly saturated flow (Table 2). Many sections in the upper Ichinosawa catchment are greater than  $22.2^\circ$  (Fig. 10), which is the theoretical channel gradient needed for occurrence of a partly saturated debris flow ( $\alpha_2$ ) in the Ichinosawa catchment. Although the  $\alpha_2$  is different among torrents affected by soil parameters such as the internal angle of friction, debris flow initiation zones in other torrents, which are generally greater than  $22.2^\circ$  (e.g., VanDine 1985; McCoy et al., 2012), possibly satisfy the conditions for the occurrence of partly saturated flow.

The proportional duration of partly saturated flow in the overall surges had a weak positive relationship with the volume of storage (Fig. 7). It indicates that the volume of storage was a factor controlling not only the initiation of the debris flow, particularly in the supply limited basin (Bovis and Jakob, 1999; Jakob et al., 2005), but also the debris flow characteristics. The water content in the storage, which is considered an important factor controlling flow characteristics (Takahashi, 1991; Hürlimann et al., 2015), may affect such relationships. When a large volume of storage is present in a basin, a large amount of water is needed for saturation of the storage, which can be difficult to attain. In such cases, even if the sediment mass that initially moved in the channel was saturated, storage along the channel eroded by the debris flow would not be fully saturated when the channel gradient  $>\alpha_2$ . Consequently, partly saturated flow can easily dominate when a large volume of storage accumulates in the channel. Such erosion of unsaturated sediment has also been reported in other channels (Berger et al., 2011b; McCoy et al., 2012). In contrast, storage can be easily saturated by smaller amounts of rainfall when there is only a small volume of storage in the basin. In such cases, even when debris flows were not fully saturated in their initial stages, as they traveled downstream they possibly became saturated by the water supply from tributaries as well as the erosion of saturated deposits.

Our monitoring results also revealed that the proportional duration of partly saturated flow in a debris flow event was low during long-lasting rainfall events (e.g., typhoons and stationary fronts), while the duration was high during short-lasting rainfall events (e.g., convective rainfall; Table 2, Fig. 5). The relationships between rainfall patterns and flow types have also been reported in other debris flow basins (Okano et al., 2012; Kean et al., 2013; Hürlimann et al., 2014). Okano et al. (2012) reported that the front of a surge in the transportation zone was completely saturated when rainfall intensity over a long duration (24 h) was high, while partly saturated flow occurred at the front of surges during short-term, intense rainfall events. Such rainfall patterns may relate debris flow type by affecting water contents in the storage together with volume of storage. Previous study reported changes in the flow characteristics during a debris flow event associated with the sediment supply from hillslopes (Staley et al., 2014; Zhou et al., 2015), possibly because of the increasing in the amount of sediment relative to the water in channels.

## 6.2 Influence of the sediment transport type on the slope gradient of terrains


The value of topographic indexes (e.g., slope gradient) are variable depending on the scale of the window size used in the GIS analyses, because factors affecting the indexes are different among the scales of topography (Schmidt and Andrew, 2005; Loye et al., 2009; Pirotti and Tarolli, 2010; Drăguț and Eisank, 2011). Histogram for the talus slope was steep when grid size was  $\geq 1.0$  m, which was larger than the maximum grain size of boulders on talus slopes (0.5 m, Fig. 9). Histogram for the channel with grid size of 5.0 m was steeper and higher than that with grid size of 1.0 m, possibly affected by the size of the largest boulders in the channel, changing from 1 to 2 m associated with the sediment supply from hillslopes and sediment transport by debris flows (Imaizumi et al., 2006; Imaizumi et al., 2016c). Thus, when we analyse relationship between the type of sediment transport and the slope gradient of terrains, window size larger than the particle size, which can eliminate roughness attributed to the particle size, would be appropriate, because the particle size is considered to be not directly affected by the sediment transport type.

A large part of the histogram of the rock slopes was steeper than  $40^\circ$  for a grid size of  $>4.0$  m (e.g., 80% of the slope-gradient histogram for a grid size of 5.0 m; Fig. 9b), indicating that fully unsaturated sediment transport, which occurs on slopes steeper than  $\alpha_1$  (Eq. (4)), is dominant on rock slopes. In contrast, most of the channel was gentler than  $\alpha_1$  for a grid size of  $>4.0$  m (e.g.,  $>85\%$  of the slope-gradient histogram for a grid size of 5.0 m; Fig. 9b), indicating that fully and partly saturated debris flows are dominant in the channel. Such a trend was also apparent in the longitudinal channel profile of the channel (Fig. 10b). Based on the statistics of the channel gradient for each 5.0 m channel section, the sum of the length ratio of the channel sections in the theoretical range of fully and partly saturated debris flows (between  $\alpha_1$  and  $\alpha_2$ ) in the active channel bed deformation zones was almost 1.0.

The longitudinal channel gradient changed with time and was affected by the predominant type of flow during the preceding debris flow events (Fig. 10). The proportional amount of channel sections between  $\alpha_1$  and  $\alpha_2$  (theoretical range of the channel gradient for partly saturated debris flow) among all active channel deformation sections was higher when a larger volume of storage was present in the catchment (Fig. 11b). Because partly saturated flow dominated when a large volume of storage was

present in the catchment (Fig. 7), partly saturated debris flow likely formed channel topographies with a theoretical channel gradient for the partly saturated flow (Fig. 12). Similarly, the length of the channel sections in the theoretical range for fully saturated flow ( $<\alpha_2$ ) was high when small amounts of storage accumulated in the channel (Fig. 11b), during periods when fully saturated flow dominated (Fig. 7). Thus, fully saturated flow tended to form channel sections gentler than  $\alpha_2$  (Fig. 12). The standard deviation of the channel gradient after a debris flow mainly consisting of fully saturated flow was higher than that after a debris flow mainly consisting of partly saturated flow (Fig. 9, Table 3). In addition, the standard deviation of the channel gradient was high when small volumes of storage accumulated in the basin (Fig. 11a), implying that fully saturated flow tended to form a step-pool topography. As a result of field surveys and periodic topography, step-pool topography formed by large boulders and the bedrock was generally seen after fully saturated flows. Since temporal changes in the channel gradient were not apparent in the larger-scale topography (i.e., channel gradient for entire sections with an active channel bed deformation), the decrease in the channel gradient due to fully saturated flow does not likely occur throughout the channel but was occasionally interrupted by steep sections formed by large boulders and bed rock, which cannot be eroded easily (Fig. 12).

Because we did not consider the dynamic mechanisms of the debris flow, including the collision of particles and the dynamic pressure of interstitial water (Coussot and Meunier, 1999; Takahashi, 2014), our analysis could not discuss unsteady nature of debris flows, such as temporal changes in the flow type during a debris flow event. In addition, temporary appearance of the unsaturated (or extremely dense) debris flows in gentler torrents does not agree with our analysis of static force (McArdell et al., 2007; McCoy et al., 2013; Okano et al., 2012). Depth profile of the dynamic force affected by the slope gradient and the particle size relative to the flow depth should be considered to complete explanation of such dense debris flows (Takahashi, 2007; Lanzoni et al., 2017). Nevertheless, our analysis results suggested that rough relationships between the predominant types of sediment transport and the slope gradient exist in the debris flow initiation zone.

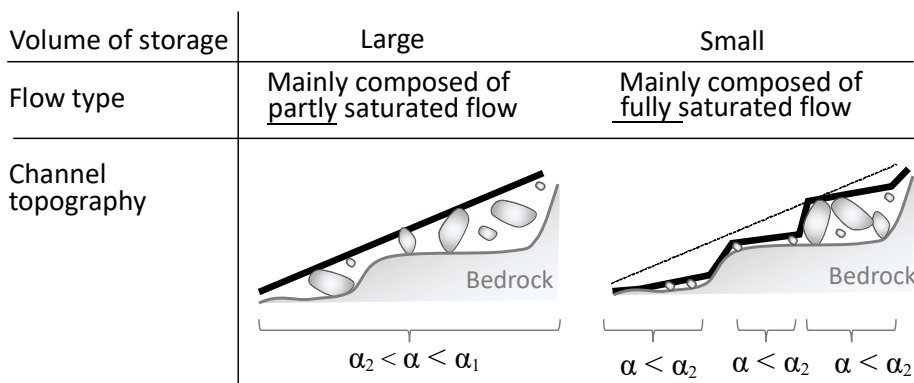

**Figure 12: Schematic diagram of the relationships between the volume of storage, flow type, and channel topography.  $\alpha$  is the channel gradient,  $\alpha_1$  is the theoretical boundary of the channel gradient between fully unsaturated and partly saturated sediment transport, and  $\alpha_2$  is the theoretical boundary of the channel gradient between partly and fully saturated sediment transport.**



## 7 Summary and conclusion

We investigated the **relationship** between flow type (partly and fully saturated flows) and accumulation conditions of sediment storage (i.e., channel gradient and volume of storage) in the debris flow initiation zone at the Ohya landslide, Japan, using various methods, including a physical analysis of static force, field monitoring, periodical TLS surveys, and an estimation of the volume of storage using GIS. Our study revealed that both partly and fully saturated debris flows are important hydrogeomorphic processes in the initiation zone because of the steep terrain. The predominant type of flow is affected by the volume of storage as well as rainfall patterns, which control the amount of water in the storage. For example, fully saturated flow dominated when total volume of storage  $< 10,000 \text{ m}^3$ , while partly saturated dominated when total of the storage  $> 15,000 \text{ m}^3$ . In addition, small-scale channel gradients (on the order of meters) formed by erosion and deposition reflected the dominant flow type in the debris flow events. A large part of the channel sections after partly saturated debris flows were steeper than  $22.2^\circ$ , while fully saturated debris flows tended to formed channel sections gentler than  $22.2^\circ$ . Such relationship between flow type and channel gradient could be explained by a simple analysis of static force at the bottom of the sediment mass.

Our study implies that the volume of storage and the rainfall patterns, which control predominant debris flow type classified by the ratio of the depth of the saturated zone, are potential information to improve debris-flow warning system, since the flow characteristics (e.g., sediment concentration, velocity) is different among debris flow types. In addition, our study elucidated that the slope gradient of geomorphic units is the key factor in the estimation of predominant type of the sediment transport processes in the Ohya landslide, where stony debris flows occur due to the mobilization of storage laid on the steep channel. Therefore periodical measurement of the topography in debris flow initiation zones is considered to be essential for the better risk assessment of debris-flow hazards. Because the initiation mechanism of the debris flow and the important force inside of the flow (e.g., frictional force, grain collision) varies affected by the site conditions (e.g., grain size of material, slope gradient), monitoring data in other debris flow torrents are needed for the further understanding of **relationship** between the debris flow type and the accumulation conditions of storage.

## Acknowledgement

This study was supported by JSPS Grant Numbers 25702014, 26292077, and 26282076. Airborne DEM was provided by Shizuoka River Office, Chubu Regional Bureau, Ministry of Land, Infrastructure, Transport and Tourism, Japan. We thank Hitoshi Saito for his comments improving structure of the manuscript. We are grateful to Carlo Gregoretti and, Michel Jaboyedoff, and an anonymous reviewer, who provided critical reviews that improved our paper. Editor Paolo Tarolli are thanked for his efforts on handling the manuscript.

## References

- Arattano, M.: On the use of seismic detectors as monitoring and warning system for debris flows, *Nat. Hazards*, 20, 197–213, 1999.
- Arattano, M., Marchi, L., and Cavalli, M.: Analysis of debris-flow recordings in an instrumented basin: confirmations and new findings, *Nat. Hazards Earth Syst. Sci*, 12, 679–686, 2012.
- Badoux, A., Graf, C., Ryhner, J., Kuntner, R., and McArdell, B.W.: A debris-flow alarm system for the Alpine Illgraben catchment: design and performance, *Nat. Hazards*, 49, 517–539, 2008.
- Berger, C., McArdell, B. W., and Schlunegger, F.: Sediment transfer patterns at the Illgraben catchment, Switzerland: Implications for the time scales of debris flow activities, *Geomorphology*, 125, 421–432, 2011a.
- 10 Berger, C., McArdell, B. W., and Schlunegger, F.: Direct measurement of channel erosion by debris flows, Illgraben, Switzerland. *J. Geophys. Res*, 116, F01002, 2011b, doi:10.1029/2010JF001722
- Berti, M., Genevois, R., Simoni, A., and Tecca, P. R.: Field observations of a debris flow event in the Dolomites, *Geomorphology*, 29, 265–274, 1999.
- Bovis M. J., and Jakob, M.: The roll of debris supply conditions in predicting debris flow activity, *Earth Surf. Process. Landf.*, 15 24, 1039–1054, 1999.
- Carson, M. A.: Angle of repose, angle of shearing resistance and angle of talus slopes, *Earth Surf. Process.*, 2, 368–380, 1977.
- Chen, H. X., Zhang, L. M., Chang, D. S., and Zhang, S.: Mechanisms and runout characteristics of the rainfall triggered debris flow in Xiaojiagou in Sichuan Province, China, *Nat. Hazards*, 62, 1037–1057, 2012.
- Coe J. A., Kinner D. A., and Godt J. W.: Initiation conditions for debris flows generated by runoff at Chalk Cliffs, central Colorado, *Geomorphology*, 96, 270–297, 2008.
- 20 Coussot, P., and Meunier, M.: Recognition, classification and mechanical description of debris flows, *Earth-Sci. Rev.*, 40, 209–227, 1996.
- Cui, P., Hu, K., Zhuang, J., Yang, Y., and Zhang, J.: Prediction of debris-flow danger area by combining hydrological and inundation simulation methods, *J. Moun. Sci.*, 8, 1–9, 2011, doi: 10.1007/s11629-011-2040-8
- 25 Degetto, M., Gregoretto, C., and Bernard M.: Comparative analysis of the differences between using LiDAR contour-based DEMs for hydrological modeling of runoff generating debris flows in the Dolomites, *Front. Earth Sci.*, 3, 21, 2015, doi:10.3389/feart.2015.00021
- Dorren, L. K. A.: A review of rockfall mechanics and modelling approaches, *Prog. Phys. Geogr.* 27, 1, 69–87, 2003.
- Drăguț L., and Eisank, C.: Object representations at multiple scales from digital elevation models, *Geomorphology*, 129, 183–30 189, 2011.
- Egashira, S., Itoh, T. and Takeuchi, H.: Transition mechanism of debris flows over rigid bed to over erodible bed, *Phys. Chem. Earth, Part B: Hydrology, Oceans and Atmosphere*, 26, 169–174, 2001, doi:10.1016/S1464-1909(00)00235-5
- Gabet E. J.: Sediment transport by dry ravel, *J. Geophys. Res.*, 108(B1), 2049, 2003, doi: 10.1029/2001JB001686

- Gregoretto, C., and Dalla Fontana, D.: The triggering of debris flow due to channel-bed failure in some alpine headwater basins of the Dolomites: analyses of critical runoff, *Hydrol. Process.*, 22, 2248–2263, 2008, doi: 10.1002/hyp.6821
- Hayakawa Y., Imaizumi, F., Hotta, N., and Tsunetaka, H.: Towards Long-Lasting Disaster Mitigation Following a Mega-landslide: High-Definition Topographic Measurements of Sediment Production by Debris Flows in a Steep Headwater Channel, In *Geomorphology and Society*, Springer, 2016.
- Horn, B. K. P.: Hill shading and the reflectance map, *Proc. IEEE*, 69(1), 14–47, doi:10.1109/PROC.1981.11918, 1981.
- Hu, K., Wei, F., and Li, Y.: Real-time measurement and preliminary analysis of debris-flow impact force at Jiangjia Ravine, China, *Earth Surf. Process. Landf.*, 36, 1268–1278, 2011.
- Hungr, O.: Classification and terminology, In *Debris-flow Hazards and Related Phenomena*, Praxis, Springer, Berlin Heidelberg, 106–134, 2005.
- Hunger, O., McDougall, S., Wise, M., and Cullen, M.: Magnitude–frequency relationships of debris flows and debris avalanches in relation to slope relief, *Geomorphology*, 96, 355–365, 2008.
- Hürlimann, M., Abancó, C., Moya, J., and Vilajosana, I.: Results and experiences gathered at the Rebaixader debris-flow monitoring site, Central Pyrenees, Spain, *Landslides*, 11, 939–953, 2014. doi: 10.1007/s10346-013-0452-y
- Hürlimann, M., McArdell, B. W., and Rickli, C.: Field and laboratory analysis of the runout characteristics of hillslope debris flows in Switzerland, *Geomorphology*, 232, 20–32, 2015. doi:10.1016/j.geomorph.2014.11.030
- Imaizumi, F., Tsuchiya, S., and Ohsaka, O.: Behaviour of debris flows located in a mountainous torrent on the Ohya landslide, Japan, *Can. Geotech. J.*, 42, 919–931, 2005.
- Imaizumi, F., Sidle, R. C., Tsuchiya, S., and Ohsaka, O.: Hydrogeomorphic processes in a steep debris flow initiation zone, *Geophys. Res. Lett.*, 33, L10404, 2006.
- Imaizumi, F., Nishii, R., Murakami, W., and Daimaru, H.: Parallel retreat of rock slopes underlain by alternation of strata, *Geomorphology*, 238, 27–36, 2015.
- Imaizumi, F., Trappman, D., Matsuoka, N., Tsuchiya, S., Ohsaka, O. and Stoffel, M.: Biographical sketch of a giant: deciphering recent debris-flow dynamics from Ohya landslide body (Japanese Alps), *Geomorphology*, 272, 102–114, 2016a, <http://dx.doi.org/10.1016/j.geomorph.2015.11.008>
- Imaizumi, F., Tsuchiya, S., and Ohsaka, O.: Behavior of boulders within a debris flow initiation zone, *Int. J. Erosion Control Eng.*, 9(3), 91-100, 2016b, doi:<http://doi.org/10.13101/ijece.9.91>
- Imaizumi F., Tsuchiya, S., and Ohsaka, O.: Field observations of debris-flow initiation processes on sediment deposits in a previous deep-seated landslide site, *J. Mount. Sci.*, 13, 213–222, 2016c, doi: 10.1007/s11629-015-3345-9
- Jakob, M., Bovis, M., and Oden, M.: The significance of channel recharge rates for estimating debris-flow magnitude and frequency, *Earth Surf. Process. Landf.*, 30, 755–766, 2005.
- Kean, J. W., McCoy, S. W., Tucker, G. E., Staley, D. M., and Coe, J. A.: Runoff-generated debris flows: Observations and modeling of surge initiation, magnitude, and frequency, *J. Geophys. Res.*, 18, 2190–2207, 2013, doi:10.1002/jgrf.20148

- Kirkby, M. J., and Statham, I.: Surface stone movement and scree formation, *J. Geology*, 83, 349–362, 1975.
- Lanzoni, S. Gregoretto, C., Stancanelli, L. M.: Coarse-grained debris flow dynamics on erodible beds, *J. Geophys. Res.*, printing, 2017.
- Lin, P. S., Lin, J. Y., Hung, J. C., and Yang, M. D.: Assessing debris-flow hazard in a watershed in Taiwan, *Eng. Geol.*, 66, 295–313, 2002, doi: 10.1016/S0013-7952(02)00105-9
- Loye, L., Jaboyedoff, M., and Pedrazzini, A.: Identification of potential rockfall source areas at a regional scale using a DEM-based geomorphometric analysis, *Nat. Hazards Earth Syst. Sci.*, 9, 1643–1653, 2009.
- March, L., Arattano, M., and Deganutti, A. M.: Ten years of debris-flow monitoring in the Morcardo Torrent (Italian Alps), *Geomorphology*, 46, 1–17, 2002.
- Mangeny, A., Bouchut, F., Thomas, N., Vilotte, J. P., and Bristeau, M. O.: Numerical modeling of self-channeling granular flows and of their levee-channel deposits, *J. Geophys. Res.*, 112, F02017, 2007, doi:10.1029/2006JF000469
- McArdell, B. W., Bartelt, P., and Kowalski, J.: Field observations of basal forces and fluid pore pressure in a debris flow, *Geophys. Res. Lett.*, 34, L07406, 2007, doi:10.1029/2006GL029183
- McCoy, S. W., Kean, J. W., Coe, J. A., Staley, D. M., Wasklewicz, T. A., and Tucker, G. E.: Evolution of a natural debris flow: In situ measurements of flow dynamics, video imagery, and terrestrial laser scanning, *Geology*, 38, 735–738, 2010.
- McCoy, S. W., Kean, J. W., Coe, J. A., Tucker, G. E., Staley, D. M., and Wasklewicz, T. A.: Sediment entrainment by debris flows: In situ measurements from the headwaters of a steep catchment, *J. Geophys. Res.*, 117, F03016, 2012, doi:10.1029/2011JF002278
- McCoy, S. W., Tucker, G. E., Kean, J. W., and Coe, J. A.: Field measurement of basal forces generated by erosive debris flows, *J. Geophys. Res.*, 118, 589–602, 2013, doi:10.1002/jgrf.20041.
- Obanawa, H., Matsukura, Y.: Cliff retreat and talus development at the caldera wall of Mount St. Helens: Computer simulation using a mathematical model, *Geomorphology*, 97, 697–711, 2008.
- Okano, K., Suwa, H., and Kanno T.: Characterization of debris flows by rainstorm condition at a torrent on the Mount Yakedake volcano, Japan, *Geomorphology*, 136, 88–94, 2012.
- Pareschi, M. T., Santacroce, R., Sulpizio, R., and Zanchetta, G.: Volcaniclastic debris flows in the Clanio Vally (Campania, Italy): insights for the assessment of hazard potential, *Geomorphology*, 43, 219–231, 2002.
- Pirotti, F., and Tarolli, P.: Suitability of LiDAR point density and derived landform curvature maps for channel network extraction, *Hydrol. Process.*, 24, 1187 – 1197, 2010, doi: 10.1002/hyp.7582
- Prancevic, J. P., Lamb, M. P., and Fuller, B. M.: Incipient sediment motion across the river to debris-flow transition, *Geology*, 41, 191-194, 2014, doi:10.1130/G34927.1
- Schlunegger, F., Badoux, A., McArdell, B. W., Gwerder, C., Schnydrig, D., Rieke-Zapp, D., and Molnar, P.: Limits of sediment transfer in an alpine debris-flow catchment, Illgraben, Switzerland, *Quat. Sci. Rev.*, 28, 1097–1105, 2009.
- Schmidt, J., and Andrew, R.: Multi-scale landform characterization, *Area*, 37.3, 341–350, 2005.

- Staley, D. N., Wasklewicz, T. A., and Blaszczyński, J. S.: Surficial patterns of debris flow deposition on alluvial fans in Death Valley, CA using airborne laser swath mapping data, *Geomorphology*, 74, 152–163, 2006.
- Staley, D. N., Wasklewicz, T. A., and Kean, J. W.: Characterizing the primary material sources and dominant erosional processes for post-fire debris-flow initiation in a headwater basin using multi-temporal terrestrial laser scanning data, *Geomorphology*, 214, 324–338, 2014, doi: j.geomorph.2014.02.015
- 5 Takahashi, T.: An occurrence mechanism of mud-debris flows, and their characteristics in motion. *Annals, DPRI*, 23B2, 405–435 (in Japanese), 1977.
- Takahashi, T.: Mechanical characteristics of debris flow, *J. Hydraul. Div., ASCE*, 104 (8), 1153–1169, 1978.**
- Takahashi, T.: *Debris flow*, IAHR Monograph. A.A. Balkema, Rotterdam, 1991.
- 10 Takahashi, T.: *Debris flow: Mechanics, Prediction and Countermeasures*. Taylor & Francis, Leiden, 448p, 2007.
- Takahashi, T.: *Debris flow*, CRC Press/Balkema, EH Leiden, Netherlands, 2014.
- Takahashi, T.: and Tsujimoto, H.: A mechanical model for Merapi-type pyroclastic flow, *J. Volcanol. Geotherm. Res.*, 98, 91–115, 2000, doi:10.1016/S0377-0273(99)00193-6
- Theule, J. I., Liébault, F., Loye, A., Laigle, D., and Jaboyedoff, M.: Sediment budget monitoring of debris-flow and bedload transport in the Manival Torrent, SE France, *Nat. Hazards Earth Syst. Sci.*, 12, 731–749, 2012.
- 15 Tsuchiya, S., and Imaizumi, F.: Large sediment movement caused by the catastrophic Ohya-kuzure landslide, *J. Dis. Sci.*, 3(5), 257–263, 2010.
- VanDine, D. F.: Debris flows and debris torrents in the southern Canadian Cordillera, *Can. Geotech. J.*, 22, 44–62, 1985.
- Whipple, K. X., and Dunne, T.: The influence of debris-flow rheology on fan morphology, Owens Valley, California, *Geol. Soc. Am. Bull.*, 104, 887–900, 1992.
- 20 Watanabe, S.: Influence of the mixing ratio of water to sediment on the threshold slope of debris flow: a laboratory experiment, *Trans. Jpn. Geomorph. Union*, 15, 349–369 (in Japanese with English abstract), 1994.
- Yamashita, S., and Miyamoto, K.: *Sediment Problems: Strategies for Monitoring, Prediction and Control* (Proceedings of the Yokohama Symposium), IAHS Publ. no. 217, 67–74, 1993.
- 25 Zhang, S.: A comprehensive approach to the observation and prevention of debris flows in China, *Nat. Hazards*, 7, 1–23, 1993.
- Zhou, G. G. D., Cui, P., Tang, J. B., Chen, H. Y., Zou, Q., and Sun, Q. C.: Experimental study on the triggering mechanisms and kinematic properties of large debris flows in Wenjia Gully, *Eng. Geol.*, 194, 52–61, 2015. doi:10.1016/j.enggeo.2014.10.021