

**T. Glade**  
University of Vienna  
Vienna, Austria

Thomas Zieher  
University of Innsbruck  
Institute of Geography  
Tyrol, Austria  
Innsbruck, May 29, 2017



**Ms. Ref. No.: nhess-2017-73**

Dear Editor,

we have extensively revised our original manuscript based on the two reviewers comments and suggestions and would like to re-submit 'Sensitivity analysis and calibration of a dynamic physically-based slope stability model' to the Journal 'Natural Hazards and Earth System Sciences'. We are very grateful for the suggestions made by the reviewers. We feel that these have greatly improved the quality of the manuscript. The points and queries raised are addressed in detail below.

With kind regards

A handwritten signature in blue ink that reads 'Thomas Zieher'.

Thomas Zieher, on behalf of the co-authors

## Response to the Reviewers' comments

(original comment in italics and response in green)

Reviewer 1:

*This paper describes an interesting approach to analyze the sensitivity of, and to optimize the key input parameters needed for coupled hydraulic-slope stability modelling with the software TRIGRS. The contribution is generally well written, logically structured, and very nicely illustrated. The methods used are reproducible, and the results are described and discussed in some detail. In my opinion, this contribution is definitely worth to be published in NHESS. As usual, I have identified a number of issues which could be optimized. These issues are addressed in detail below. All in all, I suggest moderate revisions.*

*Even though the paper is well written in general, there are several minor mistakes of grammar and style. It would be out of scope to address these shortcomings in detail, therefore I recommend careful copy editing. In the following, I focus on issues concerning the scientific content of the manuscript. Where numbers are given they refer to the manuscript page, line.*

The manuscript was proofread by a native speaker of the research field.

*In 8, 20 it is mentioned that each pixel with  $FOS < 1$  is considered a single shallow landslide. In 16, 17f you mention that a landslide is considered predicted correctly if at least one pixel with  $FoS < 1$  coincides spatially with an observed landslide release area. This seems somewhat inconsistent to me and leads to two questions that have to be clarified:*

- (1) Do you perform the validation on the basis of correctly/incorrectly predicted landslide release polygons or on the basis of correctly/incorrectly predicted landslide release pixels?*
- (2) If the first possibility applies, how do you get your true negatives and false positives?*

In the validation strategy, rasterized scar area polygons are considered as observed landslide release areas. However, every landslide can be predicted only once. This strategy was chosen because of the discrepancy of the regular raster environment (input and output maps) and the mapped shallow landslide scar area polygons. The spatial resolution of 10 m results from a compromise between the size of most shallow landslide scar areas, the constraints of the infinite slope stability model and the representation of the topography (which should be detailed enough). However, it remains unknown which pixel represents an actually observed shallow landslide (see example in Fig. 1R1). This results from positional uncertainties of the involved data sets, but also from the smoothed representation of the topography associated with the coarse raster resolution. It is therefore assumed, that the pixel with the lowest FOS intersecting the scar area polygon represents the respective landslide (e.g., Montgomery and Dietrich 1995, Casadei et al. 2003, Keijsers et al. 2011). If the lowest FOS value falls below 1.0, the landslide is considered predicted correctly. The remaining scar area pixels are omitted from the validation (neither as false negatives nor as true positives). True negatives are all pixels outside the rasterized scar areas with a  $FOS \geq 1.0$ . False positives are pixels outside the rasterized scar areas with a  $FOS < 1.0$ .

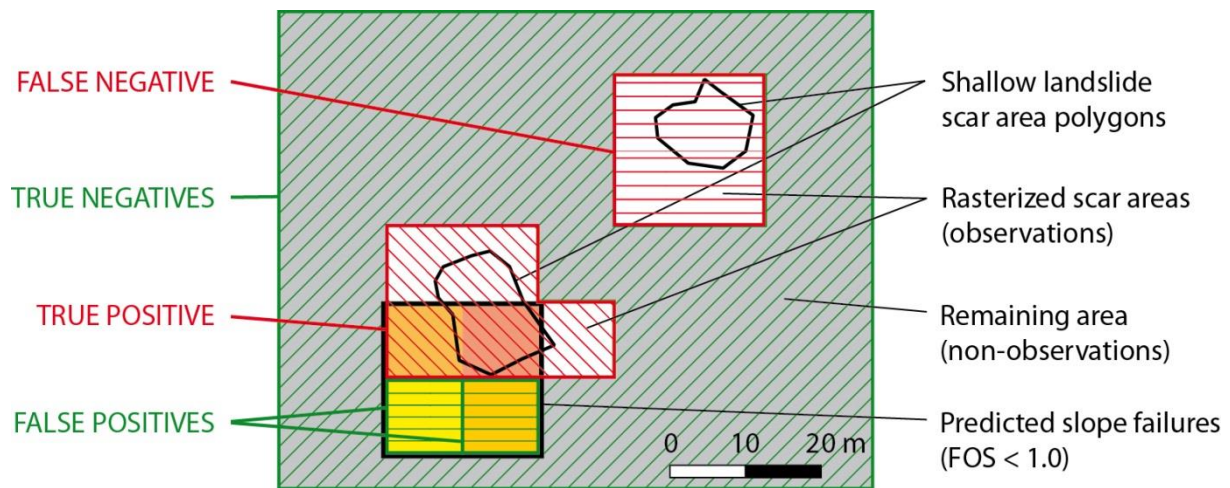


Fig. 1R1: Example for the validation strategy.

Additional information on the validation strategy is now provided in Section 3.5.

*I really like that way of regular sampling of parameter combinations, which is a very efficient method of parameter optimization. However, as I understand it, each AUC value is derived from one single computation (i.e. from one point in the ROC diagram). Even though this is not wrong in principle, the idea of ROC is rather to consider curves instead of single points. There are more appropriate performance indicators than the AUC for single values, for example the CSI, HSS, D2PC, or FoC (see., e.g., Formetta et al., 2016; de Lima Neves Seefelder et al., 2016; Mergili et al., 2017). Please either clarify why you use the AUC, or use other performance indicators instead. For assessing the performance of the model ensemble (with 25 values; Fig. 11ca and f), AUC is perfectly suitable.*

This comment refers to the original Table 5, page 19. The AUC values in this table are given for the whole curves as stated on page 17, line 30. Generally, the AUC values are not used for the calibration procedure. Instead, the sum of the true positive rate and true negative rate was optimized (maximized). So, strictly speaking none of the above mentioned performance indicators were applied. In the present case study, minimizing the distance to the perfect classification (D2PC) instead of maximizing the sum of the true positive rate and true negative rate leads to the exact same results (although, considering the theoretical background, the results could differ). However, we think that the D2PC indeed may be a more general and more reliable performance indicator for the parameter optimization. The manuscript was adopted accordingly and in the revised version and the ranges of the D2PC were added in Table 6, Table 7 and Table 8. In the tables of the revised paper, the resulting AUC values are still presented to provide insight into its ranges. As requested in the following comment, the applicability of the AUC as performance indicator is now discussed in Section 5.

*Looking at Table 5, the maximum AUC is lower with the best 25 runs than with all runs. This means that the best AUC value is associated with a parameter combination not satisfying the other criteria. In general, the improvement of AUC with a more constrained set of parameter combinations is very minor. This shows two issues:*

*(1) The AUC might be inappropriate, as mentioned above.*

(2) More importantly, the results seem to confirm the findings of de Lima Neves Seefelder et al. (2016) that model performance in terms of AUC (or similar measures) may react quite insensitive to the variation of the input parameters. In this specific case, the other criteria (those leading to the constrained set of 25 parameter combinations) appear much more important to me. This is something that should be addressed adequately in the discussion.

I agree that the AUC is of limited value for validating physically-based slope stability models. For the tested parameter value ranges, the resulting AUC is definitively less sensitive than the position of the FOS falling below 1.0. This is now addressed in the discussion.

The labelling of Fig. 7 is unclear to me: how can particular values of FOS be associated to a position along the ROC curve? E.g., with  $FOS=2$ , there are no true positives and 100% true negatives. Please explain or redraw the figure.

The receiver operating characteristic (ROC) principle allows evaluating the performance of a binary classifier while varying its discrimination threshold. In case of FOS-maps it's the FOS which is varied (Fig. 2R1). Therefore each unique value of the FOS can be associated with a position along the ROC curve, along with the respective predictive rates. However, only the position of  $FOS = 0.99$  is relevant, since this value differentiates predicted landslides from stable slopes.

Changes in the manuscript: Figure 7 was replaced by Fig. 2 below.

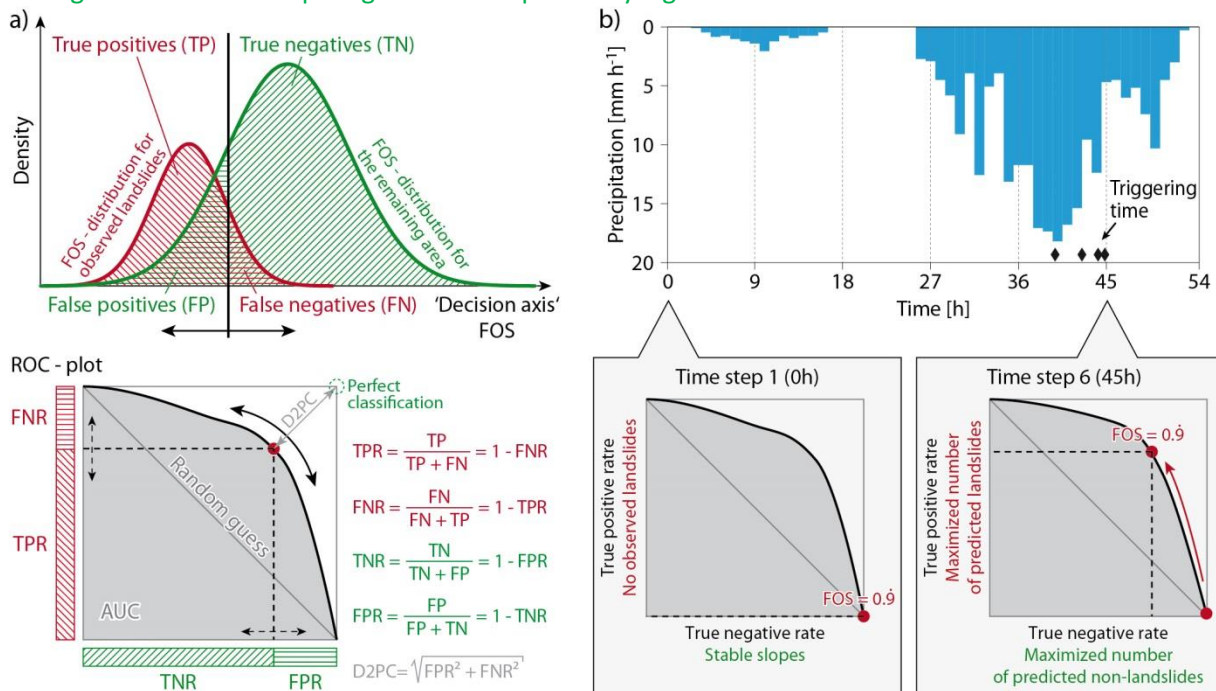


Fig. 2R1: Principle of the receiver operating characteristic (a; modified after Metz, 1978) and its application in the calibration procedure (b). FOS: factor of safety, TPR: true positive rate, FNR: false negative rate, TNR: true negative rate, FPR: false positive rate, D2PC: distance to perfect classification, AUC: area under the ROC-curve. Modified after Metz, 1978.

Fig. 8b looks like that the polygons are not drawn in a clean way.

The figure was revised.

*Figs. 9 and 12 are very well designed and informative. I also like the concept of the Figs. 11d and 11e. I hope that my comments will help to further improve the quality of the manuscript.*

*Suggested references:*

- de Lima Neves Seefelder, C., Koide, S., Mergili, M. (2016). Does parameterization influence the performance of slope stability model results? A case study in Rio de Janeiro, Brazil. Landslides. doi:10.1007/s10346-016-0783-6*
- Formetta, G., Capparelli, G., Versace, P. (2016). Evaluating performance of simplified physically based models for shallow landslide susceptibility. Hydrology and Earth System Sciences, 20(11): 4585-4603. doi:10.5194/hess-20-4585-2016*
- Mergili, M., Fischer, J.-T., Krenn, J., Pudasaini, S.P. (2017): r.avaflow v1, an advanced open source computational framework for the propagation and interaction of two-phase mass flows. Geoscientific Model Development 10: 553-569. doi:10.5194/gmd-10-553-2017*

Reviewer 2:

*The authors are to be congratulated on a well-written and detailed calibration and analysis of slope stability in the Laternser valley of western Austria. The approach is very interesting and appears to be a significant step forward in calibrating process-based models for rainfall-induced landslides, even though it may be similar to calibration procedures used for hydrological models. I have a few comments about the results and discussion and found a few items in the text that need clarification:*

*P.2 line 5. What are "settlement objects," houses, residential structures?*

Changed as requested: the term "settlement objects" was changed to residential structures.

*Figure 2c. The legend to the geologic map lists the map unit names mostly in German. It would be helpful to list the main lithology for each unit in English.*

Changed as requested. A table (Table 1) listing the geological units shown in Fig. 2c and the respective lithology was added:

Table 1. Information on the geological units shown in Fig. 2c and their respective lithology (Heissel et al., 1967; Oberhauser, 1958, 1982; Friebe, 2007). Only geological units covering more than 1% of the catchment area are listed.

Tectonic unit	No.	Geological unit	Lithology	Age
Quaternary	1	Hillside debris	Unconsolidated materials	Quaternary
	2	Till deposits	Unconsolidated materials	Quaternary
Helveticum	3	Globigerinenmergel	Calcareous marls	Eocene
	4	Grünsandstein	Sandstones	Eocene
	5	Seewerkalk	Competent limestones	Upper Cretaceous
	6	Schrattenkalk	Competent limestones	Lower Cretaceous
	7	Drusbergschichten	Marls with calcareous layers	Lower Cretaceous
Ultrahelveticum	8	Leimernmergel	Clayey marls and shales	Upper Cretaceous
Penninicum	9	Reiselsberger Sandstein	Competent sandstones	Upper Cretaceous
	10	Piesenkopfschichten	Thin-layered limestones	Upper Cretaceous
	11	Planknerbrückenserie	Sandstones	Upper Cretaceous

*p.12, lines 2-3. What is the lithology of Leimernmergel and Dursbergschichten?*

Leimernmergel are clayey marls and shales which formed in the upper Cretaceous. Drusbergschichten are marls with thin calcareous layers which formed in the lower Cretaceous (Friebe, 2007; Oberhauser, 1958). The information is now provided in the new Table 1.

*Table 2, Figure 2c and d., and p. 12 lines 2-3. Based on the information presented, it appears that landslides initiated in a number of map units that were not sampled. How do you know that the range of physical property values presented in table 2 represents the range parameter values to be expected throughout the map area? What effects do you think any sampling bias that might be present in your field and lab program had on your calibration results?*

The geotechnical sampling focussed on the areas close to the settlements. Remote areas were indeed not sampled. However, the resulting parameters cover a broad range (e.g. the angle of internal friction: 24.8 – 38.1°, cohesion 0 – 17600 Pa) which is considered representative for the

materials encountered in the Laternser valley. This raises the question, if the laboratory tests were necessary at all. These ranges could have been derived from text books as well.

With respect to the answer to the following comment – it is possible that laboratory tests conducted on samples obtained in the southern part of the catchment could additionally extend the value ranges of the tested parameters (e.g. higher angles of internal friction for effective stress). However, the parameter values of the identified ensemble are within the tested ranges. In case of the angle of internal friction for effective stress the optimal value range of the ensemble touches the tested lower boundary (21deg). Therefore, even lower values for the angle of internal friction for effective stress (in combination with enhanced cohesion for effective stress) could yield fair results. However, such low values become physically unreasonable.

This issue is now discussed in Section 5. Furthermore, the laboratory results were added in Fig. 12.

*Figure 11. Landslide density is noticeably higher in the western part of the area than in the eastern half. Despite the favorable overall results for your model ensemble, the high percentage of failures predicted along the southeast rim and northeast sector of the study area compared to the relatively low number of actual landslides seems to indicate that your model calibration is biased toward the western part of the study area. This might have to do either with the regolith depth model or cohesion and friction parameters. What additional insight can you share relative to the apparent east-west bias of your model results? Could the possible sampling bias noted previously have any bearing on this?*

This observed bias may have to do with the lithology and the associated characteristics of the unconsolidated materials. The south-eastern part of the catchment is built up of nappes of the Penninicum (ca. 60% of the catchment area, Fig. 3R1a). These nappes include mostly sandstones whereas the nappes of the Helveticum and Ultrahelveticum in the western and northern part of the catchment mostly consist of marls and shales. However, large parts of the catchment are covered by till deposits, including material with a long travel distance (originating from the southern part of Vorarlberg with a completely different lithology). The extent of the till deposits in the southern part of the catchment is somewhat unclear because of the two geological map sheets prepared by different authors (rough linear delineation of the hatched area in Fig. 3R1a). We suspect, that the southern and eastern part of the catchment (Penninicum) above the till deposits feature higher angles of internal friction compared to the rest of the catchment (Helveticum, Ultrahelveticum). This may be particularly true for the unconsolidated material in the cirques which is mostly coarse-grained debris originating from debris flows and rock falls from source areas above (highlighted in Fig. 3R1b). The generally lower parameter values of the geotechnical parameters considered by the ensemble would hence lead to predicted slope failures where there are none in nature. This may explain the observed bias.

These issues are now addressed in the discussion section.

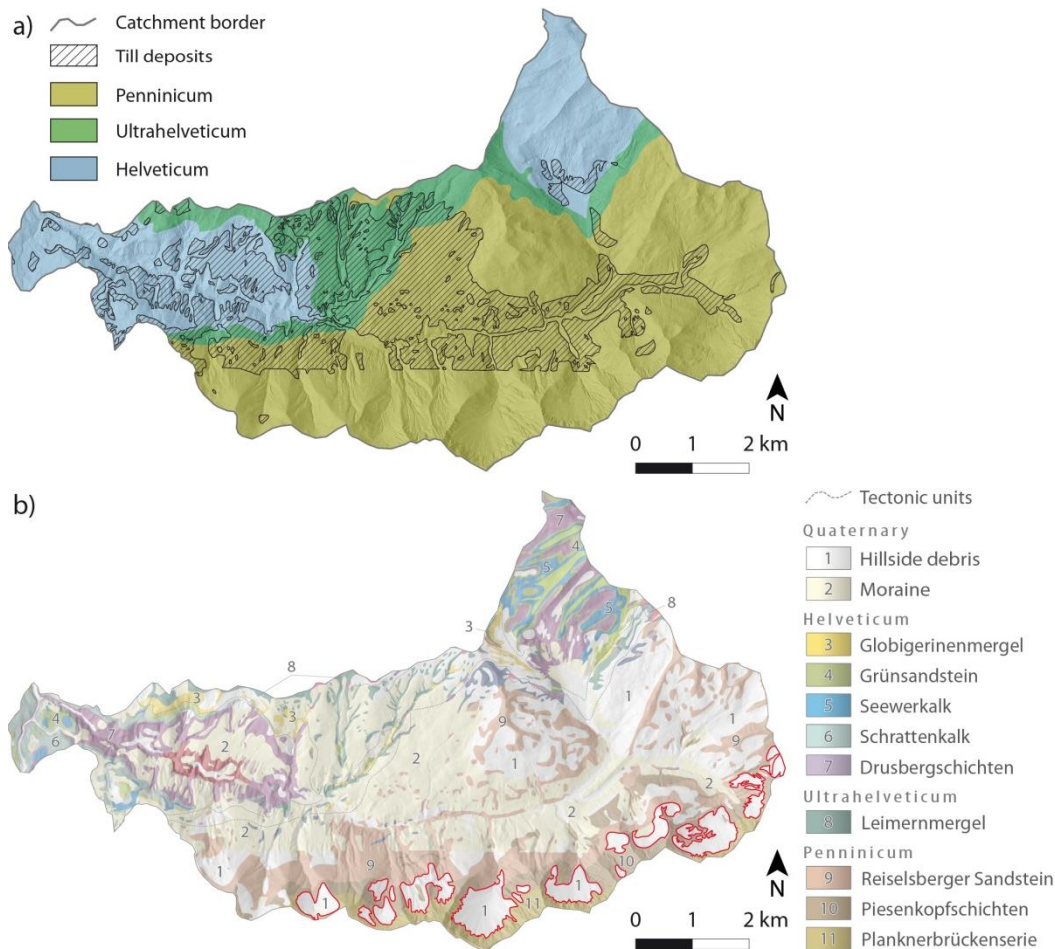


Fig. 3R1: Tectonic units with mapped extent of till deposits (a) and geological units (b) of the Latenser valley (Heissel et al. 1967, Oberhauser 1982). In (b), mapped hillside debris in the cirques along the southern rim is highlighted.

*P 22, lines 1-2 and Figure 12a. The compensation between angle of internal friction and cohesion should be expected based on the structure of equations 2 and 3.*

*A reference to Eq. 2 and Eq. 3 was added: This can be expected from Eq. 2 and Eq. 3.*

*p. 23, lines 12-14. Based on available data (Fig. 5), what other predictors might be worth considering?*

The tested morphometric parameters must be seen as proxies for a multitude of influencing factors such as material characteristics, geomorphological processes, climate, land cover, etc. (the parameters may be related to the competence of the rocks, to the landform as a result of the related geomorphological processes as well as the varying degree of weathering and erosion depending on the interplay of land cover and climate conditions). The contribution of these factors to the local morphometry may vary throughout the catchment. However, in the applied statistical model, the spatially varying effects of the parameters are not considered. We think that the introduction of expert knowledge (like geomorphological maps, Catani et al., 2010) may further improve the regolith depth model. Also land cover may be an important parameter to consider (Tesfa et al. 2009). Another issue remains the uncertainty of the area-wide regolith depth maps. For the assessment of slope stability, deviations in the order of decimetres can be crucial. The respective sentence was revised: *However, its spatial distribution may be better reproduced with techniques including further predictors like geomorphology or land cover (e.g. Catani et al., 2010; Tesfa et al., 2009).*

p. 23, line 16, Please clarify, which parameter values are conservative, the geotechnical or vegetation parameters?

Changed as requested: However, this can be attributed to the conservative set of parameter values assumed for the three vegetation parameters.

P. 24, lines 1-5, As noted previously, the calibrated model appears to be strongly biased to the west half of the area. Table 2 indicates a wide range of lateral variation in model input parameters. Property zones need not be as detailed as individual lithologic units. In the case studied here, the area might be divided into two or three zones, with division at major drainages or drainage divides. Then calibration of the separate zones could proceed without a need to deal with potential runoff interactions identified here.

In principle, the idea of using sub-catchments for the calibration procedure is good. However, we think that applying the proposed procedure to hydrologically defined sub-catchments would only be appropriate if they would coincide with units of common material characteristics. In case of the Latenser valley the material characteristics are to some extent predefined by the tectonic units except for the till deposits (Fig. 3R1). The potential two or three sub-catchments would therefore still include a mixture of material characteristics. We expect that the results would therefore still show a bias within these units while the bias throughout the catchment may be reduced.

P. 24, lines 6-15. The difficulty identified here could easily be overcome with slightly more work. After completing the 10,000 model runs and converging on the 25 best models, it would be a fairly simple matter to rerun those 25, or a subset of them, with hourly precipitation inputs to see whether the outputs change significantly. Experience has shown that averaging precipitation into longer time steps can effectively reduce the total number of rainfall inputs needed (Baum et al. 2011; Alvioli & Baum, 2016). Testing to find the most effective combination(s) of time steps to represent a particular rainfall sequence can be done fairly quickly using single-grid cell models.

Hourly precipitation maps were used as model input, but to reduce the necessary disk space outputs were generated only for time intervals of 9h. As suggested, the ensemble was re-run to produce hourly FOS-maps (Fig. 4R1).

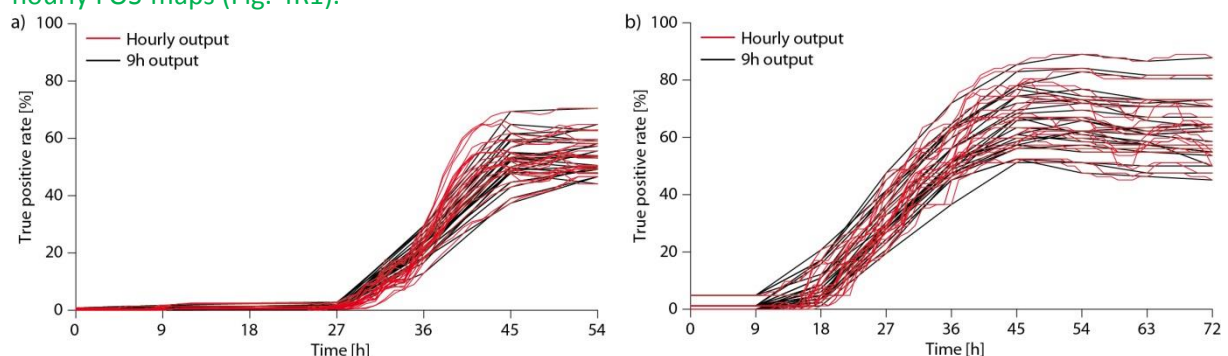


Fig. 4R1: Comparison of the ensemble prediction rates with 9h and hourly output time steps for the landslide-triggering rainfall events in August 2005 (a) and May 1999 (b).

The results show that in some cases slightly more landslides are predicted in the time intervals between the original time steps. Theoretically, the issue remains whether more landslides are

predicted within the time intervals of one hour. Also, the selection procedure would probably yield a different ensemble based on the hourly output.

The part of the discussion addressing the effect of hourly output maps was revised and extended.

*Discussion section: Please compare and contrast the relative advantages and disadvantages of the approach used here and a probabilistic approach to initializing the input parameters for TRIGRS (Raia et al. 2014).*

A short comparison of the two approaches was added to the discussion:

*Four parameters with a high impact on the model outcome were systematically sampled from a uniform distribution with defined increments and ranges. Hence, the subsequent calibration procedure which considers each parameter value combination remains deterministic. However, the combination of the results of the identified model ensemble must not be confused with a probability of failure, since the sampling of the parameter values is systematic and not based on probability distributions. Probabilistic approaches (e.g. Hammond et al., 1992; Raia et al., 2014), including a randomized parameter sampling strategy could overcome this limitation while considering the uncertainty of the input parameters. If the probability distributions of the parameters throughout the study area are known, probabilistic approaches can be applied to derive the probability of failure. Theoretically, the resulting parameter value combinations of the identified model ensemble could give insight into the area-wide probability distribution of the tested parameters. However, further investigations including an enhanced sampling strategy are necessary. Improved and optimized models (e.g. Alvioli and Baum, 2016) will facilitate this objective.*

*General comments: Given the requirement of high-performance computing to complete the modeling exercise described in this manuscript, the authors should be aware that an MPI version of TRIGRS is available (Alvioli & Baum, 2016).*

Most of the simulations were run already a year ago and we were not aware of this version. We will definitely regard using it in future. A comment on this issue was added in the discussion.

*Throughout the manuscript, please change "effective cohesion" and "effective angle of internal friction" to "cohesion for effective stress" and "angle of internal friction for effective stress." The fact that these parameters are for effective stress is an important distinction that is glossed over in far too many recent papers about landslides*

Changed as requested.

*Although the English is generally very good, the manuscript would benefit from editing to make minor grammar corrections throughout.*

The manuscript was proofread by a native speaker of the research field.

*References cited:*

*M. Alvioli, R.L. Baum, Parallelization of the TRIGRS model for rainfall induced landslides using the message passing interface, Environmental Modelling & Software, Volume 81, July 2016, Pages 122-135, ISSN 1364-8152, <http://dx.doi.org/10.1016/j.envsoft.2016.04.002>.*

*Baum, R.L.; Godt, J.W.; and Coe, J.A., 2011, Assessing susceptibility and timing of shallow landslide and debris flow initiation in the Oregon Coast Range, USA. In Genevois, R. Hamilton, D.L. and Prestininzi, A. (Editors), Proceedings of the Fifth International Conference on Debris Flow Hazards Mitigation–Mechanics, Prediction, and Assessment, pp. 825-834. Rome: Casa Editrice Università La Sapienza (doi: 10.4408/IJEGE.2011-03.B-090).*

*Raia, S., Alvioli, M., Rossi, M., Baum, R. L., Godt, J. W., and Guzzetti, F.: Improving predictive power of physically based rainfall-induced shallow landslide models: a probabilistic approach, Geosci. Model Dev., 7, 495-514, doi:10.5194/gmd-7-495-2014, 2014.*

#### References cited in the answers:

- Alvioli, M. & Baum, R. 2016: Parallelization of the TRIGRS model for rainfall-induced landslides using the message passing interface, *Environmental Modelling & Software* 81, 122-135.
- Casadei, M., Dietrich, W. E. & Miller, N. L. 2003: Testing a model for predicting the timing and location of shallow landslide initiation in soil-mantled landscapes, *Earth Surface Processes and Landforms* 28(9), 925-950.
- Catani, F.; Segoni, S. & Falorni, G. 2010: An empirical geomorphology-based approach to the spatial prediction of soil thickness at catchment scale, *Water Resources Research* 46, W05508.
- Friebe, J. 2007: Vorarlberg. Geologie der Österreichischen Bundesländer, Verlag der Geologischen Bundesanstalt (GBA), Wien.
- Hammond, C.; Hall, D.; Miller, S. & Swetik, P. 1992: Level I stability analysis (LISA) documentation for version 2.0, Intermountain Research Station, Ogden.
- Heissel, W., Oberhauser, R. & Schmidegg, O. 1967: Geologische Karte des Walgauer, Vorarlberg 1:25.000, Verlag der Geologischen Bundesanstalt (GBA), Wien.
- Keijsers, J. G. S., Schoorl, J. M., Chang, K. T., Chiang, S. H., Claessens, L. & Veldkamp, A. 2011: Calibration and resolution effects on model performance for predicting shallow landslide locations in Taiwan, *Geomorphology* 133(3-4), 168-177.
- Metz, C. E. 1978: Basic principles of ROC analysis, *Seminars in Nuclear Medicine* 8(4), 283-298.
- Montgomery, D. R. & Dietrich, W. E. 1994: A physically-based model for the topographic control on shallow landsliding, *Water Resources Research* 30(4), 1153-1171.
- Oberhauser, R. 1958: Neue Beiträge zur Geologie und Mikropaläontologie von Helvetikum und Flysch im Gebiet der Hohen Kugel (Vorarlberg), *Verhandlungen der Geologischen Bundesanstalt*, 1958/2, 121-140.
- Oberhauser, R. 1982: Geologische Karte St. Gallen Süd und Dornbirn Süd 1:25.000, Verlag der Geologischen Bundesanstalt (GBA), Wien.
- Raia, S.; Alvioli, M.; Rossi, M.; Baum, R. L.; Godt, J. W. & Guzzetti, F. 2014: Improving predictive power of physically based rainfall-induced shallow landslide models: a probabilistic approach, *Geoscientific Model Development* 7(2), 495-514.
- Tesfa, T. K.; Tarboton, D. G.; Chandler, D. G. & McNamara, J. P. 2009: Modeling soil depth from topographic and land cover attributes, *Water Resources Research* 45(10), W10438.

# Sensitivity analysis and calibration of a dynamic physically-based slope stability model

Thomas Zieher<sup>1,2</sup>, Martin Rutzinger<sup>2</sup>, Barbara Schneider-Muntau<sup>3</sup>, Frank Perzl<sup>4</sup>, David Leidinger<sup>5</sup>, Herbert Formayer<sup>5</sup>, and Clemens Geitner<sup>1</sup>

<sup>1</sup>Institute of Geography, University of Innsbruck, Innrain 52f, 6020 Innsbruck, Austria

<sup>2</sup>Institute for Interdisciplinary Mountain Research, Austrian Academy of Sciences, Technikerstraße 21a, 6020 Innsbruck, Austria

<sup>3</sup>Unit of Geotechnical and Tunnel Engineering, Institute of Infrastructure, University of Innsbruck, Technikerstraße 13, 6020 Innsbruck, Austria

<sup>4</sup>Austrian Research and Training Centre for Forests, Natural Hazards and Landscape, Rennweg 1, 6020 Innsbruck, Austria

<sup>5</sup>Institute of Meteorology, University of Natural Resources and Life Sciences Vienna, Peter Jordan Straße 82, 1190 Vienna, Austria

*Correspondence to:* Thomas Zieher (thomas.zieher@uibk.ac.at)

**Abstract.** Physically-based modelling of slope stability **at on a** catchment scale is still a challenging task. **When Applying** a physically-based model **at on** such **a** scale (1:10,000 to 1:50,000), parameters with a high impact on the model result should be calibrated to account for (i) the spatial variability of parameter values, (ii) shortcomings of the selected model, (iii) uncertainties of laboratory tests and field measurements or (iv), if parameters cannot be derived experimentally or measured

5 in the field (e.g. calibration constants). While systematic parameter calibration is a common task in hydrological modelling, this is rarely done using physically-based slope stability models. In the present study a dynamic, physically-based, coupled hydrological/geomechanical slope stability model is calibrated based on a limited number of laboratory tests and a detailed multi-temporal shallow landslide inventory covering two landslide-triggering rainfall events in the Laternser valley, Vorarlberg (Austria). Sensitive parameters are identified based on a local one-at-a-time sensitivity analysis. These parameters (hydraulic

10 conductivity, specific storage, **effective** angle of internal friction **for effective stress**, **effective cohesion for effective stress**) are systematically sampled and calibrated for a landslide-triggering rainfall event in August 2005. The identified model ensemble, including 25 'behavioural model runs' with the highest portion of correctly predicted landslides and non-landslides, is then validated with another landslide-triggering rainfall event in May 1999. The identified model ensemble correctly predicts the location and the supposed triggering timing of 73.5% of the observed landslides triggered in August 2005 and 91.5% of the

15 observed landslides triggered in May 1999. Results of the model ensemble driven with raised precipitation input reveal a slight increase in areas potentially affected by slope failure. At the same time, the peak runoff increases more markedly, suggesting that precipitation intensities during the investigated landslide-triggering rainfall events were already close to or above the soil's infiltration capacity.

## 1 Introduction

Shallow landslides are abundant geomorphological phenomena in mountain regions ~~of~~ across the world. The related processes are usually understood as translational sliding movements of soil material along a pre-defined slip surface at a depth of up to 2 m (Cruden and Varnes, 1996; Lateltin et al., 2005). In Austria, shallow landslides are typically triggered by heavy rainfalls (Andrecs et al., 2002; Markart et al., 2007; Zieher et al., 2016), causing damages to ~~settlement-objects~~ residential structures and infrastructure, as well as a loss of agricultural land. To prevent future impacts, it is essential to identify potentially affected areas. For this task, various modelling techniques are currently applied, including (i) expert-based (e.g. Kienholz, 1977), (ii) statistically-based (e.g. Carrara et al., 1991) and (iii) physically-based approaches (e.g. Baum et al., 2010). The latter ones are typically based on the limit equilibrium concept ~~employing and employ~~ physical laws to relate resisting to driving forces. Their result is a dimensionless factor of safety (FOS), which is a quantitative measure of slope stability. Many physically-based approaches include a hydrological and a geomechanical model element and can be further divided into (i) steady-state (e.g. Dietrich and Montgomery, 1998; Montgomery and Dietrich, 1994) and (ii) dynamic models (e.g. Baum et al., 2010; Crosta and Frattini, 2003). In contrast to steady-state models, dynamic models allow for the spatio-temporal assessment of hillslope hydrology and stability. Physically-based slope stability models can be upscaled to medium scale (1:10,000 to 1:50,000) using a raster-based geographical information system (GIS). However, ~~such~~ spatially distributed models require data on the spatial distribution of the included parameters (van Westen et al., 2006). ~~To overcome the problem of usually unknown material characteristics throughout the study area, probabilistic approaches have proven feasible (Hammond et al., 1992; Raia et al., 2014).~~

Before applying a spatially distributed physically-based model, parameter values are often calibrated to minimize the difference between observations and simulation results. One way of achieving this, is to vary the model input parameter values in order to find ~~optimal~~ optimum values or value ranges which yield a general agreement between observations and simulations (back calculation). This task is common in hydrological modelling involving a high-dimensional parameter space (e.g. Dobler and Pappenberger, 2013; Tang et al., 2007). The underlying principles also apply ~~for~~ to physically-based slope stability models. Theoretically, ~~a~~ calibration is not necessary as long as the parameter values are based on a sufficient number of direct measurements or laboratory tests. However, a calibration is advisable (i) if the spatial distribution and variability of parameter values is unknown, (ii) to account for model shortcomings compared to the represented physical processes, (iii) to account for uncertainties of laboratory tests and field measurements or (iv), if parameter values cannot be derived experimentally or measured in the field (e.g. calibration constants). The calibration procedure should be based on physical reasoning and only involve sensitive parameters (i.e. parameters with a distinct impact on the model's outcome) (Bathurst et al., 2005; Wagener and Kollat, 2007). To identify sensitive parameters, a sensitivity analysis is usually performed. A simple, but often applied method is based on the local assessment (one representative raster cell) of the impact of systematic variations of ~~one parameter-at-a-time~~ one-parameter-at-a-time (OAT) on the model's results (e.g. Hammond et al., 1992). This method is also frequently used for parameter value calibration (e.g. Gioia et al., 2016; Salciarini et al., 2006). However, the OAT assessment of parameter sensitivity becomes unreliable with an increasing number of considered parameters, correlated parameters and

non-linear model behaviour (Wagener and Kollat, 2007). As an alternative, global methods which cover the whole parameter space can overcome this drawback (Dobler and Pappenberger, 2013; Tang et al., 2007). Their main disadvantage is the high computational effort, usually requiring a high performance computing cluster (HPCC). Depending on the sampling technique, a multitude of parameter value combinations is tested and evaluated based on observations. However, instead of identifying a single parameter set which explains the observations best, an ensemble of 'behavioural model runs' is often used for the final prediction. These model runs are in general agreement with the observations, while their disagreement reflects model uncertainty (Bathurst et al., 2005; Wagener and Kollat, 2007).


In the present study, the parameters of a revised form of the spatially distributed, dynamic, physically-based slope stability model TRIGRS 2.0 (Transient Rainfall Infiltration and Grid-Based Regional Slope-Stability Analysis; Baum et al., 2008, 2010) are systematically tested and calibrated. The four main steps of the analysis are shown in Fig. 1. First, sensitive parameters of the revised model are identified with a local OAT sensitivity analysis. The tested parameter space is derived from a limited number of laboratory tests and ~~respective relevant~~ literature. Then, the four identified sensitive parameters (hydraulic conductivity, specific storage, ~~effective~~ angle of internal friction ~~for effective stress~~, ~~effective cohesion for effective stress~~) are systematically sampled ~~from a uniform distribution. and calibrated considering each parameter value combination for the whole catchment area (global approach).~~ Unlike in probabilistic parameter sampling strategies (e.g. Raia et al., 2014), the parameters are sampled with defined, constant increments. ~~In the calibration procedure, the best 25 'behavioural model runs' are identified out of 10,000 conducted simulations considering each sampled parameter value combination are identified. The ensemble of these 25 model runs which~~ optimally predicts the location and the supposed triggering timing of observed shallow landslides, triggered during a rainfall event in August 2005. The predictive performance of this model ensemble is then tested for another landslide-triggering rainfall event ~~which occurred~~ in May 1999. Finally, the model ensemble is re-run with positively scaled input precipitation maps to give an estimate of ~~expeetable potential~~ impacts of increasing precipitation intensities on slope stability.

The objectives of the present study are:

1. To identify sensitive parameters of the revised dynamic physically-based slope stability model TRIGRS 2.0
2. To present a procedure for a global parameter calibration (model identification) for a landslide-triggering rainfall event in August 2005, validated with another rainfall event in May 1999
3. To evaluate the capability of the identified model ensemble for quantifying potential changes in slope stability associated with increasing precipitation intensity

## 2 Study area

The study area is located in the Laternser valley in Vorarlberg, the westernmost province of Austria (Fig. 2a). It covers the catchment area (52.1 km<sup>2</sup>) of the river Frutz, a tributary of the Rhine ~~river~~. The valley extends about 13 km in the east-west direction, following the strike angle of the Bregenzerwald Mountains. Its highest point is the Hoher Freschen (2004 m) at the head of the valley. The outlet at approximately 500 m is characterized by a steeply incised gorge. In the Laternser valley about

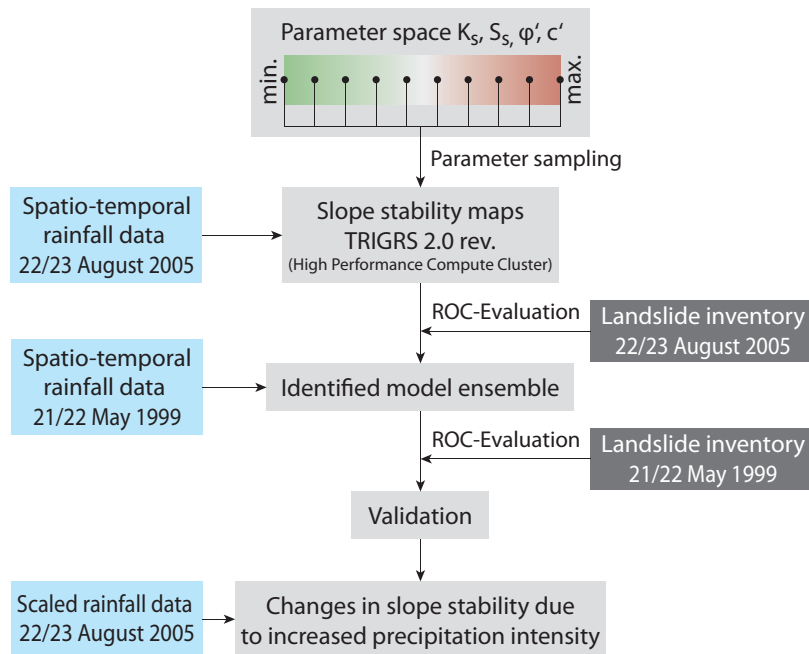

**Figure 1.** Workflow with the main steps of the analysis.

half of the catchment area is covered by forest (2001: 51.0%, 2006: 50.9%). A majority of the forest stands are composed of fir (*Abies alba* Miller) and spruce (*Picea abies* (L.) Karsten), with beech (*Fagus sylvatica* L.) occurring below 1300 m (Amann et al., 2014). Around 1.2% of the catchment area is occupied by settlements and infrastructure. The remaining area is predominantly used as hay meadow or pasture or a combination of both.

## 5 2.1 Geology

The Latenser valley is built up by different tectonic units, including a variety of geological units (Fig. 2c, Table 1). Helvetic nappes in the western and northern part of the valley include competent limestones (e.g. Schrattenkalk, Seewerkalk) and marls with calcareous layers (e.g. Drusbergsschichten). To the south-east, ultrahelvetic nappes are superimposed, which are mainly built up of clayey marls and shales (e.g. Leimernmergel). On top in the south-east of the catchment area, penninic nappes build make up more than half of the valley. These nappes include mainly sandstones (e.g. Reiselsberger Sandstein, Planknerbrückenserie) and thinly layered marls (e.g. Piesenkopfschichten) (Friebe, 2007; Heissel et al., 1967; Oberhauser, 1982, 1998). Wide-spread Widespread till deposits and hillside debris cover more than 57% of the catchment area. These units are overly susceptible to shallow landsliding (Zieher et al., 2016). In numerous cases, subglacial till is reported to act as an impermeable layer and slip surface for the unconsolidated material on top. Furthermore, marls of the ultrahelvetic nappes, as well as less competent sandstones of the penninic nappes, are particularly susceptible to shallow landsliding (Zieher et al., 2016).

**Table 1.** Information on the geological units shown in Fig. 2c and their respective lithology (Heissel et al., 1967; Oberhauser, 1958, 1982; Friebe, 2007). Only geological units covering more than 1% of the catchment area are listed.

Tectonic unit	No.	Geological unit	Lithology	Age
Quaternary	1	Hillside debris	Unconsolidated materials	Quaternary
	2	Till deposits	Unconsolidated materials	Quaternary
Helveticum	3	Globigerinenmergel	Calcareous marls	Eocene
	4	Grünsandstein	Sandstones	Eocene
	5	Seewerkalk	Competent limestones	Upper Cretaceous
	6	Schrattenkalk	Competent limestones	Lower Cretaceous
	7	Drusbergschichten	Marls with calcareous layers	Lower Cretaceous
Ultrahelveticum	8	Leimernmergel	Clayey marls and shales	Upper Cretaceous
Penninicum	9	Reiselsberger Sandstein	Competent sandstones	Upper Cretaceous
	10	Piesenkopfschichten	Thin-layered limestones	Upper Cretaceous
	11	Planknerbrückenserie	Sandstones	Upper Cretaceous


## 2.2 Climate

Oceanic air masses ~~adveeted~~ **advecting** from the north-west dominate the warm temperate climate of Vorarlberg. On the ~~fringe of the Alps~~ **Alpine rim** in northern Vorarlberg, precipitation amounts are higher due to blocking of the inflowing air masses (Werner and Auer, 2001b, a). Because of the valley’s orientation, it is prone to north and north-westerly weather conditions. At 5 Innerlaterns station (location mapped in Fig. 2c), ~~the~~ mean annual precipitation ~~sum (period 1981–2010)~~ exceeds 1800 mm a<sup>-1</sup> ~~(period 1981–2010)~~. Considering a potential evaporation in Vorarlberg in the order of 600 mm a<sup>-1</sup> (Werner and Auer, 2001a), a year-round high amount of seepage water can be assumed.

~~At On~~ the synoptic scale, the landslide-triggering rainfall events in May 1999 and August 2005 occurred in the course of so-called Vb weather situations (van Bebber, 1891; Formayer and Kromp-Kolb, 2009). Such synoptic meteorological situations 10 are characterized by a low forming south of the Alps, subsequently moving to the ~~North-East~~ **north-east**. The moisture taken up over the Mediterranean and Adriatic Sea is transported to East-Central Europe, potentially causing heavy rainfalls in large parts of Austria (Seibert et al., 2007).

## 2.3 Landslide-triggering rainfall events


Figure 3a,b shows the daily and cumulative deviation of precipitation from the long-term mean (1981–2010) covering one 15 year before the landslide-triggering rainfall events in May 1999 and August 2005 event ~~respectively for the region around the Laternser valley~~. For the period of June 1998 to January 1999, the cumulative deviation of precipitation was ~~in-total~~ balanced ~~overall~~, including a dry August and a wet September and October (Fig. 3a). Afterwards, particularly the second half of February 1999 was exceptionally wet. Locally, fresh snow depth exceeded two ~~meters~~ **metres** within three days, leading to catastrophic snow avalanches (Bollinger et al., 2000; Heumader, 2000). In March and April 1999, ~~the~~ precipitation ~~amount~~ corresponded 20 to the long-term mean, but precipitation in February and April provided an elevated level of the cumulative deviation. From

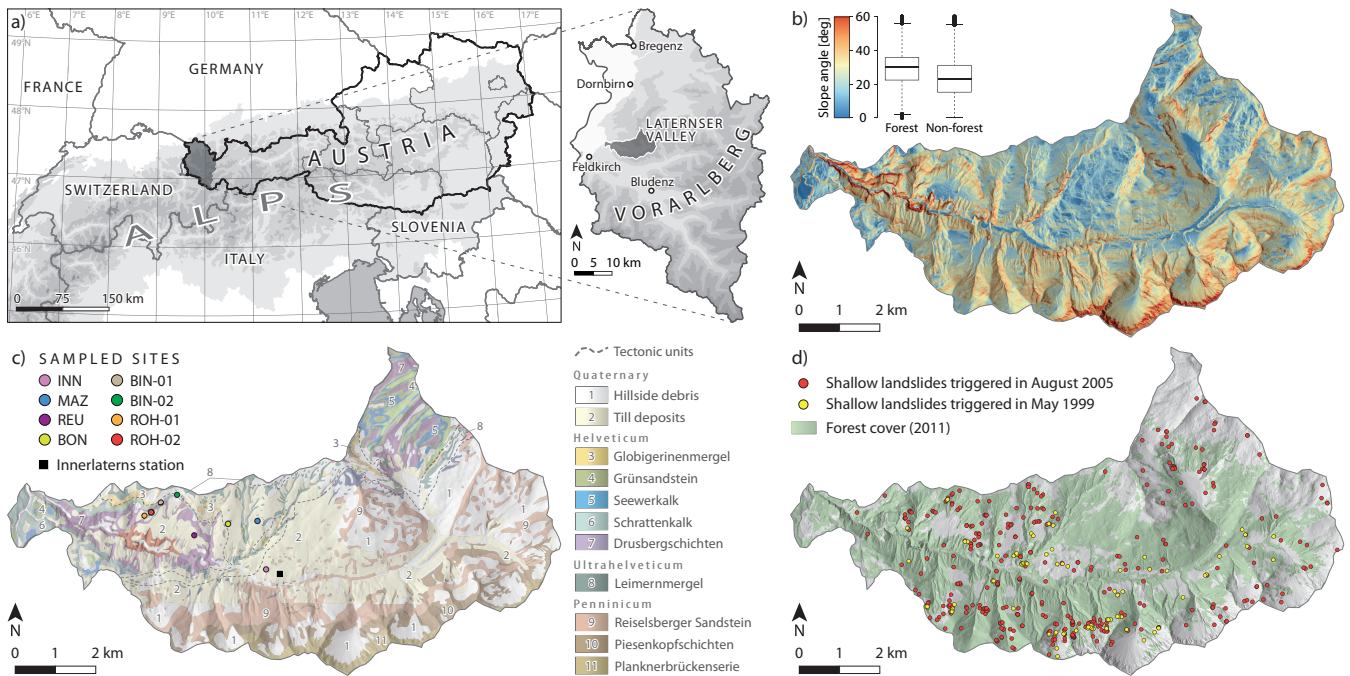

**Figure 2.** Location of the Laternser valley (a), slope angle map (b), geological map with sampled sites (c) and shallow landslide inventory (d). The slope angle map is based on a digital terrain model derived from airborne laser scanning (ALS) in 2011, serving as input data for modelling (resampled to a spatial resolution of 10 m). The boxplots show the slope angle distribution for forest and non-forest areas. In the geological map only geological units covering more than 1% of the catchment area are listed in the legend (Data source: Heissel et al., 1967; Oberhauser, 1982). The shallow landslide inventory shows landslides triggered by the rainfall events in May 1999 (82; yellow) and August 2005 (356; red) occurring on undisturbed hillside slopes (Zieher et al., 2016). The areas covered by forest were derived from ALS data acquired in 2011.

May 11 to May 14, a rainfall event with a total sum of 144.4 mm occurred. No shallow landslides are reported for this event. However, increased soil moisture must be **expected assumed** before the onset of the landslide-triggering rainfall event on May 21/22, with a total sum between 134.0 mm at Frastanz station and 212.8 mm at Thüringen station (Fig. 3c).

Monthly precipitation sums from November 2004 to June 2005 generally fell below the long-term mean, except for February and May (Fig. 3b). Therefore it can be expected that no exceptional antecedent soil moisture preceded the rainfall event in August. However, the amount of precipitation in July and the first half of August corresponds to the long-term mean. Therefore, no exceptionally dry conditions preceded the landslide-triggering rainfall event. After days with repeated minor rainfalls, a phase of intense precipitation started on August 22. At Innerlaterns station, the 24 hour cumulative sum amounted up to 244 mm. The highest precipitation intensity was recorded in the late evening on August 22 and during the night **hours** (21 to 22 pm: 19.4 mm h<sup>-1</sup>). The triggering time of four landslides was reconstructed from protocols of the local voluntary fire brigade (Fig. 3d). Most landslides occurred in the course of the night from August 22/23.

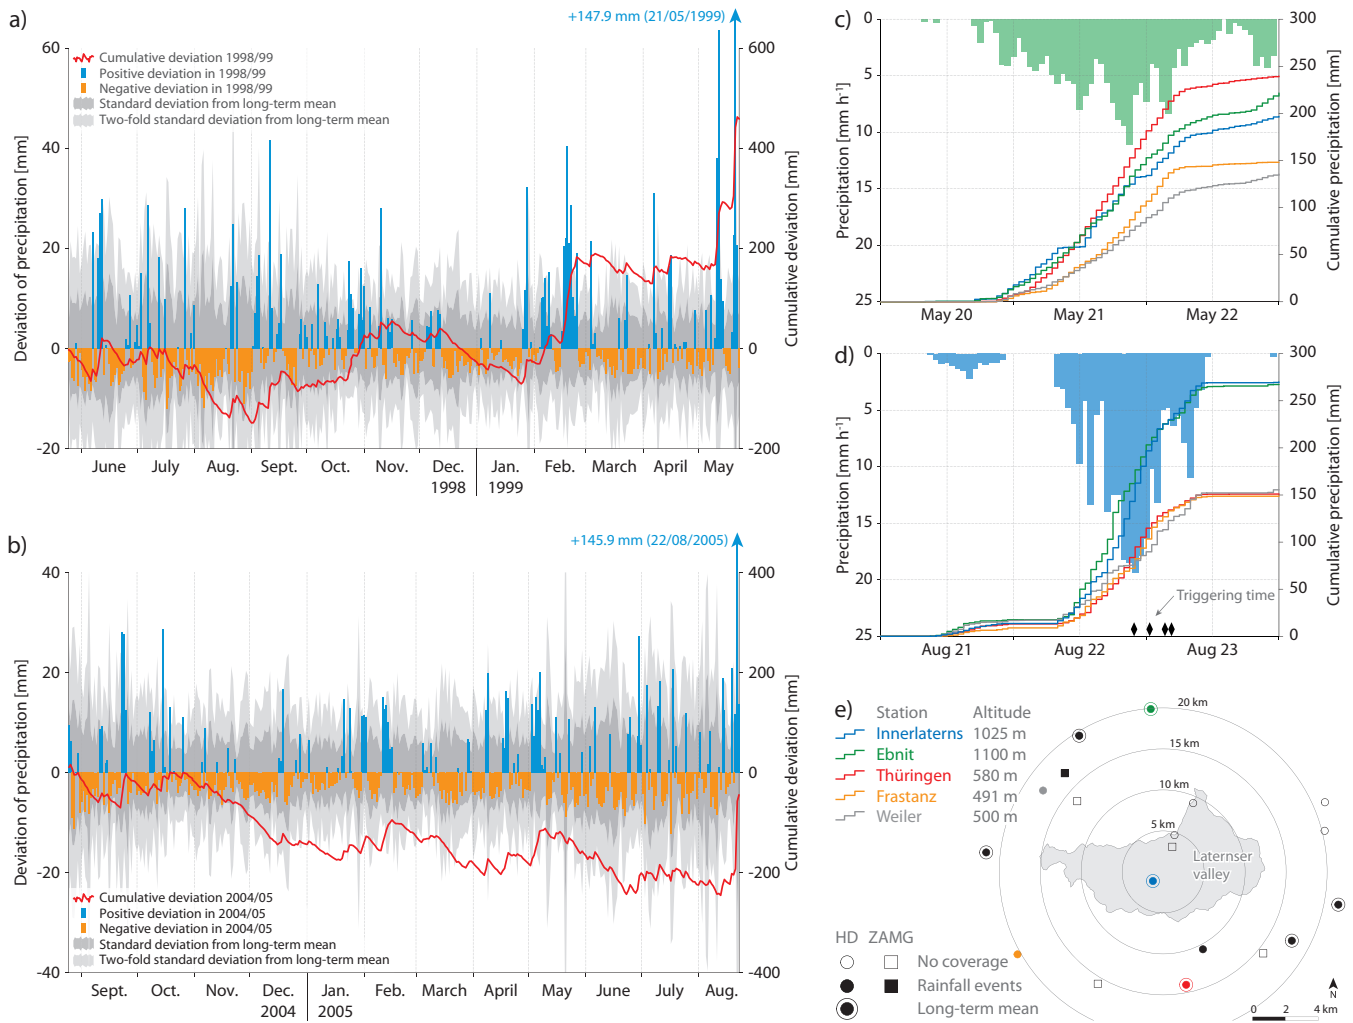

**Figure 3.** Landslide-triggering rainfall events in the Laternser valley on 21/22 May 1999 (a,c) and 22/23 August 2005 (b,d). The map (e) shows the **considered** meteorological stations **considered**. Regional **mean** daily **mean** (7:00–7:00) and cumulative deviation of precipitation from the long-term mean (1981–2010) are shown for the period of one year before the rainfall events (a,b). Cumulative precipitation for three days covering the landslide-triggering rainfall events are shown for meteorological stations within and surrounding the Laternser valley (c,d). Hourly precipitation sums are shown for Ebnit station in May 1999 (c), because at Innerlaterns station missing values are present in the respective hourly time series. Estimated triggering times of four shallow landslides were derived from protocols by the voluntary fire brigade. Data source: Hydrographic Service of Vorarlberg (HD), Central Institute for Meteorology and Geodynamics (ZAMG).

### 3 Materials and Methods

#### 3.1 Shallow landslide inventory

A comprehensive shallow landslide inventory was compiled for the catchment area of the Laternser valley [Zieher et al., 2016](#). [The inventory is](#), based on the systematic interpretation of nine orthophoto series covering the period from 1950–2012 ([Zieher et al., 2016](#)). Landslide mapping was aided by digital terrain models (DTMs) derived from two [airborne laser scanning \(ALS\)](#) campaigns and their differential digital terrain model (dDTM). In addition, data from two field surveys conducted immediately after two landslide-triggering rainfall events in May 1999 and August 2005 and associated archive data [was were](#) included in the inventory. In total, 82 shallow landslides attributed to the rainfall event in May 1999, and 356 shallow landslides triggered in August 2005, were used for this study (Fig. 2d). Only rainfall-triggered shallow landslides which occurred on undisturbed hillside slopes were considered. [They which](#) account for 3/4 of the observed landslides for both rainfall events. Observed shallow landslides on other slope types may involve additional causative factors for slope failure, which are not included in the model (e.g. weakened foot slope). Of the considered landslides, 28 (34.1%; May 1999) and 88 (24.7%; August 2005) are located within forests.

#### 3.2 TRIGRS 2.0 model

The dynamic, physically-based, coupled hydrological/geomechanical model TRIGRS 2.0 was developed by Baum et al. (2008, 2010) and is written in the Fortran programming language (USGS, 2016). TRIGRS 2.0 is based on a raster environment and implements a hydrological model element (a runoff model and two types of infiltration models) and a geomechanical model element (infinite slope stability model). It is suitable for modelling the spatio-temporal progression of slope stability in the course of rainfall events with a duration of up to a few days (Baum et al., 2010).

In the model, the infiltration process and associated effects on slope stability are computed dynamically for each raster cell [in defined time intervals](#). Runoff  $R_d$  is routed downslope from raster cells where the precipitation intensity  $P$  plus the incoming runoff  $R_u$  from adjacent raster cells above exceeds the infiltration capacity (equal to the hydraulic conductivity  $K_s$ ; Baum et al., 2008):

$$R_d = \begin{cases} P + R_u - K_s & \text{if } P + R_u - K_s \geq 0 \\ 0 & \text{if } P + R_u - K_s < 0 \end{cases} \quad (1)$$

However, the amount of runoff is not passed on to the next time [step interval](#). The available amount of water ready for infiltration on each raster cell is passed on to the infiltration model. For tension-saturated initial conditions, a generalized pore pressure diffusion model after Iverson (2000) can be applied. The predictive performance of Iverson's model has been tested in the Laternser valley [at on a plot scale](#) (Zieher et al., 2017). For unsaturated conditions, an analytical solution for unsaturated flow following Srivastava and Yeh (1991) can be applied. However, the exponential model describing the soil water retention curve (Gardner, 1958) used for [linearising linearizing](#) Richard's equation is considered suitable for coarse-grained materials

(Baum et al., 2008) and hence not suitable for the application in the Laternser valley. The details of the infiltration models have been presented in previous studies (e.g., Baum et al., 2010; Iverson, 2000; Kim et al., 2013; Park et al., 2013; Salciarini et al., 2006). The result of both infiltration models is the evolution of pore pressures with depth and time as response to the infiltration of time-varying precipitation. Pore pressures  $\psi(d, t)$  are passed on to the infinite slope stability model relating driving to resisting stresses (factor of safety; FOS):

$$FOS(d, t) = \frac{\tan \varphi'}{\tan \beta} + \frac{c' - \psi(d, t) \cdot \gamma_w \cdot \tan \varphi'}{\gamma_s \cdot d \cdot \sin \beta \cdot \cos \beta} \quad (2)$$

where  $d$  [m] is the vertical depth (positive in downward direction),  $t$  [s] is time,  $\varphi'$  [deg] is the **effective** angle of internal friction **for effective stress**,  $\beta$  [deg] is the slope angle,  $c'$  [Pa] is the **effective cohesion for effective stress** per unit area,  $\gamma_w$  (9.81 N m<sup>-3</sup>) is the unit weight of water and  $\gamma_s$  [N m<sup>-3</sup>] is the unit weight of soil. Raster cells where the FOS falls below 1.0 are considered slope failures. Each cell with a FOS < 1.0 represents a single shallow landslide (Milledge et al., 2012). The model's results are FOS maps showing a quantitative measure of slope stability in space and time.

However, the original version of TRIGRS 2.0 does not account for effects of vegetation. Kim et al. (2013) extended the model to include vegetation effects on hydrology and slope stability. They conclude that root reinforcement and tree surcharge can affect slope stability, while interception has only minor effects during landslide-triggering rainfall events. Following Kim et al. (2013), lateral root cohesion  $c_r$  [Pa] and tree surcharge  $s_t$  [Pa] were added to Eq. (2):

$$FOS(d, t) = \frac{\tan \varphi'}{\tan \beta} + \frac{c' + c_r - \psi(d, t) \cdot \gamma_w \cdot \tan \varphi'}{(s_t + \gamma_s \cdot d) \cdot \sin \beta \cdot \cos \beta} \quad (3)$$

Instead of adding a constant value for  $c_r$  (e.g. Kim et al., 2013), a linear decrease of  $c_r$  with depth up to a given rooting depth  $d_r$  [m] was assumed, accounting for the distribution of roots with depth as observed in other studies (e.g. Bischetti et al., 2005, 2009). If the rooting depth exceeds the regolith depth,  $c_r$  is only considered down to the regolith/bedrock interface (roots are not expected to penetrate the bedrock). For the revised form of TRIGRS 2.0, three additional parameters ( $c_r$ ,  $s_t$  and  $d_r$ ) must be given. The three parameters are allowed to vary spatially and can be prepared as parameter maps.

### 3.3 Model parameters

Table 2 shows the required parameters and their values considered in previous studies **applying with** the original TRIGRS model (Version 1.0 and 2.0) and a revised form (Kim et al., 2013). In the cited studies, the time-varying precipitation intensities are derived from meteorological stations in or **nearby near** the study area. The slope angle maps are calculated using DEMs (based on interpolated contour lines) of various spatial resolutions. Regolith depth maps are prepared as a function of the slope angle (Salciarini et al., 2006), by using a geomorphologically indexed model (Zizioli et al., 2013), a spline interpolation of direct measurements (Kim et al., 2013) and spatially constant values (Park et al., 2013; Vieira et al., 2010). The initial depth of the water table  $d_{wi}$  (positive in downward direction) is assumed to be either at the regolith/bedrock interface (Kim et al., 2013;


**Table 2.** Parameters for the revised TRIGRS 2.0 model and parameter values considered in previous studies. DEM: digital elevation model,  $K_s$ : saturated hydraulic conductivity. \*revised form of TRIGRS 1.0.

Parameter	Unit	Salciarini et al. (2006)	Zizioli et al. (2013)	Vieira et al. (2010)	Park et al. (2013)	Kim et al. (2013)*
Precipitation intensity $P$	$\text{m s}^{-1}$	Station data	Station data	Station data	Station data	Station data
Slope angle $\beta$	Degree	DEM ( $5 \times 5$ m)	DEM ( $10 \times 10$ m)	DEM ( $2 \times 2$ m)	DEM ( $10 \times 10$ m)	DEM ( $5 \times 5$ m)
Regolith depth $d_{max}$	m	Function of slope angle	Geomorphologically indexed model	Constant value (1.0, 2.0 and 3.0 m)	Constant value (2.0 m)	Spline interpolation of measurements
Initial depth of the water table $d_{wi}$	m	0, 25, 50 and 100% of regolith depth	0.75 m below the surface	At regolith depth	At regolith depth	At regolith depth
Background infiltration rate $I_z$	$\text{m s}^{-1}$	-	-	$1.00 \times 10^{-9}$	$0.01 \times K_s$	$4.50 \times 10^{-9}$
<del>Effective</del> Angle of internal friction for effective stress $\varphi'$	Degree	18.00–40.00	22.00–33.70	34.00	29.63	34.00
<del>Effective</del> Cohesion for effective stress $c'$	kPa	4.00–100.00	0.00–10.00	1.00; 6.00	10.17	5.20
Sat. hydraulic conductivity $K_s$	$\text{m s}^{-1}$	$10^{-8} - 10^{-4}$	$1.50 \times 10^{-5} - 1.00 \times 10^{-4}$	$1.00 \times 10^{-6}$	$1.30 \times 10^{-5}$	$4.50 \times 10^{-5}$
Hydraulic diffusivity $D_0$	$\text{m}^2 \text{s}^{-1}$	-	-	$5.5 \times 10^{-5}$	$200 \times K_s$	-
Unit weight of soil $\gamma$	kPa	18.00–22.00	17.46–19.91	17.10; 14.30	18.38	14.71
Root cohesion $c_r$	kPa	-	-	-	-	3.0
Tree surcharge $s_t$	kPa	-	-	-	-	2.9
Rooting depth $d_r$	m	-	-	-	-	-
Number of property zones		5	4	1	1	1

Park et al., 2013; Vieira et al., 2010) or at a depth relative to it (Salciarini et al., 2006; Zizioli et al., 2013). For the background infiltration rate describing a steady-state infiltration component, constant values (e.g. Kim et al., 2013; Vieira et al., 2010) or multiples of  $K_s$  (e.g. Park et al., 2013) ~~have been~~ were used.

For the landslide-triggering rainfall events considered in the present study, hourly precipitation maps were prepared ~~covering~~ for the whole province of Vorarlberg. Based on hourly precipitation records from available meteorological stations throughout the province, hourly precipitation maps were generated using a spline interpolation. Figure 4 shows the respective time series and the resulting cumulative precipitation maps for the Laternser valley. The temporal course of the precipitation intensities differs ~~distinctively~~ distinctly (August 2005: short and intense; May 1999: prolonged and less intense), while cumulative precipitation sums over the considered duration are in the same order (May 1999: 263 mm; August 2005: 252 mm). For modelling the temporal evolution of slope stability, FOS maps were computed for nine (May 1999; Fig. 4a) and seven (August 2005; Fig. 4c) time steps ~~with intervals~~ of nine hours to completely cover both rainfall events.

The required slope angle map (Fig. 2b) was derived area-wide from a DTM after Wood (1996). The DTM was generated with ALS data acquired in 2011, with a reported accuracy of 10 cm ~~in horizontal~~ horizontally and 7.5 cm ~~in vertical direction~~ vertically (Wiedenhöft and Vatslid, 2014). The data quality of the DTM from 2011 ~~surpasses~~ exceeds the quality of the DTM from 2004, particularly in areas covered by forest. The spatial resolution of the prepared parameter maps was set to 10 m with regard to the most abundant size of observed landslide scar areas, which is in the order of  $100 \text{ m}^2$  (Zieher et al., 2016). Furthermore, the chosen spatial resolution was considered a compromise between the topographical representation of the surface, the computational efficiency for the modelling and the required minimum length-to-depth ratio (in the order of 8:1) for the application of the infinite slope stability model (Milledge et al., 2012).

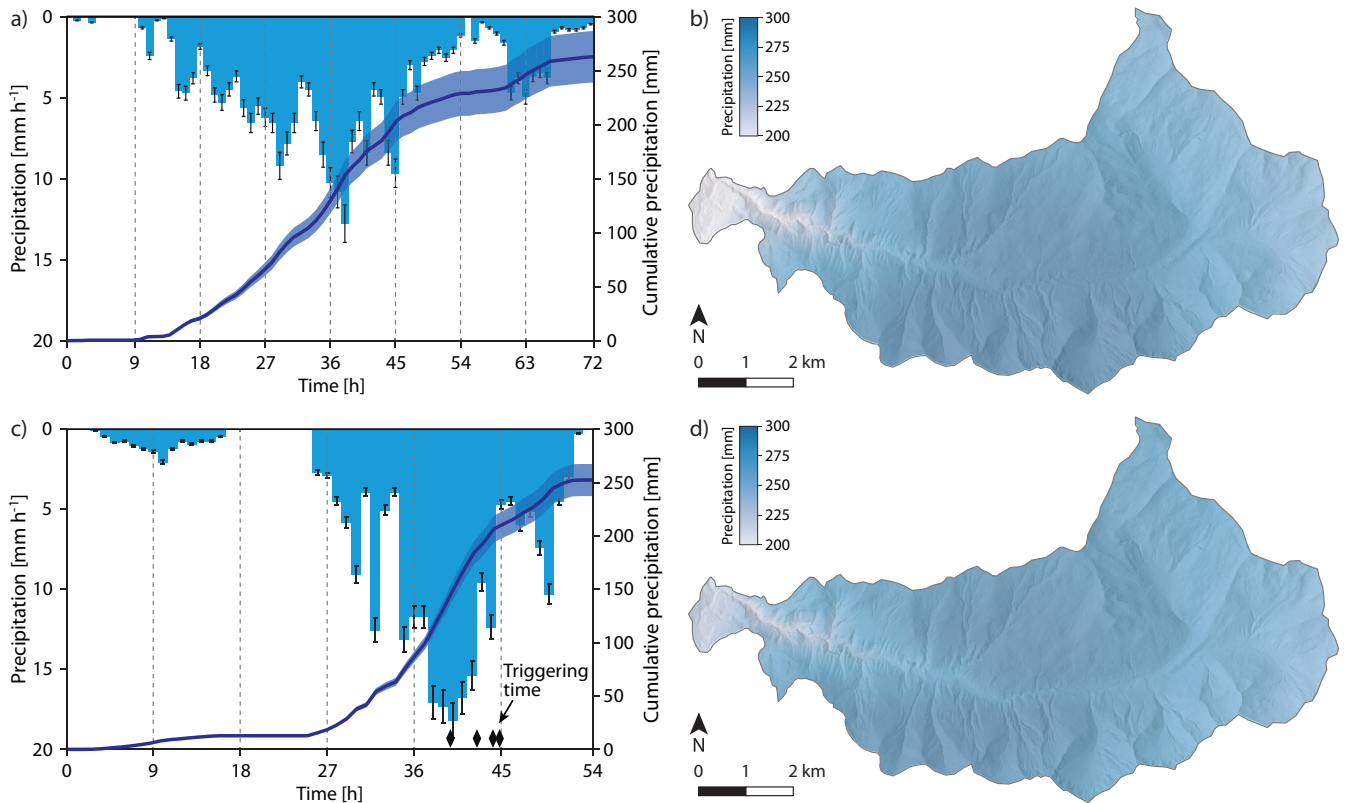


**Figure 4.** Hourly precipitation time series (a, c) and spatially interpolated precipitation sums (b,d) for the duration of the landslide-triggering rainfall events in 1999 (a,b; 20 May, 07:00–23 May, 07:00) and 2005 (c,d; August 21, 07:00–August 23, 12:00). The error bars and the shading for the cumulative precipitation sum in (a) and (c) indicate the range of the interpolated hourly precipitation sums within the catchment area.

Regolith depth, also referred to as soil depth (e.g. Lanni et al., 2013) or soil thickness (e.g. Catani et al., 2010; Segoni et al., 2012), is still one of the most difficult and laborious parameters to measure at a catchment scale, yet crucial for physically-based modelling of slope stability (Dietrich et al., 1995; Lanni et al., 2012; Segoni et al., 2012). It is defined as the thickness of unconsolidated material covering the earth's surface, i.e. the depth from surface to bedrock (Fairbridge, 1968). Regolith depth can be assessed by (i) direct measurements (e.g. Lanni et al., 2012; Wiegand et al., 2013), (ii) means of geophysics (e.g. Davis and Annan, 1989; Sass, 2007) or (iii) modelling (e.g. Dietrich et al., 1995; Heimsath et al., 1997). Furthermore, the depth of past landslides can be derived from multi-temporal, remotely sensed elevation data (Zieher et al., 2016). For regolith depth mapping, regression models correlating regolith depth to either elevation, slope angle or other derivatives were used in previous case studies on shallow landslide susceptibility (Baum et al., 2010; Lanni et al., 2012; Salciarini et al., 2006; Segoni et al., 2012). For the assessment of regolith depth in the Laternser valley, 126 dynamic cone penetration tests (DCPTs) were conducted along four transects. A lightweight dynamic cone penetrometer comprising a 10 kg hammer dropped from a height of 0.5 m onto an anvil of 6 kg was used (e.g. Wiegand et al., 2013). Following ÖNORM EN ISO 22476-2:2012,

the number of strokes for penetrating vertical increments of 10 cm was recorded in the field. After completing 50 strokes, the penetration tests were stopped if the penetrated increment was less than 10 cm (ÖNORM EN ISO 22476-2:2012). The final depth was recorded to the nearest centimetre, with the maximum detectable depth of 6.0 m exceeded only once. Furthermore, the maximum vertical depths of 96 shallow landslides triggered on 21/22 May 1999, and of 249 shallow landslides triggered on 22/23 August 2005, are available for validation (Fig. 5b). The landslide depths were measured in the field after the triggering event in May 1999 (Andreacs et al., 2002) and derived from the analysis of a dDTM for the landslides triggered in August 2005 (Zieher et al., 2016). The final depths of the DCPTs were used to train generalized linear models (GLMs) with local morphometric parameters as predictors, including elevation, slope angle, minimum and maximum curvature (Wood, 1996), and the topographic wetness index (Beven and Kirkby, 1979). A stepwise backward predictor selection revealed a linear model with the slope angle yielding the best agreement with the cumulative landslide depths from 1999 and 2005 (Fig. 5a). It outperforms the curvature and the combined slope angle/curvature model, particularly for depths below 2.0 m. The resulting empirical relationship for regolith depth  $d_{max}$  and the slope angle  $\beta$  is

$$d_{max} = \begin{cases} 3.028 - 0.049 \cdot \beta & \text{for } 0.0^\circ \leq \beta < 61.8^\circ \\ 0.0 & \text{for } \beta \geq 61.8^\circ \end{cases} \quad (4)$$

The derived regolith depth map (Fig. 5b) also matches the field observation, that on slopes which are inclined more than approximately  $60^\circ$  the surficial cover of unconsolidated material is of minor depth or not present at all. Furthermore, on very steep slopes there is a transition from sliding to toppling and falling as the predominant types of failures (Baum et al., 2010).

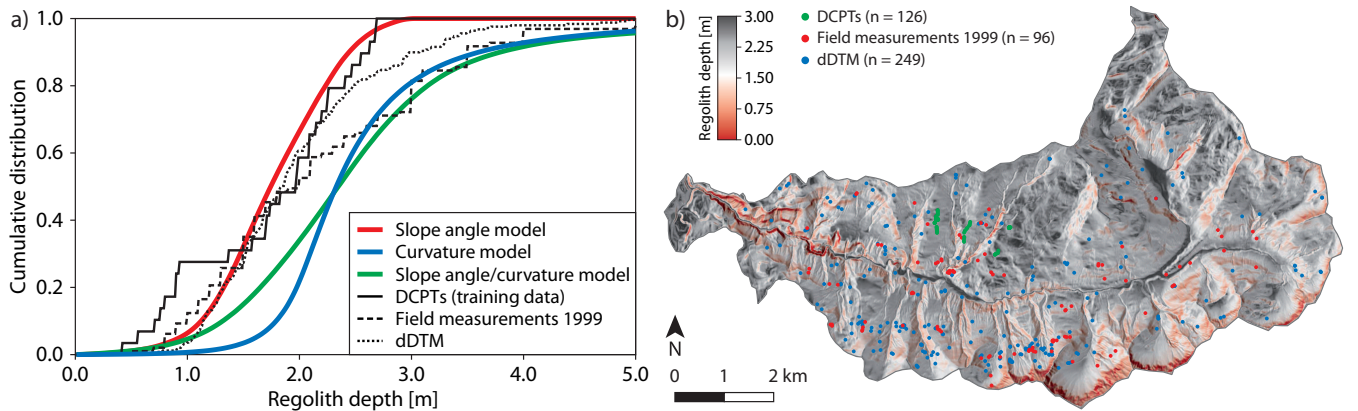

**Figure 5.** Cumulative distribution of  $d_{max}$  derived from observations and models (a) and the resulting regolith depth map (b).

For the derivation of the geotechnical and hydrological parameter values suitable for the Laternser valley, a limited number of laboratory tests were conducted. On the south-facing slopes of the study area, geotechnical samples were collected from eight sites where shallow landslides had been triggered in 1999 (BIN-02), 2002 (ROH-01), 2005 (BIN-01, BON, MAZ, REU, ROH-02) and 2013 (INN), close to populated areas in the Laternser valley (Fig. 2c, Table 3). The abbreviations were chosen

according to the closest settlements (BIN: Bingadels, BON: Bonacker, INN: Innerlaterns, MAZ: Mazona, REU: Reute, ROH: Rohnen). In the geological map (Fig. 2c), the sampled sites are mapped as hillslope debris (BIN-01, BIN-02), till deposits (INN, MAZ, REU, ROH-01), Leimernmergel (BON) and Drusbergsschichten (ROH-02). Back walls were laid open at the top of the landslide scarps. Two undisturbed and one disturbed sample were taken at two depths at each site except for location ROH-02.

- 5 There, samples of one depth were considered sufficient because of the homogeneously structured regolith. The undisturbed samples were collected with the help of core cutters (diameter 9.6 cm) and stored airtight. Furthermore, buckets of material were taken from the respective depths. The grain size distributions (Fig. 6b), wet and dry bulk densities, and water contents were determined for all samples. With the lower samples, geotechnical parameters ( $\varphi'$ ,  $c'$ , Atterberg limits) were derived from the respective laboratory tests (Fig. 6a,d). The upper samples were used to obtain estimates for the specific storage  $S_s$ , based  
 10 on the constrained modulus  $E_s$  [Pa] derived from oedometer tests (Rowe and Barden, 1966). The respective values for  $S_s$  [ $\text{m}^{-1}$ ] were derived from

$$S_s = \rho_w \cdot g \cdot (\alpha_s + n \cdot \beta_w) \quad (5)$$

where  $\rho_w$  [ $\text{kg m}^{-3}$ ] is the density of water,  $g$  is the acceleration of gravity ( $9.81 \text{ m s}^{-2}$ ),  $n$  is porosity,  $\beta_w$  is the compressibility of water ( $4.4 \times 10^{-10} \text{ m}^2 \text{ N}^{-1}$ ) and  $\alpha_s$  [ $\text{m}^2 \text{ N}^{-1}$ ] is the compressibility of bulk soil, derived from


$$15 \quad \alpha_s = \frac{3 \cdot (1 - \nu)}{E_s \cdot (1 + \nu)} \quad (6)$$

where  $\nu$  is Poisson's ratio, for which a constant value of  $1/3$  was assumed (e.g. Lu and Godt, 2013; Schmidt et al., 2014).  $E_s$  depends on the prevailing stress level (i.e. overburden height; Schmidt et al., 2014) and was derived for a depth of 1–2 m (e.g. Berti and Simoni, 2010). The hydraulic diffusivity  $D_0$  [ $\text{m}^2 \text{ s}^{-1}$ ] was derived from

$$D_0 = \frac{K_s}{S_s} \quad (7)$$

- 20 However,  $K_s$  was not tested in the field or laboratory. Its parameter values were calibrated over several orders of magnitude (Table 5). The background infiltration rate was set to zero in-order to consider a conservative estimation estimate of pore pressure conditions assuming a slope-parallel ground water flow (Baum et al., 2008, 2010).

- For the parameters representing the effects of vegetation on slope stability in the revised model, spatially constant parameter values are assumed within the area covered by forest. A conservative set of parameter values is derived from respective literature  
 25 with  $c_r$  set to 2.5 kPa (e.g. Bischetti et al., 2009; Steinacher et al., 2009),  $s_t$  set to 2.5 kPa (e.g. Steinacher et al., 2009) and  $d_r$  set to 1.0 m (e.g. Bischetti et al., 2009; Kutschera and Lichtenegger, 2002). However, these values were only applied within areas covered by forest. A forest cover map was prepared, based on the normalized digital surface model (nDSM) derived from the ALS data from 2011. The areas covered by forest for the time of the two landslide-triggering rainfall events in August 2005

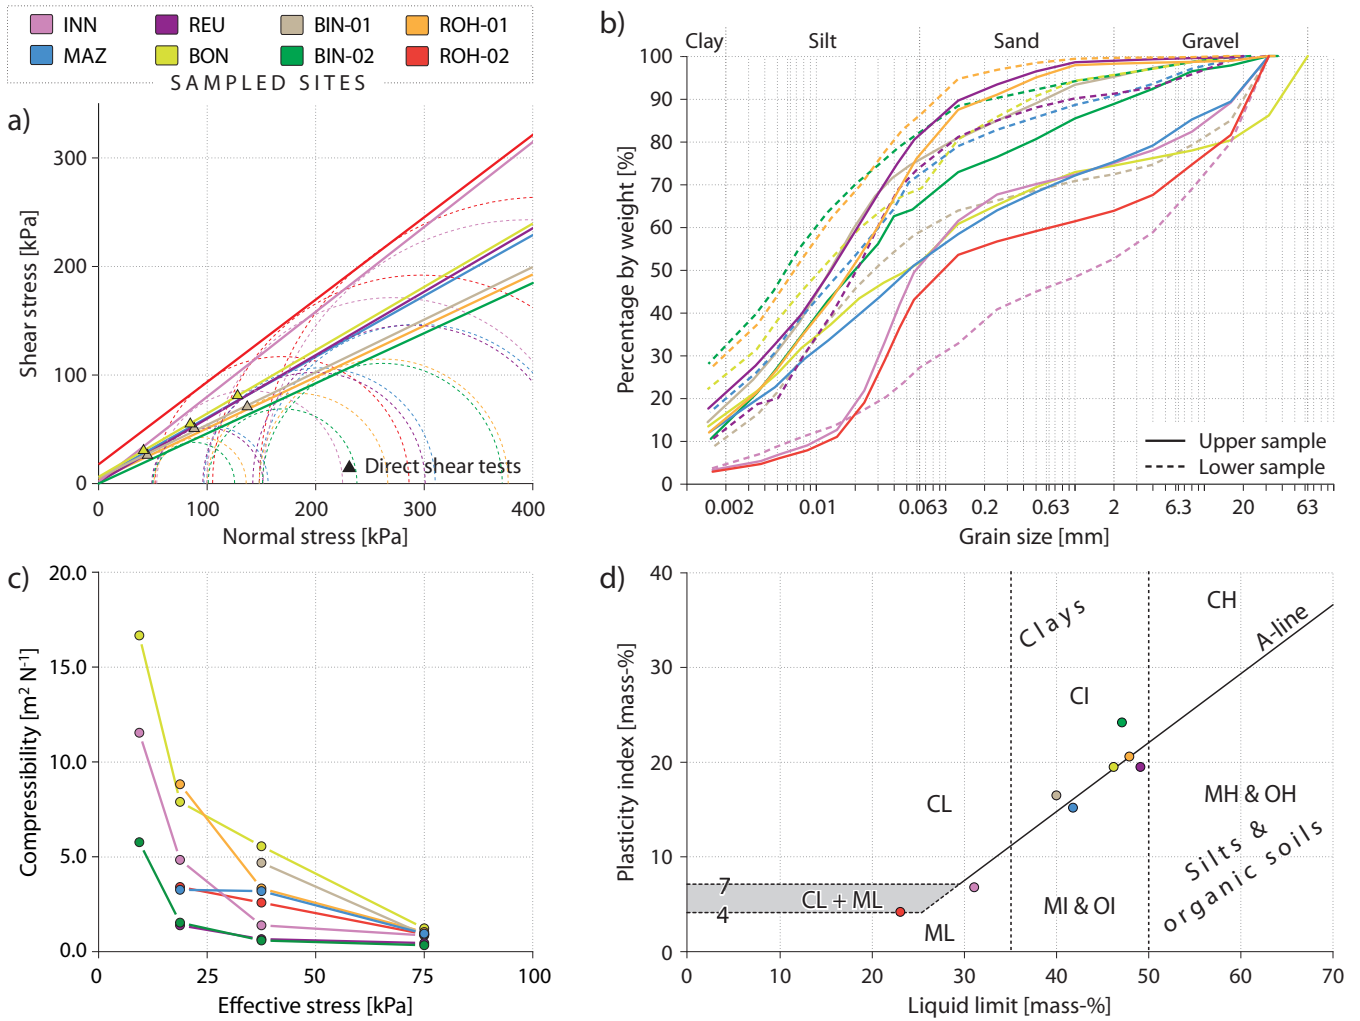

**Figure 6.** Results of the conducted laboratory tests. a) Direct and triaxial shear tests, b) grain size distributions, c) compressibility of bulk soil and d) Atterberg limits.

and May 1999 was adapted manually, using high-resolution orthophotos from 2006 (ground sampling distance 0.125 m) and 2001 (ground sampling distance 0.25 m) respectively.

### 3.4 One-parameter-at-a-time sensitivity analysis

Following Hammond et al. (1992), the model's sensitivity against each parameter is tested individually (Fig. 8). For each parameter, central, minimum and maximum values are defined, based on laboratory tests, field investigations and respective

**Table 3.** Metadata for the eight sampled landslide sites and results of the conducted laboratory tests. \*Results for a depth of 2.0 m.

Parameters	Unit	INN	MAZ	REU	BON	BIN-01	BIN-02	ROH-01	ROH-02
Latitude	Degree	47.2572	47.2679	47.2647	47.2673	47.2722	47.2737	47.2690	47.2699
Longitude	Degree	9.7381	9.7352	9.7144	9.7256	9.7040	9.7087	9.6980	9.7001
Sample depth 1	cm	56	37	34	30	45	42	41	-
Sample depth 2	cm	72	67	56	80	92	72	65	108
<del>Eff-<math>\alpha</math></del> Angle of internal friction for effective stress	Degree	38.1	29.3	30.3	30.3	25.9	24.8	25.3	37.2
<del>Effective-<math>c</math></del> Cohesion for effective stress	kPa	1.3	4.6	0.8	6.2	5.6	0.0	3.7	17.6
Constrained modulus*	kPa	1050	470	2040	240	1400	2740	400	750
Specific storage*	m <sup>-1</sup>	0.037	0.031	0.007	0.061	0.011	0.005	0.037	0.020
Plastic limit	mass %	24.2	26.6	29.6	26.8	23.5	22.8	27.3	18.9
Liquid limit	mass %	31.1	41.8	49.1	46.2	40.0	47.1	47.9	23.1
Dry density	g cm <sup>-3</sup>	1.43	1.45	1.27	1.37	1.36	1.84	1.25	1.99
Porosity	%	45.2	45.1	52.4	48.9	46.3	29.8	52.3	25.5
Soil type		Clay/silt	Silt	Silt	Clay	Clay	Clay	Clay	Clay/silt

**Table 4.** Parameter value ranges and central values considered in the OAT sensitivity analyses.

Parameter	Unit	Central value	Range	
			Minimum	Maximum
<del>Eff-<math>\alpha</math></del> Angle of internal friction for effective stress	Degree	29.0	20.0	38.0
<del>Cohesion (soil)</del> Cohesion for effective stress	kPa	5.0	0.0	18.0
Root cohesion	kPa	2.5	0.0	5.0
Slope angle	Degree	30.0	20.0	40.0
Regolith depth	m	1.5	1.0	2.0
Unit weight of soil	kPa	18.5	17.0	20.0
Rooting depth	m	1.0	0.5	1.5
Tree surcharge	kPa	2.5	0.0	5.0
Specific storage	m <sup>-1</sup>	0.010	0.001	0.100
Sat. hydraulic conductivity	m s <sup>-1</sup>	10 <sup>-6</sup>	10 <sup>-8</sup>	10 <sup>-4</sup>
Depth of the water table	m	1.5	0.0	1.5
Precipitation (August 2005)	%	100	50	150

literature (Table 4). The resulting  $FOS_{p_i}$  for each parameter  $p_i$  sampled over the specified range, is related to the respective  $FOS_{p_{central}}$  based on the defined central parameter values:

$$\Delta FOS = \frac{FOS_{p_i} - FOS_{p_{central}}}{FOS_{p_{central}}} \quad (8)$$

The resulting relative deviation  $\Delta FOS$  reflects the model's sensitivity against each parameter. However, interactions between parameters are not considered (Dobler and Pappenberger, 2013; Hammond et al., 1992).

**Table 5.** Tested parameter values used for the calibration runs. For all 10,000 parameter value combinations, time-dependent FOS maps were computed for the landslide-triggering rainfall event in August 2005.

Parameter	Unit	1	2	3	4	5	6	7	8	9	10
Cohesion for effective stress	kPa	0.0	2.0	4.0	6.0	8.0	10.0	12.0	14.0	16.0	18.0
Eff- <del>a</del> Angle of internal friction for effective stress	deg	21.0	23.0	25.0	27.0	29.0	31.0	33.0	35.0	37.0	39.0
Sat. hydraulic conductivity	m s <sup>-1</sup>	1.0 × 10 <sup>-6</sup>	2.2 × 10 <sup>-6</sup>	4.6 × 10 <sup>-6</sup>	1.0 × 10 <sup>-5</sup>	2.2 × 10 <sup>-5</sup>	4.6 × 10 <sup>-5</sup>	1.0 × 10 <sup>-4</sup>	2.2 × 10 <sup>-4</sup>	4.6 × 10 <sup>-4</sup>	1.0 × 10 <sup>-3</sup>
Specific storage	m <sup>-1</sup>	1.0 × 10 <sup>-3</sup>	1.7 × 10 <sup>-3</sup>	2.8 × 10 <sup>-3</sup>	4.6 × 10 <sup>-3</sup>	7.7 × 10 <sup>-3</sup>	1.3 × 10 <sup>-2</sup>	2.2 × 10 <sup>-2</sup>	3.6 × 10 <sup>-2</sup>	6.0 × 10 <sup>-2</sup>	1.0 × 10 <sup>-1</sup>

### 3.5 Parameter calibration and validation


In previous studies, local OAT parameter tests ~~are were~~ used for the calibration of parameter values (e.g. Gioia et al., 2016). In the present study, the calibration of the four identified sensitive parameters ( $\varphi'$ ,  $c'$ ,  $K_s$ ,  $S_s$ ; Sect. 4.1) is based on systematic testing of parameter value combinations for the whole catchment ~~area~~ (global calibration), computed with a HPCC (162 nodes, 5 1.944 Intel Xeon Gulftown compute cores). For each parameter, ten values are sampled from a uniform distribution in equal increments from the defined minimum to maximum (e.g. Beven and Freer, 2001). Because of the limited number of laboratory tests, it is not possible to infer ~~a~~-probability distributions of the parameter values. The hydrological parameters are sampled on the logarithmic scale (Table 5).

The predictive performance of each FOS map resulting from the 10,000 calibration runs with seven time steps each (514.9 10 gigabyte of data), was assessed with the receiver operating characteristic (ROC) principle (Begueria, 2006). Using physically-based slope stability models, a FOS < 1.0 indicates a potential slope failure, while a FOS ≥ 1.0 suggests a stable slope. The coordinates of the point in the ROC-plot where the FOS falls below 1.0 represent the correctly predicted ~~fractions of~~ observed landslides (true positives; TP) and non-landslides (true negatives; TN). The basic idea of the calibration procedure is to identify parameter value combinations, which result in an ~~optimal optimum~~ prediction of observed landslides and non-landslides, ~~at a~~ 15 ~~FOS-threshold falling below 1.0, by minimizing the distance to the perfect classification (D2PC, Formetta et al., 2016; Mergili et al., 2017; Fig. 7) (Fig. 7)~~. Data processing and analysing included the open source GRASS GIS 6.4 (GRASS Development Team, 2014), Python 2.7 programming language (Python Software Foundation, 2016) and R statistical software (R Core Team, 2016).

The identification of 'behavioural model runs' out of the 10,000 calibration runs is based on the following observations and 20 assumptions:

1. At the beginning of the simulations, the slopes throughout the Laternser valley must be stable (FOS ≥ 1.0).
2. Most shallow landslides were triggered after the highest precipitation intensity occurred (FOS falls below 1.0).
3. ~~Optimal Optimum~~ parameter values can be derived from the simulations ~~that which~~ correctly predict the most ~~observed~~ landslides ~~and non-landslides (minimized D2PC)~~ while satisfying the first two assumptions.

25 The necessary observations for the assessment of the predictive performance are obtained from the shallow landslide inventory. For 261 out of 356 shallow landslides triggered in August 2005, the scar areas are available, delineated with the help of

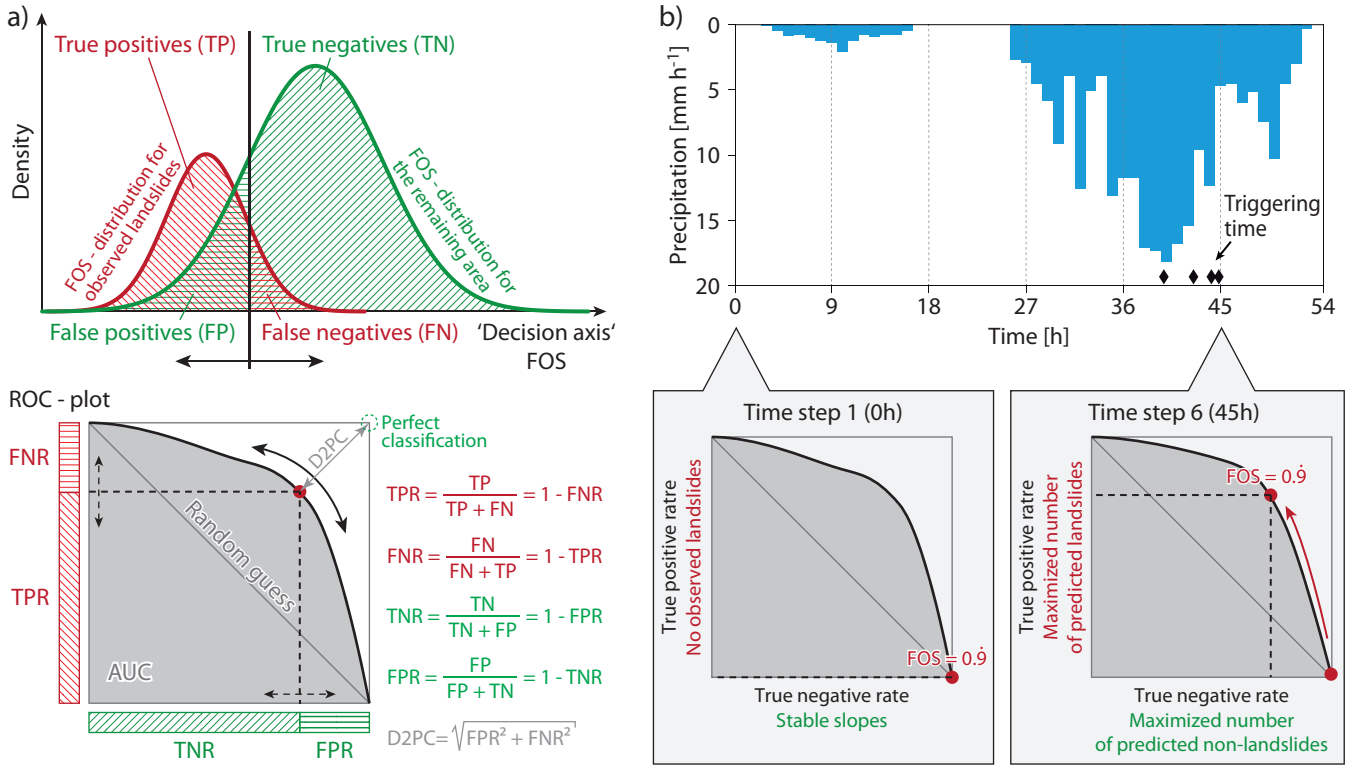

**Figure 7.** Principle of the receiver operating characteristic (a; modified after Metz, 1978) and its application in the calibration procedure (b). FOS: factor of safety, TPR: true positives rate, FNR: false negatives rate, TNR: true negatives rate, FPR: false positives rate, D2PC: distance to perfect classification, AUC: area under the ROC-curve.

a dDTM (Zieher et al., 2016). A shallow landslide is regarded as correctly predicted, if the FOS falls below 1.0 in at least one raster cell intersecting the scar area. This strategy was chosen because of the discrepancy between the regular raster environment (input and output maps) and the mapped shallow landslide scar area polygons. The spatial resolution of 10 m results from a compromise between the size of most shallow landslide scar areas, the constraints of the infinite slope stability model and the representation of the topography. However, it remains unknown which pixel represents an actually observed shallow landslide. This results from positional uncertainties of the involved data sets, but also from the smoothed representation of the topography associated with the coarse raster resolution. It is therefore assumed that the raster cell with the lowest FOS intersecting the scar area polygon represents the respective landslide (e.g., Montgomery and Dietrich, 1994; Casadei et al., 2003; Keijsers et al., 2011). For landslides with no scar area mapped (95 landslides triggered in August 2005, landslides triggered in May 1999), a planimetric circle with a diameter radius of 5.6 m (resulting in an area of 100 m<sup>2</sup>) around the scar point (mapped in the visual center of the scar areas) is used instead.

## 4 Results


### 4.1 One-parameter-at-a-time sensitivity analysis

The OAT sensitivity analysis of the geomechanical model element's parameters reveals that an increase in parameter values can have positive ( $\varphi'$ ,  $c'$  and  $c_r$ ) and negative effects ( $\beta$ ,  $d_{max}$ ,  $s_t$ ) on slope stability (Fig. 8a). Variations in  $\beta$  and  $d_{max}$  result in non-linear effects on slope stability. An increase in  $\beta$  or  $d_{max}$  lowers the FOS. Both parameters are derived from a DTM and direct field measurements. Increased parameter values for  $\varphi'$  and  $c'$  **distinctively distinctly** enhance the FOS. Their impact is greater than the effects of the parameters associated with the vegetation ( $c_r$ ,  $s_t$ ,  $d_r$ ). While variations of  $s_t$  have minor destabilizing effects, modified values of  $c_r$  increase the FOS. For the tested parameterization, variations of  $d_r$  do not show effects on the FOS. In the calibration procedure, the parameters representing the effects of vegetation are kept constant within the respective areas covered by forest, while the parameters  $\varphi'$  and  $c'$  are tested systematically.

For the parameters of the hydrological model element, the sensitivity analysis is based on the precipitation time series from 22/23 August 2005 to account for time-dependent responses. The model's sensitivity against the precipitation input is tested with scaled time series of this rainfall event. Depending on the previous precipitation input, the parameters  $K_s$ ,  $S_s$  and  $d_{wi}$  have different effects on the resulting FOS. Reducing  $K_s$  by two orders of magnitude, the FOS increases up to 30% due to the lowered infiltration, while higher parameter values result in a reduced FOS as reaction to the enhanced infiltration. The magnitude of  $S_s$  essentially controls the temporal dynamics of the modelled infiltration process. By reducing  $S_s$ , the value of  $D_0$  increases (Eq. 7), leading to a quicker infiltration of the precipitation input. Thus, lowering the  $S_s$  by one order of magnitude leads to a reduction of the FOS by more than 20%, while higher parameter values lead to an enhanced FOS. Decreasing the  $d_{wi}$  by 100% (initial water table at the surface) results in a reduced FOS by 24%. Compared to the other hydrological parameters, the model's sensitivity against the scaled precipitation time series is lower. By varying the precipitation input within a range of  $\pm 50\%$ , the resulting FOS changes by -4% to +9%. The precipitation input is given by the interpolated hourly precipitation sums and the  $d_{wi}$  is set to the regolith/bedrock interface for the calibration procedure with the rainfall event in August 2005, while the parameters  $K_s$  and  $S_s$  are tested systematically.

### 4.2 Calibration with the landslide-triggering rainfall event in August 2005

The temporal prediction rates and the respective coordinates for **FOS=0.99 a FOS falling below 1.0** in the ROC-curveplot for the shallow landslides triggered on 22/23 August 2005 are shown in Fig. 9. Table 6 shows the respective minimum and maximum prediction rates for the calibration steps. The **value ranges are presented for the best-performing output time step of each simulation. The D2PC is given for the coordinates of the FOS falling below 1.0, while the** area under the ROC-curve (AUC) as a measure of the overall predictive performance (Begueria, 2006) is based on the full FOS range of the resulting maps. Considering all 10,000 calibration runs (Fig. 9a), many parameter combinations yield completely stable conditions over all computed time steps (no correctly predicted landslides;  $TPR = 0.0\%$ ) but also **too to** unstable conditions at time step  $t = 0$ . Allowing for 0.5% of the catchment area to fail at time step  $t = 0$ , 7,300 calibration runs remain (Fig. 9b). However, many of the remaining calibration runs predict slope failures before the onset of the landslide-triggering rainfall event. Assuming that most

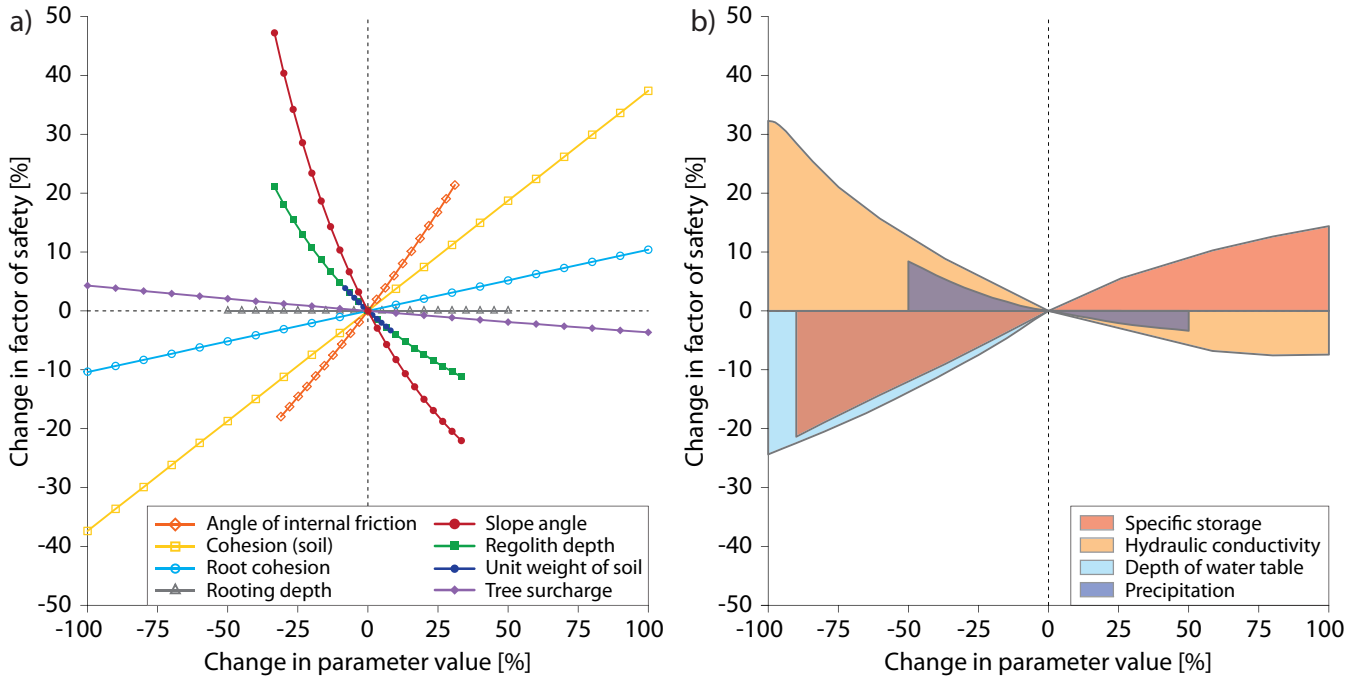


**Figure 8.** OAT sensitivity of the model results (change in factor of safety) for tested parameter value ranges for the geomechanical model element (a) and the hydrological model element (b). Respective parameter values are listed in Table 4.

shallow landslides were triggered after the maximum precipitation intensity, 1,134 calibration runs remain (Fig. 9c). Several of these remaining calibration runs do not predict any of the observed shallow landslides **over time** ( $TPR = 0.0\%$ ). Therefore, the 25 calibration runs with the highest sum of correctly predicted landslides and non-landslides are selected, **while minimizing the D2PC** ('behavioural model runs', Fig. 9d). With these model runs, the location and the supposed triggering timing of 46.6 to 70.5% of the observed shallow landslides can be predicted, while 71.0 to 90.3% of the observed non-landslides remain stable. It is assumed that this identified model ensemble is able to represent the spatial and temporal occurrence of shallow landslides triggered on 22/23 August 2005. The resulting parameter value combinations are regarded **optimal as best** for the dynamic modelling of slope stability in the Laternser valley.

#### 4.3 Validation with the landslide-triggering rainfall event in May 1999

- 10 To test the identified model ensemble's predictive performance, it is applied for the landslide-triggering rainfall event in May 1999. Despite the different nature of the rainfall events (August 2005: short and intense; May 1999: prolonged and less intense), most landslides are again predicted after the highest precipitation intensity (time step 6; after 45h; Fig. 10). Hence, assuming that the landslides observed for the rainfall event on 21/22 May 1999 were triggered after the maximum precipitation intensity occurred, the model ensemble is able to predict the location and the supposed triggering timing of most of these landslides.
- 15 However, the melting of the accumulated snow from the preceding winter may have **lead led** to an enhanced soil moisture and

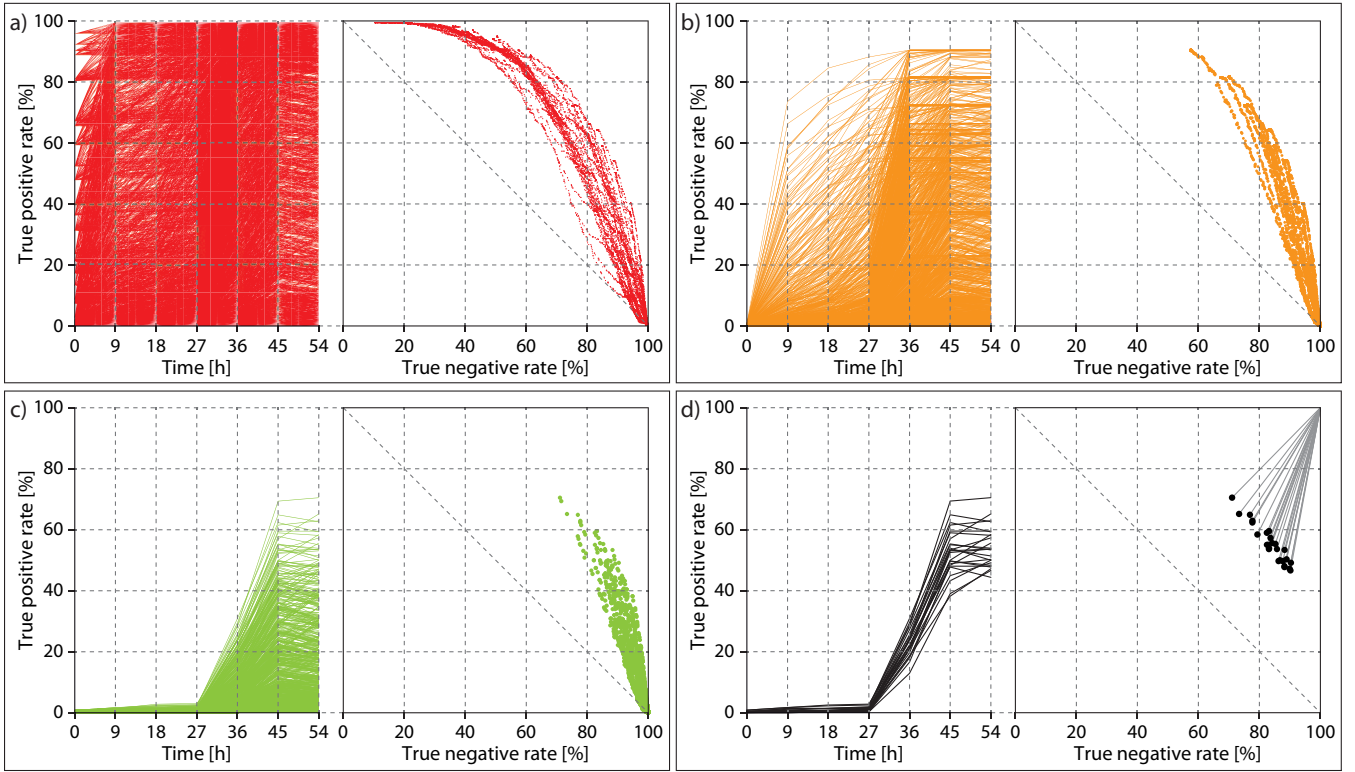

**Figure 9.** Temporal prediction rate for the seven time steps and rate of correctly predicted landslides (true positives) and non-landslides (true negatives) at  $\text{FOS}=0.99$  a  $\text{FOS}$  falling below 1.0 for the calibration runs. All 10,000 calibration runs (a), calibration runs which satisfy assumption 1 (b;  $n = 7,300$ ), calibration runs which satisfy assumption 2 (c;  $n = 1,134$ ) and the 25 calibration runs which predict most landslides and non-landslides (d). In d, only the coordinates  $\text{of}$ with the highest true positive rate for the 25 calibration runs are shown. The  $\text{gray}$  grey lines in (d) indicate the D2PCs of these runs.


**Table 6.** Prediction rates of the model ensemble for the landslide-triggering rainfall event in August 2005. TPR: true positive rate, TNR: true negative rate, FPR: false positive rate, FNR: false negative rate, D2PC: distance to perfect classification, AUC: area under the ROC-curve.

Prediction	All calibration runs		Stable at $t = 0$		Most landslides at $t = 45$		Best 25 runs	
	Minimum	Maximum	Minimum	Maximum	Minimum	Maximum	Minimum	Maximum
TPR	0.0%	99.4%	0.0%	90.4%	0.0%	70.5%	46.6%	70.5%
FNR	0.6%	100.0%	9.6%	100.0%	29.5%	100.0%	29.5%	53.4%
TNR	10.6%	100.0%	57.5%	100.0%	71.0%	100.0%	71.0%	90.3%
FPR	0.0%	89.4%	0.0%	42.5%	0.0%	29.0%	9.7%	29.0%
D2PC	0.34	1.00	0.34	1.00	0.41	1.00	0.41	0.54
AUC	72.2%	84.3%	73.5%	84.3%	73.5%	84.0%	78.1%	83.5%

**Table 7.** Prediction rates of the model ensemble for the landslide-triggering rainfall event in May 1999. Three scenarios for the initial depth of the ground water table in relation to regolith depth are considered. TPR: true positive rate, TNR: true negative rate, FPR: false positive rate, FNR: false negative rate, **D2PC: distance to perfect classification**, AUC: area under the ROC-curve.

Description	Regolith depth		0.75×regolith depth		0.50×regolith depth	
	Minimum	Maximum	Minimum	Maximum	Minimum	Maximum
TPR	43.9%	79.3%	51.2%	89.0%	58.5%	95.1%
FNR	20.7%	56.1%	11.0%	48.8%	4.9%	41.5%
TNR	71.5%	91.5%	66.1%	89.1%	62.7%	88.6%
FPR	8.5%	28.5%	10.9%	33.9%	11.4%	37.3%
<b>D2PC</b>	<b>0.35</b>	<b>0.57</b>	<b>0.31</b>	<b>0.50</b>	<b>0.29</b>	<b>0.44</b>
AUC	82.3%	87.6%	84.1%	87.8%	85.2%	87.2%

a rise of the water table. Therefore, three scenarios for the  $d_{wi}$  were considered (100%, 75% and 50% of the regolith depth; Fig. 10, Table 7). Assuming the  $d_{wi}$  to be at the regolith/bedrock interface, between 43.9–79.3% of the observed landslides are predicted correctly. Increasing the  $d_{wi}$  to 75% of the regolith depth, the true positive rate rises to 51.2–89.0% with up to 4.9% of the landslides predicted at  $t = 0$ . By further increasing the  $d_{wi}$  to 50% of the regolith depth, the true positive rate rises to 58.5–95.1%, while up to 30.3% of the landslides **are** predicted at  $t = 0$ . Setting  $d_{wi}$  to 75% of the regolith depth is therefore considered adequate for simulating slope stability for the landslide-triggering rainfall event in May 1999.

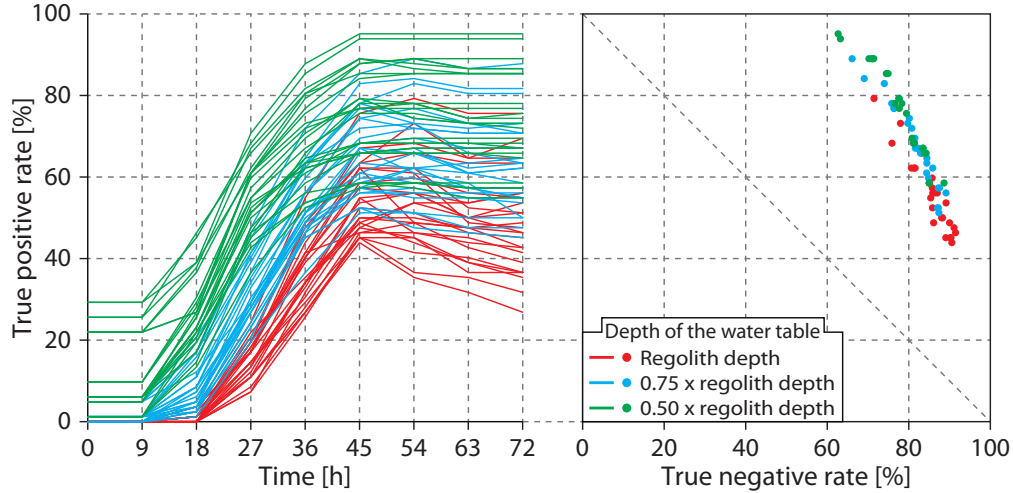

**Figure 10.** Temporal prediction rate (a) and coordinates for **FOS=0.99** a **FOS falling below 1.0**, based on the model ensemble for the landslide-triggering rainfall event in May 1999. Three scenarios for the initial conditions (initial depth of the water table) are considered.


**Table 8.** Prediction rates of the model ensemble for the landslide-triggering rainfall events in May 1999 and August 2005. For the rainfall event in May 1999, an initial depth of the water table of  $0.75 \times$  regolith depth was considered. TPR: true positive rate, TNR: true negative rate, FPR: false positive rate, FNR: false negative rate, **D2PC: distance to perfect classification**, AUC: area under the ROC-curve.

Description	May 1999		August 2005	
	Minimum	Maximum	Minimum	Maximum
TPR	51.2%	89.0%	46.6%	70.5%
FNR	11.0%	48.8%	29.5%	53.4%
TNR	66.1%	89.1%	71.0%	90.3%
FPR	10.9%	33.9%	9.7%	29.0%
<b>D2PC</b>	<b>0.31</b>	<b>0.50</b>	<b>0.41</b>	<b>0.54</b>
AUC	84.1%	87.8%	78.1%	83.5%

#### 4.4 Comparison of the model ensemble’s predictive performance

Figure 11 shows the resulting areas of slope failures predicted by the model ensemble for both rainfall events. The ~~color~~ colours indicate the number of model runs predicting slope failures per raster cell. Areas shown in red indicate a high agreement of the model ensemble, while yellow areas are identified by only one model run. The coordinates in the ROC plots associated with the number of agreeing model runs are shown in Fig. 11c for the rainfall event in August 2005 and Fig. 11f for the rainfall event in May 1999. ~~The single model run which predicts most landslides correctly also entails the lowest TNR of the model ensemble~~ The area, which is predicted to fail by at least one model run of the model ensemble, includes the most observed landslides (highest TPR) while the TNR is considerably low. With all 25 model runs in agreement, the rate of correctly predicted landslides is ~~distinctively~~ distinctly lower, while the TNR increases markedly. The prediction rates of the 25 model runs are shown in Fig. 11d for the rainfall event in August 2005 and Fig. 11e for the rainfall event in May 1999. Respective maximum and minimum prediction rates are listed in Table 8. Generally, the model ensemble is better predicts at predicting the landslides triggered in May 1999. However, non-landslides are better predicted for the rainfall event from August 2005.

In total, the model ensemble correctly predicts 73.0% of the landslides triggered in August 2005 (landslides, which are predicted correctly by at least on ensemble model run). This is slightly more than the best single model run of the ensemble. Apparently, some observed landslides which cannot be explained by the best single model run (TPR 70.5%) are explained by other model runs. Landslides observed on open land are predicted better (206 out of 268; 76.9% correctly predicted) than in the forest (54 out of 88; 61.4%). For the landslide-triggering rainfall event in May 1999, 91.5% of the observed landslides are predicted correctly. Like for the results for the rainfall event in August 2005, some additional landslides are explained by the model ensemble compared to the best single model run (TPR 89.0%). On open land, landslides are again predicted better (51 out of 54; 94.4% correctly predicted) than in the forest (24 out of 28; 85.7%).

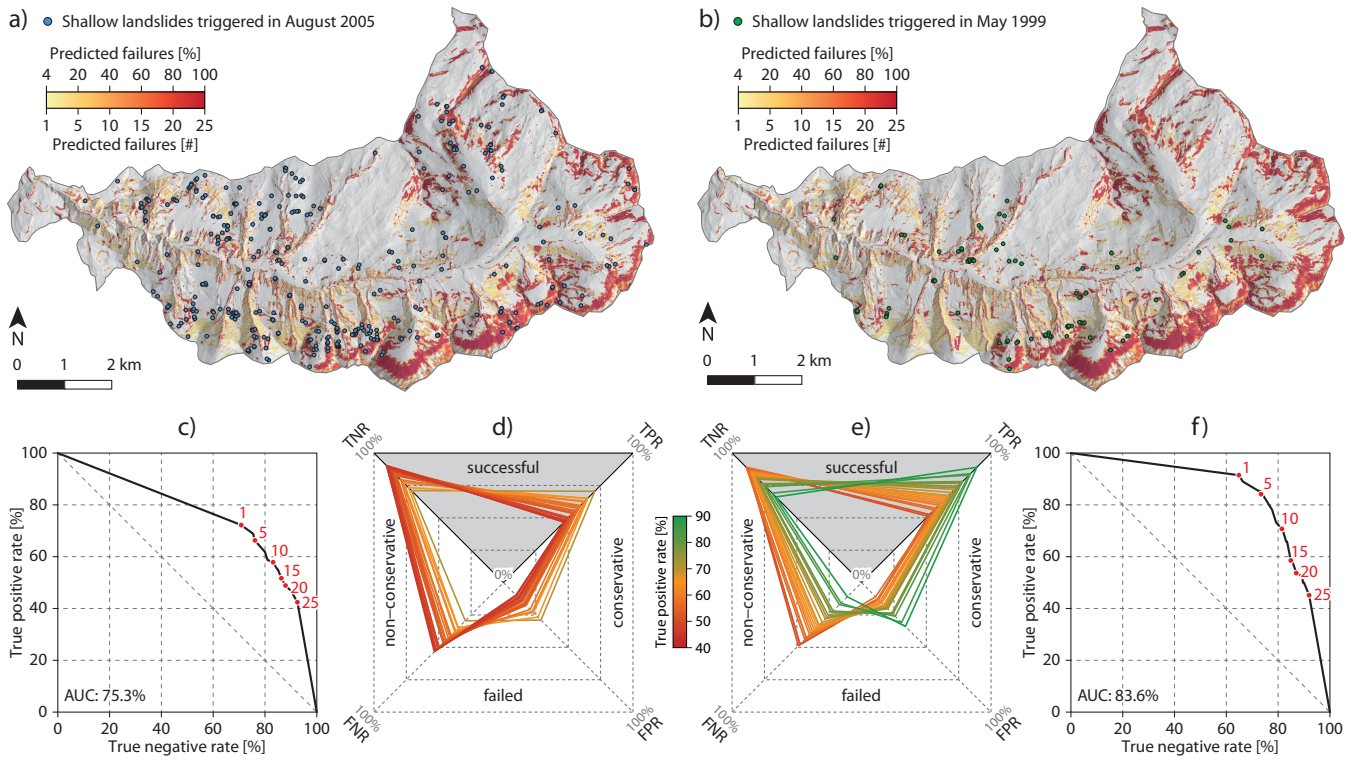


**Figure 11.** Predictive performance of the model ensemble. The maps show areas predicted to fail in response to the rainfall event in August 2005 (a) and in May 1999 (b). The colors indicate the number of models predicting the respective areas to fail. The ROC plots likewise show the coordinates of the correctly predicted landslides and non-landslides for August 2005 (c) and May 1999 (f) associated with the number of models which are in agreement. The predictive rates of the model ensemble (see Table 8) are visualized for August 2005 (d) and May 1999 (e). The colors indicate the true positive rate. TPR: true positive rate, TNR: true negative rate, FPR: false positive rate, FNR: false negative rate, AUC: area under the ROC-curve.

#### 4.5 Calibrated parameter values

Unlike the OAT sensitivity analysis, the presented calibration procedure can reveal parameter interactions. The calibrated parameter values are shown in (Fig. 12). For the geotechnical parameters, ranges of  $21^{\circ}$ – $35^{\circ}$  for the angle of internal friction for effective stress and 4–8 kPa for the cohesion for effective stress are optimal optimum value ranges. The results of four of the eight conducted shear tests are within these ranges. Furthermore, the distribution of the calibrated geotechnical parameters suggests; that lower angles of internal friction for effective stress can be compensated by increasing the cohesion for effective stress and vice versa. This can be expected from Eq. 2 and Eq. 3. In case of the hydrological parameters, the calibration procedure reveals optimal value ranges between  $10^{-6}$ – $10^{-5}$  m s<sup>-1</sup> for the hydraulic conductivity and  $10^{-2}$ – $10^{-1}$  m<sup>-1</sup> for the specific storage. Compared to the experimentally derived range of the specific storage, the calibrated parameter values show a

tendency towards higher values. The resulting hydraulic diffusivity (Eq. 7) is in the range of  $10^{-5}$ – $10^{-3} \text{ m}^2 \text{ s}^{-1}$ . These ranges theoretically cover a variety of materials, from sands to clays (e.g. Prinz and Strauß, 2011).

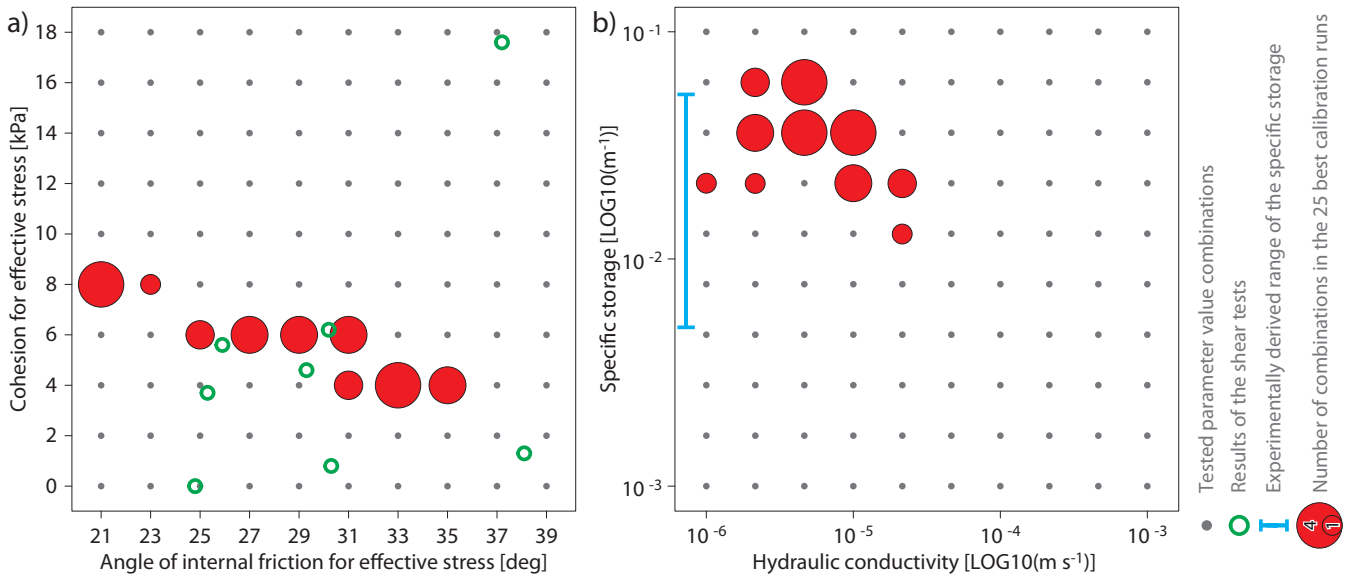


**Figure 12.** Calibrated values for the geotechnical (a) and hydrological parameters (b). The sizes of the red circles indicate the number of model runs based on these value pairs (with varying values of the further tested parameters). The results of the shear tests are shown in (a) as green circles. The experimentally derived range of the specific storage is indicated by the blue bar in (b).

#### 4.6 Model ensemble's sensitivity against increased precipitation intensity

According to the Austrian Assessment Report (Kromp-Kolb et al., 2014), frequency and magnitude of extreme precipitation events are expected to increase over Austria in a future climate. Using the model ensemble, the impact of increasing precipitation intensity on shallow landslide susceptibility is assessed. Therefore, the precipitation input from August 2005 is scaled up to 125% in increments of 5% (Fig. 13a). The resulting change in the proportion of unstable areas is shown in Fig. 13b. It increases from 7.6% ( $\pm 2.4\%$ ; 1 standard deviation) for the original rainfall event in August 2005 to 8.5% ( $\pm 2.7\%$ ) for the same rainfall event scaled to 125%.

- At the same time, the predicted mean surface runoff observed at time-step after 40h (time step with the highest runoff) increases **distinctively distinctly**. It rises from  $9.8 \times 10^{-4} \text{ m s}^{-1}$  ( $\pm 1.3 \times 10^{-3} \text{ m s}^{-1}$ ; 1 standard deviation) for the original rainfall event in August 2005 to  $1.7 \times 10^{-3} \text{ m s}^{-1}$  ( $\pm 1.8 \times 10^{-3} \text{ m s}^{-1}$ ) for the same rainfall event scaled to 125%. This is an increase of 76.0% compared to the runoff generated with the original rainfall input from August 2005 (Fig. 13c).

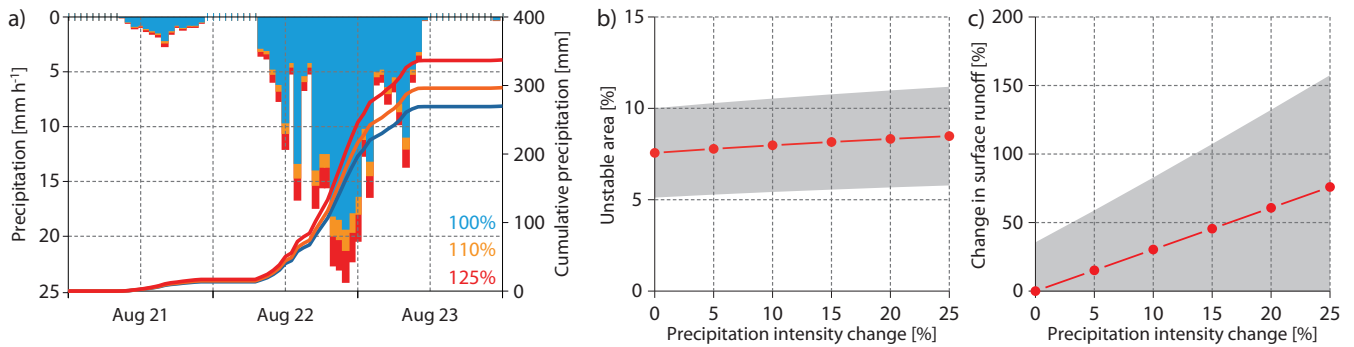

**Figure 13.** Scaled rainfall event of August 2005 (a) and resulting changes in slope stability (b) and surface runoff (c), based on the ensemble runs with a scaled precipitation input (b). The area shaded in grey shows one standard deviation.

## 5 Discussion

The OAT sensitivity analysis reveals a high impact of the slope angle and the regolith depth on the resulting FOS. The slope angle map is derived area-wide from a DTM based on ALS data. Their accuracy is considered sufficient for the derivation of slope angles at a spatial resolution of 10 m. However, resulting slope angles may differ, depending on the respective calculation method (e.g. Horn, 1981; Wood, 1996). The regolith depth map used in this study is based on a linear model with the slope angle as the only predictor. It is shown that this model is suitable to predict the cumulative distribution of regolith depth for depths up to 2.0 m. However, its spatial distribution may be better reproduced with techniques including more further predictors, like geomorphology or land cover (e.g. Catani et al., 2010; Tesfa et al., 2009). Compared to the impact of the geotechnical parameters, the effect of the vegetation parameters are considerably rather small. However, this can be attributed to the conservative set of parameter values assumed for the three vegetation parameters.

For the calibration procedure, the tested parameters are assumed to be constant throughout the catchment area. In other studies, property zones according to the geological substratum are defined with varying parameter value ranges. However, for the proposed calibration procedure, interactions between such property zones would have had to be included (e.g. enhanced runoff from zones above with lower infiltration capacity). Considering such interactions would exceed have exceeded the available computational capabilities.

The parameter value ranges considered in the calibration procedure are derived from laboratory tests conducted on samples from eight sites. It is assumed that these ranges are representative for the whole catchment area. However, results of additional laboratory tests conducted on samples from other locations could further extend these ranges. On the other hand, the tested parameter space already covers a wide range of material properties raising and raises the question whether laboratory tests are required for the suggested calibration procedure at all. Such parameter value ranges could be derived from text books as well (e.g. Prinz and Strauß, 2011). Nevertheless, results of laboratory tests can be helpful for interpreting and validating the parameter combinations of the identified model ensemble.

Four parameters with a high impact on the model outcome were systematically sampled from a uniform distribution with defined increments and ranges. Hence, the subsequent calibration procedure, which considers each parameter value combination, remains deterministic. However, the combination of the results of the identified model ensemble must not be confused with a probability of failure, since the sampling and selecting of the parameter values is done systematically. Probabilistic approaches (e.g. Hammond et al., 1992; Raia et al., 2014), including a randomized parameter sampling strategy, could overcome this limitation while considering the uncertainty of the input parameters. If the probability distributions of the parameters throughout the study area are known, probabilistic approaches can be applied to derive the probability of failure. Theoretically, the resulting parameter value combinations of the identified model ensemble could provide insights into the area-wide probability distributions of the tested parameters. However, further investigations are necessary, including an enhanced sampling strategy. Improved and optimized models (e.g. Alvioli and Baum, 2016) will facilitate this objective.

The constrained set of 25 simulations, which optimally predict the observed landslides and non-landslides, is selected by minimizing the D2PC at a FOS-threshold right below 1.0. Further performance indicators could be used for this task instead (e.g. Formetta et al., 2016; Mergili et al., 2017). However, for validating the results of physically-based slope stability models, a performance indicator which is independent of a threshold (such as the AUC) can be misleading. As shown in Table 5, the AUC is less sensitive over the tested parameter value ranges compared to the D2PC. As a consequence, a high D2PC for the coordinates of the FOS-threshold right below 1.0 (indicating a bad model performance) can go along with a high AUC (typically indicating a good model performance). Thus, for validating the results of physically-based slope stability models, a performance indicator considering a FOS-threshold right below 1.0 must be preferred over an indicator independent of a threshold. Nevertheless, the minimum D2PC increased during the calibration procedure from 0.34 to 0.41, suggesting worsening results. However, the simulations with lower D2PCs are associated with an unrealistic early triggering of the observed landslides before the onset of the rainfall event. Therefore, in case of dynamic slope stability models, the temporal progression of the performance indicators must be considered.

In the calibration procedure, FOS maps were calculated for seven time steps with intervals of nine hours. ~~Due to~~ For computational reasons it was not possible to compute hourly output maps. ~~Therefore, the model's predictive performance between these time steps remains unknown. It is possible that the model is able to predict more landslides correctly, if more time steps could be considered:~~ for all 10,000 simulations. A re-calculation of hourly output maps with the parameter combinations of the identified model ensemble showed that, in the time intervals between the original output time steps, slightly more observed landslides were predicted correctly in some cases. Theoretically, even more observed landslides could be predicted within the hourly time steps. Therefore the proposed calibration procedure may yield a different model ensemble if more output time steps were considered. In the same way, parameter values were tested in discrete intervals. Using parameter values in-between these intervals could enhance the model's predictive performance. Hence, the assessed predictive performance must be taken as a conservative estimate.

~~As shown in~~ For both landslide-triggering rainfall events, some of the ensemble model runs show a decrease in the temporal true positive rate after the maximum precipitation intensity. This observation is associated with decreasing pore pressures due to less infiltrating water. For some observed landslides, which are predicted to fail around the maximum precipitation

intensity, the reduced pore pressure afterwards later causes the FOS to rise above 1.0, and hence predicts stable slopes are predicted again. However, this behaviour also suggests a sufficient calibration of the parameter values, since the model reacts to the temporally varying precipitation intensity. In the same sense, parameter values were tested in discrete intervals. The application of parameter values in-between also could increase the models predictive performance. Hence, the assessed predictive performance must be considered as a conservative estimate.

With the model runs of the identified model ensemble between 46.6–70.5% of the observed landslides triggered in August 2005 and 51.2–89.0% of the observed landslides triggered in May 1999 can be predicted correctly. In total, the model ensemble correctly predicts 73.0% of the landslides triggered in August 2005 and 91.5% of the observed landslides triggered in May 1999. A direct comparison with prediction rates of further studies conducted in other study areas is difficult, since site-specific characteristics (e.g. soil material, conditions prior to landslide triggering, size of the study area) and data availability and quality (e.g. landslide inventory, DTM) may vary considerably. Still, the model ensemble fails to predict the remaining 27.0% of the landslides triggered in August 2005 and 8.5% of the landslides triggered in May 1999. Furthermore, the identified model ensemble cannot explain why landslides triggered in August 2005 were not triggered in May 1999. Areas predicted as unstable are in good agreement for both rainfall events. Further local factors may control the triggering of the landslides (e.g. local precipitation patterns, preferential flow, concentrated surface runoff, locally weak layers). Such local effects and properties are not covered by the model nor by the input parameter maps. Moreover, the geomechanical model element includes a simplified representation of landslide geometry, while an instant failure mechanism of the whole landslide is assumed. The model's simplifications of complex processes, together with the applied parametrization, may explain the shortfall in spatial and temporal prediction accuracy.

The resulting slope stability maps of the identified model ensemble show a bias from east to west. Compared to the observed landslides, the predicted landslide density is noticeably higher in the eastern half of the catchment area. This bias might be related to the lithology. The south-eastern part of the Laternser valley is built up of sandstones (penninic nappes), while the western and northern part is underlain by limestones, marls and shales (helvetic and ultrahelvetic nappes). Furthermore, the unconsolidated material located in the cirques of the south-eastern part of the valley is mostly coarse-grained debris originating from debris slides/debris flows and rock falls from source areas above. Therefore, the material may feature higher angles of internal friction, compared to the respective value range considered in the model ensemble. As a result, the slopes may remain stable in nature while they are predicted to fail by the ensemble.

Furthermore, the results of the identified model ensemble suggest a lower prediction rate of shallow landslides located in the forest. Therefore, the chosen representation of the effects of vegetation on slope stability in the revised model may be too simple. Furthermore, a conservative, spatially constant, set of parameter values was chosen for the parameters describing the effects of vegetation. In forest stands, these parameter values vary spatially according to tree species, age and density. Parameter maps for the effects of vegetation accounting for these attributes could further improve the model's predictive performance (e.g. Schwarz et al., 2010, 2012).

The results of the model ensemble based on a scaled precipitation intensity suggest a slight positive trend of unstable areas, while the surface runoff increases markedly. However, since subsurface flow is not considered and the runoff is calculated

for each time step individually, the model will fail in predicting actual stream flow. Nevertheless, this result suggests that the precipitation intensities during landslide-triggering rainfall events are already close to or above the infiltration capacity under present-day conditions. A potential increase in precipitation intensity might thus lead to an increase in surface runoff rather than slope failure. However, considering the uncertainty indicated by the model ensemble, both trends are not significant.

## 5 6 Conclusions

In the present study, a revised form of the model TRIGRS 2.0 is calibrated based on a limited number of laboratory tests and a detailed shallow landslide inventory. The parameter space of four identified sensitive parameters is tested systematically. A model ensemble including 25 'behavioural model runs' is identified which correctly predicts ~~the~~ most landslides and non-landslides for a landslide-triggering rainfall event in August 2005. The predictive performance of this ensemble is tested for a  
10 landslide-triggering rainfall event in May 1999. Finally, the ensemble is used to quantify potential changes in slope stability associated with increasing rainfall intensities.

It is shown that despite the simplified representation of the involved processes the location and the supposed triggering timing of 73.0% of the observed landslides triggered in August 2005 and 91.5% of the observed landslides triggered in May 1999 are predicted correctly by the identified model ensemble. The inability of the model to correctly predict the remaining  
15 landslides may be in part related to the simplifications of the related processes. To overcome these issues, additional processes should be included in the model (e.g. subsurface flow). However, ~~an-unresolved-issue-remains~~ the spatial variability of the input parameter values ~~remains an unresolved issue~~.

The assessment of changes in slope stability associated with scaled precipitation input shows a slight increase in potentially affected areas. At the same time, the peak runoff increases markedly. ~~Despite both trends are not~~ Even though neither trend is  
20 significant, this could indicate that the precipitation intensities of past landslide-triggering rainfall events were already close to the soil's infiltration capacity. However, a general increase in precipitation intensity could lead to an increase in the frequency of landslide-triggering rainfall events. Rainfall events which did not trigger any shallow landslides in the past may become trigger events under a changing climate in future.

*Acknowledgements.* We thank the federal state of Vorarlberg and the Hydrographic Service of Vorarlberg (HD) for kindly providing data for  
25 this study. The computational results presented have been achieved (in part) using the HPC infrastructure LEO of the University of Innsbruck. We also thank the two anonymous reviewers for their constructive comments. This work has been conducted within the project C3S-ISLS, which is funded by the Austrian Climate and Energy Fund, 5th ACRP ~~Program~~ Programme.

## References

- Alvioli, M. and Baum, R.: Parallelization of the TRIGRS model for rainfall-induced landslides using the message passing interface, *Environmental Modelling & Software*, 81, 122–135, doi:10.1016/j.envsoft.2016.04.002, <http://doi.org/10.1016/j.envsoft.2016.04.002>, 2016.
- Amann, G., Schennach, R., Kessler, J., Maier, B., and Terzer, S.: *Handbuch der Vorarlberger Waldgesellschaften*, vol. 2, Amt der Vorarlberger Landesregierung, Abteilung Forstwesen, 2014.
- Andrecs, P., Markart, G., Lang, E., Hagen, K., Kohl, B., and Bauer, W.: Untersuchung der Rutschungsprozesse vom Mai 1999 im Laternsertal (Vorarlberg), *BFW Berichte*, 127, 55–87, 2002.
- Bathurst, J. C., Moretti, G., El-Hames, A., Moaven-Hashemi, A., Burton, A., et al.: Scenario modelling of basin-scale, shallow landslide sediment yield, Valsassina, Italian Southern Alps, *Natural Hazards and Earth System Science*, 5, 189–202, doi:10.5194/nhess-5-189-2005, <http://dx.doi.org/10.5194/nhess-5-189-2005>, 2005.
- Baum, R. L., Savage, W. Z., and Godt, J. W.: TRIGRS- A Fortran Program for Transient Rainfall Infiltration and Grid-Based Regional Slope-Stability Analysis, Version 2. 0, Tech. rep., U. S. Geological Survey, 2008.
- Baum, R. L., Godt, J. W., and Savage, W. Z.: Estimating the timing and location of shallow rainfall-induced landslides using a model for transient, unsaturated infiltration, *Journal of Geophysical Research*, 115, F03 013, doi:10.1029/2009JF001321, <http://dx.doi.org/10.1029/2009JF001321>, 2010.
- Begueria, S.: Validation and Evaluation of Predictive Models in Hazard Assessment and Risk Management, *Natural Hazards*, 37, 315–329, doi:10.1007/s11069-005-5182-6, <http://dx.doi.org/10.1007/s11069-005-5182-6>, 2006.
- Berti, M. and Simoni, A.: Field evidence of pore pressure diffusion in clayey soils prone to landsliding, *Journal of Geophysical Research: Earth Surface*, 115, 1–20, doi:10.1029/2009JF001463, <http://dx.doi.org/10.1029/2009JF001463>, 2010.
- Beven, K. and Freer, J.: Equifinality, data assimilation, and uncertainty estimation in mechanistic modelling of complex environmental systems using the GLUE methodology, *Journal of Hydrology*, 249, 11–29, doi:10.1016/S0022-1694(01)00421-8, [http://dx.doi.org/10.1016/S0022-1694\(01\)00421-8](http://dx.doi.org/10.1016/S0022-1694(01)00421-8), 2001.
- Beven, K. and Kirkby, M.: A physically based, variable contributing area model of basin hydrology, *Hydrol. Sci. Bull.*, 24, 43–69, doi:10.1080/02626667909491834, <http://dx.doi.org/10.1080/02626667909491834>, 1979.
- Bischetti, G., Chiaradia, E., Epis, T., and Morlotti, E.: Root cohesion of forest species in the Italian Alps, *Plant and Soil*, 324, 71–89, doi:10.1007/s11104-009-9941-0, <http://dx.doi.org/10.1007/s11104-009-9941-0>, 2009.
- Bischetti, G. B., Chiaradia, E. A., Simonato, T., Speziali, B., Vitali, B., Vullo, P., and Zocco, A.: Root strength and root area ratio of forest species in Lombardy (Northern Italy), *Plant and Soil*, 278, 11–22, doi:10.1007/s11104-005-0605-4, <http://dx.doi.org/10.1007/s11104-005-0605-4>, 2005.
- Bollinger, D., Hegg, C., Keusen, H., and Lateltin, O.: Ursachenanalyse der Hanginstabilitäten 1999. Arbeitsgruppe Geologie und Naturgefahren (AGN) Teil A: Allgemeiner Teil: Aspekte der Hangstabilität, in: *Bulletin für angewandte Geologie*, vol. 5/1, pp. 5–38, AGN, 2000.
- Carrara, A., Cardinali, M., Detti, R., Guzzetti, F., Pasqui, V., and Reichenbach, P.: GIS techniques and statistical models in evaluating landslide hazard, *Earth Surf. Process. Landforms*, 16, 427–445, doi:10.1002/esp.3290160505, <http://dx.doi.org/10.1002/esp.3290160505>, 1991.

- Casadei, M., Dietrich, W. E., and Miller, N. L.: Testing a model for predicting the timing and location of shallow landslide initiation in soil-mantled landscapes, *Earth Surface Processes and Landforms*, 28, 925–950, doi:10.1002/esp.470, <http://dx.doi.org/10.1002/esp.470>, 2003.
- Catani, F., Segoni, S., and Falorni, G.: An empirical geomorphology-based approach to the spatial prediction of soil thickness at catchment scale, *Water Resources Research*, 46, W05 508, doi:10.1029/2008WR007450, <http://dx.doi.org/10.1029/2008WR007450>, 2010.
- Crosta, G. B. and Frattini, P.: Distributed modelling of shallow landslides triggered by intense rainfall, *Natural Hazards and Earth System Science*, 3, 81–93, doi:10.5194/nhess-3-81-2003, <http://dx.doi.org/10.5194/nhess-3-81-2003>, 2003.
- Cruden, D. M. and Varnes, D. J.: *Landslides: Investigation and Mitigation*, vol. 247, chap. Landslide types and processes, pp. 36–75, National Academies Press, 1996.
- 10 Davis, J. L. and Annan, A. P.: Ground-penetrating radar for high-resolution mapping of soil and rock stratigraphy, *Geophysical Prospecting*, 37, 531–551, doi:10.1111/j.1365-2478.1989.tb02221.x, <http://dx.doi.org/10.1111/j.1365-2478.1989.tb02221.x>, 1989.
- Dietrich, W. and Montgomery, D.: Shalstab: a digital terrain model for mapping shallow landslide potential. [WWW document, accessed May 2015], <http://socrates.berkeley.edu/~geomorph/shalstab/>, 1998.
- Dietrich, W. E., Reiss, R., Hsu, M.-L., and Montgomery, D. R.: A process-based model for colluvial soil depth and shallow landsliding using digital elevation data, *Hydrological Processes*, 9, 383–400, doi:10.1002/hyp.3360090311, <http://dx.doi.org/10.1002/hyp.3360090311>, 1995.
- 15 Dobler, C. and Pappenberger, F.: Global sensitivity analyses for a complex hydrological model applied in an Alpine watershed, *Hydrological Processes*, 27, 3922–3940, doi:10.1002/hyp.9520, <http://dx.doi.org/10.1002/hyp.9520>, 2013.
- Fairbridge, R. W.: *The Encyclopedia of Geomorphology*. Encyclopedia of Earth Sciences Series, vol. 3, Dowden, Hutchinson & Ross Stroudsburg, Pennsylvania, 1968.
- 20 Formayer, H. and Kromp-Kolb, H.: *Hochwasser und Klimawandel. Auswirkungen des Klimawandels auf Hochwasserereignisse in Österreich*, BOKU-Met, Wien, <https://meteo.boku.ac.at/klima/berichte/>, 2009.
- Formetta, G., Capparelli, G., and Versace, P.: Evaluating performance of simplified physically based models for shallow landslide susceptibility, *Hydrology and Earth System Sciences*, 20, 4585–4603, doi:10.5194/hess-20-4585-2016, <http://dx.doi.org/10.5194/hess-20-4585-2016>, 2016.
- 25 Friebe, J.: *Vorarlberg. Geologie der Österreichischen Bundesländer*, Verlag der Geologischen Bundesanstalt (GBA), Wien, 2007.
- Gardner, W.: Some steady-state solutions of the unsaturated moisture flow equation with application to evaporation from a water table, *Soil science*, 85, 228–232, 1958.
- Gioia, E., Speranza, G., Ferretti, M., Godt, J. W., Baum, R. L., and Marincioni, F.: Application of a process-based shallow landslide hazard model over a broad area in Central Italy, *Landslides*, 13, 1197–1214, doi:10.1007/s10346-015-0670-6, <http://dx.doi.org/10.1007/s10346-015-0670-6>, 2016.
- 30 GRASS Development Team: *Geographic Resources Analysis Support System (GRASS GIS) Software*, Open Source Geospatial Foundation, USA, <http://grass.osgeo.org>, 2014.
- Hammond, C., Hall, D., Miller, S., and Swetik, P.: *Level I stability analysis (LISA) documentation for version 2.0*, Intermountain Research Station, Ogden, 1992.
- 35 Heimsath, A. M., Dietrich, W. E., Nishiizumi, K., and Finkel, R. C.: The soil production function and landscape equilibrium, *Nature*, 388, 358–361, doi:10.1038/41056, <http://dx.doi.org/10.1038/41056>, 1997.

- Heissel, W., Oberhauser, R., and Schmidegg, O.: Geologische Karte des Walgaues, Vorarlberg 1:25.000, Verlag der Geologischen Bundesanstalt (GBA), Wien, 1967.
- Heumader, J.: Die Katastrophenlawinen von Galtür und Valzur am 23. und 24.2.1999 im Paznauntal/Tirol, in: Proc. of the IX International Congress Interpraevent 2000, Villach, vol. 1, pp. 397–410, 2000.
- 5 Horn, B.: Hill shading and the reflectance map, *Proceedings of the IEEE*, 69, 14–47, doi:10.1109/PROC.1981.11918, <http://dx.doi.org/10.1109/PROC.1981.11918>, 1981.
- Iverson, R. M.: Landslide triggering by rain infiltration, *Water Resources Research*, 36, 1897–1910, doi:10.1029/2000WR900090, <http://dx.doi.org/10.1029/2000WR900090>, 2000.
- Keijsers, J. G. S., Schoorl, J. M., Chang, K. T., Chiang, S. H., Claessens, L., and Veldkamp, A.: Calibration and resolution effects on model  
 10 performance for predicting shallow landslide locations in Taiwan, *Geomorphology*, 133, 168–177, doi:10.1016/j.geomorph.2011.03.020, <http://dx.doi.org/10.1016/j.geomorph.2011.03.020>, 2011.
- Kienholz, H.: Kombinierte geomorphologische Gefahrenkarte 1:10 000 von Grindelwald, *Catena*, 3, 265–294, doi:10.1016/0341-8162(77)90034-0, [http://dx.doi.org/10.1016/0341-8162\(77\)90034-0](http://dx.doi.org/10.1016/0341-8162(77)90034-0), 1977.
- Kim, D., Im, S., Lee, C., and Woo, C.: Modeling the contribution of trees to shallow landslide development in a steep, forested watershed,  
 15 *Ecological Engineering*, 61, Part C, 658–668, doi:10.1016/j.ecoleng.2013.05.003, <http://dx.doi.org/10.1016/j.ecoleng.2013.05.003>, 2013.
- Kromp-Kolb, H., Nakicenovic, N., Seidl, R., Steininger, K., Ahrens, B., Auer, I., Baumgarten, A., Bednar-Friedl, B., Eitzinger, J., Foelsche, U., Formayer, H., Geitner, C., Glade, T., Gobiet, A., Grabherr, G., Haas, R., Haberl, H., Haimberger, L., Hitzenberger, R., König, M., Köppl, A., Lexer, M., Loibl, W., Molitor, R., Moshhammer, H., Nachtnebel, H.-P., Prettenhaler, F., Rabitsch, W., Radunsky, K., Schneider, L., Schnitzer, H., Schöner, W., Schulz, N., Seibert, P., Stagl, S., Steiger, R., Stötter, H., Streicher, W., and Winiwarter, W.: Österreichischer  
 20 Sachstandsbericht Klimawandel 2014 (AAR14). Austrian Panel on Climate Change (APCC), Verlag der Österreichischen Akademie der Wissenschaften, Wien, Österreich, 2014.
- Kutschera, L. and Lichtenegger, E.: Wurzelatlas europäischer Waldbäume, Leopold Stocker Verlag, Graz, 2002.
- Lanni, C., Borga, M., Rigon, R., and Tarolli, P.: Modelling shallow landslide susceptibility by means of a subsurface flow path connectivity index and estimates of soil depth spatial distribution, *Hydrology and Earth System Sciences*, 16, 3959–3971, doi:10.5194/hess-16-3959-2012, <http://dx.doi.org/10.5194/hess-16-3959-2012>, 2012.  
 25
- Lanni, C., McDonnell, J., Hopp, L., and Rigon, R.: Simulated effect of soil depth and bedrock topography on near-surface hydrologic response and slope stability, *Earth Surface Processes and Landforms*, 38, 146–159, doi:10.1002/esp.3267, <http://dx.doi.org/10.1002/esp.3267>, 2013.
- Lateltin, O., Haemmig, C., Raetzo, H., and Bonnard, C.: Landslide risk management in Switzerland, *Landslides*, 2, 313–320, doi:10.1007/s10346-005-0018-8, <http://dx.doi.org/10.1007/s10346-005-0018-8>, 2005.
- 30 Lu, N. and Godt, J. W.: Hillslope hydrology and stability, Cambridge University Press, 2013.
- Markart, G., Perzl, F., Kohl, B., Luzian, R., Kleemayr, K., Ess, B., and Mayerl, J.: Schadereignisse 22./23. August 2005 - Ereignisdokumentation und -analyse in ausgewählten Gemeinden Vorarlbergs, in: BFW-Dokumentation, vol. 5, Bundesforschungs-und Ausbildungszentrum für Wald, Naturgefahren und Landschaft, Wien, 2007.
- Mergili, M., Fischer, J.-T., Krenn, J., and Pudasaini, S. P.: r.avaflow v1, an advanced open-source computational framework for the  
 35 propagation and interaction of two-phase mass flows, *Geoscientific Model Development*, 10, 553–569, doi:10.5194/gmd-10-553-2017, <http://dx.doi.org/10.5194/gmd-10-553-2017>, 2017.
- Metz, C. E.: Basic principles of ROC analysis, *Seminars in Nuclear Medicine*, 8, 283–298, doi:10.1016/S0001-2998(78)80014-2, [http://dx.doi.org/10.1016/S0001-2998\(78\)80014-2](http://dx.doi.org/10.1016/S0001-2998(78)80014-2), 1978.

- Milledge, D. G., Griffiths, D. V., Lane, S. N., and Warburton, J.: Limits on the validity of infinite length assumptions for modelling shallow landslides, *Earth Surface Processes and Landforms*, 37, 1158–1166, doi:10.1002/esp.3235, <http://dx.doi.org/10.1002/esp.3235>, 2012.
- Montgomery, D. R. and Dietrich, W. E.: A physically-based model for the topographic control on shallow landsliding, *Water Resources Research*, 30, 1153–1171, doi:10.1029/93WR02979, <http://dx.doi.org/10.1029/93WR02979>, 1994.
- 5 Oberhauser, R.: Neue Beiträge zur Geologie und Mikropaläontologie von Helvetikum und Flysch im Gebiet der Hohen Kugel (Vorarlberg), *Verhandlungen der Geologischen Bundesanstalt*, 1958/2, pp. 121–140, 1958.
- Oberhauser, R.: *Geologische Karte St. Gallen Süd und Dornbirn Süd 1:25.000*, Verlag der Geologischen Bundesanstalt (GBA), Wien, 1982.
- Oberhauser, R.: *Erläuterungen zur geologisch-tektonischen Übersichtskarte von Vorarlberg 1: 200.000*, Verlag der Geologischen Bundesanstalt (GBA), Wien, 1998.
- 10 ÖNORM EN ISO 22476-2:2012: Geotechnische Erkundung und Untersuchung – Felduntersuchungen – Teil 2: Rammsondierungen, 2012.
- Park, D. W., Nikhil, N. V., and Lee, S. R.: Landslide and debris flow susceptibility zonation using TRIGRS for the 2011 Seoul landslide event, *Natural Hazards and Earth System Sciences Discussions*, 1, 2547–2587, doi:10.5194/nhessd-1-2547-2013, <http://dx.doi.org/10.5194/nhessd-1-2547-2013>, 2013.
- Prinz, H. and Strauß, R.: *Ingenieurgeologie*, vol. 5, Springer, Heidelberg, 2011.
- 15 Python Software Foundation: *Python Programming Language*, Python Software Foundation, Hampton, New Hampshire, <http://www.python.org/>, 2016.
- R Core Team: *R: A Language and Environment for Statistical Computing*, R Foundation for Statistical Computing, Vienna, Austria, <https://www.R-project.org/>, 2016.
- Raia, S., Alvioli, M., Rossi, M., Baum, R. L., Godt, J. W., and Guzzetti, F.: Improving predictive power of physically based rainfall-induced shallow landslide models: a probabilistic approach, *Geoscientific Model Development*, 7, 495–514, doi:10.5194/gmd-7-495-2014, <http://dx.doi.org/10.5194/gmd-7-495-2014>, 2014.
- 20 Rowe, P. W. and Barden, L.: A new consolidation cell, *Géotechnique*, 16, 162–170, doi:10.1680/geot.1966.16.2.162, <http://dx.doi.org/10.1680/geot.1966.16.2.162>, 1966.
- Salciarini, D., Godt, J. W., Savage, W. Z., Conversini, P., Baum, R. L., and Michael, J. A.: Modeling regional initiation of rainfall-induced shallow landslides in the eastern Umbria Region of central Italy, *Landslides*, 3, 181–194, doi:10.1007/s10346-006-0037-0, <http://dx.doi.org/10.1007/s10346-006-0037-0>, 2006.
- 25 Sass, O.: Bedrock detection and talus thickness assessment in the European Alps using geophysical methods, *Journal of Applied Geophysics*, 62, 254–269, doi:10.1016/j.jappgeo.2006.12.003, <http://dx.doi.org/10.1016/j.jappgeo.2006.12.003>, 2007.
- Schmidt, H.-H., Buchmaier, R. F., and Vogt-Breyer, C.: *Grundlagen der Geotechnik: Geotechnik nach Eurocode*, Springer Fachmedien Wiesbaden, Heidelberg, 2014.
- 30 Schwarz, M., Preti, F., Giadrossich, F., Lehmann, P., and Or, D.: Quantifying the role of vegetation in slope stability: A case study in Tuscany (Italy), *Ecological Engineering*, 36, 285–291, doi:10.1016/j.ecoleng.2009.06.014, <http://dx.doi.org/10.1016/j.ecoleng.2009.06.014>, 2010.
- Schwarz, M., Cohen, D., and Or, D.: Spatial characterization of root reinforcement at stand scale: Theory and case study, *Geomorphology*, 171–172, 190–200, doi:10.1016/j.geomorph.2012.05.020, <http://dx.doi.org/10.1016/j.geomorph.2012.05.020>, 2012.
- 35 Segoni, S., Rossi, G., and Catani, F.: Improving basin scale shallow landslide modelling using reliable soil thickness maps, *Natural Hazards*, 61, 85–101, doi:10.1007/s11069-011-9770-3, <http://dx.doi.org/10.1007/s11069-011-9770-3>, 2012.
- Seibert, P., Frank, A., and Formayer, H.: Synoptic and regional patterns of heavy precipitation in Austria, *Theoretical and Applied Climatology*, 87, 139–153, doi:10.1007/s00704-006-0198-8, <http://dx.doi.org/10.1007/s00704-006-0198-8>, 2007.

- Srivastava, R. and Yeh, T. C. J.: Analytical Solutions For One-dimensional, Transient Infiltration Toward the Water-table In Homogeneous and Layered Soils, *Water Resources Research*, 27, 753–762, doi:10.1029/90WR02772, <http://dx.doi.org/10.1029/90WR02772>, 1991.
- Steinacher, R., Medicus, G., Fellin, W., and Zangerl, C.: The Influence of Deforestation On Slope (in-) Stability, *Austrian Journal of Earth Sciences*, 102, 90–99, 2009.
- 5 Tang, Y., Reed, P., Wagener, T., and van Werkhoven, K.: Comparing sensitivity analysis methods to advance lumped watershed model identification and evaluation, *Hydrology and Earth System Sciences*, 11, 793–817, doi:10.5194/hess-11-793-2007, <http://dx.doi.org/10.5194/hess-11-793-2007>, 2007.
- Tesfa, T. K., Tarboton, D. G., Chandler, D. G., and McNamara, J. P.: Modeling soil depth from topographic and land cover attributes, *Water Resources Research*, 45, W10438, doi:10.1029/2008WR007474, <http://dx.doi.org/10.1029/2008WR007474>, 2009.
- 10 USGS: TRIGRS 2.0. Accessed on 02 Nov 2016, <http://pubs.usgs.gov/of/2008/1159/downloads/>, 2016.
- van Bebbber, W. J.: Die Zugstrassen der barometrischen Minima nach den Bahnenkarten der Deutschen Seewarte für den Zeitraum von 1870–1890, *Meteorologische Zeitschrift*, 8, 361–366, 1891.
- van Westen, C. J., van Asch, T. W. J., and Soeters, R.: Landslide hazard and risk zonation - why is it still so difficult?, *Bulletin of Engineering Geology and the Environment*, 65, 167–184, doi:10.1007/s10064-005-0023-0, <http://dx.doi.org/10.1007/s10064-005-0023-0>, 2006.
- 15 Vieira, B. C., Fernandes, N. F., and Filho, O. A.: Shallow landslide prediction in the Serra do Mar, Sao Paulo, Brazil, *Natural Hazards and Earth System Sciences*, 10, 1829–1837, doi:10.5194/nhess-10-1829-2010, <http://dx.doi.org/10.5194/nhess-10-1829-2010>, 2010.
- Wagener, T. and Kollat, J.: Numerical and visual evaluation of hydrological and environmental models using the Monte Carlo analysis toolbox, *Environmental Modelling & Software*, 22, 1021–1033, doi:10.1016/j.envsoft.2006.06.017, <http://dx.doi.org/10.1016/j.envsoft.2006.06.017>, 2007.
- 20 Werner, R. and Auer, I.: Klima von Vorarlberg: Eine anwendungsorientierte Klimatographie. 2. Niederschlag und Gewitter, Schnee und Gletscher, Verdunstung, Luftdruck, Wind, Umweltinstitut des Landes Vorarlberg, Bregenz, 2001a.
- Werner, R. and Auer, I.: Klima von Vorarlberg: Eine anwendungsorientierte Klimatographie. 1. Lufttemperatur, Bodentemperatur, Wassertemperatur, Luftfeuchte, Bewölkung, Nebel, Umweltinstitut des Landes Vorarlberg, Bregenz, 2001b.
- Wiedenhöft, A. and Vatslid, S.: LiDAR und RGB - Land Vorarlberg. Technischer Abschlussbericht., Tech. rep., Trimble Germany GmbH, 2014.
- 25 Wiegand, C., Kringer, K., Geitner, C., and Rutzinger, M.: Regolith structure analysis - A contribution to understanding the local occurrence of shallow landslides (Austrian Tyrol), *Geomorphology*, 183, 5–13, doi:10.1016/j.geomorph.2012.06.027, <http://dx.doi.org/10.1016/j.geomorph.2012.06.027>, 2013.
- Wood, J.: The geomorphological characterisation of digital elevation models, Ph.D. thesis, University of Leicester, <http://www.soi.city.ac.uk/~jwo/phd>, 1996.
- 30 Zieher, T., Perzl, F., Rössel, M., Rutzinger, M., Meißl, G., Markart, G., and Geitner, C.: A multi-annual landslide inventory for the assessment of shallow landslide susceptibility - Two test cases in Vorarlberg, Austria, *Geomorphology*, 259, 40–54, doi:10.1016/j.geomorph.2016.02.008, <http://dx.doi.org/10.1016/j.geomorph.2016.02.008>, 2016.
- Zieher, T., Markart, G., Ottowitz, D., Römer, A., Rutzinger, M., Meißl, G., and Geitner, C.: Water content dynamics at plot scale– comparison of time-lapse electrical resistivity tomography monitoring and pore pressure modelling, *Journal of Hydrology*, 544, 195–209, doi:10.1016/j.jhydrol.2016.11.019, <http://dx.doi.org/10.1016/j.jhydrol.2016.11.019>, 2017.
- 35

Zizioli, D., Meisina, C., Valentino, R., and Montrasio, L.: Comparison between different approaches to modeling shallow landslide susceptibility: a case history in Oltrepo Pavese, Northern Italy, *Natural Hazards and Earth System Science*, 13, 559–573, doi:10.5194/nhess-13-559-2013, <http://dx.doi.org/10.5194/nhess-13-559-2013>, 2013.