

AUTHOR'S RESPONSES

These are the Authors' replies to comments from Referee #1 and #2 and from G. Felder. We use blue color for our replies and black color for Referee's comments.

Author's response. Referee #1

Received and published: 21 June 2018

Firstly, we want to sincerely thank Referee #1 for the remarks and recommendations which will undoubtedly improve the quality and scope of the paper.

While introducing floods, the authors state that they are usually characterized through a relation between their peak discharge Q and volume V , and the associated annual exceedance probability. In my opinion, this sentence needs some clarification. In order to define an exceedance probability for a hydrograph (combination of Q and V), a way of comparing two hydrographs is required. In the context of dam safety analysis, this comparison should be made through the maximum water level that the hydrograph attains while it is routed through the reservoir. For some reservoirs, Q is the most relevant variable, while for other V may be the dominant factor. I suggest that the authors add a brief explanation to clarify this issue.

When mentioning Q and V (and their relation with AEP), the authors refer to hydrological variables on which frequency analyses can be applied to estimate the occurrence probabilities of such floods. Further variables (such as the maximum water level that the hydrograph attains while it is routed through the reservoir) depend on the magnitude and frequency of these floods, but also on other factors like the gate performance or the previous reservoir level and thus cannot be directly used to compare 2 hydrographs.

For clarity, the authors suggest the following paragraph:

"In the hydrological scenario, floods are the initiating event (node) that creates the loads to which the dam is subjected. The probabilities of the emerging branches are defined by the frequency occurrence linked to the inflow hydrographs (Figure 2 (b)), introducing the temporal component to the risk calculation [consequences/year]. These are associated with a given return period (T) or its equivalent annual exceedance probability (AEP)."

Different analyses can be performed to estimate the occurrence probability of these events using deterministic, parametric, probabilistic and stochastic methods (World Meteorological Organization, 2008). Some of them seek relating the magnitude of one or more hydrological variables with T . A widely used approach to characterize this relation is to perform univariate or bivariate frequency analyses of the maximum values of peak discharge (Q_p) and/or volume (V) (Figure 2 (a))."

Regarding the relative influence of Q and V in dam safety, it is clear that this will depend on the characteristics of the dam-reservoir system (a soon to be published work of the authors characterizes the factors affecting this relation). In the approach followed, this influence is revealed when routing the incoming floods through the reservoir (nodes **Maximum pool level** and **Hydrograph (no failure)**).

I also missed a discussion of non-stationary flood frequency analysis. For some dams the hydrological load is mostly estimated through flood frequency analysis. Many studies have been carried out to account for climate change through non-stationary models and a brief discussion of this work would be adequate for a review paper.

The authors agree with Referee #1 about the convenience of including a special mention of non-stationary flood frequency analysis and citing relevant studies dealing with this subject (e.g., Gilroy and McCuen, 2012; López and Francés, 2013).

One more detail: Section 3.14 is titled "Flood routing". I think "Flood management strategy" may be more appropriate, since the emphasis is not on how you compute the flood wave propagation through the reservoir, but on how you decide how to manage the flood wave to minimize dam risk and downstream damages.

The title "Flood routing" was directly extracted from the document of SPANCOLD (2012) from where the risk modelling approach used in the paper (Figure 1) was taken. Following the title suggested by Referee #1 ("Flood management strategy"), the authors propose to combine both in "Flood routing strategy", which will replace the title of Section 3.1.4 as well as in Figure 1.

Author's response. Referee #2

Received and published: 23 June 2018

Firstly, we want to sincerely thank Referee #2 for the remarks and recommendations which will undoubtedly improve the quality and scope of the paper.

Novelty cannot be demanded from a review, but I still miss some recommendations coming out of the review: What is the main findings of collecting this information, either for practice to be used for design or operation or for the research community to explore further because of lack of information on specific or cross-cutting topics. As it is I am in doubt what the purpose of the paper is.

The purpose of the manuscript is to serve as a dam safety management supporting tool when assessing how climate change may affect dam risk. With this information, long-term investments can be planned more efficiently. Indeed, the application of this tool may prevent investing in measures that would no longer be necessary in the future, or missing some measures that could reduce the future risk. As such, it is addressed to dam owners and dam safety practitioners, but also to the research community that can help improving it and filling the gaps that still remain in some aspects of the risk assessment.

Moreover, although the information collected in this work is mainly based on existing works, there is still some novelty or innovation in its processing since usually the global effects of climate change on dam risk are studied separately. The authors introduce a more comprehensive and structured approach to take them into account, which can be used to apply this same risk analysis to other critical infrastructures.

These remarks will be added to the new version of the manuscript.

Throughout the paper I am in doubt whether the safety assessment is related to upstream or downstream of the dam itself or both. The discussion on the hydrological performance seems to focus on upstream loading, but typically dam safety is also concerned with downstream consequences of failures. Please clarify the scope of the paper, also in terms of physical boundaries. When considering $T=100000$ downstream consequences can be catastrophic and often much higher than upstream.

Dam risk analyses focus on the downstream consequences of a dam failure but depend also on the upstream conditions or loads. Thus, in terms of physical boundaries, the dam safety assessment can be divided in two parts that correspond to 2 different components of dam risk:

- When we assess the loads of a dam in the hydrological scenario, including the incoming floods to the reservoir, we refer to upstream of the dam.
- When we assess the consequences we refer to downstream of the dam.

For clarity, this will be mentioned in the new version of the manuscript.

The comment regarding the consideration of floods of $T=100'000$ years return period unveils an interesting question. As mentioned by Escuder-Bueno et al. (2012), the presence of dams changes the downstream risk. Figure 1 shows how F-D curves¹ are modified when structural measures (such as dams) are implemented: compared to situations without any measures, the F-D curves show a decrease in the downstream consequences for a certain rank of annual probabilities of exceedance,

¹ An F-D curve illustrates the cumulative annual exceedance probability of the expected economic damages.

but also an increase in these consequences for lower probabilities (e.g. corresponding to the breakage of the dam) which is consistent with the Referee's comment.

Moreover it is worth noting that in Risk Analysis it is common practice to deal with incremental risk, that is the part of risk exclusively due to the dam failure which is obtained by subtracting from the consequences of the dam failure the ones that would have happened anyway (even if the dam had not failed). In case of a $T=100'000$ flood, the consequences downstream must be contrasted with the consequences of the dam break.

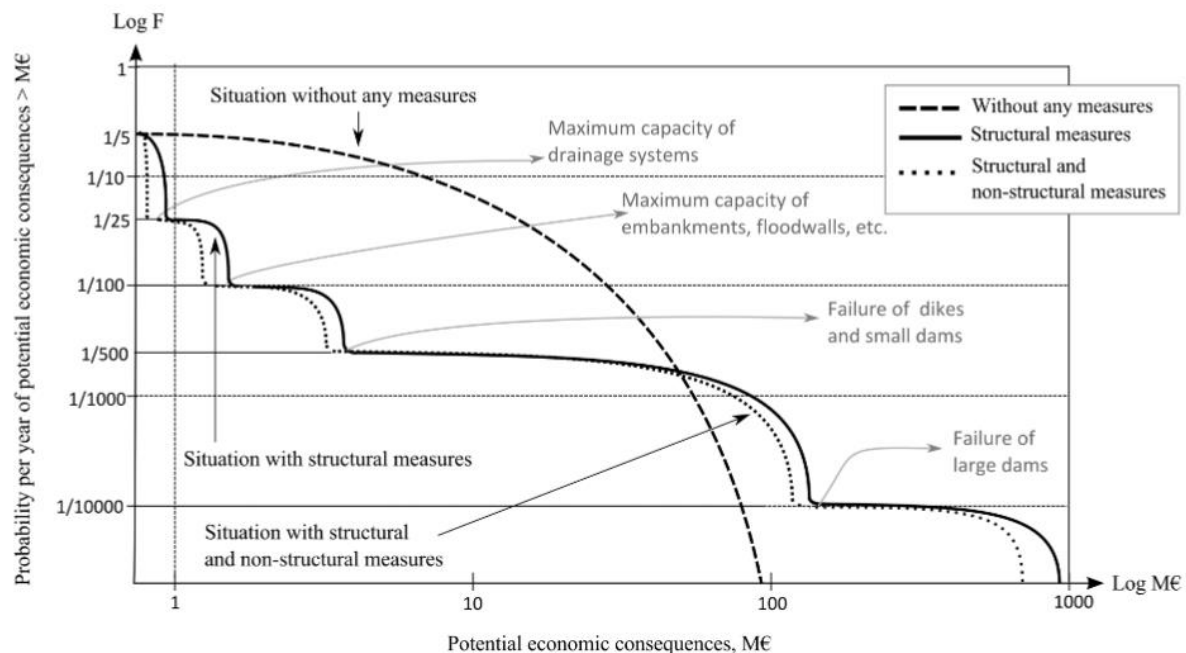


Figure 1: Effect of structural and non-structural measures on the F–D curve (from Escuder-Bueno et al., 2012).

The risk definition in Eq 1 [P3L3] is unusual and not very accurate. ‘Events under study’ imply a finite number of events and hence summation rather than integration. The cited ref does not give an explanation and I cannot identify the ICOLD (2003) reference, which seems to be the original reference. If you wish to use that definition I suggest you start with a standard formulation as in e.g. Merz et al (2010) and then extend to the definition you wish to apply, including a discussion of Figure 1. Together they can form a precise definition. It would be nice to end the review with how this figure (that only considers stationary input) by means of this review can be converted into a diagram, that considers nonstationarity. As a community we miss a figure that combines the detailed analysis schemes corresponding to Fig01 with the soft figures from IPCC (e.g. <http://www.ipcc.ch/report/graphics/images/Special%20Reports/SREX/Chapter%2001/Fig1-1.jpg> from IPCC (2012)).

The risk definition concept in Eq 1 [P3L3] was set in 1981 in the classical paper by Kaplan and Garrick (1981). This definition has been used extensively across different sectors in the industry and has been discussed in Aven (2012). In the context of dam safety, it has been frequently used and can be found, for instance, in Serrano-Lombillo et al. (2011). Nevertheless, reference to Merz et al. (2010) will be included in the manuscript.

Regarding the mutable aspect of Figure 1, as suggested by Referee #2 the authors will prepare a new diagram that will be included in the manuscript.

I am somewhat surprised that the review does not specifically cover the impacts in relation to the frequency domain. Climate change (and other drivers) impact both average and extreme values. Intuitively the first will impact operation, including the value of having a dam, while the second must be most important for safety. I sometimes see the paper only focusing on extremes (e.g. in the hydrology section) but other times also average impacts (e.g. socio-economic section).

The approach followed in the manuscript allows to integrate all the different types of aspects (from normal to extreme events) of dam safety that may be affected by climate change. On one hand, when performing a risk analysis focused on a hydrological scenario as proposed in the manuscript, the main loads are floods. In this case the analysis of climate change impacts on extreme hydrological conditions is required. On the other hand, other components such as the previous pool level or the population exposure downstream represent the normal state of these factors and have to be analyzed considering them as averaged values. That is why at certain point the paper focuses on extremes and other times in average conditions.

For clarity, this should be mentioned more explicitly in the new version of the manuscript.

There is an interesting mentioning on other key drivers of change such as population increase, economic development etc [P4L10] but the paper does not come back to discussing this except for a very broad discussion on socio-economic consequences. During this discussion I cannot see if it is the presence of the dam that drives changes in the socio-economic conditions or vice versa. Is there a difference between deciding on building of a dam and considering safety in relation to an existing dam?

The presence of the dam certainly represents an important driver to eventual socio-economic changes. Dams are indeed a key component when applying socio-economic scenarios and their importance may even increase under future climatic conditions (more frequent droughts and extreme events, for instance).


When assessing the future safety level of a dam, we could consider that there are no differences between applying the methodology to an existing dam or to a future non-existing dam. However, when assessing the safety of an existing dam, it is likely that the population in at-risk areas has already followed several safety procedure trainings which would entail a better prepared population facing inundation events thus changing their vulnerability in comparison with a non-trained population.

[Fig01] Diagram starts with a loading of Flood. Is that up- stream or downstream of the dam? A Consequence (Hydrograph (no failure)) leads to Failure modes, which seems counterintuitive. Figure needs more explanation.

The **Flood** node of Figure 1 refers to an upstream flow. Downstream flows are referred as **Hydrograph (failure and no failure)**.

The arrows in Figure 1 represent the information flow from the start until the end of the diagram. In some cases, the information transmitted is used on the connected node (for instance, some information transmitted by the node **Gate performance** is used to define the **Maximum pool level** node). However, in other cases the information is only used a little further in the diagram (for instance, the information contained in the node **Flood** is not directly used by the node **Previous pool level**, and yet they are both connected by an arrow).

It is true that this case is particularly tricky when connecting **Hydrograph (no failure)** and **Failure modes** since it may lead to a misunderstanding. That is why the authors suggest using this diagram instead, which contains the same information:

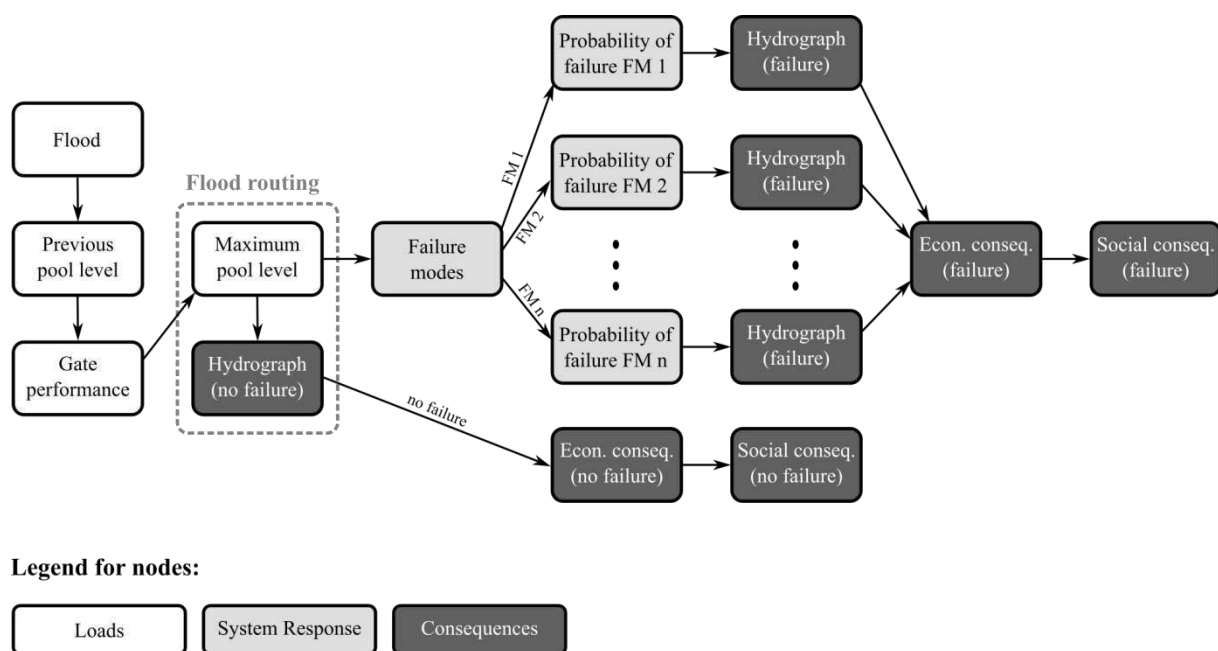

[4L15] You use the term flooding both for a high loading of the dam and for the consequences downstream. The illustrations in Fig02 seems to be unaffected by dam management, but is discussed as if it is downstream?

The use of the term flood in both cases can indeed lead to a misunderstanding of whether we refer to upstream or downstream. Thus, the authors suggest using the term flood exclusively for the upstream flow into the reservoir and outflow hydrograph or inundation when referring to downstream the dam.

Figure 2 corresponds to the floods as a load to the dam (upstream).

[P6L15] There is quite abundant literature on extracting correct projections of extremes. For single sites methods developed by e.g. Kilsby and Willems are predominant (each has many refs), while for larger regions spatially distributed methods are employed (e.g. Pereira-Cardenal et al 2014 incl. supplementary information).

The references suggested by Referee #2 cover adequately the scope of the work and will be added to the final version of the manuscript when referring to the projection of extremes.

[Fig04] This forward-propagation modelling chain deserves a reference.

This figure has not been directly extracted from any reference. It has been elaborated by the authors based on the methodologies commonly used in many studies (e.g., Chernet et al., 2014; Duan et al., 2017; Kay et al., 2006; Raff et al., 2009; Shamir et al., 2015) and serves as an example of procedure to perform frequency analysis on floods taking into account the effect of climate change.

The legend of the figure that appears in the manuscript is not accurate and should be changed to "Example of methodology for the frequency analysis of floods under climate scenarios."

[Fig05] Subfigure a and b are identical. Suggest to replace legend on yaxis on subfigure a.

The objective of showing these two figures was to highlight how the distribution of the water storage in the reservoir (and thus the loads to which the dam is subjected at the moment of arrival of a flood) varies depending on the water level regimes.

Figure 5.a) and Figure 5.b) represent the same information (relation between water pool level and probability of exceedance) but for two different cases of dams, and that is why their axes are the same:

- Figure 5.a) shows the case of a reservoir that is almost full (level above 540 m a.s.l.) almost 80 % of the time.
- Figure 5.b) represents the case of a reservoir that is half empty more than 70 % of the time.

For clarity, both curves will be plotted in a unique graphic and an explanatory legend will be included to distinguish one case from the other.

Author's response. Guido Felder

Received and published: 27 June 2018

Firstly, we want to sincerely thank Guido Felder for the remarks and recommendations which will undoubtedly improve the quality and scope of the paper.

1) Isn't there a mismatch between the target audience ("dam owners and dam safety practitioners") and the presented approaches? If the article aims to provide information for the mentioned target audience, I doubt that a methodology as proposed in Figure 4 is very useful for them. There are probably not many dam owners or dam safety practitioners who are capable to conduct GCM runs and statistical or dynamical downscaling procedures. Moreover, many dams are built within a complex topography, where results from global analyses are less reliable, and a proper downscaling of extreme events is even more challenging. Maybe this is a bit beyond the scope, but the question arises who should provide such locally representative scenarios. Science, governmental agencies, dam owners or someone else? On the other hand, if the article aims to contribute to the scientific discussion, I would suggest to elaborate a bit more on the literature review, particularly regarding GCM downscaling procedures for extreme events and regarding the stationarity assumption in FFE.

Dam Risk Analysis is a useful tool that must interpellate owners, administrations, regulators, consultants, users, civil protection services and all type of related entities and agents in dam management (SPANCOLD, 2012). The approach presented in the paper summarizes the state of the art of techniques and methodologies available to perform required studies and, although not all dam owners or dam safety practitioners may be capable to conduct some of the proposed studies, other techniques are based on easily applicable works and can be conducted without much effort. The authors would like to avoid pre-established restrictions on what techniques can be applied and who can apply them. In this regard, the authors have participated in more than 40 dam safety analyses in the last 15 years (Escuder-Bueno et al., 2016; Morales-Torres et al., 2016; Serrano-Lombillo et al., 2017; Setrakian-Melgonian et al., 2017) where not only technicians were involved but also dam owners and managers.

On the other hand, the authors agree that a more detailed review on GCM downscaling procedures for extreme events and regarding the stationarity assumption in FFE can improve the scope of the paper and thus new references will be added to the final version of the paper.

2) From a system load perspective, figure 4 implies that a downscaling of extreme GCM scenarios (or even long term runs) is the only way to assess climate change impact on dam safety risk. What about other (less costly) approaches like non-stationary FFE, or the use of adapted stochastic weather generators?

The objective of presenting the approach of Figure 4 was not to state that this was the only way of assessing the effects of climate change on the analysis of floods, but more of an example proposition. Other methods like non-stationary FFE, or the use of adapted stochastic weather generators will also be included in the next version of the paper to widen the scope of the work.

The legend of the figure that appears in the manuscript is not accurate and should be changed to "Example of methodology for the frequency analysis of floods under climate scenarios."

3) The probability of dam failure from a hydro-meteorological point of view is not primarily a question of the peak inflow, it's more dependent on the total inflowing volume over a given amount of time. I would therefore suggest to mention the ongoing discussion on bivariate FFE methods as well.

The relative influence of both factors (peak inflow and total inflowing volume) and/or their combination on failure probability cannot be generalized as it will depend on each case. In this context, a broader assertion could be stated: the probability of dam failure is not only a question of the peak inflow and the total inflowing volume, but also depends on the dam-reservoir system's capacity to absorb such hydrological loads.

If we consider the overtopping failure mode, for instance, its probability of occurrence mainly depends on two connected dam-reservoir characteristics: insufficient flood storage capacity and inadequate spillway capacity (Lee and You, 2013; USBR, 2014). On this matter, a soon to be published work of the authors reveals the relative importance of both the peak discharge and the flood volume when assessing the overtopping probability.

However, the authors consider that the comment is very pertinent in the context of hydrological risk evaluation and thus a special mention of the bivariate flood frequency methodologies will be included in the text.

4) I'm not sure whether the climate change impact on land use change and surface roughness is relevant for this topic. First, most of the hydrodynamic models for flood mapping are calibrated using the roughness parameter. A change of such a calibrated parameter could cause non-linear changes in the simulated runoff, and might lead to wrong conclusions. Second, I would consider slight changes in roughness as negligible, considering the huge uncertainties that come along with FFE (not shown in Figures 2a and 2b) and other parts of the system load component. More generally spoken: can you say something about the sensitivity of the single components in Figure 1?

The authors consider that climatic and non-climatic drivers can have an influence in land use and, at a certain point, in roughness changes. In turn, these factors can affect the evolution of inundation floods downstream the dam (Bornschein and Pohl, 2018; De Roo et al., 2001).

Although we cannot a priori state that the influence of a specific factor of the risk model will or will not be negligible for the final risk assessment, what we can say is that it is not always advisable to perform a risk analysis with a maximum level of detail. In some cases, it is convenient to include only those that will induce a significant effect on the risk, which would help avoiding unnecessary work.

Indeed, sensitivity studies must be carried out to understand the influence of the components in the risk model approach, as mentioned in your comment. Regarding this, some works have been published (Chauhan and Bowles, 2018; Escuder-Bueno et al., 2017) although in general further advances in this field can still be done, in particular when considering the additional uncertainties introduced by climate change.

REFERENCES

Aven, T.: The risk concept—historical and recent development trends, *Reliability Engineering & System Safety*, 99, 33–44, doi:10.1016/j.ress.2011.11.006, 2012.

Bornschein, A. and Pohl, R.: Land use influence on flood routing and retention from the viewpoint of hydromechanics: Land use influence on flood routing and retention, *Journal of Flood Risk Management*, 11(1), 6–14, doi:10.1111/jfr3.12289, 2018.

Chauhan, S. and Bowles, D.: DAM SAFETY RISK ASSESSMENT WITH UNCERTAINTY ANALYSIS, 2018.

Chernet, H. H., Alfredsen, K. and Midttømme, G. H.: Safety of Hydropower Dams in a Changing Climate, *Journal of Hydrologic Engineering*, 19(3), 569–582, doi:10.1061/(ASCE)HE.1943-5584.0000836, 2014.

De Roo, A., Odijk, M., Schmuck, G., Koster, E. and Lucieer, A.: Assessing the effects of land use changes on floods in the meuse and oder catchment, *Physics and Chemistry of the Earth, Part B: Hydrology, Oceans and Atmosphere*, 26(7–8), 593–599, doi:10.1016/S1464-1909(01)00054-5, 2001.

Duan, J. G., Bai, Y., Dominguez, F., Rivera, E. and Meixner, T.: Framework for incorporating climate change on flood magnitude and frequency analysis in the upper Santa Cruz River, *Journal of Hydrology*, 549, 194–207, doi:10.1016/j.jhydrol.2017.03.042, 2017.

Escuder-Bueno, I., Castillo-Rodríguez, J. T., Zechner, S., Jöbstl, C., Perales-Momparler, S. and Petaccia, G.: A quantitative flood risk analysis methodology for urban areas with integration of social research data, *Natural Hazards and Earth System Science*, 12(9), 2843–2863, doi:10.5194/nhess-12-2843-2012, 2012.

Escuder-Bueno, I., Morales-Torres, A. and Castillo-Rodriguez, J. T.: Use of quantitative risk results to inform dam safety governance: Practical cases in Europe, in 36th Annual USSD Conference 2016, Denver, Colorado, USA., 2016.

Escuder-Bueno, I., Morales-Torres, A. and Castillo-Rodriguez, J.: EPISTEMIC VS NATURAL UNCERTAINTY IN DAM SAFETY DECISION MAKING: IS IT FAIR PLAY?, in 37th Annual USSD Conference, United States Society on Dams, Anaheim, California., 2017.

Gilroy, K. L. and McCuen, R. H.: A nonstationary flood frequency analysis method to adjust for future climate change and urbanization, *Journal of Hydrology*, 414–415, 40–48, doi:10.1016/j.jhydrol.2011.10.009, 2012.

Kaplan, S. and Garrick, B. J.: On The Quantitative Definition of Risk, *Risk Analysis*, 1(1), 11–27, doi:10.1111/j.1539-6924.1981.tb01350.x, 1981.

Kay, A. L., Reynard, N. S. and Jones, R. G.: RCM rainfall for UK flood frequency estimation. I. Method and validation, *Journal of Hydrology*, 318(1–4), 151–162, doi:10.1016/j.jhydrol.2005.06.012, 2006.

Lee, B.-S. and You, G. J.-Y.: An assessment of long-term overtopping risk and optimal termination time of dam under climate change, *Journal of Environmental Management*, 121, 57–71, doi:10.1016/j.jenvman.2013.02.025, 2013.

López, J. and Francés, F.: Non-stationary flood frequency analysis in continental Spanish rivers, using climate and reservoir indices as external covariates, *Hydrology and Earth System Sciences*, 17(8), 3189–3203, doi:10.5194/hess-17-3189-2013, 2013.

Merz, B., Hall, J., Disse, M. and Schumann, A.: Fluvial flood risk management in a changing world, *Natural Hazards and Earth System Science*, 10(3), 509–527, doi:10.5194/nhess-10-509-2010, 2010.

Morales-Torres, A., Serrano-Lombillo, A., Escuder-Bueno, I. and Altarejos-García, L.: The suitability of risk reduction indicators to inform dam safety management, *Structure and Infrastructure Engineering*, 1–12, doi:10.1080/15732479.2015.1136830, 2016.

Raff, D. A., Pruitt, T. and Brekke, L. D.: A framework for assessing flood frequency based on climate projection information, *Hydrology and Earth System Sciences*, 13(11), 2119–2136, doi:10.5194/hess-13-2119-2009, 2009.

Serrano-Lombillo, A., Escuder-Bueno, I., de Membrillera-Ortuño, M. G. and Altarejos-García, L.: Methodology for the Calculation of Annualized Incremental Risks in Systems of Dams: Risk Calculation for Systems of Dams, *Risk Analysis*, 31(6), 1000–1015, doi:10.1111/j.1539-6924.2010.01547.x, 2011.

Serrano-Lombillo, A., Morales-Torres, A., Escuder-Bueno, I. and Altarejos-García, L.: A new risk reduction indicator for dam safety management combining efficiency and equity principles, *Structure and Infrastructure Engineering*, 13(9), 1157–1166, doi:10.1080/15732479.2016.1245762, 2017.

Setrakian-Melgonian, M., Escuder-Bueno, I., Castillo-Rodriguez, J. T., Morales-Torres, A. and Simarro-Rey, D.: Quantitative Risk Analysis to inform safety investments in Jaime Ozores Dam (Spain), *International Commission of Large Dams (ICOLD)*, Prague, Czech Republic., 2017.

Shamir, E., Megdal, S. B., Carrillo, C., Castro, C. L., Chang, H.-I., Chief, K., Corkhill, F. E., Eden, S., Georgakakos, K. P., Nelson, K. M. and Prietto, J.: Climate change and water resources management in the Upper Santa Cruz River, Arizona, *Journal of Hydrology*, 521, 18–33, doi:10.1016/j.jhydrol.2014.11.062, 2015.

SPANCOLD: Risk Analysis as Applied to Dam Safety. Technical Guide on Operation of Dams and Reservoirs, Professional Association of Civil Engineers. Spanish National Committee on Large Dams, Madrid. [online] Available from: http://www.spancold.es/Archivos/Monograph_Risk_Analysis.pdf, 2012.

USBR: Chapter 3: General Spillway Design Considerations, in *Appurtenant Structures for Dams (Spillways and Outlet Works)*, U.S. Bureau of Reclamation. [online] Available from: <https://www.usbr.gov/tsc/techreferences/designstandards-datacollectionguides/designstandards.html>, 2014.

World Meteorological Organization: Guide to hydrological practices, World Meteorological Organization, Geneva., 2008.

RELEVANT CHANGES

This is a list of the main relevant changes made in the manuscript after the comments of the Referees.

1. The paragraph describing the Floods node has been reformulated with more detail, including new references on non-stationary flood frequency analysis.
2. The concept "Flood routing" has been replaced in the title of Section 3.1.4 as well as in Figure 1 to "Flood routing strategy".
3. A clearer purpose of the manuscript is stated in the conclusions, as recommended by Referee #2.
4. The risk definition in Eq 1 has been reformulated included the reference mentioned by Referee #2.
5. A new diagram has been included to capture the mutable aspect of Figure 1.
6. The difference between upstream and downstream components of risk is highlighted in the text.
7. For clarity, node connections of Figure 1 have been re-ordered while preserving the same information: the non-failure consequences branches are now connected to the **Hydrograph (no failure)** node, while the failure components are directly connected to the **Maximum pool level** node.
8. The difference between flood (as the upstream flow into the reservoir) and the outflow hydrograph or inundation (when referring to downstream the dam) has been highlighted.
9. Curves a and b of Figure 5 have been combined in a unique graph, for clarity.
10. A specific mention to multivariate flood frequency analyses has been made.
11. New references have been added to the manuscript.

Review article: climate change impacts on dam safety

Javier Fluixá-Sanmartín¹, Luis Altarejos-García², Adrián Morales-Torres³, Ignacio Escuder-Bueno⁴

¹Centre de Recherche sur l'Environnement Alpin (CREALP), Sion, 1951, Switzerland

²Department of Civil Engineering, Universidad Politécnica de Cartagena (UPCT), Cartagena, 30202, Spain

5 ³iPresas Risk Analysis, Valencia, 46023, Spain

⁴Department of Hydraulic Engineering and Environment. Universitat Politècnica de València (UPV), Valencia, 46022, Spain

Correspondence to: Javier Fluixá-Sanmartín (javier.fluixa@crealp.vs.ch)

Abstract. Dams as well as protective dikes and levees are critical infrastructures whose associated risk must be properly managed in a continuous and updated process. Usually, dam safety management has been carried out assuming stationary climatic and non-climatic conditions. However, the projected alterations due to climate change are likely to affect different factors driving dam risk. Although some reference institutions develop guidance for including climate change in their decision support strategies, related information is still vast and scattered and its application to specific analyses such as dam safety assessments remains a challenge.

This article presents a comprehensive and multidisciplinary review of the impacts of climate change susceptible to affect dam safety. The global effect can be assessed through the integration of the various projected effects acting on each aspect of the risk, from the input hydrology to the calculation of the consequences of the flood wave on population and assets at risk. This will provide useful information for dam owners and dam safety practitioners in their decision-making process.

1 Introduction

Large dams as well as protective dikes and levees are critical infrastructures whose failure has high economic and social consequences. Although usually very low, these infrastructures have an associated risk that must be properly managed in a continuous and updated process. In the dam safety context, risk can be estimated by the combined impact of all triplets of scenario, probability of occurrence and the associated consequence (ICOLD, 2003). Risk analysis is a useful methodology that encompasses traditional and state-of-the-art approaches to manage dam safety in an accountable and comprehensive way (Bowles, 2000; Serrano-Lombillo et al., 2013). The development and application of risk assessment techniques worldwide in the dam industry (ANCOLD, 2003; ICOLD, 2005; SPANCOLD, 2012; USACE, 2011b) has helped informing safety governance and supporting decision-making in the adoption of structural and non-structural risk reduction measures.

Most risk assessments in the past assumed a stationary condition in the variability of climate phenomena, including the frequency and magnitude of extreme events (National Research Council, 2009). However, changes in climate factors such as variations of extreme temperatures or frequency of heavy precipitation events (CH2014-Impacts, 2014; IPCC, 2012b; Walsh et al., 2014) are likely to affect the different factors driving dam risks (Bowles et al., 2013a; USBR, 2014). The assumptions

of stationary climatic baselines are no longer appropriate for long-term dam safety management (USACE, 2016). An update of risk components (loads, system response and consequences) to take into account the new climate change scenarios becomes imperative for adaptation and decision-making support under a more resilient approach.

In this context, some reference institutions (USACE, 2014; USBR, 2014, 2016) are actively developing and implementing guidance for including climate change in their decision support strategies (U.S. Government Accountability Office, 2013). In other cases, efforts have been done in the evaluation of climate change impacts on dam safety surveillance but further research is subjected to new findings and advances in the knowledge level (OFEV, 2014).

However, climate change related information is vast and scattered, and its application to specific analyses such as dam safety assessments remains a challenge for the dam engineering community. Although a considerable amount of research has been done so far, its application to current dam safety practice is still in prospect (Bahls and Holman, 2014) and needs to be done based on national and supranational overall adaptation plans (Commonwealth of Australia, 2015; European Commission, 2013; OECC, 2008). Moreover, the impacts of climate change effects on dam safety are usually analysed separately and aim at specific aspects. Most studies tend to focus only on the impact of climate change on the hydrological loads (Bahls and Holman, 2014; Chernet et al., 2014; Novembre et al., 2015) relegating or ignoring other aspects. Other studies with a wider scope only reach qualitative assessments (Atkins, 2013) limiting their applicability to screening analyses.

The global effect of climate change on dam risk must be assessed through the integration of the various projected effects acting on each aspect, taking into account their interdependencies, rather than by a simple accumulation of separate impacts. It is thus valuable to adopt a comprehensive approach to address climate change influence on dam safety management. In this context, dam risk models represent a useful basis on which such assessments can be structured.

In this work the authors seek a multidisciplinary and structured review of the most relevant impacts of climate change on the different dam safety components, from the input hydrology to the calculation of the [downstream](#) consequences of the [flood waveinundation](#) on population and assets at risk. In order to decompose such impacts on the different risk aspects, a risk analysis approach has been adopted. Moreover, practical techniques for their direct application are presented to provide useful information for dam owners and dam safety practitioners in their decision-making process.

2 Risk analysis approach for structuring climate change impacts

The effects of climate change are expected on a variety of factors affecting the dams, from the incoming floods to the definition of downstream consequences. Thus, in order to analyse the impacts of climate change on the global safety of a dam, it is necessary to decompose them in the different aspects that integrate the dam risk. Some techniques help addressing such analyses in a comprehensive way and structuring the way in which the risk assessment is envisaged.

In particular, risk analysis is a useful methodology to manage dam safety in an accountable and comprehensive way (Bowles et al., 2013a). Risk can be defined as the combination of three concepts: what can happen (infrastructure failure), how likely is it to happen (failure probability), and what are its consequences (failure consequences) (Kaplan, 1997). [Merz et al. \(2010\)](#)

propose a non-stationary definition of flood risk that includes damage and probability of occurrence. Following-Based on this-these definitions, risk can be is usually quantified with the following equation set by Kaplan and Garrick (1981) and used extensively across different sectors in the industry (Altarejos-García et al., 2012; Aven, 2012b; Serrano-Lombillo et al., 2011):

$$5 \quad Risk = \int P(loads) \cdot P(response|loads) \cdot C(loads, response) \quad (1)$$


where the integral is defined over all the events under study, $P(loads)$ is the probability of the different load events, $P(response|loads)$ is the conditional probability of the structural response for each load event and $C(loads, response)$ are the consequences of the system response for each load event.

10 In this context, risk models are the basic tool used for the quantitative assessment of risk, integrating and connecting most variables concerning dam safety (Ardiles et al., 2011; Bowles et al., 2013b; Serrano-Lombillo et al., 2012). These models can be structured using influence diagrams such as the one presented in Figure 1~~Figure 1~~ (SPANCOLD, 2012). Each node represents a variable related to each term of risk as defined in Eq. (1):



- 15 ▪ Loads of the system. This term corresponds to the loads to which the dam will be subjected, and focuses on the upstream components of the dam. I; in particular, incoming floods are envisaged as the main hydrological load, and the rest of the component defines how the dam-reservoir system responds when confronted to such hydrological events.
- 20 ▪ System response (or failure probability). This contains the information of the failure modes and the definition of the conditional probability of failure.
- Consequences (economic, loss of life or any other). This component includes an estimation of the consequences downstream of the dam for all the significant failure modes, including the dam break modelling.

In this work, the risk modelling approach shown in Figure 1~~Figure 1~~ has been chosen to structure and organize the assessment of all the potential impacts by disaggregating them on the different components of risk. The advantage of using this approach is threefold:

- 25 ▪ The analysis is performed in a comprehensive way where the total risk and the climate change impacts are evaluated jointly, taking into account their interdependencies.
- All the risk components are evaluated, which avoids neglecting certain factors affecting the global safety.
- It is also possible to determine the contribution of each dam safety component to the overall risk impact, thus highlighting which is more susceptible to climate change or has more influence in the final risk level.

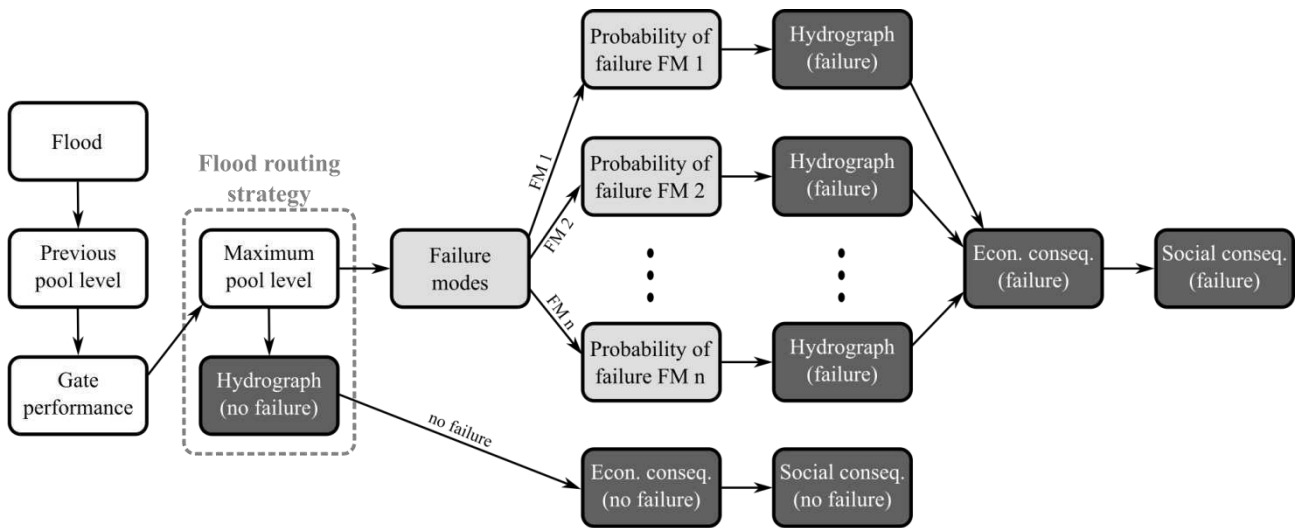

Legend for nodes:

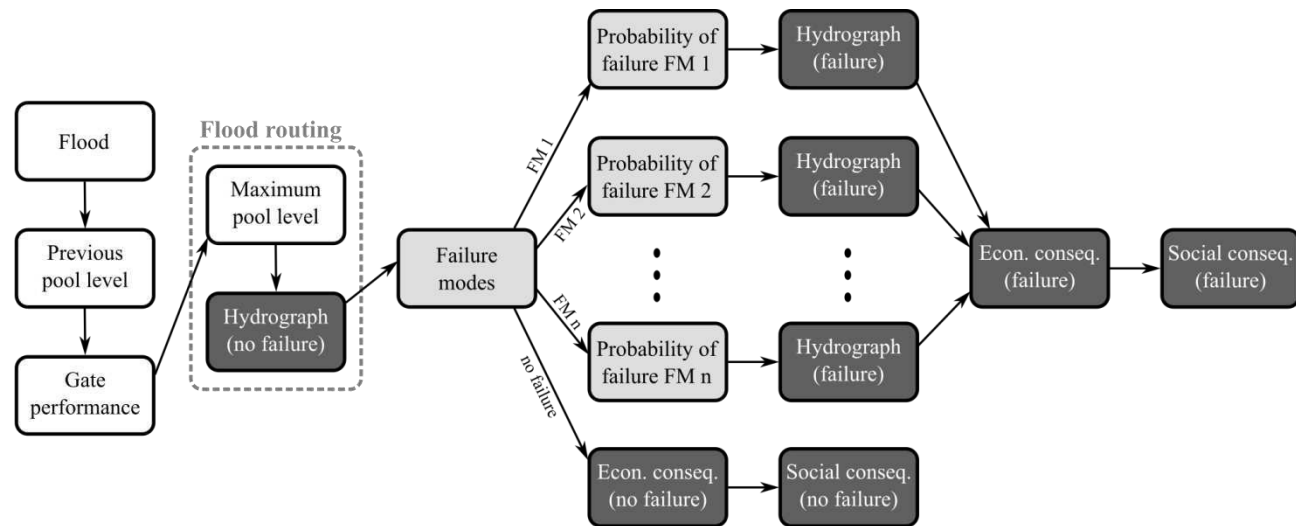

Legend for nodes:




Figure 1: Standard risk model diagram for the hydrologic scenario, divided in Loads, System Response and Consequences nodes (adapted from SPANCOLD (2012)).

3 Climate change impacts on dam risk components

What follows is a review of the main climate change impacts on the dam risk components as presented in Sect. 2. The overall effect of climate change on risk can be assessed based on how these components are susceptible to change.

The present review focuses on the impacts of climate change on dam's safety under a hydrological scenario, which means that floods are the main load component to which the dam-reservoir system is subjected.

It is worth mentioning that risk impacts of climate change are conditioned by climatic but also by non-climatic drivers (IPCC, 2014) such as population increase, economic development, or water management adaptation. In certain cases, these non-climatic drivers may have a significant influence in the dam risk calculation and have been considered in the research.

Moreover, climate change is susceptible to impact both normal components (such as the population exposure downstream of the dam) and extreme components (such as the flood events) of risk, which can be captured by using the proposed risk analysis approach.

3.1 Loads of the system

3.1.1 Flood

In the hydrological scenario, floods are the initiating event (node) that creates the loads to which the dam is subjected and will be referred here as the upstream flow into the reservoir. The probabilities of the emerging branches are defined by the frequency occurrence linked to the inflow hydrographs. They are usually characterized through a relation between their peak discharge (Q_p) and/or volume (V), and the associated annual exceedance probability (AEP) (Figure 2(a)), introducing the temporal component to the risk calculation [consequences/year]. These are associated with a given return period (T) or its equivalent annual exceedance probability (AEP). Different analyses can be performed to estimate the occurrence probability of these events using deterministic, parametric, probabilistic and stochastic methods (World Meteorological Organization, 2008). Some of them seek relating the magnitude of one or more hydrological variables with T . A widely used approach to characterize this relation is to perform frequency analyses of the maximum values of peak discharge (Q_p) and/or volume (V). However, it is useful to work with the complete hydrographs which will be also used in the flood routing calculation (Figure 2(b)); while univariate analyses focus on the individual influence of each factor, multivariate analyses are used to obtain their joint distribution in order to know the probability of occurrence of a given inflow hydrograph (Requena et al., 2013; Serinaldi and Grimaldi, 2007; Zhang and Singh, 2006).

The main component of dam safety affected by climate change is the hydrology of river basins defined by the incoming floods. Heavy precipitation has an important influence, but floods are also affected by other factors including snow cover and snowmelt (Arheimer and Lindström, 2015; Fassnacht and Records, 2015), vegetation or soil moisture (Mostbauer et al., 2017). Changes already identified in these factors are likely to modify the characteristics of floods, namely their magnitude and/or frequency (IPCC, 2014).

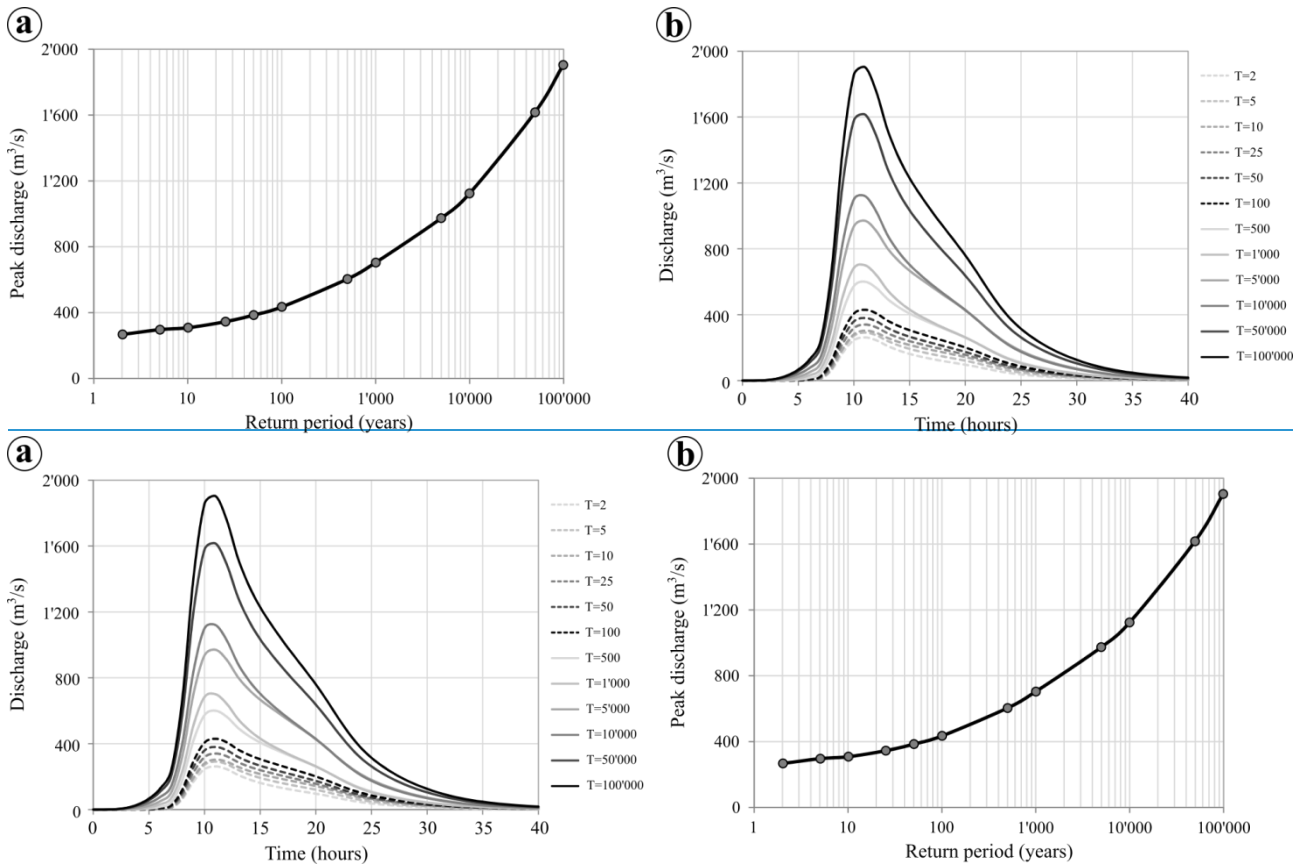


Figure 2: (a) Example of upstream hydrographs as used in the flood routing computation. (b) Resulting flood frequency characterization of the maximum values of peak discharge (Q_p), used in the Flood node. (b) Resulting hydrographs, used for the flood routing computation.

The assessment of the correspondence between changes in climate factors and flood occurrence remains however complex. Although there are abundant studies on the changes and trends for rivers ~~in~~ over the past years (Hannaford and Marsh, 2008; Petrow and Merz, 2009, p.1951–2002; Villarini et al., 2009), there is still a lack of evidence regarding patterns in the magnitude and/or frequency of floods on a global scale (IPCC, 2012b). Nevertheless, physical reasoning suggests that projected variations in heavy rainfall and other factors in some catchments or regions would contribute to variations in local floods (Bates et al., 2008; Kundzewicz, et al., 2007). Existing analyses of flood changes at the basin scale (Prudhomme and Davies, 2009; Raff et al., 2009; Taye et al., 2011) justify the need for a re-evaluation of flood frequency and magnitude impacting dam safety. To take into consideration the non-stationarity hypothesis in flood frequency analysis, some works apply methods to account for the effects of climate change in flow regimes (Gilroy and McCuen, 2012; López and Francés, 2013).

Direct analyses on the expected changes in flood's frequency and/or magnitude can be applied using existing studies of the matter on the study region. For instance, the works of Dankers and Feyen (2008), Hirabayashi et al. (2013) or Wobus et al.

(2017) present the expected variations of characteristic floods in magnitude or frequency at large scales (Figure 3). These variations can be then applied to the concerned floods of the basin by a simple extrapolation of the hydrographs based on the ratio between their peaks.

More specific analyses require to rely on local effects on floods (at catchment-wide scale) rather than apply regional- or continental-scale findings. When no detailed information is available at the catchment level, site-specific analyses are required. Most studies use adapted global (GCMs) and regional (RCMs) climate models coupled with hydrological and land surface models to assess how floods are expected to change at the watershed level (Chernet et al., 2014; Duan et al., 2017; Khazaei et al., 2012). Climate models are-can be applied to present or historical climatic variables (mainly precipitation and temperature) in order to obtain projections of future climate series (preferably at daily or sub-daily time steps). These new series are then introduced as inputs to the hydrological model. The resulting flows are then statistically analysed (the longer the simulation period, the more accuracy) to derive the flood frequency statistics (Figure 4).

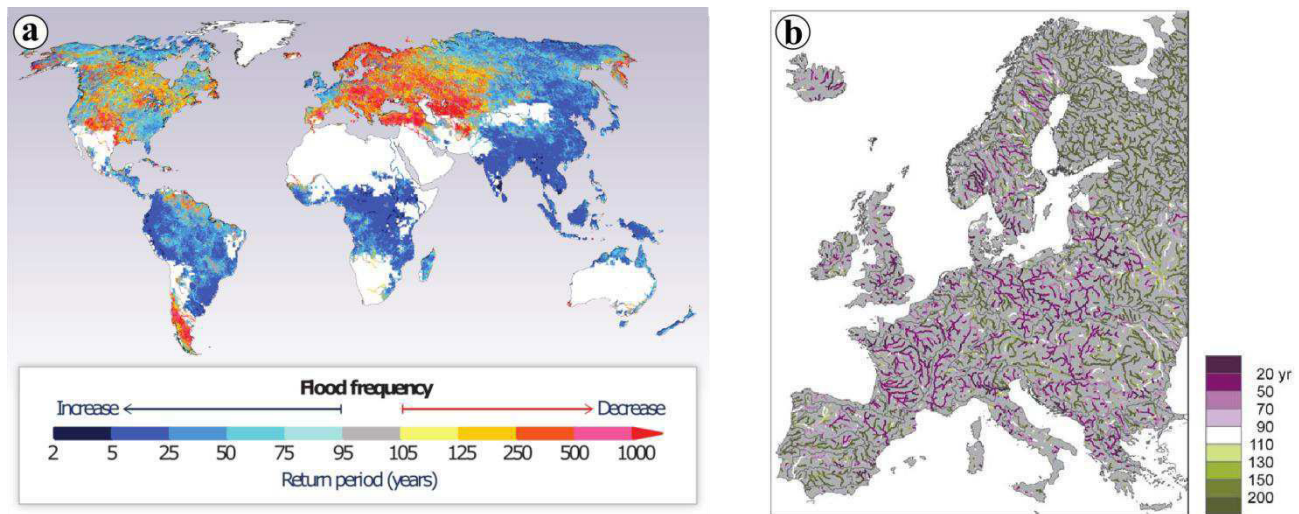


Figure 3: (a) Multi-model median return period (years) in the 2080s for the 20th century 100-year flood based on one hydrological model driven by 11 GCMs under RCP8.5 (from Hirabayashi et al. (2013)). (b) Change in recurrence of a 100-year flood in H12A2 scenario run using a Gumbel distribution (from Dankers and Feyen (2008)).

In most cases climate change projections from GCMs cannot be directly used because their spatial resolution is too coarse for modelling the hydrological processes at the required regional or even local scale, and thus must be downscaled and eventually bias-corrected. A synthetic diagram of a common methodology for the frequency analysis of floods as used in Chernet et al. (2014), Duan et al. (2017), Kay et al. (2006), Raff et al. (2009) or Shamir et al. (2015) is presented in Figure 4. The possible downscaling techniques available can be divided into dynamical downscaling based on RCMs, statistical downscaling and a combination of both. Some techniques may be more appropriate than others to simulate precipitation and other extremes (Sarr et al., 2015; Sunyer et al., 2012).

Modelling extreme events remains a challenge, and still more research is needed for analysing and refining the performance of downscaling techniques. Most downscaling techniques are designed to reproduce the mean of the climate signal, which could lead to underestimate the magnitude of the triggering precipitations, ~~although-However,~~ some studies can be found that handle the projection of extreme events (Arnbjerg-Nielsen et al., 2013; Dobler et al., 2013; Pereira-Cardenal et al., 2014; Sarr et al., 2015; Willems, 2012)(~~Dobler et al., 2013; Sarr et al., 2015~~).

Other limitations have been identified, for instance, in regions with a complex topography; in such cases, statistical downscaling perform more adequately to generate higher-resolution climate change scenarios (Dobler et al., 2013). Moreover, more attention must be paid to test the influence of non-stationarity in extreme events for flood frequency estimation (Kjeldsen et al., 2014), which is a major uncertainty when applying statistical downscaling techniques (Dixon et al., 2016; Lanzante et al., 2018). Traditionally, frequency analyses are based on the assumption of independency and stationarity of extreme events, which can eventually lead to a miscalculation of the resulting flood quantiles (Šraj et al., 2016; Zhang et al., 2015). Alternative approaches that incorporate the effects of non-independence and non-stationarity (for instance, by using time varying distribution parameters (Khaliq et al., 2006)) can improve the accuracy of the processes. Other attempts seek to reduce these uncertainties related to the statistical downscaling making use of stochastic weather generators (Wilks, 2010) which produce synthetic time series of weather data for a location based on the statistical characteristics of observed weather at that location.

Additionally, impact assessment can benefit from deeper investigations. For instance, uncertainties are inherent to both climate and hydrological projections and should be incorporated to the analyses. These may come from the consideration of several climate models or scenarios (Knutti et al., 2010), but also from the techniques used to obtain a specific projection (e.g., the downscaling method chosen), the hydrological model structure or the parameter identifiability (Chaney et al., 2015). In some cases it can be useful to apply several downscaling methods and compare the results (Willems, 2013).

Studies might also consider the effects of time-varying watershed model parameters in extreme flood climate change studies. For instance, glacier retreat is expected to intensify, leading to an alteration of the flow regimes especially in high mountain regions (Huss et al., 2010). Also, potential evapotranspiration is very likely to increase in a warmer climate, therefore changing the soil conditions when flood events happen. These conditions can in turn influence the generation and propagation of flood hydrographs. Moreover, using flood information separately by seasons can be useful in basins or environments strongly influenced by snow precipitation and storage, where changes in melting of winter snow due to a global warming may play a significant role in peak river runoff (Lawrence et al., 2014).

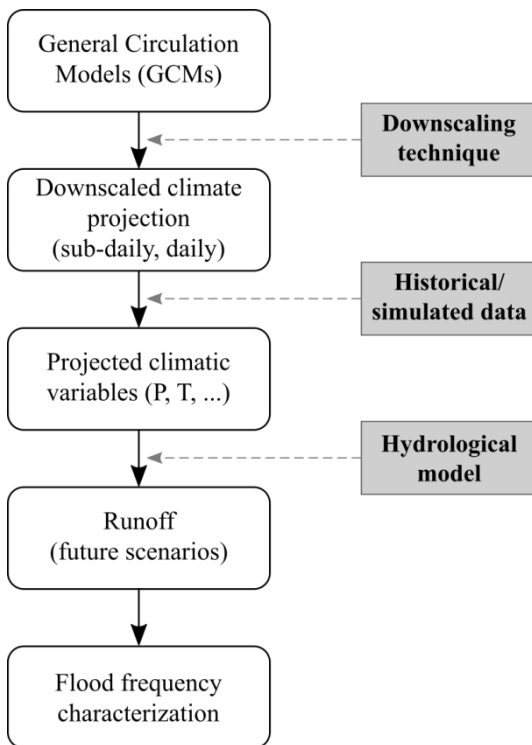


Figure 4: ~~Example~~Synthesis of the methodology for the frequency analysis of floods under climate scenarios based on downscaled projections.

3.1.2 Reservoir water levels

5 The distribution of the water storage in the reservoir, and thus of the pool levels, determines the loads to which the dam is subjected at the moment of arrival of a flood. A dam with a reservoir that is frequently full will be subjected to higher hydrostatic loads than one with larger fluctuations and less likely to be full. This is captured in the curves representing the relation between water pool level and probability of exceedance for two different cases (~~Figure 5~~Figure-5): the continues
 10 curve represents the case of (a) the case on the left indicates that the Reservoir A which is almost full (level above 540 m a.s.l.) almost 80 % of the time; (b) while the ease-discontinuous cureon the right represents a-Reservoir B that-which is half empty more than 70 % of the time. Such distributions depend basically on the inflows, the demands, the reservoir management rules and the water losses (evaporation, infiltration, etc.), and can be obtained either by using the register of historic pool levels or through the simulation of the system of water resources management.

Under climate change, surface water availability is expected to fluctuate mainly due to increased precipitation variability (IPCC, 2014) and potential evapotranspiration associated with global warming (Kingston et al., 2009; Seneviratne et al., 2010). However, other factors such as decreased snow and ice storage (Huss, 2011) may have a significant influence. Changes in agricultural land uses, which accounts for about 90 % of global water consumption, are also expected to impact freshwater systems, affecting both the hydrological processes given in the catchment and the water irrigation needs.

Moreover, water demand and allocation are strongly driven by demographic, socioeconomic, and technological changes, such as population growth, changes in land use or the adaptation of the reservoirs' exploitation strategies.

The combination of these factors is likely to alter the balance between water availability and supply, and thus will have a direct impact on the water levels in the reservoir. This impact does not only refer to the quantity, but also to the temporal distribution of the water stored, which has a key impact in the dam safety as stated before.

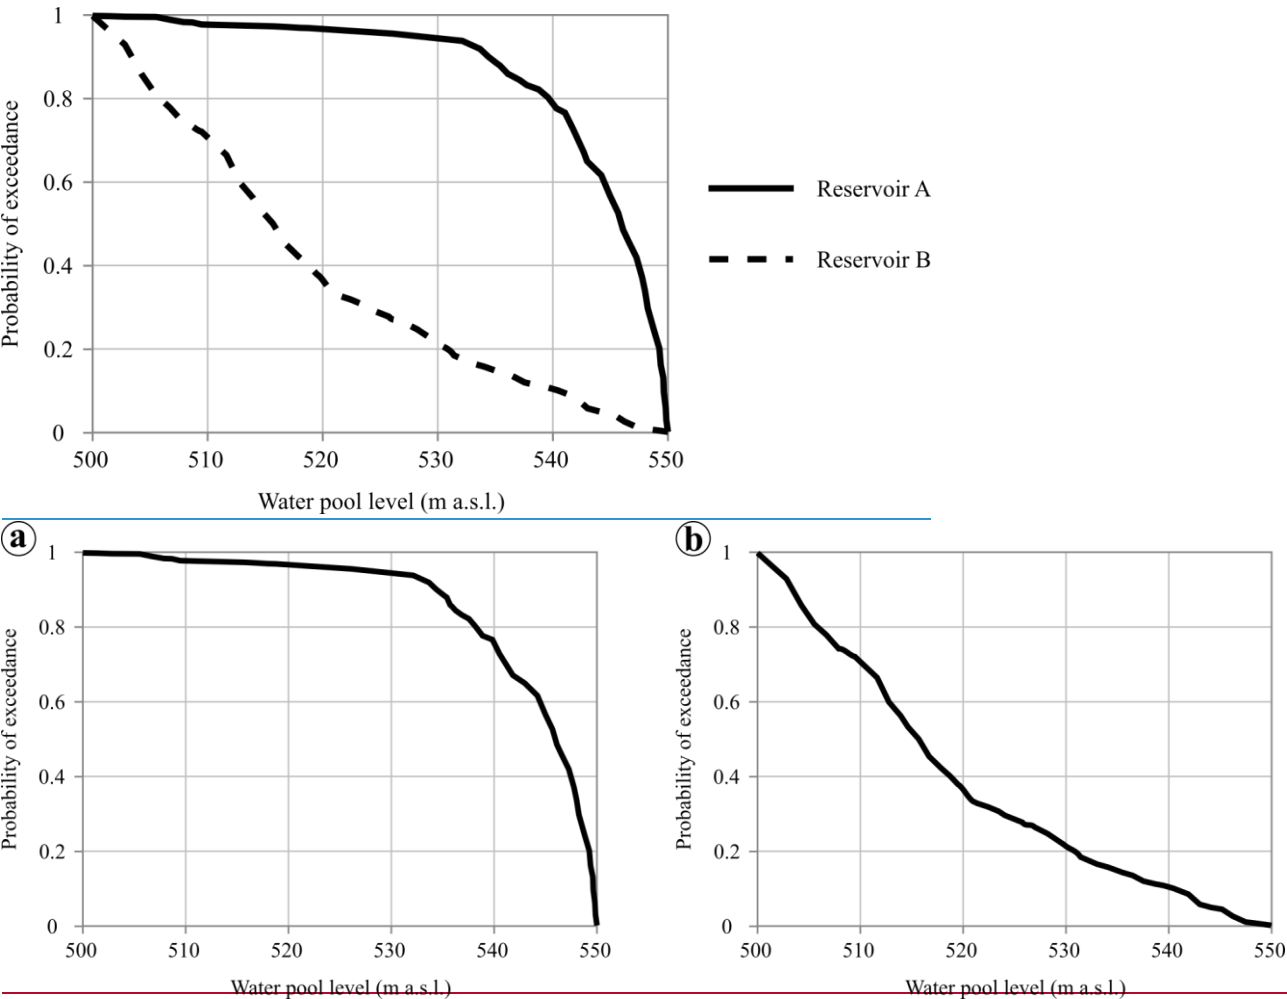


Figure 5: Examples of relation between water pool level and probability of exceedance.

When assessing the effects of climate change on the distribution of the reservoir water levels, analyses must rely on the simulation of the system of water resources management. This allows to reproduce the water balance in the reservoir under specific management rules and for future conditions. Firstly, the inflows are assessed, preferably using long updated climatic series obtained from specific climate models as inputs to a hydrological model. This in turn models the basin behaviour and provides the inflow discharges at the reservoir. These results can be then coupled with the modelling of the system of water

resources that computes the allocation and use of the water based on the reservoir's exploitation rules. For complex systems (e.g., the joint operation of several reservoirs), this can be done using simulation tools such as HEC-ResSim (Klipsch and Hurst, 2007) or AquaToolDMA (Andreu et al., 1996). The results of such models are the projected water storage evolution that can be transform in reservoir level series from which the previous pool levels curve can be obtained.

- 5 Here too the uncertainties inherent to climate and hydrological projections should be incorporated in the analysis. In this case, the conditions assumed for the water resources' exploitation modelling are also subjected to an uncertainty analysis. Additionally, non-climatic drivers affecting any component of the water balance computation (e.g., changes in land use, adaptation of reservoir's exploitation rules, etc.) can be significant and thus should be included in the analysis. However, the amount of information and work required, and the multiple determining factors involved can turn this procedure
10 impracticable and must be envisaged only when the complexity of the system and the availability of data and time allow it.

3.1.3 Gate performance

- Spillways and outlet works play a fundamental role in dam safety. They must ensure a certain discharge when required by the arrival of a certain flood. It is therefore important to assess any potential effect that could boost the failure of their regulating gates. Among the different causes that can induce a gates failure, it is worth mentioning (Lewin et al., 2003;
15 SPANCOLD, 2012): human failure, lack of access to the manoeuvre chamber, mechanical failure of the gate or of the civil works, electrical failure, blockage of the outlet works or spillway, or failure in the software controlling the gate or the valve. An important aspect for their proper working is the good condition of the gates. Severe deficiencies and deterioration could render the outlet works or spillway useless. More intense rainfalls may lead to more soil erosion (Yang et al., 2003) which can be further fostered by changes in land use. Then, an increase in the sediment content of water can worsen the abrasion
20 and erosion processes on the gates, their mechanical equipment or the spillways (British Columbia et al., 1998) thus compromising their reliability. Besides, if the water carries more and bigger suspended material (including trees, branches or debris) this could lead to a blockage of one of the gates, thus reducing the discharge capacity (Paxson et al., 2016). Changes in temperature can also affect the correct manoeuvring of the gates. Hotter or colder conditions, or even greater fluctuations in temperature, can expose gates' mechanisms to additional stresses and/or deformations. This could eventually lead to
25 blockages or malfunctioning of the gates.

- The assessment of such impacts on the gates' reliability can be performed using the qualitative description of the gate system's condition. These descriptors are based on standard cases used in dam risk analysis and shown in [Table 1](#)~~Table 4~~, without being necessary to resort to detailed studies such as fault trees (Escuder-Bueno and González-Pérez, 2014). The quantitative individual reliability of the gate (i.e. the probability that it behaves properly) is related to a qualitative
30 description of the condition of the gate system. By estimating the importance of new climatic conditions and stressors such as those mentioned above, one can assess if the gate's state must be updated and thus modify its reliability accordingly.

For more detailed studies, a deeper analysis of the causes and of the assigned failure probabilities is required. The use of fault trees (not to be mistaken for event trees) is a good option to study them in detail (SPANCOLD, 2012; Stamatelatos et

al., 2002). Such tools include all the possible manners in which a gate can fail and disaggregate all the failure probabilities, however small they are (Lewin et al., 2003).

Table 1: Standard individual reliabilities of the spillway gates

Case	Reliability
Non-gated	100 %
New / Very well maintained	95 %
Well maintained, some minor problem	85 %
Some problem	75 %
Unreliable	50 %
Not reliable at all / not used	0 %

5 **3.1.4 Flood routing [strategy](#)**

This component defines how the dam-reservoir system should respond when confronted to a hydrological event. A correct operation of the reservoir allows to maintain adequate safety levels. [Such safety levels will also depend on the characteristics of the dam-reservoir system: for some reservoirs the sufficient storage capacity to absorb the inflowing volumes will be determinant, while for others an adequate capacity of releasing peak inflows may be the dominant factor.](#)

10 Indeed, the routing of the incoming floods reduces the loads to which the dam is subjected. The capability of the dam to perform such routing depends on the state of the outlet works needed to release the discharges as well as on adapted gates operation rules. Potential effects of climate change on these aspects should be checked.

The operation procedures of the regulated gates establish the desired outflow discharge at any given moment. These procedures will usually be defined depending on a variety of factors, such as the reservoir’s water level and its evolution, the inflow discharge, time, etc. Under changes in climate conditions, [operation-rulesflood routing strategies](#) are likely to adapt. For instance, the increase of transported sediments driven by soil erosion will accelerate their accumulation within the reservoir, thus impairing the reservoir operation and decreasing its routing capacity and even posing safety hazards to the dam infrastructure (Kondolf et al., 2014; USBR, 2006). Also, changes in heavy rainfall patterns may induce variations in the flood hydrographs concentration time, thus reducing the response capacity. This may compel to re-evaluate operation criteria, especially when relying on methods based on the remaining routing volume such as the Volumetric Evaluation Method (Girón, 1988).

20 Changes in the reservoir’s operation criteria should be analysed under deep analyses that rely on the possible evolution of these criteria attending to climatic and non-climatic drivers. When comparing present and future risk, it is recommended to adapt current operation rules. First, the drivers affecting the definition of the operation rules must be identified. Then, under
25 the consideration of the climate change scenarios adopted, the analysis of the influence on such drivers is performed. Finally,

the operation criteria are re-evaluated accordingly. Given the important uncertainty involved in the process, this must be treated carefully to avoid inefficiencies in the analyses; only the most relevant and clear aspects of the problem should be addressed.

3.2 System response

5 3.2.1 Failure modes

Failure modes represent the possible ways in which the dam may fail: overtopping, pipping, sliding, etc. Their definition is a key process in risk analysis (FEMA, 2015) since if a relevant failure mode is not included in the analysis, this might lead to an important underestimation of the calculated risk. Different guidelines and tools (FERC, 2005; García-Kabbabe et al., 2010) provide guidance for the identification, description and structuring of new failure modes whenever necessary.

- 10 The vulnerability of the dam infrastructure to failure can be somehow affected by climate change. As the conditions of the dam-reservoir system deteriorate or as the climate factors worsen, an update of the failure modes considered may be required. In particular, new failure modes are susceptible to arise or previous ones to become obsolete. For instance, in the context of geological hazards, studies have confirmed the influence of climate change on slope stability (Damiano and Mercogliano, 2013; Dehn et al., 2000). A slope failure event nearby a dam site could eventually entail a part of the terrain
- 15 falling into the reservoir or impacting on the dam, which could trigger an overtopping of the dam and eventually a dam failure.

A similar hazard arises in glacial and periglacial environments where the increasing temperatures will likely cause a decrease in thickness and area of glaciers and progressive permafrost degradation. This thermal perturbation would entail stress redistributions and fast modification of the mechanical conditions at depth (Schneider et al., 2011), which could lead to rock-

20 ice avalanches or Glacial Lake Outburst Floods (GLOFs) entering the reservoir (Evans and Delaney, 2015; Huggel et al., 2008; Stoffel and Huggel, 2012).

3.2.2 Probability of failure

- Whether new failure modes are taken into account or not, the conditional probability of failure of the dam may also vary under new climatic conditions. To assess such probability and how it is impacted, one can disaggregate each failure mode
- 25 into its failure mechanisms and then assess the probability of each of them by using different tools (e.g., reliability tools or expert judgment). The objective is to study whether, subject to the same loads, the dam is responding differently under different conditions.

- The potential casuistry of climate change effects is large but, for simplicity's sake, in this study only the typical failure modes are examined: overtopping, sliding and internal erosion (piping). For instance, the structural behaviour of concrete dams, and
- 30 especially arch dams, is directly influenced by temperature (Malm, 2016) and solar exposure (FERC, 1999). Under future climate change, average temperature is expected to increase in all climate scenarios, and may have greater fluctuations

during certain periods and reach more frequent extreme values (IPCC, 2013). Moreover, the potential variation of the water storage in the reservoir (cf. Sect. 3.1.2) can increase the exposition of the body of the dam to sun radiation (both in duration and surface), increasing the temperature difference and causing temperature peaks in the surface of the concrete. These factors can eventually expose the dam to additional mechanical stresses due to the temperature variations, thus turning it more fragile to hydrostatic loads. In these cases, conventional stability analyses may be not sufficient to assess whether the failure probabilities related to dam sliding are influenced by increasing temperatures and solar radiation and then should be adapted. It could thus be of help performing mechanical and structural analyses, for instance using numerical tools such as finite element or finite difference methods. Similar studies can be applied in case other failure modes (e.g., overtopping or internal erosion) are found influenced by climate change.

In some cases, drier soil conditions are expected due to increasing temperatures and precipitation pattern's variations. Moreover, as stated above, water pool levels may significantly vary and leave the dam at lower levels during long periods. This could reduce the soil moisture, thus changing the vulnerability of embankment dams to processes such as internal erosion. Indeed, moisture content (and even soil temperature) plays a key role on the internal erosion characteristics (Briaud, 2008). The decrease of water content decreases the critical shear stress and increases the coefficient of piping erosion, thus worsening the soil resistance against erosion (Wan and Fell, 2004). Besides, in dams with vegetated downstream faces, the loss of plants due to the change in soil moisture may on the one hand leave more or less deep holes that could turn the soil more susceptible to internal erosion processes, and on the other hand present less resistance to surface flow in case of an overtopping event.

Whenever necessary, the assignation of failure probabilities should be complemented with expert consultancy and participatory workshops where results from the models serve as relevant support for the understanding of the problem. More information about probability elicitation through expert judgment can be consulted in different guidelines (ANCOLD, 2003; Ayyub, 2001; SPANCOLD, 2012).

3.3 Consequences

Damage produced by a dam failure or an abnormal discharge release is in general very important, causing serious socio-economic consequences. Their analysis is based on two parts: estimation of the outflow hydrographs and their routing downstream, and calculation of the consequences.

3.3.1 Outflow hydrographs

An important aspect in the definition of the consequences is the routing of the non-failure and the failure outflow hydrographs. The first one results from the spills released by the outlet works and spillways during the flood routing; the latter one is due to the dam failure. Even if the dam-break outflow hydrograph originated by the dam break may be many times greater than in the non-failure case, the impact of climate change is considered analogous and can be analysed jointly.

The study of [downstream](#) hydrographs can be split in two stages: estimation of the reservoir outflow hydrograph (through the dam breach or through the outlet works), and routing of the resulting hydrograph throughout the downstream inundation area.

On the one hand, the first stage can be characterized using curves that generally relate the maximum water level reached in the reservoir and the peak discharge ([Figure 6](#) [Figure-6](#) (a)). These relationships may include other variables depending on the specificities of each case: duration of the hydrograph, speed of the flood wave, etc. According to the hydraulic behaviour of the outflow hydrographs, there are no funded evidences that suggest relevant impacts of climate conditions on this aspect.

On the other hand, these outflow hydrographs are routed to estimate the resulting inundation maps downstream. This information is used to calculate the consequences curve in case of peak discharge ([Figure 6](#) [Figure-6](#) (b)).

Land use changes can affect substantially the progression of [the downstream inundation wave](#) [hydrographs](#) depending on the type of surface (e.g., urbanized or vegetation), its slope, etc. ([Bornschein and Pohl, 2018](#); [De Roo et al., 2001](#)). Some studies have applied different techniques and models to forecast future land uses, which can be found in the literature (cf. Sect. 3.3.2). Furthermore, climatic factors such as temperature, precipitation or carbon dioxide concentration are likely to influence plant growth ([Morison and Morecroft, 2007](#); [Peñuelas et al., 2004](#)) with a high variability in time and space. This will not only induce a transformation of soil cover (upstream and downstream the dam) but will also affect the amount of sediment contained in the reservoir at the time of the flow release ([Braud et al., 2001](#); [Liu et al., 2014](#)). In addition, some studies demonstrate that vegetation cover ([Anderson et al., 2006](#); [Järvelä, 2002](#)) and [incoming](#) flood sediment concentration ([Carrivick, 2010](#)) may influence the propagation of [downstream](#) hydrographs. The flow resistance of vegetation increases the roughness of floodplains and then attenuates wave celerity and dispersion of hydrographs, while suspended sediment concentration changes fluid viscosity thus affecting the acceleration and/or deceleration of the flow.

These two main factors —surface roughness and water viscosity— are typically used in floodplain models for the definition of inundation maps ([Bladé et al., 2014](#); [DHI, 2014](#); [USACE, 2011a](#)). By updating these inundation models with the projected values of the factors it is possible to analyse their effect on the outflow hydrographs.

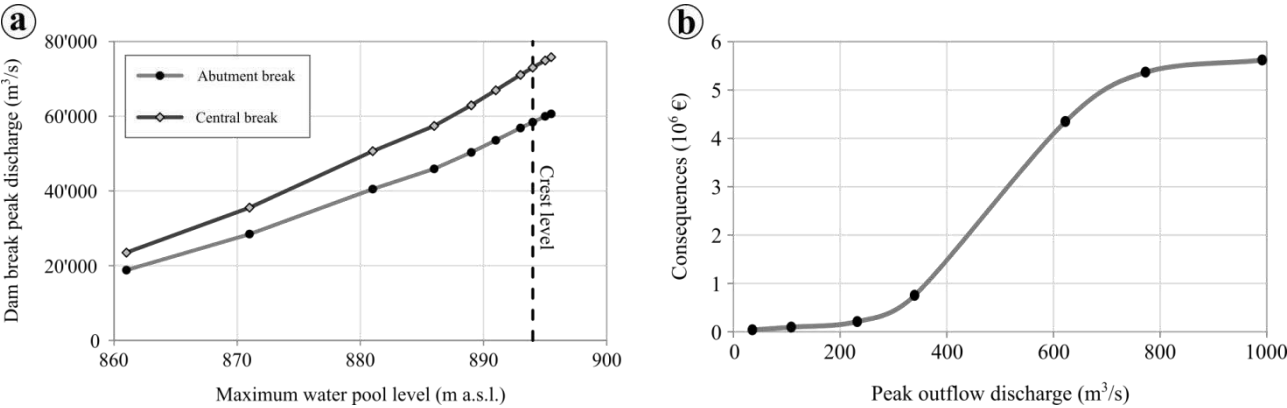


Figure 6: (a) Example of relation between the maximum water level attained in the reservoir and failure peak discharge, depending on the failure mode considered (abutment or central break). (b) Example of discharge-consequences curve.

3.3.2 Socio-economic consequences

Once the ~~outflow-downstream~~ hydrographs are defined, it is possible to assess the ~~ir~~ consequences ~~downstream~~. A distinction can be made between the direct consequences – those created directly by the impact of the ~~flood-inundation wave~~ –, and the indirect consequences – induced by the direct impacts and which may occur outside the ~~flood-inundation~~ event – (Merz et al., 2004).

Direct consequences

On the one hand, the calculation of direct consequences due to ~~floods-inundations~~ relies on two factors: exposure, which reflects the presence of people, livelihoods, infrastructure or assets in an at-risk area; and vulnerability, which refers to their propensity to be adversely affected (Cardona et al., 2012; IPCC, 2012a). For the assessment of the impact on direct consequences, changes in exposure and vulnerability are analysed.

According to long-term disaster records, some studies have revealed an increase in the losses due to extreme weather events (Mechler and Kundzewicz, 2010; Peduzzi et al., 2009; Swiss Re, 2016; UNISDR, 2009). The long-term trends in these losses are attributed to the increasing exposure of people and economic assets in at-risk areas due to population and economic growth (Bouwer, 2011; Changnon et al., 2000; Miller et al., 2008; Pielke Jr. et al., 2005) rather than to climatic drivers (Choi and Fischer, 2003; Crompton and McAneney, 2008; Neumayer and Barthel, 2011). This can be extrapolated to ~~flood-events~~~~inundations~~ (Barredo, 2009; Hilker et al., 2009; Pielke Jr. and Downton, 2000) and hence to the dam risk framework. Indeed, potential increases in the socio-economic losses are directly influenced by the enhancing presence of people and economic assets in at-risk areas due to population and economic growth (Handmer et al., 2012).

It is also expected that vulnerability facing flooding events will be affected, especially when referring to population vulnerability in poor or underdeveloped environments. Indeed, the capacity to anticipate and respond to ~~flood-inundation~~ risk depends on the existence of public education on ~~flood-risk~~, warning systems, or coordination between emergency agencies and authorities (Escuder-Bueno et al., 2012). In a changing world, these capacities may vary with the socio-economic development. For example, a potential reduction of economic support for population training or for the maintenance of warning systems may entail a reduced capacity of response, thus increasing its vulnerability.

The assessment of the change in the exposure and vulnerability of the at-risk population and assets due to non-climatic drivers depends on the population and economic growth and should be based on socioeconomic development, urbanization, and infrastructure construction information. Few works have studied jointly both factors when assessing losses from climate change (Hall, 2003; Pielke Jr., 2007; Schmidt et al., 2009).

Regarding population growth, a simple approach could be considering the past demographic evolution at the affected areas and extrapolating it to future scenarios. Another option is using existing projections at regional or national scale such as

those available at the online publication Our World in Data (2018), extracted from the UN database (United Nations, 2017). If no specific data are available and due to the complexity of proceeding otherwise, it can be considered that the same current assets and services at risk remain in the future. Only the update of their economic value (cost) is to be applied. Bouwer et al. (2010) propose the application of a factor reflecting the estimate of the increase in value of the at-risk assets based on the index for annual change in gross domestic product (GDP). Results of long term forecasts for the GDP for different countries (up to 2060) can be found in D (2018), which are based on an assessment of the economic climate in individual countries and the world economy.

More detailed projections (population, land use and value of assets) can be achieved based on quantitative indicators of societal and economical changes and on the application of specific land use and population growth models. For instance, Maaskant et al. (2009) use projections and spatial distribution of population extracted from a land use model (Schotten et al., 2001) under a high economic growth scenario. Although this scenario was specifically developed for the Netherlands, useful indications can be obtained from other work or guides for the definition and application of socio-economic scenarios (Riahi et al., 2017; UK Climate Impacts Programme, 2000). These practices are often complex and seldom applied (Feyen et al., 2008). Indeed, results of the application of such scenarios are highly dependent on the chosen scenario(s) and must include the corresponding uncertainty. Moreover, land use and economic models can be based on individual behaviour and microeconomic trends that are difficult to capture.

Regarding changes in the population vulnerability, there are different methodologies to assess the ~~flood~~-inundation severity levels according to the socio-economic context. Escuder-Bueno et al. (2011) propose a classification to assess potential loss of life in urban areas in case of river flooding depending on several factors. Once a socio-economic scenario has been chosen, it is possible (although not always easy) to study how these factors will evolve and then update the vulnerability accordingly.

Indirect consequences

On the other hand, climate change may have an influence in the indirect consequences. In particular, services and products related to water are of special importance in the context of climate change. Indeed, the value of water allocated to irrigation or hydropower production is likely to vary due to the expected alteration of the distribution, volume and timing of water resources in the future (Fischer et al., 2007, p.1990–2080; Rodríguez Díaz et al., 2007; Solaun and Cerdá, 2017; U.S. Department of Energy, 2013). [Dams are a key component when assessing socio-economic scenarios and their importance may even increase under future climatic conditions \(more frequent droughts and extreme events, for instance\). Thus, in case of dam failure or serious malfunctioning, the absence of the structure would indeed induce some consequences caused by the fact of being unable to manage part of the water volume.](#)

The assessment of how climate change may impact the indirect consequences is often very complex given the ~~amount~~number of components involved and their interrelations. When a deep analysis may be impracticable, indirect costs can be estimated as a fix percentage of direct cost (James and Lee, 1970; SPANCOLD, 2012). This fix percentage could be

simply applied to the direct costs that must be re-evaluated under the new climate change scenarios. When the application of a fixed percentage may lead to important errors (e.g., in the case of an airport, for which the indirect costs involved by the interruption of the aerial traffic are much more important than the direct ones), a more detailed work is advised.

Deeper analyses require complex modelling of the economic system to assess how it would be affected by the impact of climate change. First, if it is not yet carried out, an identification of the potentially affected services and economic activities is required (e.g., electric or telecommunications supply, industrial production). Then, specific models are to be used to assess the indirect costs induced by the interruption of these services and/or activities due to a dam failure or disruption event. Different methodologies, such as the Input-Output or the Computable General Equilibrium analyses (U.S. Department of Homeland Security, 2011), can be applied to study the variations of the economic flows after the flood. An analysis of how each component used in these models is susceptible to change in the future must be done.

In order to simplify the work, one can study only the impact in the most relevant activities affected (e.g., services and products related to water such as irrigation or hydropower production). Different works and methodologies have been developed to analyse how climate change may affect the resulting damage on the water resources systems (Hutton et al., 2007; Kazem et al., 2016; Quiroga et al., 2011).

3.4 Summary

A succinct summary of the main impacts identified for each dam risk component is presented in Table 2 along with some recommended techniques and methods for their assessment.

Table 2: Summary of climate change impacts on the different dam safety components and suggested methods for their assessment.

Risk component	Climate change impacts	Assessment methods
Flood	Variations in local floods are expected due to changes in: <ul style="list-style-type: none">Heavy rainfall patterns.Snow cover and snowmelt processes.Vegetation or soil moisture.	<ul style="list-style-type: none">Direct application of previous analyses.Combination of climate projections, downscaling techniques and hydro-meteorological modelling (Figure 4).Uncertainties inherent to climate and hydrological projections and changes in watershed model.
Reservoir water levels	Fluctuations of water storage due to: <ul style="list-style-type: none">Precipitation variability, potential evapotranspiration or decreased snow and ice storage.Changes and adaptations in agricultural land uses and water demand.	<ul style="list-style-type: none">Combination of climate projections, downscaling techniques and simulation of the system of water resources management.Importance of non-climatic drivers (e.g., changes in land use, adaptation of reservoir's exploitation rules).
Gate performance	<ul style="list-style-type: none">Abrasion processes due to increase in the sediment content of the water.	<ul style="list-style-type: none">Qualitative assessment of the impacts of new climatic conditions and stressors (Table 1).

	<ul style="list-style-type: none"> ▪ Blockage of the gates due to suspended material. ▪ Changes in temperature causing stresses and/or deformations. 	<ul style="list-style-type: none"> ▪ Use of fault trees.
Flood routing	Operation rules are likely to adapt under certain climate conditions (e.g., changes in heavy rainfalls inducing variations in the flood hydrographs concentration time).	Re-evaluation of the flood routing criteria.
Failure modes	New failures modes are susceptible to arise, in particular in the context of glacier melt and slope stability or GLOFs occurrence directly impacting the dam structure.	Guidelines and tools to identify, describe and structure new failure modes or remove obsolete ones.
Probability of failure	<ul style="list-style-type: none"> ▪ Temperature fluctuations may induce to additional mechanical stresses in concrete dams. ▪ Drier soil conditions and water level fluctuations can increase processes such as internal erosion in embankment dams. 	Probability elicitation through expert judgment in different guidelines.
Outflow hydrographs	<p>The outflow hydrograph routing is affected by:</p> <ul style="list-style-type: none"> ▪ Surface roughness of the surface. ▪ Water viscosity related to flood sediment concentration. 	Use of inundation models to assess the sensitivity of the outflow hydrographs to these factors.
Socio-economic consequences	<p><u>Direct consequences:</u></p> <ul style="list-style-type: none"> ▪ Exposure changes due to population growth. ▪ Update of the assets' economic value. <p><u>Indirect consequences:</u></p> <ul style="list-style-type: none"> ▪ The value of water for irrigation or hydropower production is likely to vary, which implies changes in the cost of interruption of services and/or activities. 	<p><u>Direct consequences:</u></p> <ul style="list-style-type: none"> ▪ Application of demographic projections. ▪ Detailed land use and population growth models based on socio-economic scenarios. ▪ Assessment of flood severity levels according to the socio-economic context. <p><u>Indirect consequences:</u></p> <ul style="list-style-type: none"> ▪ Estimation as a fix percentage of direct costs. ▪ Complex modelling of the economic system and assessment of costs induced by the interruption of services and/or activities.

4 Conclusions

This work presents an interdisciplinary review of the state-of-the-art research on projected climate change impacts on dam safety attending to both climatic and non-climatic drivers. The structure followed for such review is based on the risk analysis approach where all the variables concerning dam safety – from the hydrological loads to the consequences of failure

5 – and their interdependencies are included in a comprehensive way. The extent of the analysis to be performed should depend on the detail level chosen.

Paired with the impacts identified, the paper also presents the useful techniques for their direct application to provide information for dam owners and dam safety practitioners in their decision-making process. Although the information collected in this work is mainly based on existing works, there is still some novelty or innovation in its processing since usually the global effects of climate change on dam risk are studied separately. The authors introduce a more comprehensive and structured approach to take them into account, which can be used to apply this same risk analysis to other critical infrastructures.

The purpose of tThis review ~~is to serve can be used~~ as a dam safety management supporting tool ~~used~~ to assess the vulnerability of the dam to climate change, i.e. the additional risk imposed by climate change effects, and to define adaptation strategies for new climate scenarios under ~~an evolutive dam risk management-risk based~~ framework (Figure 7).

Under this approach, dam risk models must be updated following to the effects of climate change on each of the risk components, which will later help defining the adaptation strategies to be followed. As climate projections evolve with new scenarios of models, the process must be replicated iteratively.

With this information, long-term investments can be planned more efficiently. Indeed, the application of such tool may prevent investing in measures that would no longer be necessary in the future, or missing some measures that could reduce the future risk. As such, it is addressed to dam owners and dam safety practitioners, but also to the research community that can help improving it and filling the gaps that still remain in some aspects of the risk assessment.

~~The extent of the analysis to be performed should depend on the detail level chosen.~~

The present work is based on available data sources and information at current levels of knowledge. However, this filed of research is highly dynamic and advances in science and techniques for the assessment of these climate change effects are expected over time. Therefore, climate change impacts can then be iteratively actualized along with the forthcoming innovations and advances in science and techniques for the assessment of these effects. In particular, climate modellers as well as dam engineers face significant uncertainties when proposing and assessing climate scenarios and their impact on the different components involved in dam safety. The assignation of probabilities to uncertain future conditions and scenarios remains a major challenge and thus the management of dam safety based on climate change impacts must take into account these limitations.

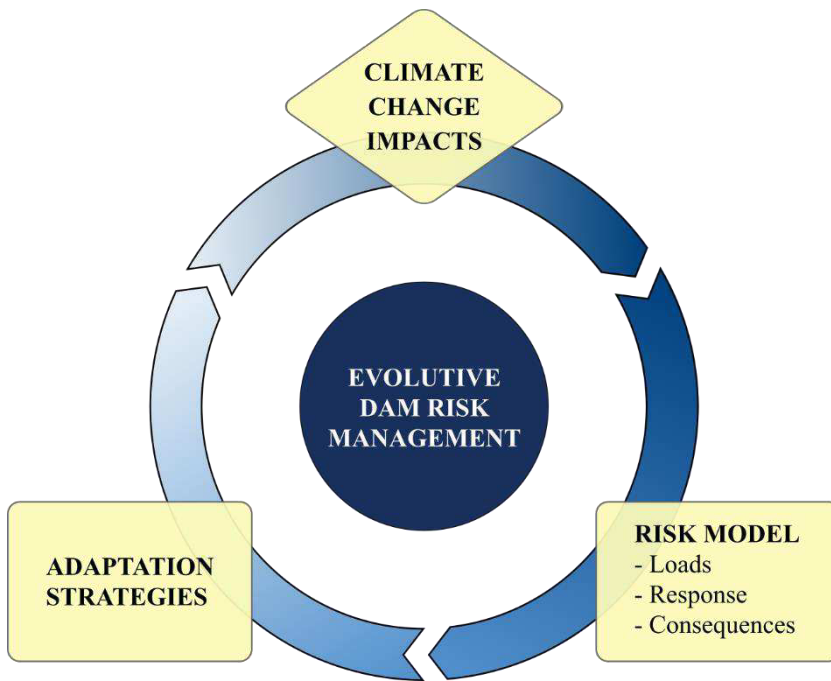


Figure 7: Evolutive dam risk management driven by climate change impacts on risk components, including adaptation strategies.

References

- 5 [Altarejos-García, L., Escuder-Bueno, I., Serrano-Lombillo, A. and de Membrillera-Ortuño, M. G.: Methodology for estimating the probability of failure by sliding in concrete gravity dams in the context of risk analysis, Struct. Saf., 36–37, 1–13, doi:10.1016/j.strusafe.2012.01.001, 2012.](#)
- [ANCOLD: Guidelines on Risk Assessment, Australian National Committee on Large Dams., 2003.](#)
- [Anderson, B. G., Rutherford, I. D. and Western, A. W.: An analysis of the influence of riparian vegetation on the propagation of flood waves, Environ. Model. Softw., 21\(9\), 1290–1296, doi:10.1016/j.envsoft.2005.04.027, 2006.](#)
- 10 [Andreu, J., Capilla, J. and Sanchís, E.: AQUATOOL, a generalized decision-support system for water-resources planning and operational management, J. Hydrol., 177\(3–4\), 269–291, doi:10.1016/0022-1694\(95\)02963-X, 1996.](#)
- [Ardiles, L., Sanz, D., Moreno, P., Jenaro, E., Fleitz, J. and Escuder-Bueno, I.: Risk Assessment and Management for 26 Dams Operated By the Duero River Authority \(Spain\), in 6th International Conference on Dam Engineering, C.Pina, E.Portela, J.Gomes, Lisbon, Portugal., 2011.](#)
- 15 [Arheimer, B. and Lindström, G.: Climate impact on floods: changes in high flows in Sweden in the past and the future \(1911–2100\), Hydrol. Earth Syst. Sci., 19\(2\), 771–784, doi:10.5194/hess-19-771-2015, 2015.](#)

- Arnbjerg-Nielsen, K., Willems, P., Olsson, J., Beecham, S., Pathirana, A., Bülow Gregersen, I., Madsen, H. and Nguyen, V.-T.-V.: Impacts of climate change on rainfall extremes and urban drainage systems: a review, *Water Sci. Technol.*, 68(1), 16, doi:10.2166/wst.2013.251, 2013.
- Atkins: Impact of Climate Change on Dams & Reservoirs, Final Guidance Report, Department of Environment, Food and Rural Affairs., 2013.
- Ayyub, B. M.: Elicitation of expert opinions for uncertainty and risks, CRC Press, Boca Raton, Fla., 2001.
- Bahls, V. S. and Holman, K.: Climate Change in Hydrologic Hazard Analyses: Friant Dam Pilot Study - Part I: Hydrometeorological Model Inputs, U.S. Department of the Interior, Bureau of Reclamation., 2014.
- Barredo, J. I.: Normalised flood losses in Europe: 1970–2006, *Nat. Hazards Earth Syst. Sci.*, 9(1), 97–104, doi:10.5194/nhess-9-97-2009, 2009.
- Bates, B. ., Kundzewicz, Z. W., Wu, S. and Palutikof, J. P., Eds.: Climate change and water, IPCC Secretariat., Geneva., 2008.
- Bladé, E., Cea, L., Corestein, G., Escolano, E., Puertas, J., Vázquez-Cendón, E., Dolz, J. and Coll, A.: Iber: herramienta de simulación numérica del flujo en ríos, *Rev. Int. Metod. Numér. Para Cálculo Diseño En Ing.*, 30(1), 1–10, doi:10.1016/j.rimni.2012.07.004, 2014.
- Bornschein, A. and Pohl, R.: Land use influence on flood routing and retention from the viewpoint of hydromechanics: Land use influence on flood routing and retention, *J. Flood Risk Manag.*, 11(1), 6–14, doi:10.1111/jfr3.12289, 2018.
- Bouwer, L. M.: Have Disaster Losses Increased Due to Anthropogenic Climate Change?, *Bull. Am. Meteorol. Soc.*, 92(1), 39–46, doi:10.1175/2010BAMS3092.1, 2011.
- Bouwer, L. M., Bubeck, P. and Aerts, J. C. J. H.: Changes in future flood risk due to climate and development in a Dutch polder area, *Glob. Environ. Change*, 20(3), 463–471, doi:10.1016/j.gloenvcha.2010.04.002, 2010.
- Bowles, D., Brown, A., Hughes, A., Morris, M., Sayers, P., Topple, A., Wallis, M. and Gardiner, K.: Guide to risk assessment for reservoir safety management, Volume 1: Guide, Environment Agency, Horison House, Deanery Road, Bristol, BS1 9AH., 2013a.
- Bowles, D., Brown, A., Hughes, A., Morris, M., Sayers, P., Topple, A., Wallis, M. and Gardiner, K.: Guide to risk assessment for reservoir safety management, Volume 2: Methodology and supporting information, Environment Agency, Horison House, Deanery Road, Bristol, BS1 9AH., 2013b.
- Bowles, D. S.: Advances in the practice and use of portfolio risk assessment, in ANCOLD Conference on Dams., 2000.
- Braud, I., Vich, A. I. J., Zuluaga, J., Fornero, L. and Pedrani, A.: Vegetation influence on runoff and sediment yield in the Andes region: observation and modelling, *J. Hydrol.*, 254(1–4), 124–144, doi:10.1016/S0022-1694(01)00500-5, 2001.
- Briaud, J.-L.: Case Histories in Soil and Rock Erosion: Woodrow Wilson Bridge, Brazos River Meander, Normandy Cliffs, and New Orleans Levees, *J. Geotech. Geoenvironmental Eng.*, 134(10), 1425–1447, doi:10.1061/(ASCE)1090-0241(2008)134:10(1425), 2008.

- British Columbia, Water Management Branch, British Columbia and Dam Safety Unit: Inspection & maintenance of dams: dam safety guidelines, British Columbia, Water Management Branch, Victoria., 1998.
- Cardona, O. D., van Aalst, M. K., Birkmann, J., Fordham, M., McGregor, G., Perez, R., Pulwarty, R. S., Schipper, E. L. F. and Sinh, B. T.: Determinants of risk: exposure and vulnerability, in *Managing the Risks of Extreme Events and Disasters to Advance Climate Change Adaptation*, edited by C. B. Field, V. Barros, T. F. Stocker, D. Qin, D. J. Dokken, K. L. Ebi, M. D. Mastrandrea, K. J. Mach, G.-K. Plattner, S. K. Allen, M. Tignor, and P. M. Midgley, pp. 65–108, Cambridge University Press, Cambridge, UK, and New York, NY, USA., 2012.
- Carrivick, J. L.: Dam break – Outburst flood propagation and transient hydraulics: A geosciences perspective, *J. Hydrol.*, 380(3–4), 338–355, doi:10.1016/j.jhydrol.2009.11.009, 2010.
- CH2014-Impacts: Toward quantitative scenarios of climate change impacts in Switzerland, OCCR, FOEN, MeteoSwiss, C2SM, Agroscope and ProClim, Bern, Switzerland., 2014.
- Chaney, N. W., Herman, J. D., Reed, P. M. and Wood, E. F.: Flood and drought hydrologic monitoring: the role of model parameter uncertainty, *Hydrol. Earth Syst. Sci.*, 19(7), 3239–3251, doi:10.5194/hess-19-3239-2015, 2015.
- Changnon, S. A., Pielke, R. A., Changnon, D., Sylves, R. T. and Pulwarty, R.: Human Factors Explain the Increased Losses from Weather and Climate Extremes *, *Bull. Am. Meteorol. Soc.*, 81(3), 437–442, doi:10.1175/1520-0477(2000)081<0437:HFETIL>2.3.CO;2, 2000.
- Chernet, H. H., Alfredsen, K. and Midttømme, G. H.: Safety of Hydropower Dams in a Changing Climate, *J. Hydrol. Eng.*, 19(3), 569–582, doi:10.1061/(ASCE)HE.1943-5584.0000836, 2014.
- Choi, O. and Fischer, A.: The Impacts of Socioeconomic Development and Climate Change on Severe Weather Catastrophe Losses: Mid-Atlantic Region (MAR) And the U.S., *Clim. Change*, 58((1-2)), 149–170, doi:10.1023/A:1023459216609, 2003.
- Commonwealth of Australia: National Climate Resilience and Adaptation Strategy., 2015.
- Crompton, R. P. and McAneney, K. J.: Normalised Australian insured losses from meteorological hazards: 1967–2006, *Environ. Sci. Policy*, 11(5), 371–378, doi:10.1016/j.envsci.2008.01.005, 2008.
- Damiano, E. and Mercogliano, P.: Potential Effects of Climate Change on Slope Stability in Unsaturated Pyroclastic Soils, in *Landslide Science and Practice*, edited by C. Margottini, P. Canuti, and K. Sassa, pp. 15–25, Springer Berlin Heidelberg, Berlin, Heidelberg., 2013.
- Dankers, R. and Feyen, L.: Climate change impact on flood hazard in Europe: An assessment based on high-resolution climate simulations, *J. Geophys. Res.*, 113(D19), doi:10.1029/2007JD009719, 2008.
- De Roo, A., Odijk, M., Schmuck, G., Koster, E. and Lucieer, A.: Assessing the effects of land use changes on floods in the meuse and oder catchment, *Phys. Chem. Earth Part B Hydrol. Oceans Atmosphere*, 26(7–8), 593–599, doi:10.1016/S1464-1909(01)00054-5, 2001.
- Dehn, M., Bürger, G., Buma, J. and Gasparetto, P.: Impact of climate change on slope stability using expanded downscaling, *Eng. Geol.*, 55(3), 193–204, doi:10.1016/S0013-7952(99)00123-4, 2000.

- DHI: MIKE FLOOD User Manual, Danish Hydraulic Institute – Water and Environment, Hørsholm, Denmark., 2014.
- Dixon, K. W., Lanzante, J. R., Nath, M. J., Hayhoe, K., Stoner, A., Radhakrishnan, A., Balaji, V. and Gaitán, C. F.: Evaluating the stationarity assumption in statistically downscaled climate projections: is past performance an indicator of future results?, Clim. Change, 135(3–4), 395–408, doi:10.1007/s10584-016-1598-0, 2016.
- 5 Dobler, C., Bürger, G. and Stötter, J.: Simulating future precipitation extremes in a complex Alpine catchment, Nat. Hazards Earth Syst. Sci., 13(2), 263–277, doi:10.5194/nhess-13-263-2013, 2013.
- Duan, J. G., Bai, Y., Dominguez, F., Rivera, E. and Meixner, T.: Framework for incorporating climate change on flood magnitude and frequency analysis in the upper Santa Cruz River, J. Hydrol., 549, 194–207, doi:10.1016/j.jhydrol.2017.03.042, 2017.
- 10 Escuder-Bueno, I. and González-Pérez, J.: Metodología para la evaluación del riesgo hidrológico de presas y priorización de medidas correctoras, Colegio de Ingeniero de Caminos, Canales y Puertos, Madrid, Spain., 2014.
- Escuder-Bueno, I., Castillo-Rodriguez, J., Perales-Momparler, S. and Morales-Torres, A.: SUFRI methodology for pluvial and river flooding risk assessment in urban areas to inform decision-making, SUFRI project, WP3, final report. [online] Available from: http://www.edams.upv.es/docs/2011_July_SUFRI_WP3_Final%20Report.pdf, 2011.
- 15 Escuder-Bueno, I., Castillo-Rodríguez, J. T., Zechner, S., Jöbstl, C., Perales-Momparler, S. and Petaccia, G.: A quantitative flood risk analysis methodology for urban areas with integration of social research data, Nat. Hazards Earth Syst. Sci., 12(9), 2843–2863, doi:10.5194/nhess-12-2843-2012, 2012.
- European Commission: An EU Strategy on adaptation to climate change. [online] Available from: <http://eur-lex.europa.eu/legal-content/EN/TXT/PDF/?uri=CELEX:52009DC0147&from=EN>, 2013.
- 20 Evans, S. G. and Delaney, K. B.: Catastrophic Mass Flows in the Mountain Glacial Environment, in Snow and Ice-Related Hazards, Risks and Disasters, pp. 563–606, Elsevier., 2015.
- Fassnacht, S. R. and Records, R. M.: Large snowmelt versus rainfall events in the mountains: Big Mountain Snowmelt vs Rainfall Events, J. Geophys. Res. Atmospheres, 120(6), 2375–2381, doi:10.1002/2014JD022753, 2015.
- FEMA: Federal Guidelines for Dam Safety Risk Management, FEMA, Federal Emergency Management Agency., 2015.
- 25 FERC: Arch Dams, in Engineering Guidelines for the Evaluation of Hydropower Projects, Federal Energy Regulatory Commission, Division of Dam Safety and Inspections, Washington, DC., 1999.
- FERC: Engineering Guidelines for the Evaluation of Hydropower Projects, in Dam Safety Performance Monitoring Program, Federal Energy Regulatory Commission., 2005.
- Feyen, L., Barredo, J. I. and Dankers, R.: Implications of global warming and urban land use change on flooding in Europe, in Water and Urban Development Paradigms: Towards an Integration of Engineering, Design and Management Approaches, pp. 217–225, CRC Press, Boca Raton, Fla., 2008.
- 30 Fischer, G., Tubiello, F. N., van Velthuisen, H. and Wiberg, D. A.: Climate change impacts on irrigation water requirements: Effects of mitigation, 1990–2080, Technol. Forecast. Soc. Change, 74(7), 1083–1107, doi:10.1016/j.techfore.2006.05.021, 2007.

- García-Kabbabe, L., Chaparro-Carrasquel, L., Escuder-Bueno, I. and Serrano-Lombillo, A.: Metodología para estructurar modos de fallo en sistemas presa-embalse, Valladolid, Spain., 2010.
- Gilroy, K. L. and McCuen, R. H.: A nonstationary flood frequency analysis method to adjust for future climate change and urbanization, J. Hydrol., 414–415, 40–48, doi:10.1016/j.jhydrol.2011.10.009, 2012.
- 5 Girón, F.: The evacuation of floods during the operation of reservoir, in 16th ICOLD Congress, San Francisco, USA., 1988.
- Hall, J.: Quantified scenarios analysis of drivers and impacts of changing flood risk in England and Wales: 2030-2100, Glob. Environ. Change Part B Environ. Hazards, 5(3–4), 51–65, doi:10.1016/j.hazards.2004.04.002, 2003.
- Handmer, J., Honda, Y., Kundzewicz, Z. W., Arnell, N., Benito, G., Hatfield, J., Mohamed, I. F., Peduzzi, P., Wu, S., Sherstyukov, B., Takahashi, K. and Yan, Z.: Changes in impacts of climate extremes: human systems and ecosystems, in
- 10 Managing the Risks of Extreme Events and Disasters to Advance Climate Change Adaptation, edited by C. B. Field, V. Barros, T. F. Stocker, D. Qin, D. J. Dokken, K. L. Ebi, M. D. Mastrandrea, K. J. Mach, G.-K. Plattner, S. K. Allen, M. Tignor, and P. M. Midgley, pp. 231–290, Cambridge University Press, Cambridge, UK, and New York, NY, USA., 2012.
- Hannaford, J. and Marsh, T. J.: High-flow and flood trends in a network of undisturbed catchments in the UK, Int. J. Climatol., 28(10), 1325–1338, doi:10.1002/joc.1643, 2008.
- 15 Hilker, N., Badoux, A. and Hegg, C.: The Swiss flood and landslide damage database 1972–2007, Nat. Hazards Earth Syst. Sci., 9(3), 913–925, doi:10.5194/nhess-9-913-2009, 2009.
- Hirabayashi, Y., Mahendran, R., Koirala, S., Konoshima, L., Yamazaki, D., Watanabe, S., Kim, H. and Kanae, S.: Global flood risk under climate change, Nat. Clim. Change, 3(9), 816–821, doi:10.1038/nclimate1911, 2013.
- Huggel, C., Caplan-Auerbach, J. and Wessels, R.: Recent Extreme Avalanches: Triggered by Climate Change?, Eos Trans. Am. Geophys. Union, 89(47), 469–470, doi:10.1029/2008EO470001, 2008.
- 20 Huss, M.: Present and future contribution of glacier storage change to runoff from macroscale drainage basins in Europe, Water Resour. Res., 47(7), doi:10.1029/2010WR010299, 2011.
- Huss, M., Juvet, G., Farinotti, D. and Bauder, A.: Future high-mountain hydrology: a new parameterization of glacier retreat, Hydrol. Earth Syst. Sci., 14(5), 815–829, doi:10.5194/hess-14-815-2010, 2010.
- 25 Hutton, G., Haller, L. and Bartram, J.: Global cost-benefit analysis of water supply and sanitation interventions, J. Water Health, 5(4), 481, doi:10.2166/wh.2007.009, 2007.
- ICOLD: Bulletin on risk assessment in dam safety management, International Commission on Large Dams., 2003.
- ICOLD: Risk assessment in dam safety management. A reconnaissance of benefits, methods and current applications, Bulletin, International Commission on Large Dams., 2005.
- 30 IPCC: Glossary of terms, in Managing the Risks of Extreme Events and Disasters to Advance Climate Change Adaptation, edited by C. B. Field, V. Barros, T. F. Stocker, D. Qin, D. J. Dokken, K. L. Ebi, M. D. Mastrandrea, K. J. Mach, G.-K. Plattner, S. K. Allen, M. Tignor, and P. M. Midgley, pp. 555–564, Cambridge University Press, Cambridge, UK, and New York, NY, USA., 2012a.

- IPCC: Managing the risks of extreme events and disasters to advance climate change adaptation: special report of the Intergovernmental Panel on Climate Change, 1. publ., edited by C. B. Field, V. Barros, T. F. Stocker, D. Qin, D. J. Dokken, K. L. Ebi, M. D. Mastrandrea, K. J. Mach, G.-K. Plattner, S. K. Allen, M. Tignor, and P. M. Midgley, Cambridge Univ. Press, Cambridge, UK, and New York, NY, USA., 2012b.
- 5 IPCC: Climate Change 2013: The Physical Science Basis. Contribution of Working Group I to the Fifth Assessment Report of the Intergovernmental Panel on Climate Change, edited by T. F. Stocker, D. Qin, G.-K. Plattner, M. Tignor, S. K. Allen, J. Boschung, A. Nauels, Y. Xia, V. Bex, and P. M. Midgley, Cambridge University Press, Cambridge, United Kingdom and New York, NY, USA., 2013.
- 10 IPCC: Climate Change 2014: Impacts, Adaptation, and Vulnerability. Part A: Global and Sectoral Aspects. Contribution of Working Group II to the Fifth Assessment Report of the Intergovernmental Panel on Climate Change, edited by C. B. Field, V. R. Barros, D. J. Dokken, K. J. Mach, M. D. Mastrandrea, T. E. Bilir, M. Chatterjee, K. L. Ebi, Y. O. Estrada, R. C. Genova, B. Girma, E. S. Kissel, A. N. Levy, S. MacCracken, P. R. Mastrandrea, and L. L. White, Cambridge Univ. Press, Cambridge, United Kingdom and New York, NY, USA., 2014.
- 15 James, L. D. and Lee, R. R.: Economics of water resources planning, McGraw-Hill Book Co. [online] Available from: <https://books.google.ch/books?id=gpE8AAAAIAAJ>, 1970.
- Järvelä, J.: Flow resistance of flexible and stiff vegetation: a flume study with natural plants, *J. Hydrol.*, 269(1–2), 44–54, doi:10.1016/S0022-1694(02)00193-2, 2002.
- Kaplan, S.: The Words of Risk Analysis, *Risk Anal.*, 17(4), 407–417, doi:10.1111/j.1539-6924.1997.tb00881.x, 1997.
- Kaplan, S. and Garrick, B. J.: On The Quantitative Definition of Risk, *Risk Anal.*, 1(1), 11–27, doi:10.1111/j.1539-6924.1981.tb01350.x, 1981.
- 20 Kay, A. L., Reynard, N. S. and Jones, R. G.: RCM rainfall for UK flood frequency estimation. I. Method and validation, *J. Hydrol.*, 318(1–4), 151–162, doi:10.1016/j.jhydrol.2005.06.012, 2006.
- Kazem, M., McPhee, D., Torkaman Rashid, A. and Kazem, A.: Climate change and economic approaches into water allocation: optimization via direct benefits of water—the case study of Rudbar Lorestan hydropower dam (Iran), *Sustain. Water Resour. Manag.*, 2(4), 461–472, doi:10.1007/s40899-016-0067-2, 2016.
- 25 Khaliq, M. N., Ouarda, T. B. M. J., Ondo, J.-C., Gachon, P. and Bobée, B.: Frequency analysis of a sequence of dependent and/or non-stationary hydro-meteorological observations: A review, *J. Hydrol.*, 329(3–4), 534–552, doi:10.1016/j.jhydrol.2006.03.004, 2006.
- Khazaei, M. R., Zahabiyou, B. and Saghaian, B.: Assessment of climate change impact on floods using weather generator and continuous rainfall-runoff model, *Int. J. Climatol.*, 32(13), 1997–2006, doi:10.1002/joc.2416, 2012.
- 30 Kingston, D. G., Todd, M. C., Taylor, R. G., Thompson, J. R. and Arnell, N. W.: Uncertainty in the estimation of potential evapotranspiration under climate change, *Geophys. Res. Lett.*, 36(20), doi:10.1029/2009GL040267, 2009.
- Kjeldsen, T. R., Macdonald, N., Lang, M., Mediero, L., Albuquerque, T., Bogdanowicz, E., Brázdil, R., Castellarin, A., David, V., Fleig, A., Gül, G. O., Kriauciuniene, J., Kohnová, S., Merz, B., Nicholson, O., Roald, L. A., Salinas, J. L.,

- Sarauskiene, D., Šraj, M., Strupczewski, W., Szolgay, J., Toumazis, A., Vanneuville, W., Veijalainen, N. and Wilson, D.: Documentary evidence of past floods in Europe and their utility in flood frequency estimation, *J. Hydrol.*, 517, 963–973, doi:10.1016/j.jhydrol.2014.06.038, 2014.
- 5 Klipsch, J. D. and Hurst, M. B.: HEC-ResSim Reservoir System Simulation User's Manual, USACE, Institute for Water Resources, Hydrologic Engineering Center, Davis, CA., 2007.
- Knutti, R., Furrer, R., Tebaldi, C., Cermak, J. and Meehl, G. A.: Challenges in Combining Projections from Multiple Climate Models, *J. Clim.*, 23(10), 2739–2758, doi:10.1175/2009JCLI3361.1, 2010.
- Kondolf, G. M., Gao, Y., Annandale, G. W., Morris, G. L., Jiang, E., Zhang, J., Cao, Y., Carling, P., Fu, K., Guo, Q., Hotchkiss, R., Peteuil, C., Sumi, T., Wang, H.-W., Wang, Z., Wei, Z., Wu, B., Wu, C. and Yang, C. T.: Sustainable sediment management in reservoirs and regulated rivers: Experiences from five continents, *Earths Future*, 2(5), 256–280, doi:10.1002/2013EF000184, 2014.
- 10 Kundzewicz, Z. W., Mata, L. J., Arnell, N. W., Doll, P., Kabat, P., Jimenez, B., Miller, K. A., Oki, T., Sen, Z. and Shiklomanov, I. A.: Freshwater resources and their management, in *Climate Change 2007. Impacts, Adaptation and Vulnerability. Contribution of Working Group II to the Fourth Assessment Report of the Intergovernmental Panel on Climate Change*, edited by M. L. Parry, O. F. Canziani, J. P. Palutikof, P. J. Van Der Linde, and C. E. Hanson, pp. 173–210, Cambridge, UK., 2007.
- 15 Lanzante, J. R., Dixon, K. W., Nath, M. J., Whitlock, C. E. and Adams-Smith, D.: Some Pitfalls in Statistical Downscaling of Future Climate, *Bull. Am. Meteorol. Soc.*, 99(4), 791–803, doi:10.1175/BAMS-D-17-0046.1, 2018.
- Lawrence, D., Paquet, E., Gailhard, J. and Fleig, A. K.: Stochastic semi-continuous simulation for extreme flood estimation in catchments with combined rainfall–snowmelt flood regimes, *Nat. Hazards Earth Syst. Sci.*, 14(5), 1283–1298, doi:10.5194/nhess-14-1283-2014, 2014.
- 20 Lewin, J., Ballard, G. and Bowles, D. .: Spillway gate reliability in the context of overall dam failure risk, in *USSD Annual Lecture*, Charleston, South Carolina., 2003.
- Liu, Y.-J., Wang, T.-W., Cai, C.-F., Li, Z.-X. and Cheng, D.-B.: Effects of vegetation on runoff generation, sediment yield and soil shear strength on road-side slopes under a simulation rainfall test in the Three Gorges Reservoir Area, China, *Sci. Total Environ.*, 485–486, 93–102, doi:10.1016/j.scitotenv.2014.03.053, 2014.
- 25 López, J. and Francés, F.: Non-stationary flood frequency analysis in continental Spanish rivers, using climate and reservoir indices as external covariates, *Hydrol. Earth Syst. Sci.*, 17(8), 3189–3203, doi:10.5194/hess-17-3189-2013, 2013.
- Maaskant, B., Jonkman, S. N. and Bouwer, L. M.: Future risk of flooding: an analysis of changes in potential loss of life in South Holland (The Netherlands), *Environ. Sci. Policy*, 12(2), 157–169, doi:10.1016/j.envsci.2008.11.004, 2009.
- 30 Malm, R.: Guidelines for FE Analyses of Concrete Dams, *ENERGIFORSK.*, 2016.
- Mechler, R. and Kundzewicz, Z. W.: Assessing adaptation to extreme weather events in Europe—Editorial, *Mitig. Adapt. Strateg. Glob. Change*, 15(7), 611–620, doi:10.1007/s11027-010-9245-y, 2010.

- Merz, B., Kreibich, H., Thieken, A. and Schmidtke, R.: Estimation uncertainty of direct monetary flood damage to buildings, *Nat. Hazards Earth Syst. Sci.*, 4(1), 153–163, doi:10.5194/nhess-4-153-2004, 2004.
- Merz, B., Hall, J., Disse, M. and Schumann, A.: Fluvial flood risk management in a changing world, *Nat. Hazards Earth Syst. Sci.*, 10(3), 509–527, doi:10.5194/nhess-10-509-2010, 2010.
- 5 Miller, S., Muir-Wood, R. and Boissonnade, A.: An exploration of trends in normalised weather-related catastrophe losses, in *Climate Extremes and Society*, edited by H. F. Diaz and R. J. Murnane, pp. 225–247, Cambridge University Press, Cambridge, UK., 2008.
- Morison, J. I. L. and Morecroft, M. D., Eds.: *Plant growth and climate change*, Nachdr., Blackwell Publ, Oxford., 2007.
- Mostbauer, K., Kaitna, R., Prenner, D. and Hrachowitz, M.: The temporally varying roles of rainfall, snowmelt and soil moisture for debris flow initiation in a snow dominated system: the compound trigger concept, *Hydrol. Earth Syst. Sci. Discuss.*, 1–33, doi:10.5194/hess-2017-626, 2017.
- 10 National Research Council, Ed.: *Informing decisions in a changing climate*, National Academies Press, Washington, DC., 2009.
- Neumayer, E. and Barthel, F.: Normalizing economic loss from natural disasters: A global analysis, *Glob. Environ. Change*, 15 21(1), 13–24, doi:10.1016/j.gloenvcha.2010.10.004, 2011.
- Novembre, N. J., Holman, K. and Bahls, V. S.: *Climate Change in Hydrologic Hazard Analyses: Friant Dam Pilot Study - Part II: Using the SEFM with Climate-Adjusted Hydrometeorological Inputs*, Technical Memorandum, U.S. Department of the Interior. Bureau of Reclamation., 2015.
- OECC: Plan Nacional de Adaptación al Cambio Climático, Oficina Española de Cambio Climático. Ministerio de Agricultura y Pesca, Alimentación y Medio Ambiente. [online] Available from: http://www.mapama.gob.es/es/cambio-climatico/temas/impactos-vulnerabilidad-y-adaptacion/pna_v3_tcm7-12445_tcm7-197092.pdf, 2008.
- 20 OFEV, Ed.: *Adaptation aux changements climatiques en Suisse. Plan d'action 2014 –2019. Deuxième volet de la stratégie du Conseil fédéral du 9 avril 2014*, Bern, Switzerland., 2014.
- Our World in Data: Future Population Growth, [online] Available from: <https://ourworldindata.org/future-population-growth> (Accessed 1 December 2018), 2018.
- 25 Paxson, G., McCann, M. and Landis, M.: A Risk Based Framework for Evaluating Gated Spillway Operations, in *6th International Symposium on Hydraulic Structures*, pp. 630–640, USU Libraries, Portland, Oregon, USA., 2016.
- Peduzzi, P., Dao, H., Herold, C. and Mouton, F.: Assessing global exposure and vulnerability towards natural hazards: the Disaster Risk Index, *Nat. Hazards Earth Syst. Sci.*, 9(4), 1149–1159, doi:10.5194/nhess-9-1149-2009, 2009.
- 30 Peñuelas, J., Gordon, C., Llorens, L., Nielsen, T., Tietema, A., Beier, C., Bruna, P., Emmett, B., Estiarte, M. and Gorissen, A.: Nonintrusive Field Experiments Show Different Plant Responses to Warming and Drought Among Sites, Seasons, and Species in a North-South European Gradient, *Ecosystems*, 7(6), doi:10.1007/s10021-004-0179-7, 2004.

- Pereira-Cardenal, S. J., Madsen, H., Arnbjerg-Nielsen, K., Riegels, N., Jensen, R., Mo, B., Wangenstein, I. and Bauer-Gottwein, P.: Assessing climate change impacts on the Iberian power system using a coupled water-power model, *Clim. Change*, 126(3–4), 351–364, doi:10.1007/s10584-014-1221-1, 2014.
- 5 Petrow, T. and Merz, B.: Trends in flood magnitude, frequency and seasonality in Germany in the period 1951–2002, *J. Hydrol.*, 371(1–4), 129–141, doi:10.1016/j.jhydrol.2009.03.024, 2009.
- Pielke Jr., R. A.: Future economic damage from tropical cyclones: sensitivities to societal and climate changes, *Philos. Trans. R. Soc. Math. Phys. Eng. Sci.*, 365(1860), 2717–2729, doi:10.1098/rsta.2007.2086, 2007.
- Pielke Jr., R. A. and Downton, M. W.: Precipitation and Damaging Floods: Trends in the United States, 1932–97, *J. Clim.*, 13(20), 3625–3637, doi:10.1175/1520-0442(2000)013<3625:PADFTI>2.0.CO;2, 2000.
- 10 Pielke Jr., R. A., Agrawala, S., Bouwer, L. M., Burton, I., Changnon, S., Glantz, M. H., Hooke, W. H., Klein, R. J. T., Kunkel, K., Mileti, D., Sarewitz, D., Thompkins, E. L., Stehr, N. and von Storch, H.: Clarifying the Attribution of Recent Disaster Losses: A Response to Epstein and McCarthy, *Bull. Am. Meteorol. Soc.*, 86(10), 1481–1483, doi:10.1175/BAMS-86-10-1481, 2005.
- Prudhomme, C. and Davies, H.: Assessing uncertainties in climate change impact analyses on the river flow regimes in the UK. Part 2: future climate, *Clim. Change*, 93(1–2), 197–222, doi:10.1007/s10584-008-9461-6, 2009.
- 15 Quiroga, S., Garrote, L., Iglesias, A., Fernández-Haddad, Z., Schlickenrieder, J., de Lama, B., Mosso, C. and Sánchez-Arcilla, A.: The economic value of drought information for water management under climate change: a case study in the Ebro basin, *Nat. Hazards Earth Syst. Sci.*, 11(3), 643–657, doi:10.5194/nhess-11-643-2011, 2011.
- Raff, D. A., Pruitt, T. and Brekke, L. D.: A framework for assessing flood frequency based on climate projection information, *Hydrol. Earth Syst. Sci.*, 13(11), 2119–2136, doi:10.5194/hess-13-2119-2009, 2009.
- 20 Requena, A. I., Mediero, L. and Garrote, L.: A bivariate return period based on copulas for hydrologic dam design: accounting for reservoir routing in risk estimation, *Hydrol. Earth Syst. Sci.*, 17(8), 3023–3038, doi:10.5194/hess-17-3023-2013, 2013.
- Riahi, K., van Vuuren, D. P., Kriegler, E., Edmonds, J., O'Neill, B. C., Fujimori, S., Bauer, N., Calvin, K., Dellink, R., Fricko, O., Lutz, W., Popp, A., Cuaresma, J. C., Kc, S., Leimbach, M., Jiang, L., Kram, T., Rao, S., Emmerling, J., Ebi, K., Hasegawa, T., Havlik, P., Humpenöder, F., Da Silva, L. A., Smith, S., Stehfest, E., Bosetti, V., Eom, J., Gernaat, D., Masui, T., Rogelj, J., Strefler, J., Drouet, L., Krey, V., Luderer, G., Harmsen, M., Takahashi, K., Baumstark, L., Doelman, J. C., Kainuma, M., Klimont, Z., Marangoni, G., Lotze-Campen, H., Obersteiner, M., Tabeau, A. and Tavoni, M.: The Shared Socioeconomic Pathways and their energy, land use, and greenhouse gas emissions implications: An overview, *Glob. Environ. Change*, 42, 153–168, doi:10.1016/j.gloenvcha.2016.05.009, 2017.
- 30 Rodríguez Díaz, J. A., Weatherhead, E. K., Knox, J. W. and Camacho, E.: Climate change impacts on irrigation water requirements in the Guadalquivir river basin in Spain, *Reg. Environ. Change*, 7(3), 149–159, doi:10.1007/s10113-007-0035-3, 2007.

- Sarr, M. A., Seidou, O., Trambly, Y. and El Adlouni, S.: Comparison of downscaling methods for mean and extreme precipitation in Senegal, *J. Hydrol. Reg. Stud.*, 4, 369–385, doi:10.1016/j.ejrh.2015.06.005, 2015.
- Schmidt, S., Kemfert, C. and Faust, E.: Simulation of Economic Losses from Tropical Cyclones in the Years 2015 and 2050: The Effects of Anthropogenic Climate Change and Growing Wealth, Discussion paper, German Institute for Economic Research, Berlin, Germany., 2009.
- Schneider, D., Huggel, C., Haeberli, W. and Kaitna, R.: Unraveling driving factors for large rock-ice avalanche mobility: UNRAVELING DRIVING FACTORS FOR LARGE ROCK-ICE AVALANCHE MOBILITY, *Earth Surf. Process. Landf.*, 36(14), 1948–1966, doi:10.1002/esp.2218, 2011.
- Schotten, K., Goetgeluk, R., Hilferink, M., Rietveld, P. and Scholten, H.: Residential Construction, Land Use and the Environment. Simulations for the Netherlands Using a GIS-Based Land Use Model, *Environ. Model. Assess.*, 6(2), 133–143, doi:10.1023/A:1011531120436, 2001.
- Seneviratne, S. I., Corti, T., Davin, E. L., Hirschi, M., Jaeger, E. B., Lehner, I., Orlowsky, B. and Teuling, A. J.: Investigating soil moisture–climate interactions in a changing climate: A review, *Earth-Sci. Rev.*, 99(3–4), 125–161, doi:10.1016/j.earscirev.2010.02.004, 2010.
- Serinaldi, F. and Grimaldi, S.: Fully Nested 3-Copula: Procedure and Application on Hydrological Data, *J. Hydrol. Eng.*, 12(4), 420–430, doi:10.1061/(ASCE)1084-0699(2007)12:4(420), 2007.
- Serrano-Lombillo, A., Escuder-Bueno, I. and Altarejos-García, L.: Use of risk models for evaluation of risk reduction measures for dams, Commission Internationale des Grands Barrages, Kyoto., 2012.
- Serrano-Lombillo, A., Morales-Torres, A., Escuder-Bueno, I. and Altarejos-García, L.: Review, Analysis and Application of Existing Risk Reduction Principles and Risk Indicators for Dam Safety Management., 2013.
- Shamir, E., Megdal, S. B., Carrillo, C., Castro, C. L., Chang, H.-I., Chief, K., Corkhill, F. E., Eden, S., Georgakakos, K. P., Nelson, K. M. and Prietto, J.: Climate change and water resources management in the Upper Santa Cruz River, Arizona, *J. Hydrol.*, 521, 18–33, doi:10.1016/j.jhydrol.2014.11.062, 2015.
- Solaun, K. and Cerdá, E.: The Impact of Climate Change on the Generation of Hydroelectric Power—A Case Study in Southern Spain, *Energies*, 10(12), 1343, doi:10.3390/en10091343, 2017.
- SPANCOLD: Risk Analysis as Applied to Dam Safety. Technical Guide on Operation of Dams and Reservoirs, Professional Association of Civil Engineers. Spanish National Committee on Large Dams, Madrid. [online] Available from: http://www.spancold.es/Archivos/Monograph_Risk_Analysis.pdf, 2012.
- Šraj, M., Viglione, A., Parajka, J. and Blöschl, G.: The influence of non-stationarity in extreme hydrological events on flood frequency estimation, *J. Hydrol. Hydromech.*, 64(4), 426–437, doi:10.1515/johh-2016-0032, 2016.
- Stamatelatos, M., Vesely, W., Dugan, J., Fragola, J., Minarick, J. and Railsback, J.: Fault tree handbook with aerospace applications, NASA Office of Safety and Mission Assurance., 2002.
- Stoffel, M. and Huggel, C.: Effects of climate change on mass movements in mountain environments, *Prog. Phys. Geogr.*, 36(3), 421–439, doi:10.1177/0309133312441010, 2012.

- Sunyer, M. A., Madsen, H. and Ang, P. H.: A comparison of different regional climate models and statistical downscaling methods for extreme rainfall estimation under climate change, *Atmospheric Res.*, 103, 119–128, doi:10.1016/j.atmosres.2011.06.011, 2012.
- 5 Swiss Re: Natural catastrophes and man-made disasters in 2015: Asia suffers substantial losses, Swiss Reinsurance Company, Zurich, Switzerland., 2016.
- Taye, M. T., Ntegeka, V., Ogiramo, N. P. and Willems, P.: Assessment of climate change impact on hydrological extremes in two source regions of the Nile River Basin, *Hydrol. Earth Syst. Sci.*, 15(1), 209–222, doi:10.5194/hess-15-209-2011, 2011.
- 10 UK Climate Impacts Programme: Socio-economic scenarios for climate change impact assessment: a guide to their use in the UK Climate Impacts Programme, UKCIP, Oxford., 2000.
- UNISDR: Global Assessment Report on Disaster Risk Reduction, Green Ink, UK., United Nations International Strategy for Disaster Reduction Secretariat, Geneva, Switzerland., 2009.
- United Nations: World Population Prospects: The 2017 Revision, Department of Economic and Social Affairs, Population Division. [online] Available from: <https://esa.un.org/unpd/wpp/Download/Standard/Population/>, 2017.
- 15 U.S. Department of Energy: Effects of Climate Change on Federal Hydropower, Washington, DC., 2013.
- U.S. Department of Homeland Security: Dam Sector. Estimating Economic Consequences for Dam Failure Scenarios., 2011.
- U.S. Government Accountability Office: Climate Change. Federal Efforts Under Way to Assess Water Infrastructure Vulnerabilities and Address Adaptation Challenges., 2013.
- USACE: HEC-GeoRAS. GIS Tools for Support of HEC-RAS using ArcGIS. User's Manual, Computer Program
- 20 Documentation, Davis, CA., 2011a.
- USACE: Safety of dams - Policy and procedures, U.S. Army Corps of Engineers, Washington, DC., 2011b.
- USACE: Climate Change Adaptation Plan, U.S. Army Corps of Engineers Committee on Climate Preparedness and Resilience., 2014.
- USACE: Guidance for Incorporating Climate Change Impacts to Inland Hydrology in Civil Works Studies, Designs, and
- 25 Projects, EBC., 2016.
- USBR: Hydrology, hydraulics, and sediment studies for the Matilija Dam Ecosystem Restoration Project, Ventura, CA - DRAFT Report, Denver, CO., 2006.
- USBR: Climate Change Adaptation Strategy, U.S. Department of the Interior. Bureau of Reclamation., 2014.
- USBR: Climate Change Adaptation Strategy: 2016 Progress Report, U.S. Department of the Interior. Bureau of
- 30 Reclamation., 2016.
- Villarini, G., Serinaldi, F., Smith, J. A. and Krajewski, W. F.: On the stationarity of annual flood peaks in the continental United States during the 20th century, *Water Resour. Res.*, 45(8), doi:10.1029/2008WR007645, 2009.
- Walsh, J., Wuebbles, D., Hayhoe, K., Kossin, J., Kunkel, K., Stephens, G., Thorne, P., Vose, R., Wehner, M., Willis, J., Anderson, D., Doney, S., Feely, R., Hennon, P., Kharin, V., Knutson, T., Landerer, F., Lenton, T., Kennedy, J. and

- Somerville, R.: Ch. 2: Our Changing Climate, in *Climate Change Impacts in the United States: The Third National Climate Assessment*, pp. 19–67, J. M. Melillo, Terese (T.C.) Richmond, and G. W. Yohe. [online] Available from: <https://doi.org/10.7930/J0KW5CXT> (Accessed 3 February 2017), 2014.
- 5 Wan, C. F. and Fell, R.: Investigation of Rate of Erosion of Soils in Embankment Dams, J. Geotech. Geoenvironmental Eng., 130(4), 373–380, doi:10.1061/(ASCE)1090-0241(2004)130:4(373), 2004.
- Wilks, D. S.: Use of stochastic weathergenerators for precipitation downscaling: Use of stochastic precipitation generators, Wiley Interdiscip. Rev. Clim. Change, 1(6), 898–907, doi:10.1002/wcc.85, 2010.
- Willems, P., Ed.: Impacts of climate change on rainfall extremes and urban drainage systems, IWA Publ, London., 2012.
- Willems, P.: Revision of urban drainage design rules after assessment of climate change impacts on precipitation extremes at Uccle, Belgium, J. Hydrol., 496, 166–177, doi:10.1016/j.jhydrol.2013.05.037, 2013.
- 10 Wobus, C., Gutmann, E., Jones, R., Rissing, M., Mizukami, N., Lorie, M., Mahoney, H., Wood, A. W., Mills, D. and Martinich, J.: Climate change impacts on flood risk and asset damages within mapped 100-year floodplains of the contiguous United States, Nat. Hazards Earth Syst. Sci., 17(12), 2199–2211, doi:10.5194/nhess-17-2199-2017, 2017.
- World Meteorological Organization: Guide to hydrological practices, World Meteorological Organization, Geneva., 2008.
- 15 Yang, D., Kanae, S., Oki, T., Koike, T. and Musiake, K.: Global potential soil erosion with reference to land use and climate changes, Hydrol. Process., 17(14), 2913–2928, doi:10.1002/hyp.1441, 2003.
- Zhang, L. and Singh, V. P.: Bivariate Flood Frequency Analysis Using the Copula Method, J. Hydrol. Eng., 11(2), 150–164, doi:10.1061/(ASCE)1084-0699(2006)11:2(150), 2006.
- Zhang, Q., Gu, X., Singh, V. P., Xiao, M. and Chen, X.: Evaluation of flood frequency under non-stationarity resulting from climate indices and reservoir indices in the East River basin, China, J. Hydrol., 527, 565–575, doi:10.1016/j.jhydrol.2015.05.029, 2015.
- 20