

Manuscript number: nhess-2018-16

MS Type: Research Article

Title: “The effects of cushion’s particle size and thickness on coefficient of restitution under the rockfall impacts”

Correspondence Author: Chun Zhu, Chen Cao

Authors: Chun Zhu, Dongsheng Wang, Xing Xia, ZhiGang Tao, ManChao He, and Chen Cao.

Dear Editor Gibson, Katie:

Thank you very much for your attention and the referee’s evaluation and comments on our paper “The effects of cushion’s particle size and thickness on coefficient of restitution under the rockfall impacts”. We have revised the manuscript thoroughly according to your kind advices and referee’s detailed suggestions. Enclosed please find the responses to the referee. We sincerely hope this manuscript will be finally acceptable to be published on “Natural Hazards and Earth System Sciences”. Thank you very much for all your help and looking forward to hearing from you soon.

Best regards

Sincerely yours

Chun Zhu, Chen Cao.

Answer to referee comments

Comment 1: the error analysis must be integrated into the paper and not included in the supplementary material. This should be possible.

Response: Thanks for the reviewer’s suggestion. I have added the error analysis in the Table 1-5 in the paper, which can fully help readers judge the results against their experimental uncertainties. Thus these data can be presented in a way that the results are assessable to other researchers working in this field.

According to the method of Influencing factor range analysis of all evaluation indices, the trend lines in Figures 12 is the line for average value of the COR statistical value of factor x at level y ($y=1, 2, 3, 4$). Due to the definition of error bar, it is meaningful to obtain the error bar of the test data if all the tests are conducted with the same conditions, and the range analysis method don’t require all the conditions are same, it just needs to calculate the average value of the COR statistical value of a factor x_A (either of the four factors) at level y ($y=1, 2, 3, 4$) in all the orthogonal test results, no matter what other factors x_B, x_C, x_D (the other three of the four factors) are different, so it is inappropriate to calculated the error bar of every data in the Table 6, because every data are calculated based on different test parameters, thus I think the Figures 12 and 13 with no uncertainties is reasonable. However, I fully agree with the review’s point that it should give uncertainties for readers, so I supplemented the standard deviation of COR and damage depth L for three tests results in Table 5.

According to the tables of standard deviation of COR and damage depth L, it can be seen the standard deviation are relative small, and the average vale of three test results of each test can be used for the subsequent range analysis.

Comment 2: the English must be dramatically improved to consider final publication. Please take the comments of reviewer 1 seriously.

Response: Thanks for the reviewer's suggestion. My manuscript has been edited for English by using an English editing services, the embellishment proof is supplied as the attachment. The format of my manuscript have been readjusted to facilitate the readers to understand based on journal requirements.

Comment 3: I therefore believe publication is warranted after major revisions. I believe the paper should be submitted as a brief communication. Try to shorten the paper and concentrate on the tests and the results. There is no need to have a long introduction to motivate the problem and laboratory tests. I will not allow the paper to be published unless there are significant improvements to the written English.

Response: Thanks for the reviewer's suggestion. I have revised the manuscript according to the rule of briefness, the introduction and laboratory tests section are shortened. My manuscript has been edited for English by using an English editing services, the embellishment proof is supplied as the attachment. The structure and format of my manuscript have been readjusted to facilitate the readers to understand based on journal requirements.



CERTIFICATE OF ENGLISH EDITING

This is to certify that the manuscript entitled
***The effects of gravel cushion particle size and thickness on the coefficient
of restitution in rockfall impacts***

commissioned to us has been carefully edited by a native English-speaking editor of MogoEdit, and the grammar, spelling, and punctuation have been verified and corrected where needed. Based on this review, we believe that the language in this paper meets academic journal requirements. Please contact us with any questions.



Gang Zhang

Dr. Gang Zhang
Founder & CEO of MogoEdit

Date of Issue
April 28, 2018

Disclaimer: The changes in the document may be accepted or rejected by the authors in their sole discretion after our editing. However, MogoEdit is not responsible for revisions made to the document after our edit on **April 28, 2018**.

MogoEdit is a professional English editing company who provides English language editing, translation, and publication support services to individuals and corporate customers worldwide. As a company invested by the affiliate fund of Chinese Academy of Science, MogoEdit is one of the leading language editing service providers in China, whose clients come from more than 1000 universities and research institutes.

MogoEdit Website: <http://en.mogoedit.com/>

500+ native English editors: <http://en.mogoedit.com/editors>



Mogo Internet Technology Co., LTD.

No. 25, 1st Gaoxin Road, Xi'an 710075, PR China +86 02988317483 support@mogoedit.com

The effects of gravel cushion particle size and thickness on the coefficient of restitution under the rockfall impacts

Zhu Chun^{1,2,3}, Wang Dongsheng^{2,3}, Xia Xing^{2,3}, Tao ZhiGang^{2,3}, He ManChao^{1,2,3}, Cao Chen*¹

Corresponding Email: zhuchuncumb@163.com;

ccao@jlu.edu.cn (Corresponding Author)

(1. College of Construction Engineering, Jilin University, Changchun 130026, China)

(2. State Key Laboratory for Geomechanics & Deep Underground Engineering, Beijing 100083, China)

(3. School of Mechanics and Civil Engineering, China University of Mining & Technology, Beijing 100083, China)

Abstracts: Gravel cushions are widely used to absorb the impact energy of falling rocks in open-pit mines. A particularly important application is ~~onto~~ enhance the energy-absorbing capacity of rockfall sheds. In this paper, we study how varying the thickness and particle size of a gravel cushion ~~layers of different thickness and particle size~~ influences ~~theits~~ energy-consumption and ~~bufferbuffering mechanismeffects of gravel cushions~~. We performed a series of laboratory drop tests by dropping blocks from varying heights ~~ononto different cushions of different thicknesses and particle sizes-materials~~. The results indicate that, for a given impact energy, the ~~change of cushion's cushion~~ thickness has a strong influence on the measured coefficient of restitution (COR) and therefore impact pressure. Additional tests were performed to study how the radius of the block and the height it is dropped from affect the measured COR. This showed that as the movement height of the block is increased the COR also increases, and blocks with larger radii exhibit a larger variability in measured COR. ~~block radius affects the measured COR and showed that b. Blocks with a large radius exhibit a larger variability in measured COR.~~ Finally, we investigated the influence of rockfall block radius, r , movement height, H , cushion thickness, h , and particle size, d , on the COR and the damage depth, L , of the cushion. ~~we investigated the influence of cushion particle size.~~ The test results reveal that the ~~cushion's cushion~~ thickness, h , is the primary design parameter, controlling not only COR but also the stability of the cushion material. The results provide a theoretical and practical basis for the design of gravel cushions for rockfall protection.

Keywords: Rockfall; cushion thickness; laboratory test; particle size; coefficient of restitution (COR).

1 Introduction

Rockfall constitutes a serious hazard in the working areas and facilities of the world's open-pit mines. Where slope surfaces are seriously weathered and the disturbing forces from mining are strong, landslides and rock-body collapse are prone to occur during rainfall. In rockfall, rocks roll down slope due to instability caused by gravity or exogenic action and come to rest at an obstacle or in the gentler part of the slope (Huang et al., 2007). Rockfall is widely distributed and occurs suddenly, posing a serious threat to life and property (Pantelidis, 2009; Pantelidis, 2010). In response to frequent rockfall disasters in recent years, numerous scholars in China and abroad have conducted in-depth studies into the characteristics of rockfall movement through theoretical analysis, field ~~investigations~~ investigation, and numerical simulation. For example, Mignelli et al. (2014), ~~meanwhile,~~ applied a rockfall risk management approach to the road infrastructure network of the Regione Autonoma Valle D'Aosta in order to calculate the level of risk and the potential for its reduction by rockfall protection devices. A comparative analysis of road accidents in the Aosta Valley was then undertaken to verify the methodology. On the basis of Hertz contact theory, the view that material accords with ideal elastic-plastic characteristics is assumed, and the

41 ~~calculation modes for normal collision coefficient of restitution and tangential collision coefficient~~
42 ~~of restitution of spheres are studied, respectively (Thornton et al., 1998).~~ Asteriou et al. (2016)
43 examined the ~~effect~~effects of rock shape by performing tests with spherical and cubic blocks,
44 finding that spherical blocks show higher and more consistent ~~COR~~coefficient of restitution (*COR*)
45 values than cubic blocks. Howald et al. (2017) evaluated the protective capacity of existing and
46 newly proposed protection measures and considered the possible reclassification of hazard as a
47 function of the mitigation role played by the measure. ~~Numerical~~Furthermore, numerical
48 simulation software has been adopted to analyze the characteristics of rockfall movement. The
49 software ROCFALL 3.0 has been adopted in dam construction, road construction and the
50 protection of historical places to calculate the velocity and locus of rockfall and avoid damage to
51 the project (Topal et al., 2006; Koleini and Van Rooy, 2011; Saroglou et al., 2012; Sadagah, 2015).
52 State-of-the-art simulation techniques incorporating nonsmooth contact dynamics and multibody
53 dynamics have been applied to and adapted for the efficient simulation of rockfall trajectories, and
54 the influence of rock geometry on rockfall dynamics has been studied through numerical
55 simulation (Leine et al., 2014).

56 The research outlined above indicates that several types of protection measure can be
57 effective in controlling rockfall. Trees have a significant blocking effect on rolling rocks.
58 Interception influence tests ~~on~~of the effect of trees on rockfall have been designed based on
59 analysis of the velocity change, the distance traveled by the rockfall, and the probability of
60 collision between trees and rockfall (Huang, 2010; Notaro, 2012; Monnet et al., 2017). Semi-rigid
61 rockfall protection barriers have been installed along areas threatened by rockfall events, and
62 Miranda et al. (2015) have carried out ~~the~~a numerical investigation of semi-rigid rockfalls~~such~~
63 protection barriers to obtain essential structural information such as ~~the~~their energy-absorption
64 capacity ~~of such barriers.~~ ~~A large-scale field test of~~has been conducted into the impact caused
65 ~~by~~of rockfall on reinforced concrete beams ~~has been conducted~~ and the process of dynamic
66 response has been studied and compared with the results of numerical simulation (Kishi et al.,
67 2002; Bhatti et al., 2009; Kishi et al., 2010; Bhatti et al. 2010). Kawahara et al. (2006) conducted a
68 large number of experiments for different soils under different combinations of falling mass and
69 drop height and studied the influence of soil characteristics on the impact response to rockfall
70 impact. Furthermore, Lambert et al. (2014) conducted real-scale impact experiments with impact
71 energies ranging from 200 kJ to 2200 kJ. They studied the response of rockfall protection
72 embankments composed of a 4-m high cellular wall ~~when exposed~~ to a rock impact and compared
73 this with previous real-scale experiments on other types of embankment. Finally, Sun et al. (2016)
74 used a tire cushion layer to absorb rockfall impact, utilizing the radial deformation of the tire.
75 They built a reinforced concrete structure model with a tire cushion layer and carried out artificial
76 rockfall tests.

77 The protection research outlined above is mainly applicable to conventional human
78 settlements, and it is expensive and inconvenient to use these measures to control rockfall in an
79 open-pit mine. A relatively common way of preventing and controlling rockfall hazard in an
80 open-pit mine is to lay an energy-consuming layer on a safety platform (Labouise et al., 1996).
81 However, research into such cushions seldom considers the effects of the particle size of the
82 cushion on the characteristics of rockfall movement. In particular, the combined effects of the
83 particle size and thickness of a gravel cushion on the coefficient of restitution (*COR*) have not yet
84 been explored. A large amount of mullock is produced during mining, and this can be broken into

85 particles of different sizes in a crusher and used to pave the platform as an energy-consuming layer.
 86 A certain thickness of gravel cushion on the platform can act as a buffer, effectively absorbing the
 87 impact energy of rockfall and reducing the impact load on the protective structure while also
 88 reducing the kinetic energy of the rockfall and causing it to stall. Because the impact between the
 89 rockfall and gravel cushion is of short duration, it involves complicated elastic-plastic deformation
 90 and energy conversion, and the energy absorption performance of gravel cushions of different
 91 thicknesses and particle sizes are quite different under rockfall impacts. Determining the
 92 energy-consumption buffering mechanism of a gravel cushion and calculating the subsequent
 93 rockfall movement has become the key to cushion design. Therefore, to control rockfalls
 94 effectively, it is necessary to further study the effects of the particle size and thickness of the
 95 cushion on *COR* under rockfall ~~impacts~~ impact.

96 2 Coefficient of restitution

97 It is challenging to predict the trajectory of rebound for a rockfall because it is influenced by
 98 several parameters such as the strength, roughness, stiffness, and inclination of the slope and
 99 blocks (Labieuse and Heidenreich, 2009). However, the coefficient of restitution (*COR*) is widely
 100 used for this purpose (Giani, 1992).

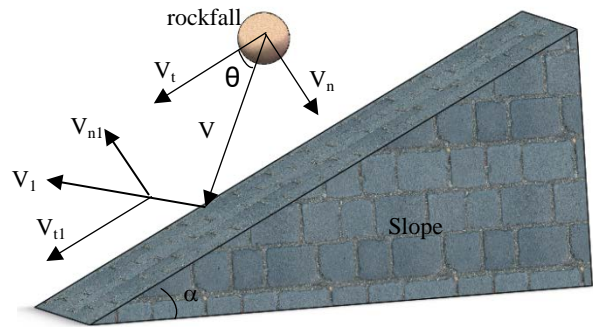


Fig.1 Motion model of rockfall

101
 102
 103 The definitions of *COR* are various (Chau et al., 2002) but for a block impacting a rocky
 104 slope (Figure 1), it can be defined on the basis of the theory of inelastic collision as:

$$105 \quad V_{COR} = \left| \frac{V_I}{V} \right|, \quad (1)$$

106 where V and V_I are the magnitudes of the incident and rebound velocities at the locus, respectively
 107 (m/s).

108 ~~V_{COR} has normal and tangential components, and the.~~ The normal (R_n) and tangential (R_t)
 109 coefficients are defined as:

$$110 \quad R_n = \left| \frac{V_{nI}}{V_n} \right| \quad \text{and} \quad R_t = \left| \frac{V_{tI}}{V_t} \right|, \quad (2)$$

111 ~~Where~~ where R_n and R_t are the normal and tangential restitution coefficients, respectively, and V_n
 112 ~~and V_{nI} and V_{tI}~~ are the normal components and V_t and V_{tI} are the tangential components of the
 113 velocity of the block, before and after the impact, respectively (m/s).

114 The total energy, E , of the block consists of the translational (E_0) and rotational (E_w) energy:

$$115 \quad E = E_0 + E_w = \frac{1}{2}mv^2 + \frac{1}{2}I\omega^2, \quad (3)$$

116 and the total energy coefficient (ET_{COR}) is proposed to be:

117
$$ET_{COR} = \frac{\frac{1}{2}mV_1^2 + \frac{1}{2}I\omega_1^2}{\frac{1}{2}mV^2 + \frac{1}{2}I\omega^2} = \frac{0.6mV_1^2}{0.6mV^2} = \frac{V_1^2}{V^2} = V_{COR}^2, (4)$$

118 ~~Where~~ where m is the mass of the block, I is its moment of inertia, and ω and ω_1 are the angular
119 velocity before and after the impact, respectively.

120 When a dangerous rock-body breaks away from the parent body, it will inevitably generate
121 collisions with the slope during the rolling process and lose energy. A formula for the approximate
122 calculation of the total kinetic energy of the rockfall has been derived from engineering surveys
123 (Yang et al., 2005; Zhu et al. 2018):


124
$$E = E_0 + E_w = 1.2E_0 = 0.6mV^2 = 0.6m(V_n^2 + V_t^2), (5)$$

125 3 Experimental Studies

126 3.1 Experimental material and apparatus

127 In order to study the effects of the particle size and thickness of the cushion on COR under
128 rockfall ~~impacts~~ impact conveniently, a high-strength gypsum material was adopted to simulate the
129 rockfall. A previous study (Chau et al., 2002) recommends a moisture content of 30–50% for the
130 sample, so in this study, all samples were given a moisture content of 40%.

131 ~~Compared with the non-spherical blocks, spherical blocks with same quality are relatively~~
132 ~~difficult to be resisted by the same control methods through a~~ A large number of tests, have shown
133 that spherical falling blocks presented have higher and more consistent COR values compared to
134 eubic than cubic blocks. (Asteriou et al., 2016). ~~A phenomenon was also reported that tabular~~
135 ~~shaped), and so that the same control methods will have greater difficulty in containing their~~
136 ~~effects than those of non-spherical blocks with the same properties. Moreover, a tendency to a~~
137 ~~spherical shape in falling rocks has been demonstrated by Leine et al. (2014), who showed that~~
138 ~~tabular rocks gradually become more rounded and wheel-like due to the breakage of sharp corners~~
139 ~~breaking off during the descent (Leine et al., 2014). If the designed cushion can resist the.~~ The
140 above is indicates that spherical rocks, ~~and it also can~~ are a common hazard and that if a cushion
141 is designed to resist these, it can also effectively resist ~~the~~ non-spherical rocks. ~~When~~ This greater
142 threat should therefore be the primary concern when designing ~~the~~ a protective cushion, ~~the~~ serious
143 conditions of spherical rocks should be considered to ensure fully the safety of worker. Therefore,
144 ~~the.~~ For this reason, spherical blocks with radii of 2 cm, 3 cm, 4 cm and 5 cm (Figure 2) ~~are~~
145 ~~made~~ were used to simulate rockfall, ~~and in this study. Additionally,~~ six standard ~~5cm~~ 5-cm
146 ~~diameter~~ by, ~~10-cm~~ high cylindrical samples ~~are made~~ were created with which to ~~determinetest~~
147 the uniaxial compressive strength of the gypsum materials, ~~the.~~ The uniaxial compression test is
148 shown in Figure 3. Due to the inherent error associated with the test, the ultimate compressive
149 strength of the six samples is different, so the average value is taken as the compressive strength
150 of the material. The average value at which the specimens are destroyed is 6.48 Mpa, indicating
151 that a gypsum sample with 40% moisture content is strong enough not to ~~prevent shattering~~ be
152 shattered during the collision process (Ulusay et al., 2007; Aydin, 2009).

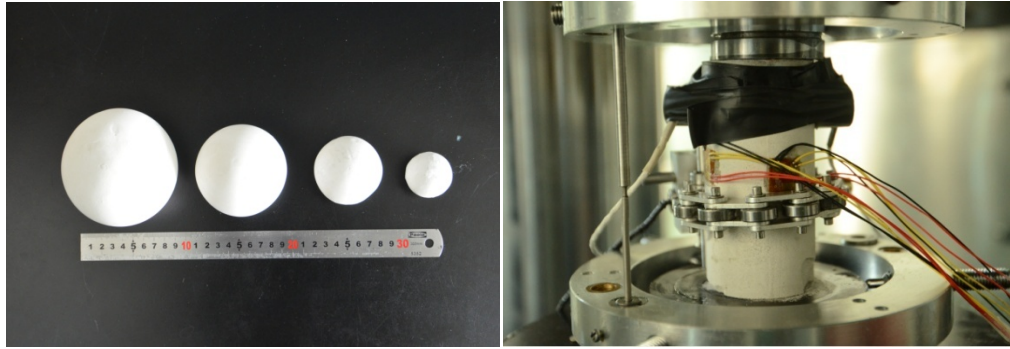

153

154 Fig.2 Spherical gypsum samples of different sizes Fig.3 Standard specimen under a uniaxial compression test

155 In order to explore the effect of different cushion thicknesses and particle sizes on the rolling
 156 motion of a rockfall, massive gypsum boards with the same properties as ~~the~~ blocks were broken,
 157 and gypsum particles for simulating the gravel cushion were divided by coarseness using 0.2 mm,
 158 0.6 mm, 1.0 mm, 1.4 mm, 1.8 mm and 2.4 mm sieves (Figure
 159 4).



160


161

Fig.4 Sieved granules of different particle sizes


162 A simple rolling stone releasing device is shown in Figure 5, ~~a~~ A tube with adjustable
 163 inclination and height is used to ~~adjust~~ vary the translational impact velocity of the blocks
 164 (Asteriou et al., 2012). The blocks slide and roll through the tube to collide with the plate. Two
 165 synchronized digital cameras (1024 × 1024 pixels and a 200 fps capture rate) were used to acquire
 166 the velocities of the blocks in stereoscopic space (Bouquet, 2008; Asteriou et al., 2013).

167 The two cameras, which obtained the motion, velocity, and kinetic energy automatically,
 168 were placed symmetrically at a distance of approximately 0.9 m from the impact surface
 169 (Figure 5). The distance between the two cameras was ~~about~~ approximately 1.2 m, making the
 170 cameras look ~~down~~ slightly down at the targeted platform.

171 The synchronized recordings from the two cameras captured a sequence of image stereopairs
 172 at time intervals of 1/200 s. By applying stereo-photogrammetric processing, the position of any
 173 point in both images can be computed in 3D space. ~~In general, a digital image is a perspective~~
 174 ~~projection of 3D space to the camera lenses. The image plane has a 2D coordinate system where~~
 175 ~~position measurements can be made using pixel coordinates. The camera has a 3D reference~~
 176 ~~coordinate system that is based on the image plane, pointing in the viewing direction of the camera.~~
 177 ~~The speed of the rocks can be obtained by measuring the distance they have moved between~~
 178 ~~adjacent frames.~~

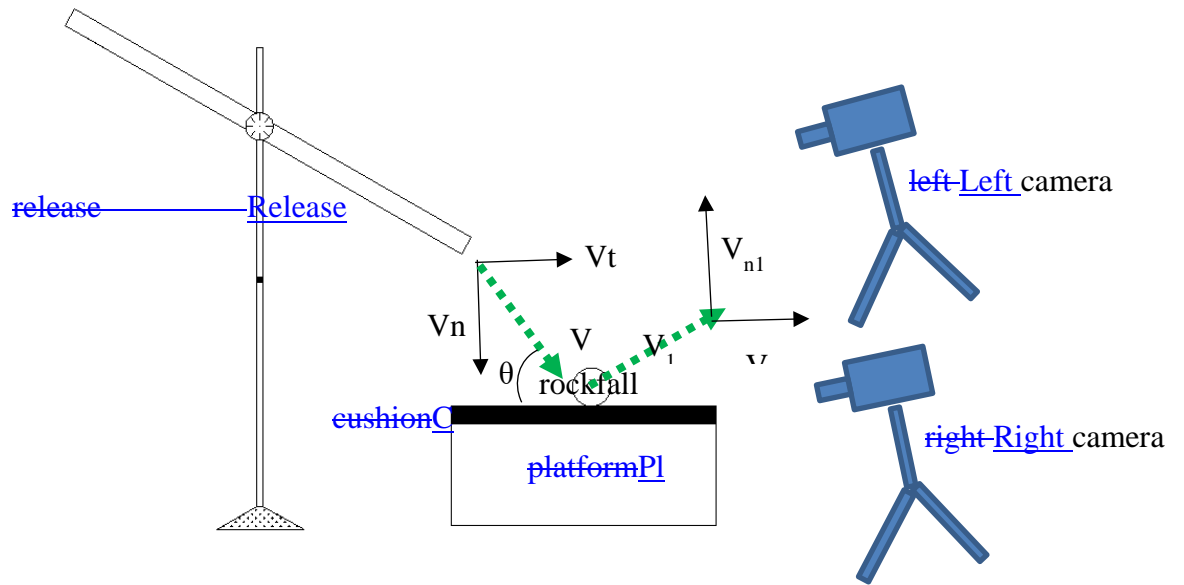

(a)

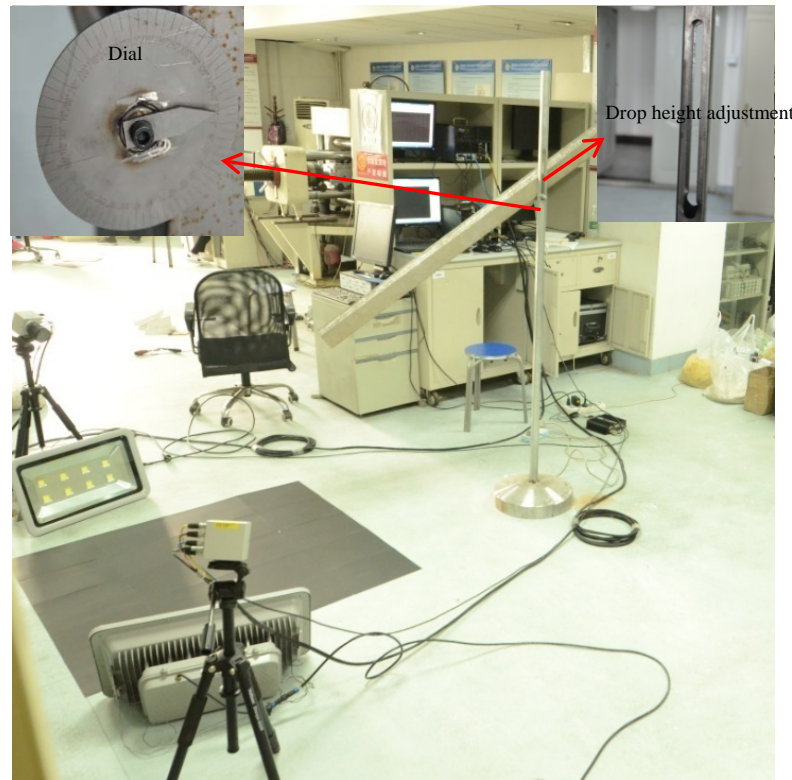


(b)

Fig.5 The experimental apparatus. (a) Model, (b) Laboratory

To simulate gravel cushions of different thicknesses, a large number of 40 cm length \times 40 cm width \times 2 cm height hollow gypsum boards were ~~made~~constructed. A 30 cm length \times 30 cm width \times 2 cm height section was cut out of the center of each board. The hollow gypsum boards were stacked on top of each other to simulate gravel cushions of different thickness, and then the hollow parts of the boards were filled with gypsum particles. The hollow boards were fixed to a massive 40 cm length \times 40 cm width \times 6 cm height gypsum base to ensure the preservation of momentum from the impact. In order to accurately measure the speed of the blocks with the cameras and to avoid interference from the motion of cushion particles affected by the collision,

192 the cushion was blackened (Figure 6).

193

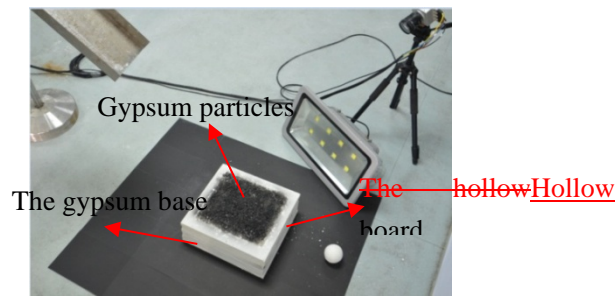

194

195

Fig. 6 Laboratory test of rolling blocks

196

3.2 Experimental procedure

197

The main uncertainties in the test results arise in tests with large cushion particles, where the wider scatter of the values is attributed to the contact configuration between the large cushion particles and the blocks: large cushion particles have numerous different configurations. This also affected the deviation in the trajectory caused by the impact, which had a drastically higher uncertainty than for small cushion particles. In order to counteract the effects of chance, a “three tests for the mean” method was adopted, and the average value was set as the final result given for each data point in the figures and tables presented here. For cushion particle sizes of 1.8 cm 18 mm and 2.4 cm 24 mm, each test was repeated five times, and the middle three values were used to obtain the average value, while for cushion particle sizes of less than 1.8 cm 18 mm, each test was conducted three times. If an obviously outlying result was obtained, the test was repeated to reduce the error.

208

The 2 cm, 3 cm, 4 cm, and 5 cm radius spherical blocks (Figure 3) were released from a height of 1.2 m height, and the effects of cushion thickness and particle size and of block volume on the *COR* were studied. V_{COR} for the *CORs* measured in the experiment was calculated using the magnitudes of the incident and rebound velocities as in Equation (1). The block was inserted into one side of the tube and, after sliding and rolling through the tube, collided with the collision surface. The initial impact surface was the massive gypsum base to simulate the platform before paving with a cushion in an open-pit mine. Paved tests were then performed using thicknesses of 2 cm, 4 cm, 6 cm, 8 cm, 10 cm, 12 cm, and 14 cm and cushion particle sizes of 0.2 cm 2 mm, 0.6 cm 6 mm, 1.0 cm 10 mm, 1.4 cm 14 mm, 1.8 cm 18 mm, and 2.4 cm 24 mm. Five iterations of 628 testing cases were carried out.

218

In order to investigate the effect of rockfall released from different movement heights on the *COR* of the collision between rockfall and cushion, experiments were conducted in which blocks of 2 cm, 3 cm, 4 cm, and 5 cm radius fell from 0.4 m, 0.8 m, 1.2 m, and 1.6 m to collide with an 8-cm thick cushion of different particle sizes. Four iterations of 352 testing cases were carried out. Photographs of the cushion before and after a rock impact experiment are shown in Figure 7. The cushion was always repaired completely after each impact experiment to ensure that the next experiment was free from interference. If any particles had collided-out from been knocked off the platform, new particles were added to supplement the cushion, and the surface was blackened again before the next impact experiment in order for the cameras to obtain accurate measurements of block speed.

227

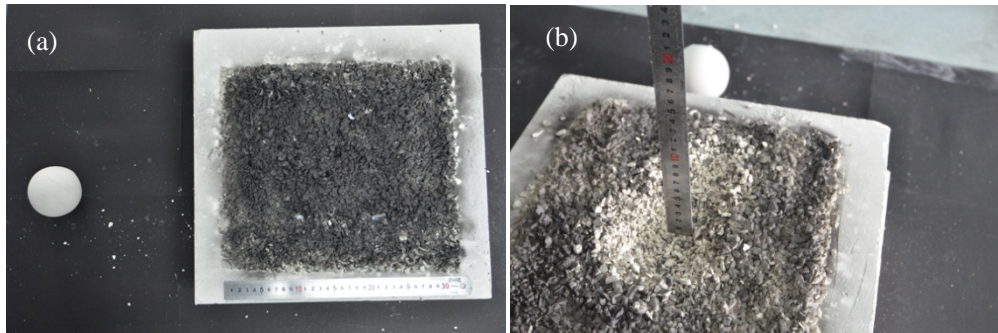


Fig. 7 Photographs of a cushion (a) before and (b) after a rock impact experiment

3.3 Experimental results and discussion

3.3.1 Experimental results

The COR for blocks released from a height of 1.2 m to collide with an uncushioned plate is shown in Table 1 and Figure 8.

Table 1 The COR of block collisions with the plate

$H=1.2m, h=0cm,$	$r=2cm$ (Mean/Std dev)	$r=3cm$ (Mean/Std dev)	$r=4cm$ (Mean/Std dev)	$r=5cm$ (Mean/Std dev)
$d=0mm$	0.384/0.032	0.421/0.020	0.437/0.048	0.444/0.036

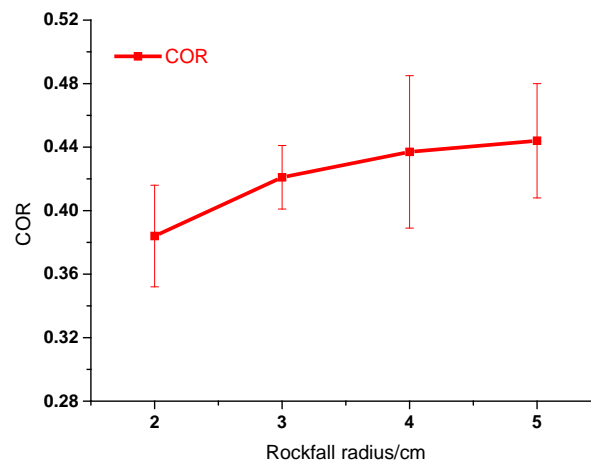


Fig. 8 The COR (Mean \pm SD) of block collisions with the plate. (Error bars: one standard deviation)

CORs derived from experiments where ~~rockfalls~~rocks of different radii were released from a 1.2 m movement height to collide with a ~~plate~~ paved ~~plate~~ with ~~various cushion~~cushions of different thicknesses and particle sizes are plotted in Table 2 and Figure 9. ~~For avoiding the In Figure 9, _ becomes confusing and intricate after adding the error bar to each curve, thus the mean values are shown offor each test without error bars is shown in Figure 9 for illustrative clarity.~~

Table 2 ~~the experimental~~Experimental results ~~offor~~ the first group of tests (movement height $H=1.2m$ ~~2 m~~)

r (cm)	h (cm) \ d (mm)	2mm(Mean/Std dev)	6mm(Mean/Std dev)	10mm(Mean/Std dev)	14mm(Mean/Std dev)	18mm(Mean/Std dev)	24mm(Mean/Std dev)
	2cm	2cm	0.326/0.015	0.332/0.029	0.346/0.029	0.343/0.029	0.348/0.063
4cm		0.294/0.019	0.325/0.029	0.302/0.037	0.323/0.038	0.317/0.062	0.312/0.047
6cm		0.259/0.017	0.274/0.034	0.282/0.036	0.283/0.042	0.301/0.043	0.296/0.038
8cm		0.243/0.028	0.254/0.040	0.263/0.048	0.271/0.043	0.277/0.048	0.284/0.074
10cm		0.241/0.038	0.247/0.048	0.255/0.031	0.258/0.051	0.264/0.068	0.277/0.057
12cm		0.228/0.027	0.233/0.042	0.247/0.048	0.252/0.057	0.251/0.062	0.266/0.054
14cm		0.22/0.032	0.232/0.045	0.24/0.032	0.236/0.060	0.249/0.048	0.258/0.054
3cm	h (cm) \ d (mm)	2mm(Mean/Std dev)	6mm(Mean/Std dev)	10mm(Mean/Std dev)	14mm(Mean/Std dev)	18mm(Mean/Std dev)	24mm(Mean/Std dev)
	2cm	0.334/0.019	0.341/0.013	0.347/0.036	0.354/0.050	0.352/0.030	0.368/0.046

	4cm	0.302/0.036	0.315/0.042	0.316/0.044	0.327/0.049	0.326/0.036	0.334/0.065
	6cm	0.277/0.025	0.284/0.024	0.288/0.033	0.318/0.039	0.309/0.053	0.325/0.072
	8cm	0.247/0.026	0.262/0.046	0.267/0.040	0.273/0.055	0.281/0.054	0.292/0.031
	10cm	0.237/0.027	0.246/0.027	0.254/0.031	0.262/0.045	0.257/0.049	0.268/0.051
	12cm	0.226/0.035	0.239/0.045	0.242/0.019	0.248/0.041	0.255/0.035	0.259/0.042
	14cm	0.218/0.053	0.224/0.027	0.229/0.044	0.231/0.054	0.246/0.055	0.262/0.044
r=4cm	$\frac{h(\text{cm})}{d(\text{mm})}$	2mm(Mean/Std.dev)	6mm(Mean/Std.dev)	10mm(Mean/Std.dev)	14mm(Mean/Std.dev)	18mm(Mean/Std.dev)	24mm(Mean/Std.dev)
	2cm	0.336/0.019	0.348/0.022	0.356/0.026	0.365/0.048	0.367/0.036	0.372/0.040
	4cm	0.309/0.026	0.321/0.024	0.315/0.030	0.325/0.023	0.334/0.037	0.343/0.045
	6cm	0.28/0.014	0.309/0.018	0.292/0.023	0.292/0.012	0.312/0.035	0.325/0.033
	8cm	0.256/0.011	0.271/0.023	0.276/0.029	0.274/0.024	0.293/0.031	0.302/0.037
	10cm	0.252/0.015	0.258/0.022	0.269/0.025	0.265/0.024	0.281/0.041	0.278/0.043
	12cm	0.236/0.010	0.245/0.025	0.237/0.027	0.243/0.038	0.252/0.045	0.258/0.035
	14cm	0.224/0.011	0.235/0.022	0.232/0.038	0.237/0.027	0.248/0.038	0.253/0.037
r=5cm	$\frac{h(\text{cm})}{d(\text{mm})}$	2mm(Mean/Std.dev)	6mm(Mean/Std.dev)	10mm(Mean/Std.dev)	14mm(Mean/Std.dev)	18mm(Mean/Std.dev)	24mm(Mean/Std.dev)
	2cm	0.34/0.014	0.342/0.022	0.356/0.035	0.368/0.028	0.371/0.032	0.38/0.036
	4cm	0.324/0.013	0.311/0.017	0.323/0.030	0.344/0.028	0.343/0.037	0.352/0.023
	6cm	0.291/0.009	0.292/0.021	0.318/0.015	0.309/0.025	0.326/0.047	0.33/0.046
	8cm	0.265/0.013	0.28/0.012	0.288/0.025	0.293/0.027	0.302/0.050	0.313/0.043
	10cm	0.263/0.017	0.265/0.029	0.269/0.028	0.272/0.024	0.271/0.040	0.288/0.043
	12cm	0.24/0.012	0.243/0.027	0.252/0.036	0.257/0.028	0.259/0.046	0.266/0.060
	14cm	0.22/0.015	0.23/0.027	0.237/0.012	0.242/0.028	0.234/0.045	0.254/0.034

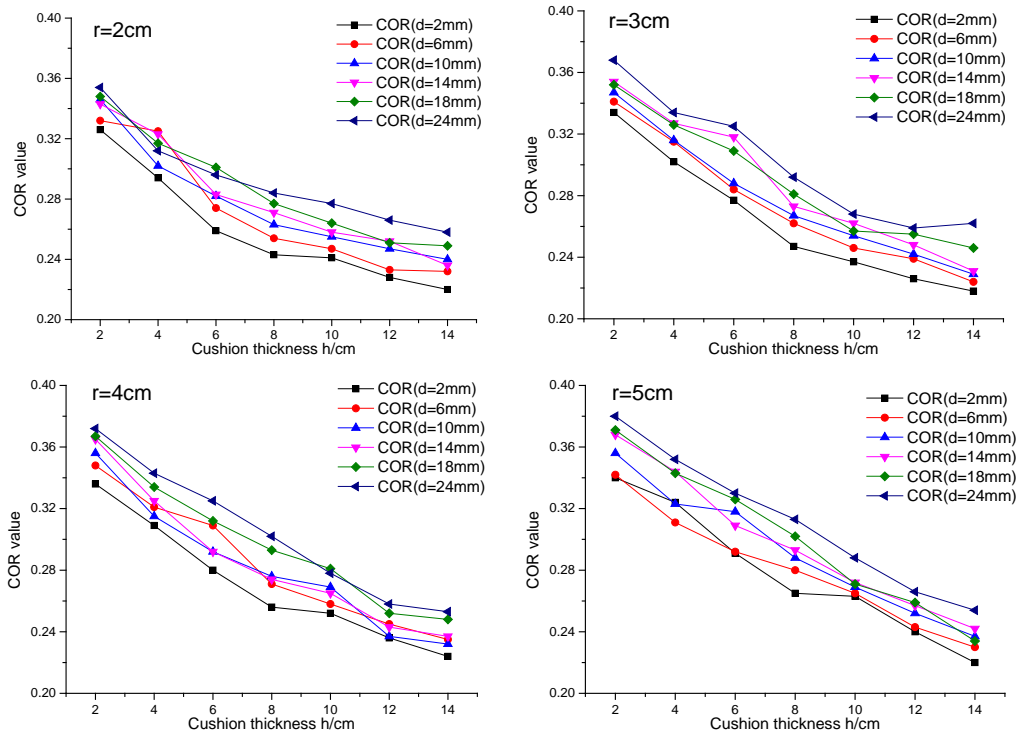



Fig.9 Comparison of the COR of blocks of different radii released from a height of 1.2m

CORs derived for rocks of different radii released from different movement heights to collide with an 8-cm thick cushion of various particle sizes are plotted in Table 3 and Figure 10. As with Figure 9, Figure 10 shows ~~Figure 10 becomes confusing and intricate after adding the error bar to each curve, thus the mean values for each test without error bars of each test is shown in Figure 10 for illustrative clarity.~~

Table 3 Experimental results for the second group of tests (cushion thickness h=8cm)

r=2cm	$\frac{H(\text{m})}{d(\text{mm})}$	2mm(Mean/Std.dev)	6mm(Mean/Std.dev)	10mm(Mean/Std.dev)	14mm(Mean/Std.dev)	18mm(Mean/Std.dev)	24mm(Mean/Std.dev)
	0.4m	0.216/0.020	0.228/0.011	0.236/0.025	0.254/0.030	0.256/0.053	0.260/0.037
	0.8m	0.229/0.009	0.234/0.030	0.245/0.027	0.243/0.029	0.262/0.037	0.267/0.053

	1.2m	0.243/0.019	0.254/0.033	0.263/0.033	0.271/0.044	0.277/0.047	0.284/0.032
	1.6m	0.243/0.013	0.252/0.018	0.271/0.042	0.290/0.047	0.283/0.036	0.282/0.051
r=3cm	H(m) \ d(mm)	2mm(Mean/Std dev)	6mm(Mean/Std dev)	10mm(Mean/Std dev)	14mm(Mean/Std dev)	18mm(Mean/Std dev)	24mm(Mean/Std dev)
	0.4m	0.224/0.015	0.231/0.022	0.243/0.023	0.252/0.037	0.265/0.042	0.268/0.055
	0.8m	0.236/0.015	0.243/0.023	0.264/0.037	0.262/0.037	0.267/0.033	0.276/0.045
	1.2m	0.247/0.020	0.262/0.020	0.267/0.032	0.273/0.046	0.281/0.041	0.292/0.044
	1.6m	0.254/0.014	0.265/0.032	0.286/0.026	0.289/0.035	0.293/0.018	0.301/0.032
r=4cm	H(m) \ d(mm)	2mm(Mean/Std dev)	6mm(Mean/Std dev)	10mm(Mean/Std dev)	14mm(Mean/Std dev)	18mm(Mean/Std dev)	24mm(Mean/Std dev)
	0.4m	0.231/0.013	0.242/0.015	0.239/0.026	0.264/0.031	0.262/0.029	0.276/0.039
	0.8m	0.245/0.021	0.257/0.012	0.262/0.029	0.287/0.028	0.286/0.039	0.290/0.055
	1.2m	0.256/0.012	0.271/0.036	0.276/0.025	0.284/0.020	0.293/0.038	0.302/0.020
	1.6m	0.261/0.020	0.285/0.018	0.286/0.034	0.299/0.054	0.311/0.041	0.310/0.050
r=5cm	H(m) \ d(mm)	2mm(Mean/Std dev)	6mm(Mean/Std dev)	10mm(Mean/Std dev)	14mm(Mean/Std dev)	18mm(Mean/Std dev)	24mm(Mean/Std dev)
	0.4m	0.236/0.010	0.253/0.014	0.25/0.036	0.263/0.033	0.276/0.045	0.284/0.036
	0.8m	0.252/0.017	0.267/0.015	0.283/0.022	0.272/0.037	0.294/0.043	0.298/0.045
	1.2m	0.265/0.011	0.28/0.037	0.288/0.030	0.293/0.049	0.302/0.038	0.313/0.045
	1.6m	0.273/0.027	0.287/0.021	0.299/0.042	0.31/0.039	0.308/0.051	0.322/0.038

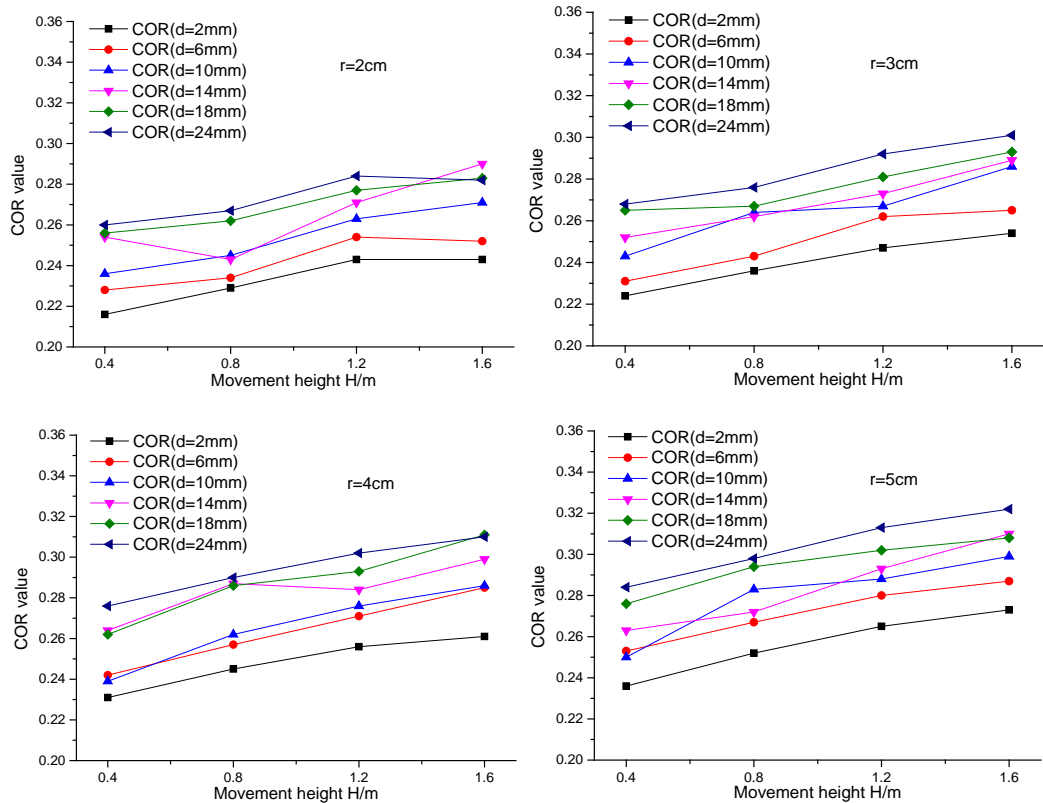

255

256

257

258

259

260

261

262

263

264

265

266

267

Fig.10 Comparison of the *COR* for blocks of different blocks radii colliding with an 8-cm thick cushion
3.3.2 Discussion

The figures above indicate that cushion thickness and particle size have a strong influence on the *COR* of collisions between a rockfall and a cushion, whereas the influence of rockfall block radius is relatively weak. When the particle size of the cushion is small and its thickness is large, the *COR* of the collision is small, and its effectiveness for energy-consumption is obvious. With an increase in rockfall block radius and movement height, the impact energy increases dramatically for rockfalls colliding with a cushion (Kawahara et al., 1998). Under low impact energy, changes in cushion thickness have a relatively small effect on the *COR* of the collision ~~between rockfall and cushion~~, and even thin cushions have a certain energy-absorbing effect, as verified by Pei (2016) and Kawahara (2006). However, under high impact energy, the difference in

268 energy-absorption of different thicknesses of gravel cushion is marked. Because a thin cushion can
269 be more easily compressed in a very short time, the rockfall is more likely to be affected by the
270 underlying platform at low cushion thicknesses. This makes reducing the cushion thickness
271 equivalent to increasing the effective stiffness of the cushion, significantly limiting its buffering
272 and energy-absorbing effect. When the cushion thickness is relatively small, the *COR* increases
273 significantly with a decrease in cushion thickness. However, when the cushion's thickness is
274 relatively large, this trend is no longer obvious.

275 When a constant rockfall release height of 1.2 m is used, the *COR* is large where there is no
276 cushion and decreases significantly with an increase in cushion thickness, ~~which~~. This agrees with
277 the observations of Kawahara (2005). However, when the cushion reaches a certain thickness,
278 namely, the ratio of the falling block radius, r , to the cushion thickness, h , is 1/4–1/3, the rate of
279 reduction in the *COR* with an increase in cushion thickness gradually decreases. *COR* is more
280 sensitive to the thickness of cushions with a small particle size than those with a relatively large
281 particle size: the range in *CORs* caused by thickness variation is wider for small cushion particle
282 sizes, while, as the thickness of cushions with a large particle size is increased, the *COR* of the
283 collision between the rockfall and cushion changes relatively slightly.

284 If the cushion thickness is kept constant at 8 cm, as the movement height of the block
285 increases the *COR* also increases, but when blocks of different radii collide with a cushion of the
286 same thickness, the range in the *COR* of blocks with a large radius is larger than for blocks with a
287 relatively small radius. When the blocks move from a relatively low height, the *COR* of the
288 collision ~~between rockfall and cushion~~ is more likely to be affected by the particle size compared
289 to when blocks are released from a greater height. When the cushion particle size is large, the
290 difference in collision configuration between the rockfall and cushion is more pronounced,
291 resulting in a wide range in the *COR* of the collision ~~between rockfall and cushion~~.

292 4 Orthogonal test design

293 4.1 Orthogonal test procedure

294 To explore the degree of influence of cushion particle size and thickness on *COR* when a
295 rockfall moves through the cushion, orthogonal test theory was adopted to design a test program
296 (Tao et al., 2017). Orthogonal testing is a design method that allows the testing of multiple factors
297 ~~and~~ multiple levels. It is based on orthogonality and selects representative points from a
298 comprehensive experiment for testing, so that fewer trials can fully reflect the impact of the
299 variation of each factor on the index. When these factors cannot be considered in full, the leading
300 factor is considered to achieve the expected effects to a great extent.

301 Four independent parameters, the rockfall block radius, r , movement height, H , cushion
302 thickness, h , and particle size, d , were selected as the basic factors ~~of orthogonal design~~ to test.
303 The purpose of doing an orthogonal test ~~is~~ was to explore the degree of influence of the four
304 different factors on the *COR* and damage depth, L , and find the ~~best~~ combination ~~to reach~~ that will
305 give the optimal protective effect when a rockfall collides with a cushion. The damage depth (L) is
306 the depth to which the cushion is influenced after a rockfall has collided with it and can be used to
307 represent the degree of damage to the cushion. As shown in Table 4, every factor has four levels:

308 Table 4 Factors and levels ~~off~~ for the orthogonal test

Factor level	Rockfall radius r/cm	Movement height H/m	Cushion thickness h/cm	Particle size d/mm
Level 1	2	0.4	2	0.2
Level 2	3	0.8	4	0.6
Level 3	4	1.2	6	1.0
Level 4	5	1.6	8	1.4

309 In order to improve the accuracy of the test, and considering that all of the factors have four
310 levels, the $L_{32} (4^9)$ arrangement factor ~~can be was~~ selected for the testing program. The damage
311 depth, L , of the cushion and the COR of the ~~collision between rockfall and cushion~~ collision are
312 taken as test indices to explore the degree of influence of the four factors (Pichler et al., 2005).

313 As there is a high degree of randomness inherent in the rockfall motion, each case was tested
314 three times and the mean value was taken as the final result, so as to improve the accuracy of the
315 experiments. The test results are shown in Table 5.

316 Table 5 Orthogonal test results


Test number	Rockfall radius r/cm	Movement height H/m	Cushion thickness h/cm	Particle size d/mm	Damage depth of cushion L/cm (Mean/Std dev)	COR of collision between rockfall and cushion (Mean/Std dev)
1	2	0.4	2	0.2	<u>0.65/0.082</u>	<u>0.278/0.012</u>
2	2	0.8	4	0.6	<u>0.74/0.056</u>	<u>0.273/0.023</u>
3	2	1.2	6	1.0	<u>0.93/0.082</u>	<u>0.282/0.029</u>
4	2	1.6	8	1.4	<u>1.05/0.046</u>	<u>0.295/0.028</u>
5	3	0.4	2	0.6	<u>0.58/0.053</u>	<u>0.294/0.012</u>
6	3	0.8	4	0.2	<u>1.45/0.165</u>	<u>0.265/0.015</u>
7	3	1.2	6	1.4	<u>1.03/0.171</u>	<u>0.317/0.041</u>
8	3	1.6	8	1.0	<u>1.60/0.193</u>	<u>0.280/0.020</u>
9	4	0.4	4	1.0	<u>0.62/0.036</u>	<u>0.296/0.028</u>
10	4	0.8	2	1.4	<u>0.56/0.104</u>	<u>0.338/0.029</u>
11	4	1.2	8	0.2	<u>2.60/0.303</u>	<u>0.256/0.022</u>
12	4	1.6	6	0.6	<u>2.20/0.375</u>	<u>0.284/0.036</u>
13	5	0.4	4	1.4	<u>0.61/0.076</u>	<u>0.309/0.031</u>
14	5	0.8	2	1.0	<u>0.58/0.026</u>	<u>0.328/0.037</u>
15	5	1.2	8	0.6	<u>2.12/0.217</u>	<u>0.280/0.025</u>
16	5	1.6	6	0.2	<u>2.85/0.321</u>	<u>0.273/0.022</u>
17	2	0.4	8	0.2	<u>1.36/0.026</u>	<u>0.216/0.016</u>
18	2	0.8	6	0.6	<u>1.24/0.106</u>	<u>0.265/0.025</u>
19	2	1.2	4	1.0	<u>1.13/0.149</u>	<u>0.302/0.031</u>
20	2	1.6	2	1.4	<u>0.68/0.082</u>	<u>0.358/0.038</u>
21	3	0.4	8	0.6	<u>0.92/0.121</u>	<u>0.231/0.017</u>
22	3	0.8	6	0.2	<u>1.49/0.187</u>	<u>0.256/0.012</u>
23	3	1.2	4	1.4	<u>1.08/0.046</u>	<u>0.327/0.031</u>
24	3	1.6	2	1.0	<u>0.84/0.076</u>	<u>0.351/0.029</u>
25	4	0.4	6	1.0	<u>0.77/0.135</u>	<u>0.287/0.035</u>

26	4	0.8	8	141.4	<u>0.81/0.137</u>	<u>0.281/0.027</u>
27	4	1.2	2	20.2	<u>1.03/0.159</u>	<u>0.336/0.021</u>
28	4	1.6	4	60.6	<u>1.96/0.115</u>	<u>0.318/0.030</u>
29	5	0.4	6	141.4	<u>0.67/0.044</u>	<u>0.292/0.019</u>
30	5	0.8	8	104.0	<u>1.05/0.092</u>	<u>0.275/0.078</u>
31	5	1.2	2	60.6	<u>1.14/0.098</u>	<u>0.347/0.025</u>
32	5	1.6	4	20.2	<u>2.54/0.184</u>	<u>0.294/0.027</u>

317 **4.2 Optimization analysis and discussion of test results**

318 4.2.1 Optimization analysis method (flow)

319 The method of analysis-method used to optimize the calculation results and the optimization
 320 process is shown in Figure 11, and R_y is the range of factory.

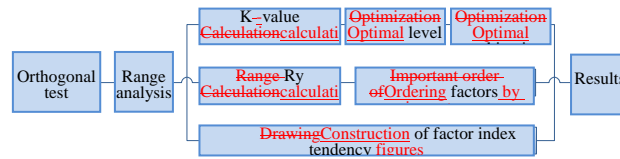

321

322 Fig.11 Flow chart for the optimization analysis of the test. R_y is the range in factor y . The K value is the sum of the
 323 statistical test results.

324 The four parameters, rockfall block radius, r , movement height, H , cushion thickness, h , and
 325 particle size, d , belong to the factor set $x \in (A, B, C, D)$, and the number of levels for all factors is
 326 four. The statistical test parameter under level y of factor set at level y can be calculated by
 327 determining K_{xy} ($x=A, B, C, D; y=1, 2, 3, 4$), i.e., the sum of all the test result indices P_{xy}
 328 containing level y of factor x , and dividing it by the total number of levels to obtain the average
 329 value k_{xy} in which P_{xy} is the random variable of the normal distribution:

330
$$k_{xy} = \frac{K_{xy}}{N_y} = \sum \frac{P_{xy}}{N_y}, \quad (6)$$

331 where K_{xy} is the statistical parameter of factor x at level y , k_{xy} is the average value of K_{xy} , and N_y is
 332 the number of levels.

333 k_{xy} can be used to judge the optimization optimal level and optimization-combination of each
 334 factor. If a more optimal result is obtained at a higher index value, then the level that increases the
 335 index value should be selected, i.e., the level with maximum values for all factors k_{xy} ; conversely,
 336 if the smaller the index value is, the more optimal it is, the level with minimum values for all
 337 factors k_{xy} should be selected. The parameter-combination of parameters corresponding to an
 338 optimal level of all factors is the optimal parameter combination. R_y reflects the amount of
 339 variation of the test index when with fluctuation in factor level y is fluctuating. The larger R_y is, the
 340 more sensitive the factor is to the influence of the test index. The order of importance of the
 341 factors can be judged using R_y , and the optimization optimal level and optimization combination of
 342 factor x can be judged from k_{xy} .

343 4.2.2 Results of analysis and discussion

344 Range analysis was used to analyze the orthogonal test results in Table 5. If the influencing
 345 factors for the range analysis are This uses the damage depth, L , of the cushion and the COR of the
 346 collision between rockfall and cushion collision (Table 6), then as influencing factors to
 347 determine the optimum parameter-combination for of rockfall block radius, r , movement height, H ,

348 cushion thickness, h , and particle size, d , ~~to reduce for the reduction of COR can be obtained.~~

349 Table 6 ~~Influencing factor range~~Range analysis of ~~two influencing factors for~~ all evaluation indices


Evaluation index	Levels	Rockfall radius r/cm	Movement height H/m	Cushions thickness h/cm	Particle size d/cm
COR of collision between rockfall and cushion	k_{x1}	0.285	0.271	0.325	0.270
	k_{x2}	0.288	0.287	0.296	0.285
	k_{x3}	0.298	0.305	0.281	0.301
	k_{x4}	0.299	0.306	0.267	0.313
	R_y	0.014	0.035	0.058	0.043
Damage depth of cushion L	k_{x1}	0.97	0.78	0.76	1.75
	k_{x2}	1.12	0.99	1.26	1.35
	k_{x3}	1.33	1.38	1.40	0.94
	k_{x4}	1.44	1.72	1.44	0.81
	R_y	0.47	0.94	0.68	0.94

350 The following conclusions can be ~~derived~~drawn from Table 6:

351 (1) The degree of influence of the ~~four~~ factors ~~considered~~ on the *COR* of the ~~collision~~
 352 ~~between rockfall and cushion collision~~ is: cushion thickness (h) > particle size (d) > movement
 353 height (H) > block radius (r);

354 (2) The degree of influence of the ~~four~~ factors ~~considered~~ on the damage depth, L , of the
 355 cushion is: movement height (H) = particle size (d) > cushion thickness (h) > block radius (r).

356 *E-I* tendency figures (Tao et al., 2017) are used to further explore the effects of each factor on
 357 the test indices. The level of all factors is the X -coordinate (E), and the average value of the test
 358 index is the Y -coordinate (I). The *E-I* tendency ~~drawings~~plots, ~~shown in~~ Figure 12 and Figure 13,
 359 intuitively reflect the tendency of the test index with a change in factor level and can point the way
 360 to further testing.

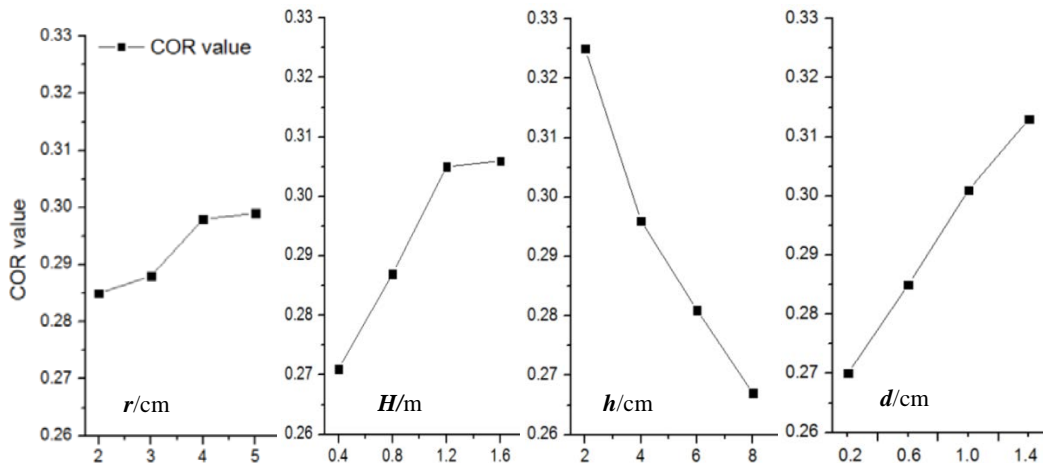

361

362 Fig.12 Tendency of each factor as regards the *COR* of the ~~collision between rockfall and cushion collision~~

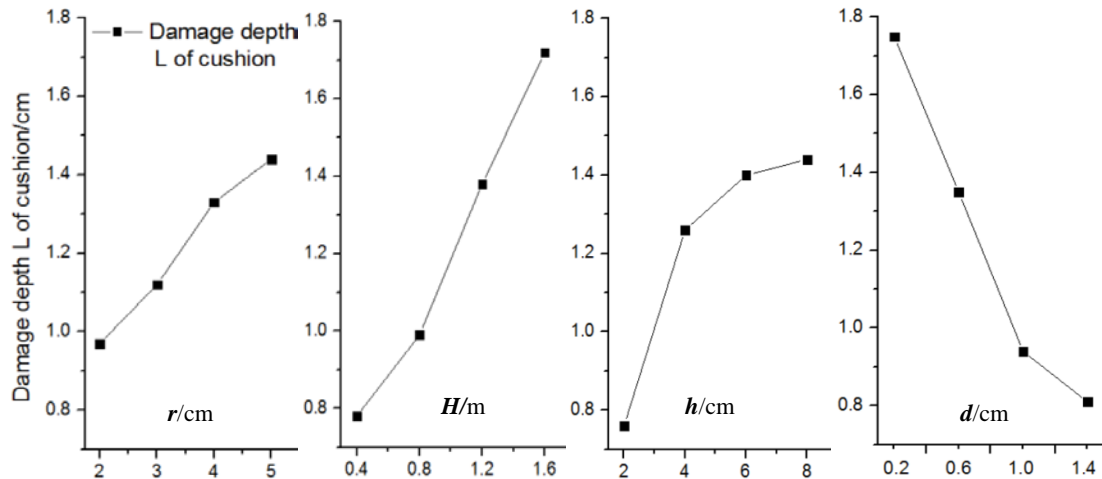


Fig.13 Tendency of each factor as regards damage depth L of the cushion

The following conclusions can be derived from Figures 11 and 12: –

(1) The smallest optimal ~~parameter~~ combination of ~~parameters of the~~ COR of the ~~collision~~ ~~between rockfall and cushion~~ collision is A1B1C4D1; that is, when $r=2\text{cm}$, $H=0.4\text{m}$, $h=8\text{cm}$, and $d=2\text{mm}$, the COR of the collision ~~between rockfall and cushion~~ is the smallest (Figure 12).

(2) The shallowest optimal ~~parameter~~ combination of ~~parameters of the~~ damage depth, L , of the cushion is A1B1C1D4; that is, when $r=2\text{cm}$, $H=0.4\text{m}$, $h=2\text{cm}$, and $d=1.4\text{cm}$, the damage depth, L , of the cushion is the shallowest (Figure 13).

To sum up, the cushion thickness, h , has the most significant influence on the COR of the ~~collision between rockfall and cushion~~ collision, while it has a relatively minor effect on the damage depth, L , of the cushion. The second most important factor is particle size, d , but the cushion can easily be destroyed when a rockfall with a high kinetic energy collides with a cushion of small particle size. The degree of influence of the rockfall block radius, r , on the two indices is far less than that of the other factors. When a gravel cushion is used to control rockfall down a slope, ~~both~~ the effectiveness with which it controls the rockfall and its durability ~~is~~ ~~are~~ taken into account (Pichler et al., 2005) so the cushion thickness, h , should be the primary consideration in cushion design. The optimal thickness is 3–4 times the radius of the majority of the rockfall blocks. The smaller the particle size is, the smaller the COR is, but the cushion is also more likely to be destroyed ~~so~~. ~~Therefore~~ the appropriate particle size must be determined by combining the expected ~~and evaluated~~ block size and drop height of the rockfall so that the cushion not only achieves the effect of reducing COR but also maintains its stability.

5 Conclusions

The buffering and energy-dissipation mechanism of gravel cushions with different properties under different impact energies were studied ~~throughin~~ laboratory collision tests, leading to ~~in~~ the following conclusions:

1. Unlike conventional protection measures, a gravel cushion makes full use of waste mullock produced in the process of mine extension, which can be conveniently broken up into particles of the appropriate size. This can not only reduce the costs of reducing rockfall hazard and of mullock transportation and relieve overloading of the mine's dump but can also achieve better

394 control of rockfalls, realizing the goal of “stone conquers stone.”

395 2. ~~Through~~In a series of laboratory ~~drop~~-tests ~~by dropping~~, blocks ~~of different radii were~~
396 ~~dropped~~ from ~~varying different~~ heights ~~on~~onto different cushion materials. The results indicate that,
397 for a given impact energy, the ~~change of cushion's~~cushion thickness, h , has a strong influence on
398 the measured coefficient of restitution (COR) and therefore impact pressure. ~~When the cushion~~
399 ~~reaches a certain thickness, namely,~~From the point where the ratio of the falling block radius, r , to
400 the cushion thickness, h , is $1/4$ – $1/3$, the rate of reduction in the COR with an increase in cushion
401 thickness gradually decreases. When the blocks move from a relatively low height, the COR of the
402 ~~collision between~~rockfall ~~and~~ cushion ~~collision~~ is more likely to be affected by the particle size
403 ~~compared to~~than when blocks are released from a greater height. Therefore, in the process of
404 cushion design, the estimated physical properties and drop height of the potentially dangerous
405 rock should be investigated to ~~roughly~~ estimate the impact energy of the rockfall.

406 3. Through an orthogonal test, it is found that the cushion thickness, h , has the most
407 significant influence on the COR of the ~~rockfall-cushion~~ collision ~~between rockfall and cushion~~.
408 The second most important factor is particle size, d , ~~but with a smaller particle size leading to a~~
409 ~~smaller~~ COR . However, the cushion can easily be destroyed when a rockfall with a high kinetic
410 energy collides with a ~~small particle size~~ cushion ~~of small particle size~~. Therefore, ~~the optimum~~
411 cushion ~~thickness and particle size can be obtained by taking its effectiveness, its~~design should
412 ~~take~~ structural reliability, ~~as well as effectiveness~~ and any economic constraints into account. ~~The~~
413 ~~smaller the particle size is, the smaller the~~ COR is, ~~but a cushion with a small particle size is more~~
414 ~~likely to be destroyed~~. The appropriate particle size must be determined on the basis of the block
415 size and drop height of the expected rockfall so that the cushion can not only achieve the effect of
416 reducing COR but also maintain its stability.

417 4. Until now, it has not been possible to dictate a universal rule that the majority of
418 engineering personnel can follow in the design of gravel cushions for a platform. This is a
419 troubling blind spot. However, this work shows that, as well as increasing the cushion thickness,
420 changing its particle size can improve the rockfall-controlling effect, and that the optimal particle
421 size can be determined on the basis of the expected block size and drop height of the rockfall. This
422 provides a widely applicable theoretical and practical basis for cushion design for open-pit mine
423 rockfall protection.

424 References

- 425 [1] Huang R, Liu W, Zhou J, and Pei X. Rolling tests on movement characteristics of rock blocks. Chinese
426 Journal of Geotechnical Engineering, 2007, 29(9):1296-1302. (in Chinese)
- 427 [2] Pantelidis, L. Rock slope stability assessment through rock mass classification systems. International Journal
428 of Rock Mechanics and Mining Sciences, 2009, 46(2): 315-325.
- 429 [3] Pantelidis, L. An alternative rock mass classification system for rock slopes. Bulletin of engineering geology
430 and the environment, 2010, 69(1):29-39.
- 431 [4] Mignelli C, Peila D, Russo SL, et al. Analysis of rockfall risk on mountainside roads: evaluation of the effect
432 of protection devices. Natural Hazards, 2014, 73(1):23-35.
- 433 [5] Asteriou P, Tsiambaos G. Empirical model for predicting rockfall trajectory direction. Rock Mechanics
434 and Rock Engineering, 2016, 49:927-941.
- 435 [6] Howald EP, Abbruzzese JM, Grisanti C. An approach for evaluating the role of protection measures

- 436 in rockfall hazard zoning based on the Swiss experience. *Natural Hazards & Earth System Sciences*, 2017,
437 17(7):1127-1144.
- 438 [7] Topal T, Akın M, Özden AU. Analysis and evaluation of rockfall hazard around Afyon Castle, Turkey.
439 *Environmental Geology*, 2006, 53 (1) :191-200.
- 440 [8] Koleini M, Van Rooy JL. Falling rock hazard index: a case study from the Marun Dam and power plant,
441 south-western Iran. *Bulletin of engineering geology and the environment*, 2011, 70(2):279-290.
- 442 [9] Saroglou H, Marinos V, Marinos P, Tsiambaos G. Rockfall hazard and risk assessment: an example from a
443 high promontory at the historical site of Monemvasia, Greece. *Natural Hazards & Earth System Sciences*,
444 2012, 12(6):1823–1836.
- 445 [10] Sadagah B. Back analysis of a rockfall event and remedial measures along part of a Mountainous Road,
446 Western Saudi Arabia. *Int J Innov Sci Mod Eng*, 2015, 3(2): 2319-6386.
- 447 [11] Leine RI, Schweizer A, Christen M, et al. Simulation of rockfall trajectories with consideration of rock shape.
448 *Multibody System Dynamics*, 2014, 32(2):241-271.
- 449 ~~[12] Huang R, Liu W, Gong M, and Zhou J. Study of trees resistance effect test on rolling rock blocks. *Chinese*
450 *Journal of Rock Mechanics and Engineering*, 2010, 29(s1):2895-2901. (in Chinese)~~
- 451 ~~[13]~~[12] Notaro S, Paletto A. The economic valuation of natural hazards in mountain forests: an approach based
452 on the replacement cost method. *Journal of Forest Economics*, 2012, 18 (4): 318–328.
- 453 ~~[14]~~[13] Monnet JM, Bourrier F, Dupire S, et al. Suitability of airborne laser scanning for the assessment of
454 forest protection effect against rockfall. *Landslides*, 2017, 14(1):299-310.
- 455 ~~[15]~~[14] Miranda SD, Gentilini C, Gottardi G, et al. Virtual testing of existing
456 semi-rigid rockfall protection barriers. *Engineering Structures*, 2015, 85:83-94.
- 457 ~~[16] Kishi N, Bhatti AQ. An equivalent fracture energy concept for nonlinear dynamic response analysis of~~
458 ~~prototype RC girders subjected to falling weight impact loading. *International Journal of Impact Engineering*,~~
459 ~~2010, 37(1):103–113.—~~
- 460 ~~[17] Kishi N, Konno H, Ikeda K, et al. Prototype impact tests on ultimate impact resistance of PC rock sheds.~~
461 ~~*International Journal of Impact Engineering*, 2002, 27(9):969–986.—~~
- 462 ~~[18] Bhatti AQ, Kishi N. Impact response of RC rock shed girder with sand cushion under falling load. *Nuclear*
463 ~~*Engineering and Design*, 2010, 240(10):2626-2632.—~~~~
- 464 ~~[19] Bhatti AQ, Kishi N, Mikami H, et al. Elasto-plastic impact response analysis of shear failure type RC beams~~
465 ~~with shear rebars. *Materials & Design*, 2009, 30(3):502–510.—~~
- 466 ~~[20] Kawahara S, Muro T. Effects of dry density and thickness of sandy soil on impact response due to rockfall.~~
467 ~~*Journal of Terramechanics*, 2006, 43 (3): 329-340.~~
- 468 ~~[21]~~[15] Lambert S, Heymann A, Gotteland P, et al. Real-scale investigation of the kinematic response of a
469 rockfall protection embankment. *Natural Hazards & Earth System Sciences*, 2014, 14(5):1269-1281.
- 470 ~~[22]~~[16] Sun J, Chu Z, Liu Y, et al. Performance of Used Tire Cushion Layer under Rockfall Impact. *Shock and*
471 *Vibration*, 2016, 2016 (10):1-10.
- 472 ~~[23]~~[17] Labiouse V, Descoeurdes F, Montani S. Experimental study of rock sheds impacted by rock blocks.
473 *Structural Engineering International*, 1996, 6(3):171–176.
- 474 ~~[24]~~[18] Labiouse V, Heidenreich B. Half-scale experimental study of rockfall impacts on sandy slopes. *Natural*
475 *Hazards & Earth System Sciences*, 2009, 9(6):1981-1993.
- 476 ~~[25]~~[19] Giani GP. *Rock slope stability analysis*. Balkema, Rotterdam, 1992.
- 477 ~~[26]~~[20] Chau KT, Wong RHC, Wu JJ. Coefficient of restitution and rotational motions of rockfall impacts.
478 *International Journal of Rock Mechanics and Mining Sciences*, 2002, 39(1):69–77.

479 | ~~{27}~~[21] Yang Y, Zhou Y, Jiang R, et al. Theory and practice of slope geological disaster flexible protection
480 | [M].Beijing: Science Press, 2005. (in Chinese)

481 | ~~{28}~~[22] Zhu C, Tao Z, Yang S, Zhao S. V shaped gully method for controlling rockfall on high-steep slopes in
482 | China. Bulletin of Engineering Geology and the Environment, 2018:1-17. DOI: 10.1007/s10064-018-1269-7.

483 | ~~{29}~~[23] Ulusay R, Hudson JA. The complete ISRM suggested methods for rock characterization, testing and
484 | monitoring: 1974–2006. Ankara: ISRM Commission on Testing Methods; 2007.

485 | ~~{30}~~[24] Aydin A. ISRM Suggested method for determination of the Schmidt hammer rebound hardness: revised
486 | version. International Journal of Rock Mechanics and Mining Sciences, 2009, 46(3):627–34.

487 | ~~{31}~~[25] Asteriou P, Saroglou H, and Tsiambaos G. Geotechnical and kinematic parameters affecting the
488 | coefficients of restitution for rockfall analysis. International Journal of Rock Mechanics and Mining Sciences,
489 | 2012, 54(1):103-113.

490 | ~~{32}~~[26] Bouguet JY. Camera calibration toolbox for Matlab. http://www.vision.caltech.edu/bouguetj/calib_doc.
491 | Accessed 20 Jan, 2012.

492 | ~~{33}~~[27] Asteriou P, Saroglou H, Tsiambaos G. Rockfall: scaling factors for the coefficient of restitution. In:
493 | Kwasniewski M, Lydzba D (eds) Rock mechanics for resources, energy and environment. Taylor & Francis
494 | Group, London, 2013:195–200.

495 | ~~{34}~~[28] Kawahara S, Muro T. Effects of weight mass and drop height on vertical distribution of dry density of
496 | sandy soil in one-dimensional impact compaction. In: Proceedings of the 5th Asia-Pacific regional
497 | conference of the ISTVS; 1998:151–61.

498 | ~~{35}~~[29] Pei X, Liu Y, Wang D. Study on the energy dissipation of sandy soil cushions on the rock-shed under
499 | rockfall impact load. Journal of Sichuan University (Engineering Science Edition), 2016, 48(1):15-22.(in
500 | Chinese)

501 | ~~{36}~~[30] Kawahara S, Muro T. Effects of dry density and thickness of sandy soil on impact response due to
502 | rockfall. Journal of Terramechanics, 2006, 43 (3): 329–340.

503 | ~~{37}~~[31] Pichler B, Hellmich C, Mang H A. Impact of rocks onto gravel design and evaluation of experiments.
504 | International Journal of Impact Engineering, 2005, 31(5):559-578.

505 | ~~{38}~~[32] Tao Z, Zhu C, He M, et al. Test of V shaped groove structure against rockfall based on orthogonal
506 | design. Journal of China Coal Society, 2017, 42(9):2307-2315.