

1 **Comparing the efficiency of hypoxia mitigation strategies in an urban, turbid tidal river**
2 **via a coupled hydro sedimentary-biogeochemical model**

3 Katixa Lajaunie-Salla^{1,2,*}, Aldo Sottolichio¹, Sabine Schmidt¹, Xavier Litrico², Guillaume
4 Binet², Gwenaël Abril^{1,3,4}.

5 ¹ Laboratoire EPOC, Environnements et Paléoenvironnements Océaniques et Continentaux
6 UMR 5805, CNRS – Université de Bordeaux – Pessac, France.

7 ² LyRE, SUEZ Research Center, Bordeaux, France.

8 ³ Programa de Geoquímica, Universidade Federal Fluminense, Niterói, RJ, Brazil.

9 ⁴ Biologie des Organismes et Ecosystèmes Aquatiques (BOREA), UMR 7208, Muséum
10 National d'Histoire Naturelle, CNRS, Sorbonne Université, Université de Caen Normandie,
11 Université des Antilles, IRD, Paris, France.

12 * Now at Aix Marseille Université, CNRS/INSU, Université de Toulon, IRD, Mediterranean
13 Institute of Oceanography (MIO) UMR 7294

14 **Corresponding Author:** katixa.lajaunie-salla@mio.osupytheas.fr

15 **Acknowledgments**

16 This study was funded by the Aquitaine Region (DIAGIR project) and LyRE (SUEZ research
17 center), who cosponsored a Ph.D. grant to K. Lajaunie-Salla, and was supported by the
18 Cluster of Excellence COTE at the Université de Bordeaux (ANR-10-LABX-45). The
19 authors are grateful to the MAGEST network for the availability of data and to the SGAC and
20 Bordeaux Metropole for providing urban effluent data and for fruitful discussions. This work
21 was supported by the Avakas cluster resources of the Mésocentre de Calcul Intensif Aquitain
22 (MCIA) of the University of Bordeaux.

23 **Highlights**

- 24 - A 3D model shows different efficiencies of management actions to limit hypoxia.
- 25 - Downstream relocation of wastewater discharge totally mitigates hypoxia
- 26 - Sewage overflow reduction improves DO levels, but only locally.
- 27 - Water replenishment improves DO in the upper estuary.

28 **Abbreviations**

- 29 DO: dissolved oxygen
- 30 DOC: dissolved organic carbon
- 31 LTS: long-term support
- 32 POC: particulate organic carbon
- 33 SO: sewage overflow
- 34 STS: short-term support
- 35 TGR: Tidal Garonne River
- 36 TMZ: turbidity maximum zone
- 37 WWTP: wastewater treatment plant

38 **Abstract**

39 Coastal water hypoxia is increasing globally due to global warming and urbanization, and the
40 need to define management solutions to improve the water quality of coastal ecosystems has
41 become important. The lower Tidal Garonne River (TGR, southwestern France),
42 characterized by the seasonal presence of a turbidity maximum zone (TMZ) and urban water
43 discharge, is subject to episodic hypoxia events during low river flow periods in the summer.
44 Future climatic conditions (higher temperature, summer droughts) and increasing
45 urbanization could enhance hypoxia risks near the city of Bordeaux in the coming decades. A
46 3D model of dissolved oxygen (DO) that couples hydrodynamics, sediment transport and
47 biogeochemical processes was used to assess the efficiency of different management
48 solutions for oxygenation of the TGR during summer low-discharge periods. We ran different
49 scenarios of reductions in urban sewage overflows, displacement of urban discharges
50 downstream from Bordeaux, and/or temporary river flow support during the summer period.
51 The model shows that each option mitigates hypoxia but with variable efficiency over time
52 and space. Sewage overflow reduction improves DO levels only locally near the city of
53 Bordeaux. Downstream relocation of wastewater discharges allows for better oxygenation
54 levels in the lower TGR. The support of low river flow limits the upstream TMZ propagation
55 and dilutes the TGR waters with well-oxygenated river water. Scenarios combining
56 wastewater network management and low water replenishment indicate an improvement in
57 water quality over the entire TGR. These modeling outcomes constitute important tools for
58 local water authorities to develop the most appropriate strategies to limit hypoxia in the TGR

59 **Keywords:** hypoxia, management, modeling, Garonne Tidal River, wastewater, water quality

60

61 1 Introduction

62 Hypoxia (dissolved oxygen (DO) concentration $< 2 \text{ mg.L}^{-1}$ or $< 30\%$ of saturation) is a major
63 environmental issue, as it stresses marine organisms and disturbs the function of marine
64 ecosystem (Rabalais et al., 2010; Vaquer-Sunyer and Duarte, 2008). Coastal hypoxia is a
65 widespread phenomenon that has increased since the middle of the 20th century due to the
66 combined effects of climate change and local anthropic activities (land and water uses)
67 (Breitburg et al., 2018). Good oxygenation of estuarine waters is crucial in order to maintain
68 ecological and economical services within the whole watershed because of the strategic
69 position of estuaries for migratory fishes (Rabalais et al., 2010). Estuarine deoxygenation is
70 the result of a complex interaction of environmental factors. First, an increase in temperature
71 decreases the oxygen solubility of the water, favors thermal stratification of the water
72 column, limiting reaeration (Conley et al., 2009; Lehmann et al., 2014), and accelerates DO-
73 consuming biogeochemical processes (Goosen et al., 1999). Second, a decrease in river flow
74 modifies estuarine residual circulation, sediment transport, and the transit and mineralization
75 of terrestrial organic material in estuaries (Abril et al., 1999; Howarth et al., 2000). In
76 addition, an increase in population and human activities enriches coastal waters with nutrients
77 and labile organic matter from urban effluents, possibly leading to eutrophication problems
78 (Billen et al., 2001). Finally, in macrotidal estuaries, DO consumption by heterotrophic
79 organisms is exacerbated by the presence of a turbidity maximum zone (TMZ), which favors
80 the growth of particle-attached bacteria and, in contrast, limits phytoplankton primary
81 production (Diaz, 2001; Goosen et al., 1999; Talke et al., 2009). In view of the ongoing
82 global changes, it is now essential to find management strategies for hypoxia mitigation. To
83 recover or maintain a good ecological status for transitional waters is one of the objectives of
84 the European Water Framework Directive (Best et al., 2007).

85 In an urban tidal river, the first obvious action to mitigate hypoxia is to improve the urban
86 wastewater network and treatment and to reduce the input of organic matter and nutrients to
87 the estuary. In several European estuaries suffering from urban inputs, water quality
88 improvement was achieved by the installation and renovation of a wastewater treatment plant
89 (WWTP) in the Thames Estuary in the 1980s (Andrews and Rickard, 1980; Tinsley, 1998)
90 and the construction of a WWTP in the Seine River in the 1990s (Billen et al., 2001). In the
91 Scheldt Estuary, sewage network improvement reduced N, P and Si loads by 5.4%, 1.3% and
92 1%, respectively, and two WWTPs have been implemented for the city of Brussels since
93 2000 (Billen et al., 2005; Soetaert et al., 2006; Vanderborght et al., 2007). Sewage network
94 systems in Europe usually combine both urban sewage and stormwater collection. During
95 heavy rain and storm events, the capacity of the urban wastewater network is generally
96 insufficient to treat all effluents, inducing deoxygenation events due to untreated wastewater
97 release from sewage overflows (SO) (Even et al., 2007). In the 2000s, the Environmental
98 Protection Agency promoted a strategy to monitor urban drainage networks in real time to
99 regulate flow and avoid the overflow of untreated wastewater (EPA, 2006; Gonwa, 1993).
100 This control was developed in several cities in the USA (Gonwa, 1993), Québec (Pleau et al.,
101 2005) and Tokyo (Maeda et al., 2002). An additional management solution was tested in the
102 Thames Estuary: the construction of a 24-km-long sewer network under the riverbed that
103 allows the transit of urban wastewater to the WWTP located downstream (Thames Tideway
104 Tunnel, www.tideway.london). This type of solution is also ongoing in Stockholm
105 (www.stockholmvatten.se) and in the Helsinki (www.hsy.fi) metropolis.

106 In macrotidal estuaries, the lowest DO concentrations occur during the lowest river flow
107 (Lanoux et al., 2013; Talke et al., 2009; Zhang et al., 2015). A second possible action could
108 therefore be to modify the local residual circulation and to reduce water flushing time to
109 promote the dilution by well-oxygenated waters and/or the seaward dispersion of oxygen-

110 consuming material (Lajaunie-salla et al., 2018). This implies providing water replenishment
111 above critical levels by limiting water abstraction for irrigation in the watershed or by
112 modulating water release from dams when hypoxia is present (Schmidt et al., 2017).

113 To optimize preventive management strategy, the efficiency of the potential solutions needs
114 to be evaluated. Therefore, numerical modeling is an efficient tool to quantitatively assess
115 hypoxia mitigation by management scenarios. Moreover, models provide guidelines for
116 setting objectives to maintain good water quality in coastal environments (Kemp et al., 2009;
117 Skerratt et al., 2013).

118 A recently developed 3D coupled hydro sedimentary-biogeochemical DO model simulated
119 possible scenarios for the coming decades, suggesting a future spatial and temporal extension
120 of summer hypoxia in the Tidal Garonne River (TGR, S-W France), an urban, turbid tidal
121 river (Lajaunie-salla et al., 2018). Until now in the TGR, only a few hypoxia events have
122 been reported, for example, during summer 2006 (Lanoux et al., 2013). Previous work
123 highlighted that these low DO levels are due to the combination of the presence of the TMZ,
124 high water temperature, drought periods and urban effluent inputs (Lajaunie-Salla et al.,
125 2017; Lanoux et al., 2013; Schmidt et al., 2017). Such a perspective of permanent summer
126 hypoxia in the lower TGR implies the need to develop management strategies to protect the
127 ecosystem. The aim of the present work was to assess the efficiency of possible management
128 solutions to limit future hypoxia risk in the Tidal Garonne River. For this purpose, we applied
129 the aforementioned DO model in order to simulate scenarios based on two main management
130 actions: optimization of the urban wastewater network and fresh water replenishment during
131 low water periods.

132 2 Materials and Methods

133 2.1 Study Area

134 The Garonne River, located in southwestern France, is the main tributary of the Gironde
135 Estuary, which is formed by its confluence with the Dordogne River and flows toward the
136 Atlantic Ocean (Fig. 1). This macrotidal fluvio-estuarine system is characterized by the
137 presence of a TMZ, where suspended sediment concentrations in surface waters are $> 1 \text{ g.L}^{-1}$
138 (Allen, 1972). The position of the TMZ varies seasonally: during low river flow, it is present
139 in the Tidal Garonne River from KP25 to KP70, i.e., upstream of Pauillac (Fig. 1). The rest of
140 the year, the TMZ is located near Pauillac (Fig. 1), in the Gironde Estuary (Jalón-Rojas et al.,
141 2015).

142 The annual mean Garonne River flow is $680 \text{ m}^3.\text{s}^{-1}$ for the period 1913-2018, with the highest
143 flows in winter (mean of $720 \text{ m}^3.\text{s}^{-1}$) and the lowest flows in summer and early autumn (mean
144 of $190 \text{ m}^3.\text{s}^{-1}$) (<http://www.hydro.eaufrance.fr/indexd.php>). The threshold of $110 \text{ m}^3.\text{s}^{-1}$ is the
145 present-day low water target flow for the lower Garonne, below which there is water
146 replenishment for the period from June 1 to October 31. Since the mid 1980s, there has been
147 an increase in the number of days with a river flow below $110 \text{ m}^3.\text{s}^{-1}$
148 (<http://www.hydro.eaufrance.fr/indexd.php>). A decrease in the Garonne flow limits the
149 reoxygenation of the TGR waters with well-oxygenated freshwater and favors upstream
150 advection and the concentration of the TMZ (Lajaunie-salla et al., 2018). Six water reservoirs
151 that can store a maximum water volume of 58 hm^3 are located in the upper Garonne River,
152 corresponding to an equivalent river flow of $95 \text{ m}^3.\text{s}^{-1}$ during a single week. This water
153 storage is used to maintain the Garonne discharge above the critical ($>110 \text{ m}^3.\text{s}^{-1}$) for the
154 ecosystem during the summer.

155 The large city of Bordeaux is located at the border of the Tidal Garonne River, 25 km
156 upstream of the confluence (Bec d'Ambès, Fig. 1). The sewage systems of the metropolis
157 drain an urban area of 578 km² and serve a population estimated at 749 595 inhabitants in
158 2015. Part of the sewage system is composed of a combined sewer network: two wastewater
159 treatment plants, Clos de Hilde and Louis Fargue, and nine sewage overflows. The releases of
160 treated and untreated wastewaters represent up to 1.5% of the fluvial Garonne discharge
161 (Lanoux et al., 2013).

162 The Bordeaux metropolis has already taken several actions to improve the urban wastewater
163 network. In 2011, the WWTP Louis Fargue was resized and upgraded to the treatment
164 effectiveness of the WWTP Clos de Hilde. In addition, since 2013, real-time control of the
165 urban drainage network was developed to reduce urban effluents during rainy weather
166 (Andréa et al., 2013). This system decreased the volume of untreated wastewater released by
167 30% in 2013 and by 40% in 2014 and 2015 (Robitaille et al., 2016), improving the overall net
168 purification efficiency to > 95% for particulate organic carbon (POC), >75% for dissolved
169 organic carbon (DOC) and >30% for ammonia (Lanoux, 2013).

170 **2.2 Model description**

171 The SiAM-3D model, which couples hydrodynamics, suspended sediment transport and
172 biogeochemical processes (Lajaunie-Salla et al., 2017), was used to test the efficiency of
173 possible management solutions. The model was implemented for the Gironde Estuary from
174 the 200 m isobath on the continental shelf to the upstream limits of the tidal propagation on
175 both rivers (Sottolichio et al., 2000). The mesh of the model is an irregular grid, with finer
176 resolution in the estuary (200 m x 1 km) and coarser resolution on the shelf. The tidal rivers
177 are represented by one cell in width. The vertical grid uses real depth coordinates and is split

178 into 12 layers. The model uses a finite difference numerical scheme with a transport time step
179 of 35 s.

180 The transport model solves the advection/dispersion equations for dissolved and particulate
181 variables, i.e., suspended sediment, salinity and biogeochemical variables. The
182 biogeochemical model extensively resolves the processes that produce and consume oxygen
183 in the water column, taking into account different types of dissolved and particulate organic
184 matter: degradation of organic matter (mineralization of organic carbon and ammonification
185 using the C/N ratio); nitrification; photosynthesis, respiration and mortality of phytoplankton;
186 and DO gas exchange with the atmosphere. The model includes 11 state variables: dissolved
187 oxygen (DO), ammonia (NH_4^+ , input from rivers and mainly from urban effluents), nitrate
188 (NO_3^-), POC and DOC from the watershed (POC from litter; DOC from rivers), WWTPs,
189 SOs, phytoplankton and detritus. At the open boundaries, the hydrodynamic model is forced
190 by astronomical tides at the shelf and by daily river flow of the Garonne and Dordogne
191 Rivers at the upstream limit (data from www.hydro.eaufrance.fr). The biogeochemical model
192 uses measured water temperature from Bordeaux station (MAGEST network; Etcheber et al.
193 (2011), <http://magest.oasu.u-bordeaux.fr/>) and wind and incident light intensity from Pauillac
194 station (Météo France). The boundary conditions of biogeochemical variables were detailed
195 by Lajaunie-Salla et al. (2017), and the data of organic matter and nutrients were retrieved
196 from the works of Etcheber et al. (2007), Lemaire (2002), Lemaire et al. (2002) and Veyssy
197 (1998). Urban wastewater discharges are included in the model with biodegradable POC and
198 DOC and NH_4 loads representative of water flowing from WWTP and from SO (every 5
199 minutes; concentration data are from Lanoux (2013), and the flow data are from the SUEZ
200 environment; Fig. 1).

201 The model was compared with data available for the TGR and tested on the basis of three
202 criteria: (i) the ability to reproduce the observed DO variability at a seasonal scale, (ii) the

203 ability to reproduce the spring-neap tidal cycle, and (iii) a statistical evaluation based on the
204 Willmott skill score (WSS, Willmott (1982)). In brief, the model performed well ($WSS > 0.7$)
205 in the lower TGR around Bordeaux and is less accurate in the upper section ($WSS < 0.5$); the
206 model and its validation were presented in detail by Lajaunie-Salla et al. (2017).

207 In this work, we want to demonstrate the advantage and/or effectiveness of urban water
208 networks and treatment processes for limiting hypoxia events during critical conditions. The
209 reference simulation is based on the real conditions of 2006, which was a critical year from
210 the point of view of river discharge, temperature and hypoxia. A 21-day heat wave occurred,
211 and the summer water temperature reached a maximum of 29.5°C , with an average of
212 24.6°C . The reference simulation considered a severe and constant low flow of $40 \text{ m}^3 \cdot \text{s}^{-1}$ from
213 July 15 to September 30, which is different from the real river flow recorded (60 continuous
214 days of river flow below $110 \text{ m}^3 \cdot \text{s}^{-1}$) but helps to visualize the impact of potential solutions on
215 oxygenation (Fig. 2a). The sewage network of the Bordeaux metropolis was improved in
216 2011, after which we used a time series of 2014 to reach our objectives to find management
217 solutions to mitigate hypoxia events. The SO discharges constituted 16% in 2006 and 12% in
218 2014.

219 **2.3 The scenarios**

220 Several scenarios have been designed to assess the efficiency of the retained management
221 strategies to improve the DO levels of the Tidal Garonne River (Tab. 1): optimization of the
222 urban wastewater network and water replenishment during low water periods.

223 Two main actions of wastewater management were simulated (Tab. 2):

- 224 - the increase in wastewater storage during storms. For this, fractions of 10, 20, 30, 40
225 and 50% of untreated wastewater SO was transferred to WWTP discharges (taking

226 into account the organic matter and nutrient loads of WWTP). In comparison with the
227 reference simulation, an improvement of 50% in WW treatment corresponds to a
228 reduction of 26% of POC, 3% of DOC and an increase of 6% of NH_4 loads.

229 - the implementation of an outfall that releases urban effluents downstream. Two
230 wastewater discharge points were tested: (1) at 21 km (same distance as in the
231 Thames Estuary) corresponding to position KP25 (Fig. 1), where the currents are
232 relatively high and could disperse urban effluents relatively quickly, and (2) at 11 km,
233 corresponding to KP15 as an alternative and less expensive solution (Fig. 1).
234 Although this solution seems difficult to implement due to technical and financial
235 constraints, it is interesting to investigate its potential environmental benefits.

236 For the support of low river flow during the driest season, two actions were tested according
237 to the maximum stored water volume in the dams (58 hm^3) of the upper Garonne River (Tab.
238 2):

239 - low-intensity and long-term support (LTS) from 15th July by 10, 20 and $30 \text{ m}^3 \cdot \text{s}^{-1}$
240 during 67, 33 and 22 days, respectively.

241 - intense and short-term support (STS) as an emergency solution by 100, 200 and 400
242 $\text{m}^3 \cdot \text{s}^{-1}$ at spring tide from July 27 to 29 (3 days), corresponding to water volumes of
243 16, 41 and 93 hm^3 , respectively.

244 Finally, two scenarios that coupled wastewater management actions and the support of low
245 river flow were simulated (Tab. 2):

246 - a LTS of $10 \text{ m}^3 \cdot \text{s}^{-1}$ over 67 days was combined with the reduction of 50% of untreated
247 wastewater SO, which is transferred to WWTP discharges;

248 - a LTS of $10 \text{ m}^3 \cdot \text{s}^{-1}$ over 67 days was combined with the reduction of 50% of untreated
249 wastewater SO, which is transferred to WWTP discharges and to the relocation of
250 wastewater discharges 11 km (KP15) downstream of Bordeaux (Fig. 1).

251 The 16 scenarios were run over 10 months, from January 1 to October 31. To evaluate the
252 improvement of DO level, three indicators were used: (i) the minimum DO value (DO_{\min});
253 (ii) the number of hypoxia days, i.e., $\text{DO} < 2 \text{ mg} \cdot \text{L}^{-1}$; and (iii) the summer-averaged rates of
254 biogeochemical processes consuming DO in the Bordeaux and Portets areas (6.6 and 1.2 km^2 ,
255 respectively). The grid cells in front of Bordeaux and Portets were chosen because Bordeaux
256 is directly under the impact of urban effluents and because Portets represents the presence of
257 TMZ in the upper TGR.

258 **3 Results**

259 **3.1 Action 1: Wastewater management**

260 **• Action 1.1: Reduction in sewage overflows**

261 The simulations of sewage overflow reduction do not show an increase in DO_{\min} at Bordeaux
262 and Portets (Tab. 2). However, some short but significant differences in the modeled DO time
263 series in Bordeaux are noticeable during the largest sewage overflow events (Fig. 2c). In fact,
264 wastewater overflows represent, on average, 12% of the urban effluents but could represent
265 up to 98% during storm events. For the scenario SO-50%, there is a slight increase in DO
266 level by 6 and 2% sat in late June and mid-August, respectively (Fig. 2c). The total DO
267 consumption by biogeochemical processes decreases up to 6% at Bordeaux (Tab. 3). The rate
268 of mineralization of urban organic matter decreases considerably, by 31% and 33%, with a
269 reduction of 50% of SO flow at Bordeaux and Portets, respectively (Tab. 3). In fact, at
270 Bordeaux, the material brought by the SO contributes 7% of the total DO consumption, with

271 a reduction of 50% with versus 13% without reduction (Fig. 2d). In contrast, the nitrification
272 process and degradation of treated urban effluents were slightly increased by the reduction in
273 SO flow (Fig. 2d & Tab. 3) because the wastewater removed from SOs is transferred to
274 WWTPs, which include ammonia at the difference of SOs (Lanoux, 2013).

275 In these simulations, sudden wastewater release events from SO (late June) did not occur
276 simultaneously with the maximum temperature (i.e., late July). In such a case, a more critical
277 hypoxia event would have occurred. However, the modeling results show that the
278 improvement of SO management contributes to improving the DO level only locally and
279 temporarily in the vicinity of the city of Bordeaux.

280 • **Action 1.2: Downstream relocation of wastewater discharges**

281 In the case of a relocation of urban effluent discharge at KP15, only 4 days of hypoxia were
282 simulated with a minimum of 1.8 mg.L^{-1} (Tab. 2), which represents a reduction of 9 days in
283 comparison with the reference simulation. In the case of the relocation of urban effluents
284 discharge farther downstream at KP25, the model simulated no hypoxia and a minimum DO
285 value of 2.1 mg.L^{-1} (Tab. 2). The oxygen level in the vicinity of Bordeaux was improved.
286 According to the model, figure 3 highlights that the displacement of the urban wastewater
287 discharge point downstream significantly improves the oxygen levels in the TGR around
288 Bordeaux and appears to be an efficient action to mitigate hypoxia near Bordeaux (Fig. 3).
289 Moreover, the DO concentration does not change downstream of Bordeaux, maintaining a
290 value of over 50% saturation. Under these relocation scenarios, the amount of urban organic
291 matter and ammonia are relatively low at Bordeaux. Urban effluents are diluted by
292 downstream estuarine waters and exported toward the Gironde. In fact, urban effluents reach
293 the city of Pauillac, approximately 50 km downstream of Bordeaux (Fig. 1) after 1 and 1.5
294 days when effluents are released at KP25 and KP15, respectively, versus 2.5 days when they
295 are discharged near Bordeaux. With the downstream relocation of urban discharge, DO levels

296 are strongly improved in the TGR, without significantly altering the oxygenation condition
297 downstream of Bordeaux. This phenomenon is due to shorter residence times of effluents and
298 larger dilutions with oxygenated estuarine waters downstream.

299 A downstream relocation (KP15 or KP25) significantly decreases total DO consumption in
300 the lower TGR by 33% and 47%, respectively: the mineralization of urban matter is reduced
301 by 65% and 95%, and the nitrification is reduced by 47% and 69%, respectively (Tab.3). At
302 Portets, even if the total DO consumption decreases only by 8%, the degradation of urban
303 matter decreases strongly by 76% and 94% and the nitrification is reduced by 17% and 20%
304 when urban effluents are discharged in KP15 and KP25, respectively (Tab. 3). In fact, the
305 mineralization of urban matter occurs downstream of TGR, with less impact on the DO in
306 this area, thanks to the dilution effect with estuarine waters. Finally, at Bordeaux, the
307 contribution of urban effluents to the DO consumption decreases from 27% to 2%, and
308 nitrification decreases from 20% to 10% (Fig. 3d).

309 The discharge of the wastewater downstream from the city center considerably improves the
310 water quality in the vicinity of Bordeaux. However, hypoxia persists in Portets (30 hypoxic
311 days, Tab. 2 & Fig. 3) because in the upper TGR, hypoxia is mainly due to temperature, very
312 high turbidity and low water renewal.

313 **3.2 Action 2: Support of summer river discharge**

314 • **Action 2.1: Low-intensity and long-term support of summer river discharge**

315 The simulations of low-intensity and long-term support of water flow show an increase in
316 the DO_{\min} not only at Portets but also at Bordeaux (Tab. 2). At Bordeaux, the DO_{\min} increases
317 by only 0.3 mg.L^{-1} , and the number of simulated hypoxia days decreases by only 2 days for a
318 discharge increase of $30 \text{ m}^3.\text{s}^{-1}$. However, in Portets, oxygen levels are much more improved:
319 the additional flows significantly reduce the number of hypoxic days, reducing them from 52

320 days (reference simulation) to 29, 39 days or 40 days with supports of 10, 20 or 30 m³.s⁻¹,
321 respectively (Tab. 2).

322 Significant effects of maintaining summer river discharge in the area of Bordeaux are
323 reflected by the decrease in nitrification processes and the increase in mineralization of
324 matter coming from the watershed (Tab. 3). At Portets, nitrification and mineralization of
325 organic matter are decreased due to the diluted input of urban water upstream (Tab. 3).

326 These simulations show that a low-intensity and long-term support of river flow considerably
327 reduce hypoxia events in the upper TGR but not sufficiently to significantly influence
328 Bordeaux waters. The average time to renew half of the water volume in Bordeaux is 22 and
329 67 days in the cases of river flows increased by 10 and 30 m³.s⁻¹, respectively. By
330 comparison, at Portets, the renewal times are only 3 and 11 days, respectively. The option of
331 low-intensity support needs to be sufficiently long to maintain a good oxygen level all
332 summer in the upper TGR. An additional river flow > 10 m³.s⁻¹ for two months would be a
333 feasible solution to avoid hypoxia events upstream of Bordeaux, and freshwater storage
334 should be optimized to reach these objectives.

335 ● **Action 2.2: Intense and short-term support of low water discharge**

336 An intense and short-term support of freshwater allows low-oxygenated water to be pushed
337 downstream and induces a strong dilution of estuarine water with well-oxygenated fluvial
338 waters due to the large amount of water supply (100, 200 and 400 m³.s⁻¹) (Fig. 4 & Fig. 5).
339 Figure 4 highlights this phenomenon and the improvement of oxygen level along the TGR,
340 reaching saturation level around Portets and higher than 50% of saturation around Bordeaux
341 (Fig. 4). The model results show decreases in the number of hypoxia days in Bordeaux and
342 Portets (Tab. 2). The water half-renewal times are less than 1 day at Portets and decrease
343 from 6.6 to 1.6 days at Bordeaux with increasing discharge support from 100 to 400 m³.s⁻¹.

344 During short term support, the DO concentrations increase faster at Portets than at Bordeaux
345 (Fig. 4 & Fig. 5). During a semidiurnal tidal cycle, the DO rises by 9%sat at Bordeaux and by
346 56%sat at Portets with an input of $400 \text{ m}^3 \cdot \text{s}^{-1}$. The higher the river flow support, the faster the
347 waters of the TGR are reoxygenated.

348 The total oxygen consumption decreases with STS only at Portets (Tab. 3). At Bordeaux, the
349 decrease in nitrification is counterbalanced by an increase in river organic matter
350 mineralization (Tab. 3). The intense short-term support moves the TMZ downstream to
351 Portets, reducing organic matter mineralization in the area of Portets (Tab. 3 & Fig. 4).

352 Intense short-term support of freshwater ($400 \text{ m}^3 \cdot \text{s}^{-1}$) is not able to maintain a good oxygen
353 level all summer in Portets. After the massive water input, the DO level stayed above the
354 hypoxia threshold for 17 days but then decreased again (Fig. 5i). This type of management is
355 very powerful as an urgent remediation during severe hypoxia to quickly improve the
356 oxygenation levels of TGR waters, particularly in the upper section of the tidal river. For
357 example, during the heat wave of the end July 2006 (Fig. 2c), STS avoided hypoxia. In the
358 case of late hypoxia occurring at the end of the summer, STS may be efficient if the stored
359 water volume is sufficient. Other scenarios of short term supports were made during neap
360 tides (not shown) but were not very relevant because hypoxia events occur during spring tides
361 (Etcheber et al. 2011, Lanoux et al. 2013, Lajaunie-Salla et al. 2017).

362 **3.3 Synthesis of management actions efficiency**

363 These different simulated scenarios allow us to quantitatively estimate the efficiency of
364 different management options to reduce hypoxia in the TGR. The two management solutions
365 have locally different impacts on DO (Tab. 4): optimization of the urban wastewater network
366 reduces hypoxia in the lower TGR, whereas water replenishment during low water periods
367 enhances DO levels in the upper TGR. The improvement of the wastewater network by a

368 reduction in labile organic matter input reduces oxygen consumption in Bordeaux waters.
369 The alternative, consisting of discharging urban effluents downstream of the lower TGR, has
370 the advantage of diluting wastewater with the Gironde water and favoring their dispersion
371 downstream in the wider sections of the estuary. In addition, taking into account the
372 increasing gradient of temperature landward (Schmidt, personal data), wastewater effluents
373 would be discharged in cooler waters (approximately 1-2°C) than those at Bordeaux. The
374 water replenishment during low water periods is also a powerful solution, which favors the
375 dilution of upper TGR waters with well-oxygenated freshwater and limits the upstream TMZ
376 displacement. Combining these two management solutions can improve the oxygen level
377 both in the upper TGR and around Bordeaux. Figure 6 reveals a reduction in hypoxia event
378 frequency from 6 to 2 events in the TGR. Moreover, the extension of hypoxia is significantly
379 reduced between KP0 and KP20. The scenario combining a discharge support of $+10 \text{ m}^3 \cdot \text{s}^{-1}$, a
380 reduction of 50% of SO release and discharge of urban effluents at KP15 suggests an
381 improvement of water quality over the entire TGR (Fig. 6): only 2 days below the hypoxia
382 threshold (Tab. 2) and the oxygen consumption by urban organic matter degradation is totally
383 reduced (by 100%, Tab. 3).

384 Regarding the projected population growth of the city of Bordeaux (one million inhabitants
385 will be reached in 2030, <http://www.bordeaux-metropole.fr>) and the objectives of the
386 European Water Framework Directive to maintain good water quality, the reduction in the
387 impact of urban wastewater networks in urban areas appears to be a major challenge for the
388 coming years. The construction of an outfall under the river could be an efficient solution to
389 totally mitigate hypoxia at Bordeaux, but this solution is, for instance, an academic scenario
390 considering its cost and technical constraints. Moreover, the environmental impact on the
391 ecosystem of such construction can hinder this solution. The support of summer river flow
392 could certainly be optimized by reducing water use for agricultural purposes in the watershed

393 during summer and by improving the release of stored water as a function of meteorological
394 conditions. In the case of unfavorable conditions (heat wave, drought) in early summer, LTS
395 could be implemented. However, if these conditions occur late in summer, intense STS could
396 be considered. An alternative solution could be intermittent support, with water release of
397 $100 \text{ m}^3 \cdot \text{s}^{-1}$ during spring tide and all summer (July and August, i.e., 4 spring tides). By the
398 continuation of the improvement in the urban wastewater network and by the simultaneously
399 maintenance of good river flow levels, both management options may improve the oxygen
400 level on the TGR.

401 **4 Conclusion**

402 A 3D biogeochemical model for the Tidal Garonne River coupling hydrodynamics and
403 sediment transport was applied to assess the efficiency of different management solutions to
404 improve the DO level in waters. This study tested different scenarios of management
405 solutions that can be implemented by local water authorities. Whereas a reduction in SO
406 flows contributes only to improving DO levels locally and temporarily, the downstream
407 relocation of WWTP outfalls totally mitigates hypoxia in the TGR and seems to be the most
408 efficient management solution, despite being difficult to implement in practice. The support
409 of low river flow limits the propagation of the TMZ upstream of the TGR and dilutes the
410 estuarine waters with fresh oxygenated waters. A low-intensity support over the summer
411 maintains a good oxygen level of waters during the entire drought period and prevents
412 hypoxia in the upper TGR. In contrast, an intense support of low water flow for 3 days
413 improves the oxygen levels along the entire TGR quickly and considerably, but only for a
414 few weeks. The improvement in the urban effluent network and the support of low-river flow
415 periods from dams or irrigation reduction are complementary. They contribute to
416 reoxygenating the river water near the city of Bordeaux and upstream of the Tidal Garonne

417 River, respectively. The biogeochemical numerical model helps guide the management policy
418 of urban effluents and watersheds to limit and mitigate hypoxia events.

419 **References**

420 Abril, G., Etcheber, H., Le Hir, P., Bassoullet, P., Boutier, B. and Frankignoulle, M.:
421 Oxic/anoxic oscillations and organic carbon mineralization in an estuarine maximum
422 turbidity zone (The Gironde, France), *Limnol. Oceanogr.*, 44(5), 1304–1315, 1999.

423 Allen, G. P.: Étude des processus sédimentaires dans l'estuaire de la Gironde, Université de
424 Bordeaux., 1972.

425 Andréa, G., Ahyerre, M., Pérarnaud, M., Komorowski, F. and Schoorens, J.: Gestion
426 Dynamique des RUTP du bassin versant Louis Fargue à Bordeaux: mise en oeuvre et
427 premiers résultats opérationnels, NOVATECH 2013., 2013.

428 Andrews, M. J. and Rickard, D. G.: Rehabilitation of the inner Thames estuary, *Mar. Pollut.*
429 *Bull.*, 11(11), 327–332, doi:10.1016/0025-326X(80)90051-X, 1980.

430 Best, M. A., Wither, A. W. and Coates, S.: Dissolved oxygen as a physico-chemical
431 supporting element in the Water Framework Directive, *Mar. Policy*, 55, 53–64,
432 doi:10.1016/j.marpolbul.2006.08.037, 2007.

433 Billen, G., Garnier, J., Ficht, A. and Cun, C.: Modeling the Response of Water Quality in the
434 Seine River Estuary to Human Activity in its Watershed Over the Last 50 Years, *Estuaries*,
435 24(6B), 977–993, doi:10.2307/1353011, 2001.

436 Billen, G., Garnier, J. and Rousseau, V.: Nutrient fluxes and water quality in the drainage
437 network of the Scheldt basin over the last 50 years, *Hydrobiologia*, 540(1), 47–67,
438 doi:10.1007/s10750-004-7103-1, 2005.

439 Breitburg, D., Levin, L. A., Oschlies, A., Grégoire, M., Chavez, F. P., Conley, D. J., Garçon,
440 V., Gilbert, D., Gutiérrez, D., Isensee, K., Jacinto, G. S., Limburg, K. E., Montes, I., Naqvi,
441 S. W. A., Pitcher, G. C., Rabalais, N. N., Roman, M. R., Rose, K. A., Seibel, B. A.,
442 Telszewski, M., Yasuhara, M. and Zhang, J.: Declining oxygen in the global ocean and
443 coastal waters, *Science (80-.)*, 359(February), doi:10.1126/science.aam7240, 2018.

444 Conley, D. J., Carstensen, J., Vaquer-Sunyer, R. and Duarte, C. M.: Ecosystem thresholds

445 with hypoxia, *Hydrobiologia*, 629(1), 21–29, doi:10.1007/s10750-009-9764-2, 2009

446 Diaz, R. J.: Overview of hypoxia around the world., *J. Environ. Qual.*, 30(2), 275–281,
447 doi:10.2134/jeq2001.302275x, 2001.

448 EPA: Real time control of urban drainage networks, Washington, Office of Research and
449 Development., 2006.

450 Etcheber, H., Taillez, A., Abril, G., Garnier, J., Servais, P., Moatar, F. and Commarieu, M.-
451 V.: Particulate organic carbon in the estuarine turbidity maxima of the Gironde, Loire and
452 Seine estuaries: origin and lability, *Hydrobiologia*, 588(1), 245–259, doi:10.1007/s10750-
453 007-0667-9, 2007.

454 Etcheber, H., Schmidt, S., Sottolichio, A., Maneux, E., Chabaux, G., Escalier, J.-M.,
455 Wennekes, H., Derriennic, H., Schmeltz, M., Quémener, L., Repecaud, M., Woerther, P. and
456 Castaing, P.: Monitoring water quality in estuarine environments: lessons from the MAGEST
457 monitoring program in the Gironde fluvial-estuarine system, *Hydrol. Earth Syst. Sci.*, 15(3),
458 831–840, doi:10.5194/hess-15-831-2011, 2011.

459 Even, S., Mouchel, J. M., Servais, P., Flipo, N., Poulin, M., Blanc, S., Chabanel, M. and
460 Paffoni, C.: Modelling the impacts of Combined Sewer Overflows on the river Seine water
461 quality, *Sci. Total Environ.*, 375(1–3), 140–151, doi:10.1016/j.scitotenv.2006.12.007, 2007.

462 Gonwa, W.: Efficient Real Time Control and Operation of Interconnected Wastewater
463 Collection Systems, Marquette University., 1993.

464 Goosen, N. K., Kromkamp, J., Peene, J., Rijswijk, P. van and Breugel, P. van: Bacterial and
465 phytoplankton production in the maximum turbidity zone of three European estuaries: the
466 Elbe, Westerschelde and Gironde, *J. Mar. Syst.*, 22, 151–171, 1999.

467 Howarth, R. W., Swaney, D. P., Butler, T. J. and Marino, R.: Rapid Communication:
468 Climatic Control on Eutrophication of the Hudson River Estuary, *Ecosystems*, 3(2), 210–215,
469 doi:10.1007/s100210000020, 2000

470 Jalón-Rojas, I., Schmidt, S. and Sottolichio, A.: Turbidity in the fluvial Gironde Estuary
471 (southwest France) based on 10-year continuous monitoring: sensitivity to hydrological
472 conditions, *Hydrol. Earth Syst. Sci.*, 19(2001), 2805–2819, doi:10.5194/hess-19-2805-2015,
473 2015.

474 Kemp, W. M., Testa, J. M., Conley, D. J., Gilbert, D. and Hagy, J. D.: Coastal hypoxia
475 responses to remediation, *Biogeosciences Discuss.*, 6, 6889–6948, doi:10.5194/bgd-6-6889-

476 2009, 2009.

477 Lajaunie-salla, K., Sottolichio, A., Schmidt, S., Litrico, X., Binet, G. and Abril, G.: Future
478 intensification of summer hypoxia in the tidal Garonne River (SW France) simulated by a
479 coupled hydro sedimentary-biogeochemical model, *Environ. Sci. Pollut. Res.*,
480 doi:10.1007/s11356-018-3035-6, 2018.

481 Lajaunie-Salla, K., Wild-Allen, K., Sottolichio, A., Thouvenin, B., Litrico, X. and Abril, G.:
482 Impact of urban effluents on summer hypoxia in the highly turbid Gironde Estuary , applying
483 a 3D model coupling hydrodynamics , sediment transport and biogeochemical processes, *J.*
484 *Mar. Syst.*, 174, 89–105, doi:10.1016/j.jmarsys.2017.05.009, 2017.

485 Lanoux, A.: Caratérisation et rôle respectif des apports organiques amont et locaux sur
486 l'oxygénation des eaux de la Garonne estuarienne, Université de Bordeaux., 2013.

487 Lanoux, A., Etcheber, H., Schmidt, S., Sottolichio, A., Chabaud, G., Richard, M. and Abril,
488 G.: Factors contributing to hypoxia in a highly turbid, macrotidal estuary (the Gironde,
489 France), *Environ. Sci. Process. Impacts*, 15(3), 585–595, doi:10.1039/c2em30874f, 2013.

490 Lehmann, A., Hinrichsen, H. H., Getzlaff, K. and Myrberg, K.: Quantifying the heterogeneity
491 of hypoxic and anoxic areas in the Baltic Sea by a simplified coupled hydrodynamic-oxygen
492 consumption model approach, *J. Mar. Syst.*, 134, 20–28, doi:10.1016/j.jmarsys.2014.02.012,
493 2014.

494 Lemaire, E.: Biomarqueurs pigmentaires dans les estuaires macrotidaux européens, Ec. Dr.
495 des Sci. du vivant, géosciences Sci. l'environnement, Doctorat, 236, 2002.

496 Lemaire, E., Abril, G., De Wit, R. and Etcheber, H.: Effet de la turbidité sur la dégradation
497 des pigments phytoplanktoniques dans l'estuaire de la Gironde, *Geoscience*, 334(4), 251–258,
498 2002.

499 Maeda, M., Mizushima, H. and Ito, K.: Development of the Real-Time Control (RTC)
500 System for Tokyo Sewage System, *Glob. Solut. Urban Drain.*, 1–16, doi:doi:
501 10.1061/40644(2002)317, 2002.

502 Pleau, M., Colas, H., Lavallée, P., Pelletier, G. and Bonin, R.: Global optimal real-time
503 control of the Quebec urban drainage system, *Environ. Model. Softw.*, 20(4), 401–413,
504 doi:http://dx.doi.org/10.1016/j.envsoft.2004.02.009, 2005.

505 Rabalais, N. N., Levin, L. A., Turner, R. E., Gilbert, D. and Zhang, J.: Dynamics and
506 distribution of natural and human-caused coastal hypoxia, *Biogeosciences*, 7, 585–619,

507 doi:10.5194/bgd-6-9359-2009, 2010.

508 Robitaille, L., Komorowski, F., Fortier, V., Chadoutaud, E. and Rousseau, J.-P.: Gestion
509 Dynamique des RUTP du bassin versant Louis Fargue à Bordeaux: en route vers une seconde
510 phase de déploiement, NOVATECH 2016., 2016.

511 Schmidt, S., Bernard, C., Escalier, J.-M., Etcheber, H. and Lamouroux, M.: Assessing and
512 managing the risks of hypoxia in transitional waters: a case study in the tidal Garonne River
513 (South-West France), *Environ. Sci. Pollut. Res.*, doi:10.1007/s11356-016-7654-5, 2017.

514 Skerratt, J., Wild-Allen, K., Rizwi, F., Whitehead, J. and Coughanowr, C.: Use of a high
515 resolution 3D fully coupled hydrodynamic, sediment and biogeochemical model to
516 understand estuarine nutrient dynamics under various water quality scenarios, *Ocean Coast.
517 Manag.*, 83, 52–66, doi:10.1016/j.ocecoaman.2013.05.005, 2013.

518 Soetaert, K., Middelburg, J. J., Heip, C., Meire, P., Van, S., Maris, T. and Damme, S. Van:
519 Long-term change in dissolved inorganic nutrients in the heterotrophic Scheldt estuary
520 (Belgium, The Netherlands), *Limnol. Oceanogr.*, 51(1), 409–423, 2006.

521 Sottolichio, A., Hir, P. Le and Castaing, P.: Modeling mechanisms for the stability of the
522 turbidity maximum in the Gironde estuary, France, *Proc. Mar. Sci.*, 3(Coastal and Estuarine
523 Fine Sediment Processes), 373–386 [online] Available from: 10.1016/S1568-2692(00)80132-
524 1, 2000.

525 Talke, S. A., Swart, H. E. and de Jonge, V. N.: An Idealized Model and Systematic Process
526 Study of Oxygen Depletion in Highly Turbid Estuaries, *Estuaries and Coasts*, 32(4), 602–
527 620, doi:10.1007/s12237-009-9171-y, 2009.

528 Tinsley, D.: The Thames estuary: a history of the impact of humans on the environment and a
529 description of the current approach to environmental management, in *A Rehabilitated
530 Estuarine Ecosystem SE - 2*, edited by M. Attrill, pp. 5–26, Springer US., 1998.

531 Vanderborght, J.-P., Folmer, I. M., Aguilera, D. R., Uhrenholdt, T. and Regnier, P.: Reactive-
532 transport modelling of C, N, and O₂ in a river–estuarine–coastal zone system: Application to
533 the Scheldt estuary, *Mar. Chem.*, 106(1–2), 92–110, doi:10.1016/j.marchem.2006.06.006,
534 2007.

535 Vaquer-Sunyer, R. and Duarte, C. M.: Thresholds of hypoxia for marine biodiversity., *Proc.
536 Natl. Acad. Sci. U. S. A.*, 105(40), 15452–15457, doi:10.1073/pnas.0803833105, 2008.

537 Veyssy, E.: Transferts de matière organiques des bassins versants aux estuaires de la Gironde

- 538 et de l'Adour (Sud-Ouest de la France), Université de Bordeaux., 1998.
- 539 Willmott, C. J.: Some comments on the evaluation of model performance, *Bull. Am.*
540 *Meteorol. Soc.*, 63(11), 1982.
- 541 Zhang, P., Pang, Y., Pan, H., Shi, C., Huang, Y. and Wang, J.: Factors Contributing to
542 Hypoxia in the Minjiang River Estuary, Southeast China, *Int. J. Environ. Res. Public Health*,
543 12(8), 9357–9374, doi:10.3390/ijerph120809357, 2015.

Table 1: Forcing of the different scenarios simulated with the model. (Q_{ref}: river flow of 2006; Q_{G/D}: river flow of Garonne and Dordogne
Q_{ww}: wastewater flow; SO: sewage overflow)

Scenarios	River flow	Wastewater flow
Reference	Q _{ref} = Q _{G/D} 2006 + Q _G = 40 m ³ .s ⁻¹ from 15/07 to 30/09	Q _{ww} 2006
WW of 2014 (WWTP rehabilitated)	Q _{ref}	Q _{ww} 2014
SO -10%	Q _{ref}	Q _{ww} 2014 – 10% SO
SO -20%	Q _{ref}	Q _{ww} 2014 – 20% SO
SO -30%	Q _{ref}	Q _{ww} 2014 – 30% SO
SO -40%	Q _{ref}	Q _{ww} 2014 – 40% SO
SO -50%	Q _{ref}	Q _{ww} 2014 – 50% SO
Release moved to KP15	Q _{ref}	Q _{ww} 2014 at Parempuyre
Release moved to KP25	Q _{ref}	Q _{ww} 2014 at Bec d'Ambès
Support of low river flow		
+10 m ³ .s ⁻¹	Q _{ref} ; Q _G < 50 m ³ .s ⁻¹ : Q _G +10 m ³ .s ⁻¹ over 67 days	Q _{ww} 2006
+20 m ³ .s ⁻¹	Q _{ref} ; Q _G < 50 m ³ .s ⁻¹ : Q _G +20 m ³ .s ⁻¹ over 33 days	Q _{ww} 2006
+30 m ³ .s ⁻¹	Q _{ref} ; Q _G < 50 m ³ .s ⁻¹ : Q _G +30 m ³ .s ⁻¹ over 22 days	Q _{ww} 2006
+100 m ³ .s ⁻¹	Q _{ref} ; Q _G +100 m ³ .s ⁻¹ over 3 days	Q _{ww} 2006
+200 m ³ .s ⁻¹	Q _{ref} ; Q _G +200 m ³ .s ⁻¹ over 3 days	Q _{ww} 2006
+400 m ³ .s ⁻¹	Q _{ref} ; Q _G +400 m ³ .s ⁻¹ over 3 days	Q _{ww} 2006
Combined options		
-50% +10 m ³ .s ⁻¹	Q _{ref} ; Q _G < 50 m ³ .s ⁻¹ : Q _G +10 m ³ .s ⁻¹ over 67 days	Q _{ww} 2014 – 50% SO
-50% + KP15 +10 m ³ .s ⁻¹	Q _{ref} ; Q _G < 50 m ³ .s ⁻¹ : Q _G +10 m ³ .s ⁻¹ over 67 days	Q _{ww} 2014 – 50% SO at Parempuyre

Table 2: Minimum simulated DO (in % of saturation and in mg.L⁻¹), the corresponding temperature and the number of hypoxia days in Bordeaux and Portets for each scenario. (WW: wastewater)

Scenarios	Bordeaux				Portets			
	T (°C)	DO _{min} (%)	DO _{min} (mg.L ⁻¹)	Days of hypoxia	T (°C)	DO _{min} (%)	DO _{min} (mg.L ⁻¹)	Days of hypoxia
Reference	27.4	13.5	1.0	13	24.4	8	0.7	52
WW of 2014	27.3	16.4	1.3	17	24.4	8.5	0.7	39
-10%	27.3	16.5	1.3	16	24.4	8.6	0.7	38
-20%	27.3	16.5	1.3	16	24.4	8.6	0.7	38
-30%	27.3	16.5	1.3	16	24.4	8.6	0.7	38
-40%	27.3	16.6	1.3	14	24.4	8.6	0.7	37
-50%	27.3	16.6	1.3	13	24.4	8.6	0.7	37
Release moved to KP15	26.9	23.5	1.8	4	24.4	9.7	0.8	33
Release moved to KP25	26.9	26.9	2.1	0	24.4	10	0.8	32
+10 m³.s⁻¹	26.9	13.8	1.1	13	24.4	12.7	1.0	29
+20 m³.s⁻¹	26.8	15.3	1.2	11	24.4	8.3	0.7	39
+30 m³.s⁻¹	26.8	17	1.3	11	24.4	8.3	0.7	40
+100 m³.s⁻¹	26.9	12.3	1.0	12	24.4	8.4	0.7	48
+200 m³.s⁻¹	27.4	14.5	1.1	10	24.4	8.3	0.7	44
+400 m³.s⁻¹	27.7	16.7	1.3	5	24.4	9.1	0.7	37
-50% +10 m³.s⁻¹	26.9	14.5	2	14	24.4	12.5	1	26
-50% + KP15 +10 m³.s⁻¹	26.9	24.9	2	2	26.9	14.1	1.1	22

Table 3: Differences (in %) of biogeochemical process rates impacting DO between the scenarios and reference simulations during summer in Bordeaux and Portets (WW: wastewater; WS: watershed)

Scenarios	Bordeaux				Portets				
	total	nitrification	mineralization TOC _{WS}	mineralization TOC _{WW}	total	nitrification	mineralization TOC _{WS}	mineralization TOC _{WW}	
Management of wastewater discharges	WW of 2014	-1%	+11%	0	-13%	-1%	+4%	0	-16%
	-10%	-2%	+12%	0	-16%	-1%	+4%	0	-16%
	-20%	-3%	+13%	0	-20%	-1%	+6%	0	-23%
	-30%	-4%	+13%	+1%	-24%	-1%	+6%	+1%	-26%
	-40%	-5%	+14%	+1%	-28%	-1%	+6%	+1%	-29%
	-50%	-6%	+14%	+1%	-31%	-1%	+6%	+1%	-33%
	Release moved to KP15	-33%	-47%	+2%	-65%	-8%	-17%	-3%	-76%
Release moved to KP25	-47%	-66%	+3%	-95%	-8%	-20%	-2%	-94%	
Support of low river flow	+10 m³.s⁻¹	1%	-6%	+6%	0	-2%	-20%	-1%	-4%
	+20 m³.s⁻¹	0%	-6%	+5%	0	+1%	-14%	+2%	-2%
	+30 m³.s⁻¹	0%	-6%	+4%	0	-2%	-13%	-2%	-3%
	+100 m³.s⁻¹	0%	-2%	+2%	0	-5%	-4%	-5%	-3%
	+200 m³.s⁻¹	0%	-5%	+4%	-1%	-9%	-10%	-9%	-6%
	+400 m³.s⁻¹	0%	-11%	+9%	-1%	-13%	-14%	-13%	-8%
Combined options	-50% +10 m³.s⁻¹	-2%	+10%	+11%	-30%	+2%	-9%	+5%	-36%
	-50% + KP15 +10 m³.s⁻¹	-46%	-70%	+14%	-100%	-2%	-31%	+6%	-100%

Table 4: Summary of management solution efficiency and recommendations (WW: wastewater; WS: watershed)

Management solutions	Efficiency to mitigate hypoxia		Recommendation
	Lower TGR	Upper TGR	
SO reduction: -50%	++	+	Implementation of SOs
WW discharges at KP15	+++	+	WWTP outfall relocation
WW discharges at KP25	+++	+	WWTP outfall relocation
LTS	+	++	Preventive measures against hypoxia: reduction in freshwater subtraction during summer
STS	++	+++	Curative measures at spring tide during severe drought
LTS - SO reduction -50%	+	++	Reduction in freshwater subtraction during summer and implementation of SOs
LTS - SO reduction: -50% - WW discharges at KP15	+++	++	Reduction in freshwater subtraction during summer, implementation of SOs and WWTP outfall relocation

Figure 1: The Gironde-Garonne-Dordogne estuary, including the Tidal Garonne River in southwestern France (Inset B). “KP” denotes the distances in km from the city center of Bordeaux; the control grid cell at Bordeaux is at KP4 and Portets is at KP20. Inset A precises position of the sewage overflows (purple triangles) and of the two wastewater treatment plants (green squares). The area in orange represents the area of Bordeaux for which the biogeochemical fluxes were calculated.

Figure 1: Time series of Garonne River (black) and Dordogne River (gray) flow of the reference simulation (a & d, $\text{m}^3 \cdot \text{s}^{-1}$), wastewater discharges (WWTP±SO) for 2006 (green) and 2014 (blue) (b & e, $\text{m}^3 \cdot \text{s}^{-1}$). Comparison of simulated DO_{min} evolution (over tidal cycle in %sat) in Bordeaux with urban effluents of 2014 (blue) and with a 50% reduction in SOs (red) (c). The contribution on DO consumption (%) of degradation of watershed organic matter (brown), WWTP (red), SO (green) and nitrification (blue) in Bordeaux (f). For nitrification processes, ammonium comes from watershed and wastewater.

Figure 3: Snapshot of the vertical transect of simulated DO saturation along the Garonne tidal river for the scenarios with urban effluent discharge points in Bordeaux (a), KP15 (b) and KP25 (c). P1, P2 and P3 indicate the locations of Bec d’Ambès, Bordeaux and Portets, respectively. The contribution on DO consumption (%) of degradation of watershed (brown), WWTP (red), SO (green) and nitrification (blue) processes at Bordeaux (d). For nitrification processes, ammonium comes from watershed and wastewater.

Figure 4: Snapshot of the vertical transect of simulated DO concentration in %sat along the Garonne tidal river for the scenarios of reference (a), short river flow increases by $100 \text{ m}^3 \cdot \text{s}^{-1}$ (b), $200 \text{ m}^3 \cdot \text{s}^{-1}$ (c) and $400 \text{ m}^3 \cdot \text{s}^{-1}$ (d). P1, P2 and P3 indicate the locations of Bec d’Ambès, Bordeaux and Portets, respectively.

Figure 5: Time series of river flow (top, $\text{m}^3 \cdot \text{s}^{-1}$), DO_{min} (over tidal cycle) at Bordeaux (middle, %sat) and DO at Portets (bottom, %sat) for the scenarios of short river flow increases by $100 \text{ m}^3 \cdot \text{s}^{-1}$ (a, d and g), $200 \text{ m}^3 \cdot \text{s}^{-1}$ (b, e and h) and $400 \text{ m}^3 \cdot \text{s}^{-1}$ (c, f and i). The blue line represents the simulation of reference.

Figure 6: Spatiotemporal evolution of daily average surface DO (saturation in %) along the Tidal Garonne River section for the scenarios of reference (a) combining $+10 \text{ m} \cdot \text{s}^{-1}$ of river flow and reduction of 50% of SO releases (b), and $+10 \text{ m}^3 \cdot \text{s}^{-1}$ of river flow, a reduction of 50% of SO releases and urban effluent discharges at KP15 (c). The y-axis represents the kilometric points, and the white lines represent Bordeaux and Portets.

Figure 1

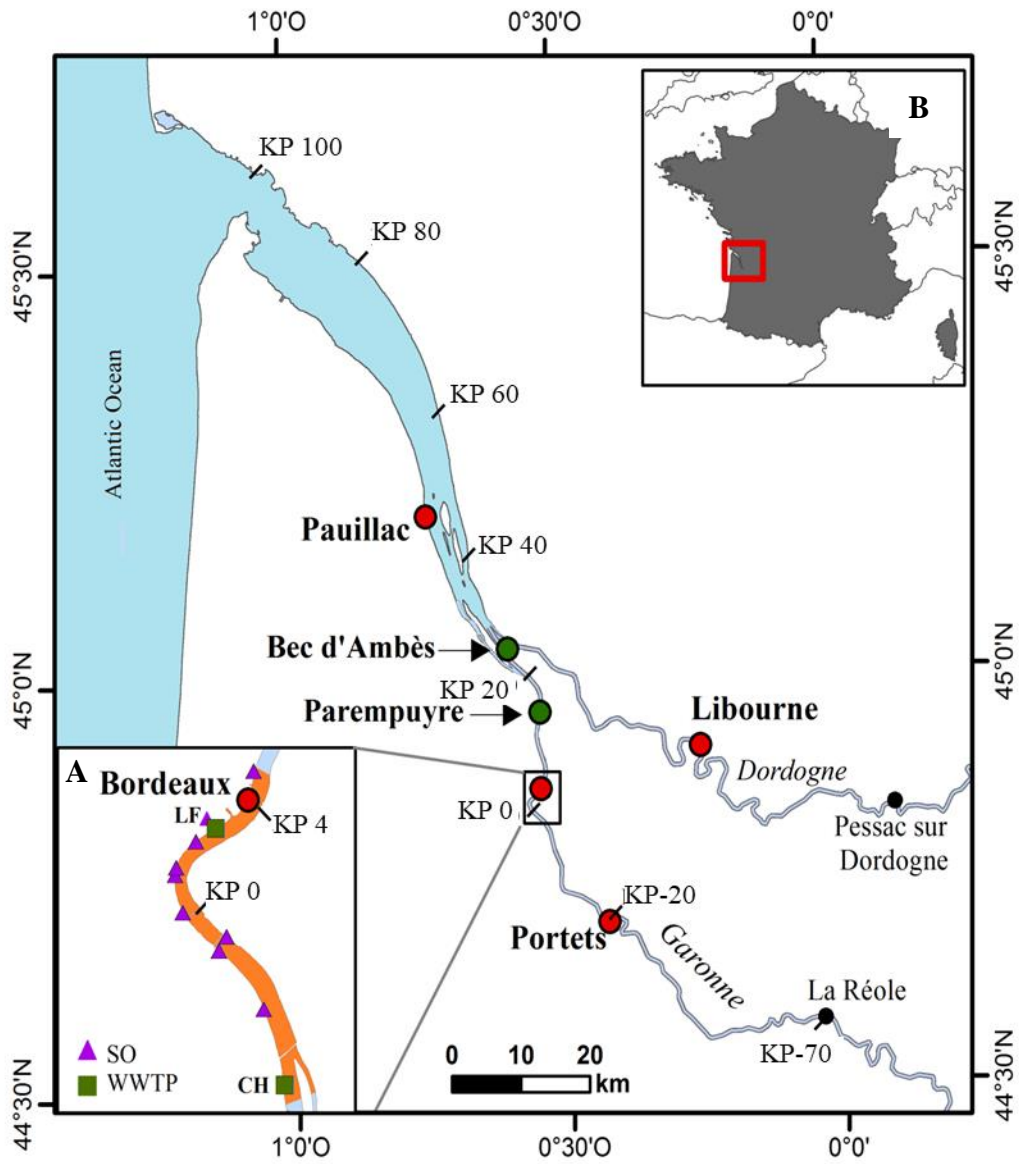


Figure 2

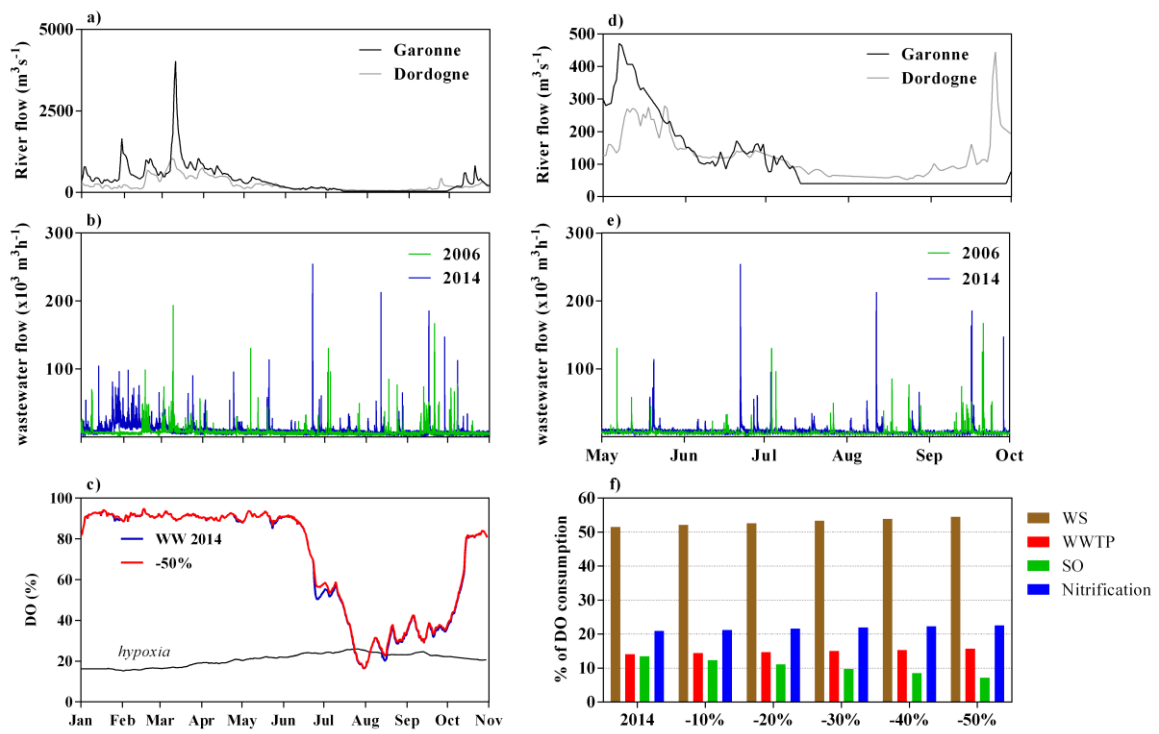


Figure 3

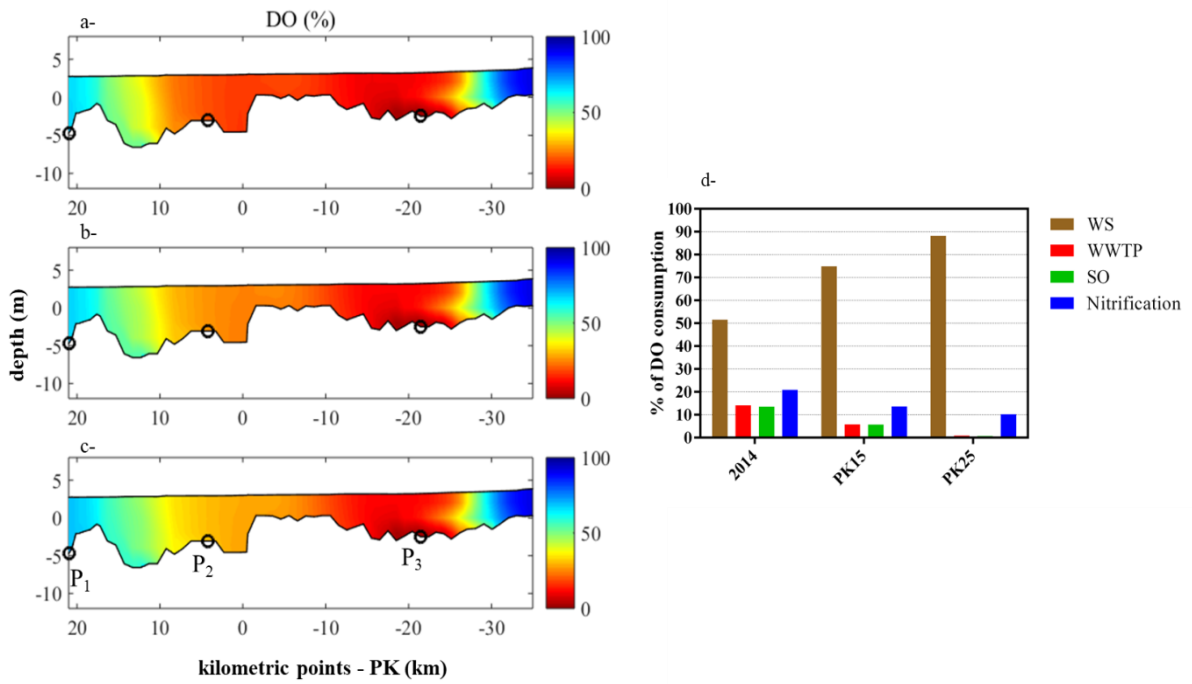


Figure 4

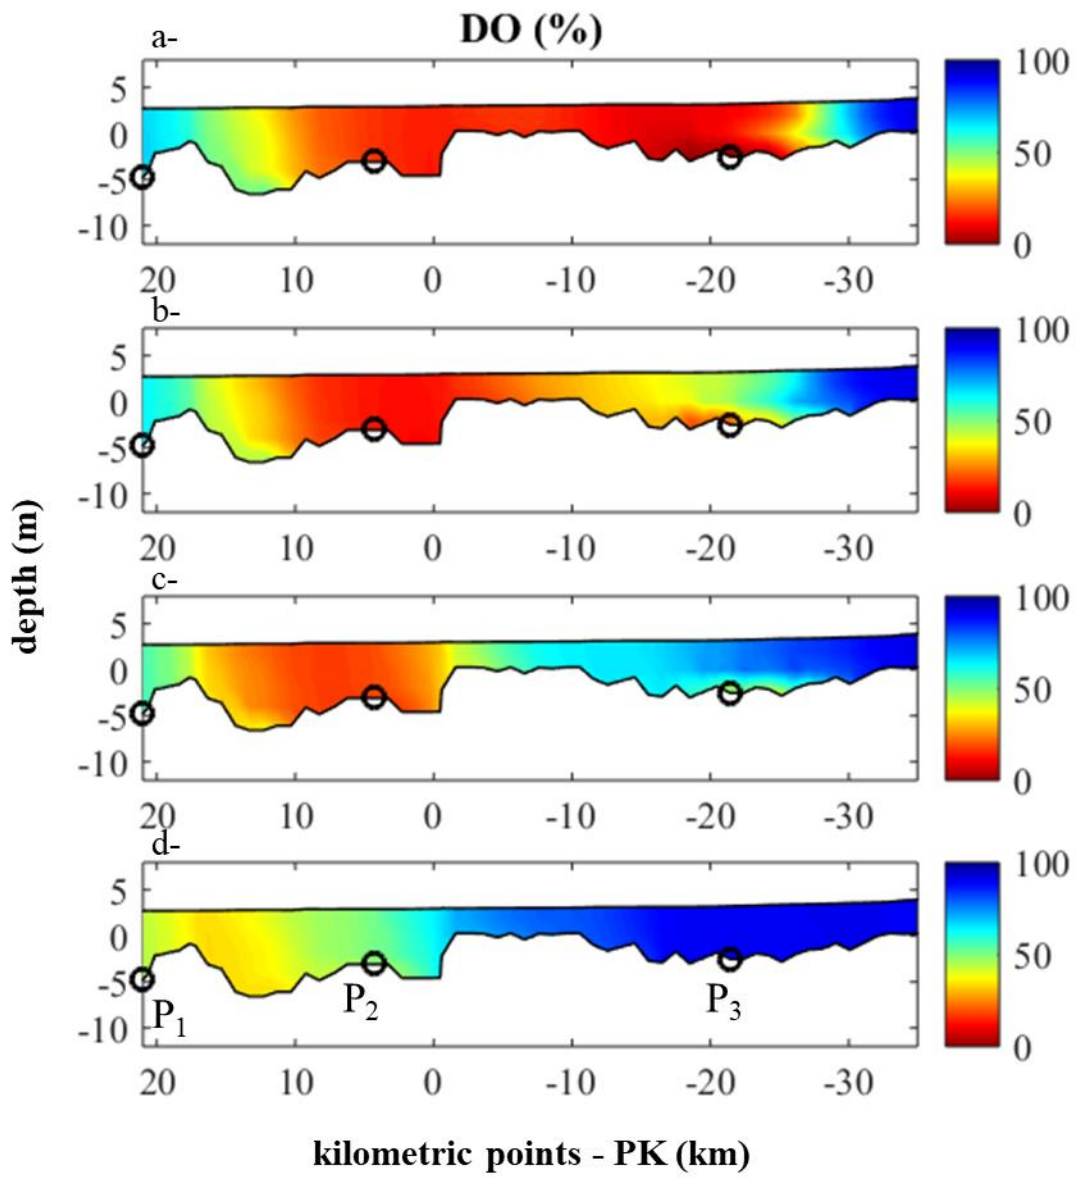


Figure 5

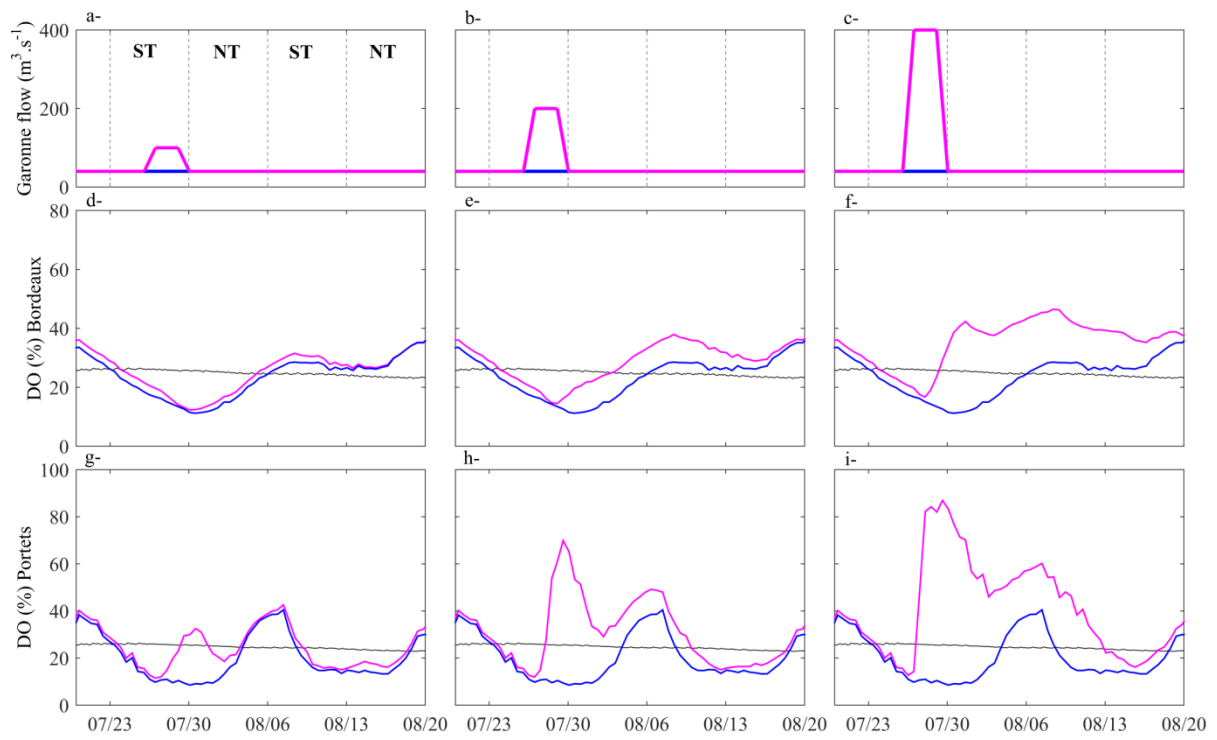


Figure 6

