

1 **Comparing the efficiency of hypoxia mitigation strategies in an urban, turbid tidal river**  
2 **via a coupled hydro sedimentary-biogeochemical model**

3 Katixa Lajaunie-Salla<sup>1,2,\*</sup>, Aldo Sottolichio<sup>1</sup>, Sabine Schmidt<sup>1</sup>, Xavier Litrico<sup>2</sup>, Guillaume  
4 Binet<sup>2</sup>, Gwenaël Abril<sup>1,3,4</sup>.

5 <sup>1</sup> Laboratoire EPOC, Environnements et Paléoenvironnements Océaniques et Continentaux  
6 UMR 5805, CNRS – Université de Bordeaux – Pessac, France.

7 <sup>2</sup> LyRE, SUEZ Research Center, Bordeaux, France.

8 <sup>3</sup> Programa de Geoquímica, Universidade Federal Fluminense, Niterói, RJ, Brazil.

9 <sup>4</sup> Biologie des Organismes et Ecosystèmes Aquatiques (BOREA), UMR 7208, Muséum  
10 National d'Histoire Naturelle, CNRS, Sorbonne Université, Université de Caen Normandie,  
11 Université des Antilles, IRD, Paris, France.

12 \* Now at Aix Marseille Université, CNRS/INSU, Université de Toulon, IRD, Mediterranean  
13 Institute of Oceanography (MIO) UMR 7294

14 **Corresponding Author:** katixa.lajaunie-salla@mio.osupytheas.fr

15 **Acknowledgments**

16 This study was funded by the Aquitaine Region (DIAGIR project) and LyRE (SUEZ research  
17 center), who cosponsored a Ph.D. grant to K. Lajaunie-Salla, and was supported by the  
18 Cluster of Excellence COTE at the Université de Bordeaux (ANR-10-LABX-45). The  
19 authors are grateful to the MAGEST network for the availability of data and to the SGAC and  
20 Bordeaux Metropole for providing urban effluent data and for fruitful discussions. This work  
21 was supported by the Avakas cluster resources of the Mésocentre de Calcul Intensif Aquitain  
22 (MCIA) of the University of Bordeaux.

23 **Highlights**

- 24 - A 3D model shows different efficiencies of management actions to limit hypoxia.
- 25 - Downstream relocation of wastewater discharge totally mitigates hypoxia
- 26 - Sewage overflow reduction improves DO levels, but only locally.
- 27 - Water replenishment improves DO in the upper estuary.

28 **Abbreviations**

- 29 DO: dissolved oxygen
- 30 DOC: dissolved organic carbon
- 31 LTS: long-term support
- 32 POC: particulate organic carbon
- 33 SO: sewage overflow
- 34 STS: short-term support
- 35 TGR: Tidal Garonne River
- 36 TMZ: turbidity maximum zone
- 37 WWTP: wastewater treatment plant

38 **Abstract**

39 Coastal water hypoxia is increasing globally due to global warming and urbanization, and the  
40 need to define management solutions to improve the water quality of coastal ecosystems has  
41 become important. The lower Tidal Garonne River (TGR, southwestern France),  
42 characterized by the seasonal presence of a turbidity maximum zone (TMZ) and urban water  
43 discharge, is subject to episodic hypoxia events during low river flow periods in the summer.  
44 Future climatic conditions (higher temperature, summer droughts) and increasing  
45 urbanization could enhance hypoxia risks near the city of Bordeaux in the coming decades. A  
46 3D model of dissolved oxygen (DO) that couples hydrodynamics, sediment transport and  
47 biogeochemical processes was used to assess the efficiency of different management  
48 solutions for oxygenation of the TGR during summer low-discharge periods. We ran different  
49 scenarios of reductions in urban sewage overflows, displacement of urban discharges  
50 downstream from Bordeaux, and/or temporary river flow support during the summer period.  
51 The model shows that each option mitigates hypoxia but with variable efficiency over time  
52 and space. Sewage overflow reduction improves DO levels only locally near the city of  
53 Bordeaux. Downstream relocation of wastewater discharges allows for better oxygenation  
54 levels in the lower TGR. The support of low river flow limits the upstream TMZ propagation  
55 and dilutes the TGR waters with well-oxygenated river water. Scenarios combining  
56 wastewater network management and low water replenishment indicate an improvement in  
57 water quality over the entire TGR. These modeling outcomes constitute important tools for  
58 local water authorities to develop the most appropriate strategies to limit hypoxia in the TGR

59 **Keywords:** hypoxia, management, modeling, Garonne Tidal River, wastewater, water quality

60

## 61 **1 Introduction**

62 Hypoxia refers to low dissolved oxygen (DO) conditions when concentrations fall below 2  
63  $\text{mg.L}^{-1}$  (or  $< 30\%$  of saturation. This is a major environmental issue, as it stresses marine  
64 organisms and disturbs the function of marine ecosystem (Rabalais et al., 2010; Vaquer-  
65 Sunyer and Duarte, 2008). Coastal hypoxia is a widespread phenomenon that has increased  
66 since the middle of the 20th century due to the combined effects of climate change and local  
67 anthropic activities (land and water uses) (Breitburg et al., 2018). Good oxygenation of  
68 estuarine waters is crucial in order to maintain ecological and economical services within the  
69 whole watershed because of the strategic position of estuaries for migratory fishes (Rabalais  
70 et al., 2010). Estuarine deoxygenation is the result of a complex interaction of environmental  
71 factors. First, an increase in temperature decreases the oxygen solubility of the water, favors  
72 thermal stratification of the water column, limiting reaeration (Conley et al., 2009; Lehmann  
73 et al., 2014), and accelerates DO-consuming biogeochemical processes (Goosen et al., 1999).  
74 Second, a decrease in river flow modifies estuarine residual circulation, sediment transport,  
75 and the transit and mineralization of terrestrial organic material in estuaries (Abril et al.,  
76 1999; Howarth et al., 2000). In addition, an increase in population and human activities  
77 enriches coastal waters with nutrients and labile organic matter from urban effluents, possibly  
78 leading to eutrophication (Billen et al., 2001). Finally, in macrotidal estuaries, DO  
79 consumption by heterotrophic organisms is exacerbated by the presence of a turbidity  
80 maximum zone (TMZ), which favors the growth of particle-attached bacteria and, in contrast,  
81 limits phytoplankton primary production (Diaz, 2001; Goosen et al., 1999; Talke et al.,  
82 2009). In view of the ongoing global changes, it is now essential to find management  
83 strategies for hypoxia mitigation. To recover or maintain a good ecological status for

84 transitional waters is one of the objectives of the European Water Framework Directive (Best  
85 et al., 2007).

86 In an urban tidal river, the first obvious action to mitigate hypoxia is to improve the urban  
87 wastewater network and treatment and to reduce the input of organic matter and nutrients to  
88 the estuary. In several European estuaries suffering from urban inputs, water quality  
89 improvement was achieved by the installation and renovation of a wastewater treatment plant  
90 (WWTP) in the Thames Estuary in the 1980s (Andrews and Rickard, 1980; Tinsley, 1998)  
91 and the construction of a WWTP in the Seine River in the 1990s (Billen et al., 2001). In the  
92 Scheldt Estuary, sewage network improvement reduced N, P and Si loads by 5.4%, 1.3% and  
93 1%, respectively, and two WWTPs have been implemented for the city of Brussels since  
94 2000 (Billen et al., 2005; Soetaert et al., 2006; Vanderborght et al., 2007). Sewage network  
95 systems in Europe usually combine both urban sewage and stormwater collection. During  
96 heavy rain and storm events, the capacity of the urban wastewater network is generally  
97 insufficient to treat all effluents, inducing deoxygenation events due to untreated wastewater  
98 release from sewage overflows (SO) (Even et al., 2007). In the 2000s, the Environmental  
99 Protection Agency promoted a strategy to monitor urban drainage networks in real time to  
100 regulate flow and avoid the overflow of untreated wastewater (EPA, 2006; Gonwa, 1993).  
101 This control was developed in several cities in the USA (Gonwa, 1993), Québec (Pleau et al.,  
102 2005) and Tokyo (Maeda et al., 2002). An additional management solution was tested in the  
103 Thames Estuary: the construction of a 24-km-long sewer network under the riverbed that  
104 allows the transit of urban wastewater to the WWTP located downstream (Thames Tideway  
105 Tunnel, [www.tideway.london](http://www.tideway.london)). This type of solution is also ongoing in Stockholm  
106 ([www.stockholmvatten.se](http://www.stockholmvatten.se)) and in the Helsinki ([www.hsy.fi](http://www.hsy.fi)) metropolis.

107 In macrotidal estuaries, the lowest DO concentrations occur during the lowest river flow  
108 (Lanoux et al., 2013; Talke et al., 2009; Zhang et al., 2015). A second possible action could

109 therefore be to modify river discharges and to reduce water flushing time to promote the  
110 dilution by well-oxygenated waters and/or the seaward dispersion of oxygen-consuming  
111 matter (Lajaunie-salla et al., 2018). This implies providing water replenishment above critical  
112 levels by limiting water abstraction for irrigation in the watershed or by modulating water  
113 release from dams when hypoxia is present (Schmidt et al., 2017).

114 To optimize preventive management strategy, the efficiency of the potential solutions needs  
115 to be evaluated. Therefore, numerical modeling is an efficient tool to quantitatively assess  
116 hypoxia mitigation by management scenarios. Moreover, models provide guidelines for  
117 setting objectives to maintain good water quality in coastal environments (Kemp et al., 2009;  
118 Skerratt et al., 2013).

119 A recently developed 3D coupled hydro sedimentary-biogeochemical DO model simulated  
120 possible scenarios for the coming decades, suggesting a future spatial and temporal extension  
121 of summer hypoxia in the Tidal Garonne River (TGR, S-W France), an urban, turbid tidal  
122 river (Lajaunie-salla et al., 2018). Until now in the TGR, only a few hypoxia events have  
123 been reported, for example, during summer 2006 (Lanoux et al., 2013). Previous work  
124 highlighted that these low DO levels are due to the combination of the presence of the TMZ,  
125 high water temperature, drought periods and urban effluent inputs (Lajaunie-Salla et al.,  
126 2017; Lanoux et al., 2013; Schmidt et al., 2017). Such a perspective of permanent summer  
127 hypoxia in the lower TGR implies the need to develop management strategies to protect the  
128 ecosystem. The aim of the present work was to assess the efficiency of possible management  
129 solutions to limit future hypoxia risk in the Tidal Garonne River. For this purpose, we applied  
130 the aforementioned DO model in order to simulate scenarios based on two main management  
131 actions: optimization of the urban wastewater network and freshwater replenishment during  
132 low water periods.

## 133 2 Materials and Methods

### 134 2.1 Study Area

135 The Garonne River, located in southwestern France, is the main tributary of the Gironde  
136 Estuary, which is formed by its confluence with the Dordogne River and flows toward the  
137 Atlantic Ocean (Fig. 1). This macrotidal fluvio-estuarine system is characterized by the  
138 presence of a TMZ, where suspended sediment concentrations in surface waters are  $> 1 \text{ g.L}^{-1}$   
139 (Allen, 1972). The position of the TMZ varies seasonally: during low river flow, it is present  
140 in the Tidal Garonne River from KP25 to KP70, i.e., upstream of Pauillac (Fig. 1). The rest of  
141 the year, the TMZ is located near Pauillac (Fig. 1), in the Gironde Estuary (Jalón-Rojas et al.,  
142 2015).

143 The annual mean Garonne River flow is  $680 \text{ m}^3.\text{s}^{-1}$  for the period 1913-2018, with the highest  
144 flows in winter (mean of  $720 \text{ m}^3.\text{s}^{-1}$ ) and the lowest flows in summer and early autumn (mean  
145 of  $190 \text{ m}^3.\text{s}^{-1}$ ) (<http://www.hydro.eaufrance.fr/indexd.php>). The threshold of  $110 \text{ m}^3.\text{s}^{-1}$  is the  
146 present-day low water target flow for the lower Garonne, below which there is water  
147 replenishment for the period from June 1 to October 31. Over the last decades, a decrease of  
148 the Garonne River flow was observed due to changes in precipitation, but also by the water  
149 abstraction for hydroelectric dam and irrigation (Schmidt et al, 2017). This is associated with  
150 an increase of the number of days the river flow is below  $110 \text{ m}^3.\text{s}^{-1}$ : on average 26.9  
151 days/year for the period 2008-2018 compared to 1.4 days/year for the period 1975-1985  
152 (<http://www.hydro.eaufrance.fr/indexd.php>). Such a decrease in the Garonne flow limits the  
153 reoxygenation of the TGR waters with well-oxygenated freshwater and favors upstream  
154 advection and the concentration of the TMZ (Lajaunie-salla et al., 2018). Six water reservoirs  
155 that can store a maximum water volume of  $58 \text{ hm}^3$  are located in the upper Garonne River,  
156 corresponding to an equivalent river flow of  $95 \text{ m}^3.\text{s}^{-1}$  during a single week. This water

157 storage is used to maintain the Garonne discharge above the critical threshold of  $110 \text{ m}^3 \cdot \text{s}^{-1}$   
158 for the ecosystem during the summer.

159 The large city of Bordeaux is located at the border of the Tidal Garonne River, 25 km  
160 upstream of the confluence (Bec d'Ambès, Fig. 1). The sewage system of the metropolis  
161 drains an urban area of  $578 \text{ km}^2$  and serves a population estimated at 749 595 inhabitants in  
162 2015. Part of the sewage system is composed of a combined sewer network: two wastewater  
163 treatment plants, Clos de Hilde and Louis Fargue, and nine sewage overflows. The release of  
164 treated and untreated wastewater represents up to 1.5% of the fluvial Garonne discharge  
165 (Lanoux et al., 2013).

166 The Bordeaux metropolis has already taken several actions to improve the urban wastewater  
167 network. In 2011, the WWTP Louis Fargue was resized and upgraded to the treatment  
168 effectiveness of the WWTP Clos de Hilde. In addition, since 2013, real-time control of the  
169 urban drainage network was developed to reduce urban effluents during rainy weather  
170 (Andréa et al., 2013). This system decreased the volume of untreated wastewater released by  
171 30% in 2013 and by 40% in 2014 and 2015 (Robitaille et al., 2016), improving the overall net  
172 purification efficiency to  $> 95\%$  for particulate organic carbon (POC),  $>75\%$  for dissolved  
173 organic carbon (DOC) and  $>30\%$  for ammonia (Lanoux, 2013).

## 174 **2.2 Model description**

175 The SiAM-3D model, which couples hydrodynamics, suspended sediment transport and  
176 biogeochemical processes (Lajaunie-Salla et al., 2017), was used to test the efficiency of  
177 possible management solutions. The model was implemented for the Gironde Estuary from  
178 the 200 m isobath on the continental shelf to the upstream limits of the tidal propagation on  
179 both rivers (Sottolichio et al., 2000). The mesh of the model is an irregular grid, with finer  
180 resolution in the estuary (200 m x 1 km) and coarser resolution on the shelf. The tidal rivers



181 are represented by one cell in width. The vertical grid uses real depth coordinates and is split  
182 into 12 layers. The model uses a finite difference numerical scheme with a transport time step  
183 of 35 s.

184 The transport model solves the advection/dispersion equations for dissolved and particulate  
185 variables, i.e., suspended sediment, salinity and biogeochemical variables. The  
186 biogeochemical model extensively resolves the processes that produce and consume oxygen  
187 in the water column, taking into account different types of dissolved and particulate organic  
188 matter: degradation of organic matter (mineralization of organic carbon and ammonification  
189 using the C/N ratio); nitrification; photosynthesis, respiration and mortality of phytoplankton;  
190 and DO gas exchange with the atmosphere. The model includes 11 state variables: dissolved  
191 oxygen (DO), ammonia ( $\text{NH}_4^+$ , input from rivers and mainly from urban effluents), nitrate  
192 ( $\text{NO}_3^-$ ), POC and DOC from the watershed (POC from litter; DOC from rivers), WWTPs,  
193 SOs, phytoplankton and detritus. At the open boundaries, the hydrodynamic model is forced  
194 by astronomical tides at the shelf and by daily river flow of the Garonne and Dordogne  
195 Rivers at the upstream limit (data from [www.hydro.eaufrance.fr](http://www.hydro.eaufrance.fr)). The biogeochemical model  
196 uses measured water temperature from Bordeaux station (MAGEST network; Etcheber et al.  
197 (2011), <http://magest.oasu.u-bordeaux.fr/>) and wind and incident light intensity from Pauillac  
198 station (Météo France). The boundary conditions of biogeochemical variables were detailed  
199 by Lajaunie-Salla et al. (2017), and the data of organic matter and nutrients were retrieved  
200 from the works of Etcheber et al. (2007), Lemaire (2002), Lemaire et al. (2002) and Veyssy  
201 (1998). Urban wastewater discharges are included in the model with biodegradable POC and  
202 DOC and  $\text{NH}_4$  loads representative of water flowing from WWTP and from SO (every 5  
203 minutes; concentration data are from Lanoux (2013), and flow data are from the WWTP (Fig.  
204 1).

205 The model was compared with data available for the TGR and tested on the basis of three  
206 criteria: (i) the ability to reproduce the observed DO variability at a seasonal scale, (ii) the  
207 ability to reproduce the spring-neap tidal cycle, and (iii) a statistical evaluation based on the  
208 Willmott skill score (WSS, Willmott (1982)). In brief, the model performed well ( $WSS > 0.7$ )  
209 in the lower TGR around Bordeaux and is less accurate in the upper section ( $WSS < 0.5$ ); the  
210 model and its validation are presented in detail by Lajaunie-Salla et al. (2017).

211 In this work, we want to demonstrate the advantage and/or effectiveness of urban water  
212 networks and treatment processes for limiting hypoxia events during critical conditions. The  
213 reference simulation is based on the real conditions of 2006, which was a critical year from  
214 the point of view of river discharge, temperature and hypoxia. A 21-day heat wave occurred,  
215 and the summer water temperature reached a maximum of  $29.5^{\circ}\text{C}$ , with an average of  
216  $24.6^{\circ}\text{C}$ . However, the reference simulation was run with an even more severe and constant  
217 low flow of  $40 \text{ m}^3 \cdot \text{s}^{-1}$  from July 15 to September 30. This flow is different from the real river  
218 flow recorded in 2006 (75 vs 60 continuous days of river flow below  $110 \text{ m}^3 \cdot \text{s}^{-1}$ ,  
219 respectively), in order to better visualize the impact of potential management solutions on  
220 oxygenation (Fig. 2a). In addition, to produce more realistic simulation of treated and  
221 untreated wastewater discharges, we used the WWTP flow of 2014, a year presenting similar  
222 volumes compared to 2006, to run the reference simulation. Indeed, the sewage network of  
223 the Bordeaux metropolis was improved in 2011, inducing a reduction of the contribution of  
224 SO to the total urban discharges from 16% in 2006 to 12% in 2014.

### 225 **2.3 The scenarios**

226 Several scenarios have been designed to assess the efficiency of the retained management  
227 strategies to improve the DO levels of the Tidal Garonne River (Tab. 1): optimization of the  
228 urban wastewater network and water replenishment during low water periods.

229 Two main actions of wastewater management were simulated (Tab. 2):

230 - the increase in wastewater storage during storms. For this, fractions of 10, 20, 30, 40  
231 and 50% of untreated wastewater SO was transferred to WWTP discharges (taking  
232 into account the organic matter and nutrient loads of WWTP). In comparison with the  
233 reference simulation, an improvement of 50% in WW treatment corresponds to a  
234 reduction of 26% of POC, 3% of DOC and an increase of 6% of  $\text{NH}_4$  loads.

235 - the implementation of an outfall that releases urban effluents downstream. Two  
236 wastewater discharge points were tested: (1) at 21 km (same distance from WWTP as  
237 what was done in the Thames Estuary) corresponding to position KP25 (Fig. 1),  
238 where the currents are relatively high and could disperse urban effluents relatively  
239 quickly, and (2) at 11 km, corresponding to KP15 as an alternative and less expensive  
240 solution (Fig. 1). Although this solution seems difficult to implement due to technical  
241 and financial constraints, it is interesting to investigate its potential environmental  
242 benefits.

243 For the support of low river flow during the driest season, two actions were tested according  
244 to the maximum stored water volume in the dams ( $58 \text{ hm}^3$ ) of the upper Garonne River (Tab.  
245 2):

246 - low-intensity and long-term support (LTS) from 15<sup>th</sup> July by 10, 20 and  $30 \text{ m}^3 \cdot \text{s}^{-1}$   
247 during 67, 33 and 22 days, respectively.

248 - intense and short-term support (STS) as an emergency solution by 100, 200 and 400  
249  $\text{m}^3 \cdot \text{s}^{-1}$  at spring tide from July 27 to 29 (3 days), corresponding to water volumes of  
250 16, 41 and  $93 \text{ hm}^3$ , respectively.

251 Finally, two scenarios that coupled wastewater management actions and the support of low  
252 river flow were simulated (Tab. 2):

253 - a LTS of  $10 \text{ m}^3 \cdot \text{s}^{-1}$  over 67 days was combined with the reduction of 50% of untreated  
254 wastewater SO, which is transferred to WWTP discharges;

255 - a LTS of  $10 \text{ m}^3 \cdot \text{s}^{-1}$  over 67 days was combined with the reduction of 50% of untreated  
256 wastewater SO, which is transferred to WWTP discharges and to the relocation of  
257 wastewater discharges 11 km (KP15) downstream of Bordeaux (Fig. 1).

258 The 16 scenarios were run over 10 months, from January 1 to October 31. To evaluate the  
259 improvement of DO level, three indicators were used: (i) the minimum DO value ( $\text{DO}_{\min}$ );  
260 (ii) the number of hypoxia days, i.e.,  $\text{DO} < 2 \text{ mg} \cdot \text{L}^{-1}$ ; and (iii) the summer-averaged rates of  
261 biogeochemical processes consuming DO in the Bordeaux and Portets areas (6.6 and 1.2  $\text{km}^2$ ,  
262 respectively). The grid cells in front of Bordeaux and Portets were chosen because Bordeaux  
263 is directly under the impact of urban effluents and because Portets represents the presence of  
264 TMZ in the upper TGR.

## 265 **3 Results**

### 266 **3.1 Action 1: Wastewater management**

#### 267 **• Action 1.1: Reduction in sewage overflows**

268 The simulations of sewage overflow reduction do not show an increase in  $\text{DO}_{\min}$  at Bordeaux  
269 and Portets (Tab. 2). However, some short but significant differences in the modeled DO time  
270 series in Bordeaux are noticeable during the largest sewage overflow events (Fig. 2c). In fact,  
271 wastewater overflows represent, on average, 12% of the urban effluents but could represent  
272 up to 98% during storm events. For the scenario SO-50%, there is a slight increase in DO  
273 level by 6 and 2%sat in late June and mid-August, respectively (Fig. 2c). The total DO

274 consumption by biogeochemical processes decreases up to 6% at Bordeaux (Tab. 3). The rate  
275 of mineralization of urban organic matter decreases considerably, by 31% and 33%, with a  
276 reduction of 50% of SO flow at Bordeaux and Portets, respectively (Tab. 3). In fact, at  
277 Bordeaux, the material brought by the SO contributes 7% of the total DO consumption, with  
278 a reduction of 50% versus 13% without reduction (Fig. 2d). In contrast, the nitrification  
279 process and degradation of treated urban effluents were slightly increased by the reduction in  
280 SO flow (Fig. 2d & Tab. 3). Indeed the wastewater transferred to WWTPs results, after  
281 treatment, in higher amounts of discharged ammonia than in effluents directly coming out  
282 from SOs (Lanoux, 2013).

283 In these simulations, sudden wastewater release events from SO (late June) did not occur  
284 simultaneously with the maximum temperature (i.e., late July). In such a case, a more critical  
285 hypoxia event would have occurred. However, the modeling results show that the  
286 improvement of SO management contributes to improving the DO level only locally and  
287 temporarily in the vicinity of the city of Bordeaux.

288 • **Action 1.2: Downstream relocation of wastewater discharges**

289 In the case of a relocation of urban effluent discharge at KP15, only 4 days of hypoxia were  
290 simulated with a minimum of  $1.8 \text{ mg.L}^{-1}$  (Tab. 2), which represents a reduction of 9 days in  
291 comparison with the reference simulation. In the case of the relocation of urban effluents  
292 discharge farther downstream at KP25, the model simulated no hypoxia and a minimum DO  
293 value of  $2.1 \text{ mg.L}^{-1}$  (Tab. 2). The oxygen level in the vicinity of Bordeaux was improved.  
294 According to the model, figure 3 highlights that the displacement of the urban wastewater  
295 discharge point downstream significantly improves the oxygen levels in the TGR around  
296 Bordeaux and appears to be an efficient action to mitigate hypoxia near Bordeaux (Fig. 3).  
297 Moreover, the DO concentration does not change downstream of Bordeaux, maintaining a  
298 value of over 50% saturation. Under these relocation scenarios, the amount of urban organic

299 matter and ammonia are relatively low at Bordeaux. Urban effluents are diluted by  
300 downstream estuarine waters and exported toward the Gironde. In fact, urban effluents reach  
301 the city of Pauillac, approximately 50 km downstream of Bordeaux (Fig. 1) after 1 and 1.5  
302 days when effluents are released at KP25 and KP15, respectively, versus 2.5 days when they  
303 are discharged near Bordeaux. With the downstream relocation of urban discharge, DO levels  
304 are strongly improved in the TGR, without significantly altering the oxygenation condition  
305 downstream of Bordeaux. This phenomenon is due to shorter residence times of effluents and  
306 larger dilutions with oxygenated estuarine waters downstream.

307 A downstream relocation (KP15 or KP25) significantly decreases total DO consumption in  
308 the lower TGR by 33% and 47%, respectively: the mineralization of urban matter is reduced  
309 by 65% and 95%, and the nitrification is reduced by 47% and 69%, respectively (Tab.3). At  
310 Portets, even if the total DO consumption decreases only by 8%, the degradation of urban  
311 matter decreases strongly by 76% and 94% and the nitrification is reduced by 17% (KP15)  
312 and 20% (KP25) (Tab. 3). In fact, the mineralization of urban matter occurs downstream of  
313 TGR, with less impact on the DO in this area, thanks to the dilution effect with estuarine  
314 waters. Finally, at Bordeaux, the contribution of urban effluents to the DO consumption  
315 decreases from 27% to 2%, and nitrification decreases from 20% to 10% (Fig. 3d).

316 The discharge of the wastewater downstream from the city center considerably improves the  
317 water quality in the vicinity of Bordeaux. However, hypoxia persists in Portets (30 hypoxic  
318 days, Tab. 2 & Fig. 3) because in the upper TGR, hypoxia is mainly due to temperature, very  
319 high turbidity and low water renewal.

### 320 **3.2 Action 2: Support of summer river discharge**

321 ● **Action 2.1: Low-intensity and long-term support of summer river discharge**

322 The simulations of low-intensity and long-term support of water flow show an increase in  
323 the  $DO_{min}$  not only at Portets but also at Bordeaux (Tab. 2). At Bordeaux, the  $DO_{min}$  increases  
324 by only  $0.3 \text{ mg.L}^{-1}$ , and the number of simulated hypoxia days decreases by only 2 days for a  
325 discharge increase of  $30 \text{ m}^3.\text{s}^{-1}$ . However, in Portets, oxygen levels are much more improved:  
326 the additional flow significantly reduces the number of hypoxic days, reducing them from 52  
327 days (reference simulation) to 29, 39 days or 40 days with supports of 10, 20 or  $30 \text{ m}^3.\text{s}^{-1}$ ,  
328 respectively (Tab. 2).

329 Significant effects of maintaining summer river discharge in the area of Bordeaux are  
330 reflected by the decrease in nitrification processes and the increase in mineralization of  
331 matter coming from the watershed (Tab. 3). At Portets, nitrification and mineralization of  
332 organic matter are decreased due to the diluted input of urban water upstream (Tab. 3).

333 These simulations show that a low-intensity and long-term support of river flow considerably  
334 reduces hypoxia events in the upper TGR but not sufficiently to significantly influence  
335 Bordeaux waters. The average time to renew half of the water volume in Bordeaux is 22 and  
336 67 days in the cases of river flows increased by 10 and  $30 \text{ m}^3.\text{s}^{-1}$ , respectively. By  
337 comparison, at Portets, the renewal times are only 3 and 11 days, respectively. The option of  
338 low-intensity support needs to be sufficiently long to maintain a good oxygen level all  
339 summer in the upper TGR. An additional river flow  $> 10 \text{ m}^3.\text{s}^{-1}$  for two months would be a  
340 feasible solution to avoid hypoxia events upstream of Bordeaux, and freshwater storage  
341 should be optimized to reach these objectives.

342 ● **Action 2.2: Intense and short-term support of low water discharge**

343 An intense and short-term support of freshwater allows low-oxygenated water to be pushed  
344 downstream and induces a strong dilution of estuarine water with well-oxygenated fluvial

345 waters due to the large amount of water supply ( $100, 200$  and  $400 \text{ m}^3 \cdot \text{s}^{-1}$ ) (Fig. 4 & Fig. 5).  
346 Figure 4 highlights this phenomenon and the improvement of oxygen level along the TGR,  
347 reaching saturation level around Portets and higher than 50% of saturation around Bordeaux  
348 (Fig. 4). The model results show decreases in the number of hypoxia days in Bordeaux and  
349 Portets (Tab. 2). The water half-renewal times are less than 1 day at Portets and decrease  
350 from 6.6 to 1.6 days at Bordeaux with increasing discharge support from  $100$  to  $400 \text{ m}^3 \cdot \text{s}^{-1}$ .  
351 During short term support, the DO concentrations increase faster at Portets than at Bordeaux  
352 (Fig. 4 & Fig. 5). During a semidiurnal tidal cycle, the DO rises by 9%sat at Bordeaux and by  
353 56%sat at Portets with an input of  $400 \text{ m}^3 \cdot \text{s}^{-1}$ . The higher the river flow support, the faster the  
354 waters of the TGR are reoxygenated.

355 The total oxygen consumption decreases with STS only at Portets (Tab. 3). At Bordeaux, the  
356 decrease in nitrification is counterbalanced by an increase in river organic matter  
357 mineralization (Tab. 3). The intense short-term support moves the TMZ downstream to  
358 Portets, reducing organic matter mineralization in the area of Portets (Tab. 3 & Fig. 4).

359 Intense short-term support of freshwater ( $400 \text{ m}^3 \cdot \text{s}^{-1}$ ) is not able to maintain a good oxygen  
360 level all summer in Portets. After the massive water input, the DO level stayed above the  
361 hypoxia threshold for 17 days but then decreased again (Fig. 5i). This type of management is  
362 very powerful as an urgent remediation during severe hypoxia to quickly improve the  
363 oxygenation levels of TGR waters, particularly in the upper section of the tidal river. For  
364 example, during the heat wave of the end July 2006 (Fig. 2c), STS would have prevented  
365 hypoxia. In the case of late hypoxia occurring at the end of the summer, STS may be efficient  
366 if the stored water volume is sufficient. Other scenarios of short term supports were made  
367 during neap tides (not shown) but were not very relevant because hypoxia events occur  
368 during spring tides (Etcheber et al. 2011, Lanoux et al. 2013, Lajaunie-Salla et al. 2017).

### 369 **3.3 Synthesis of management actions efficiency**



370 These different simulated scenarios allow us to quantitatively estimate the efficiency of  
371 different management options to reduce hypoxia in the TGR. The two management solutions  
372 have locally different impacts on DO (Tab. 4): optimization of the urban wastewater network  
373 reduces hypoxia in the lower TGR, whereas water replenishment during low water periods  
374 enhances DO levels in the upper TGR. The improvement of the wastewater network by a  
375 reduction in labile organic matter input reduces oxygen consumption in Bordeaux waters.  
376 The alternative, consisting of discharging urban effluents downstream of the lower TGR, has  
377 the advantage of diluting wastewater with the Gironde water and favoring their dispersion  
378 downstream in the wider sections of the estuary. In addition, taking into account the  
379 increasing gradient of temperature landward (Schmidt, personal data), wastewater effluents  
380 would be discharged in cooler waters (approximately 1-2°C) than those at Bordeaux. The  
381 water replenishment during low water periods is also a powerful solution, which favors the  
382 dilution of upper TGR waters with well-oxygenated freshwater and limits the upstream TMZ  
383 displacement. Combining these two management solutions can improve the oxygen level  
384 both in the upper TGR and around Bordeaux. Figure 6 reveals a reduction in hypoxia event  
385 frequency from 6 to 2 events in the TGR. Moreover, the extension of hypoxia is significantly  
386 reduced between KP0 and KP20. The scenario combining a discharge support of  $+10 \text{ m}^3 \cdot \text{s}^{-1}$ , a  
387 reduction of 50% of SO release and discharge of urban effluents at KP15 suggests an  
388 improvement of water quality over the entire TGR (Fig. 6): only 2 days below the hypoxia  
389 threshold (Tab. 2) and the oxygen consumption by urban organic matter degradation is totally  
390 reduced (by 100%, Tab. 3).

391 Regarding the projected population growth of the city of Bordeaux (one million inhabitants  
392 will be reached in 2030, i.e. +33%, <http://www.bordeaux-metropole.fr>) and the objectives of  
393 the European Water Framework Directive to maintain good water quality, the reduction in the  
394 impact of urban wastewater networks in urban areas appears to be a major challenge for the

395 coming years. The construction of an outfall under the river could be an efficient solution to  
396 totally mitigate hypoxia at Bordeaux, but this solution may be seen as an academic exercise  
397 considering its cost and technical constraints. Moreover, the environmental impact on the  
398 ecosystem of such construction can hinder this solution. The support of summer river flow  
399 could certainly be optimized by reducing water use for agricultural purposes in the watershed  
400 during summer and by improving the release of stored water as a function of meteorological  
401 conditions. In the case of unfavorable conditions (heat wave, drought) in early summer, LTS  
402 could be implemented. However, if these conditions occur late in summer, intense STS could  
403 be considered. An alternative solution could be intermittent support, with water release of  
404  $100 \text{ m}^3 \cdot \text{s}^{-1}$  during spring tide and all summer (July and August, i.e., 4 spring tides). By the  
405 continuation of the improvement in the urban wastewater network and by the simultaneously  
406 maintenance of good river flow levels, both management options may improve the oxygen  
407 level on the TGR.

#### 408 **4 Conclusion**

409 A 3D biogeochemical model for the Tidal Garonne River coupling hydrodynamics and  
410 sediment transport was applied to assess the efficiency of different management solutions to  
411 improve the DO level in waters. This study tested different scenarios of management  
412 solutions that can be implemented by local water authorities. Whereas a reduction in SO  
413 flows contributes only to improving DO levels locally and temporarily, the downstream  
414 relocation of WWTP outfalls totally mitigates hypoxia in the TGR and seems to be the most  
415 efficient management solution, despite being difficult to implement in practice. The support  
416 of low river flow limits the propagation of the TMZ upstream of the TGR and dilutes the  
417 estuarine waters with fresh oxygenated waters. A low-intensity support over the summer  
418 maintains a good oxygen level of waters during the entire drought period and prevents

419 hypoxia in the upper TGR. In contrast, an intense support of low water flow for 3 days  
420 improves the oxygen levels along the entire TGR quickly and considerably, but only for a  
421 few weeks. The improvement in the urban effluent network and the support of low-river flow  
422 periods from dams or irrigation reduction are complementary. They contribute to  
423 reoxygenating the river water near the city of Bordeaux and upstream of the Tidal Garonne  
424 River, respectively. The biogeochemical numerical model helps guide the management policy  
425 of urban effluents and watersheds to limit and mitigate hypoxia events.

## 426 **References**

- 427 Abril, G., Etcheber, H., Le Hir, P., Bassoullet, P., Boutier, B. and Frankignoulle, M.:  
428 Oxic/anoxic oscillations and organic carbon mineralization in an estuarine maximum  
429 turbidity zone (The Gironde, France), *Limnol. Oceanogr.*, 44(5), 1304–1315, 1999.
- 430 Allen, G. P.: Étude des processus sédimentaires dans l'estuaire de la Gironde, Université de  
431 Bordeaux., 1972.
- 432 Andréa, G., Ahyerre, M., Pérarnaud, M., Komorowski, F. and Schoorens, J.: Gestion  
433 Dynamique des RUTP du bassin versant Louis Fargue à Bordeaux: mise en oeuvre et  
434 premiers résultats opérationnels, NOVATECH 2013., 2013.
- 435 Andrews, M. J. and Rickard, D. G.: Rehabilitation of the inner Thames estuary, *Mar. Pollut.*  
436 *Bull.*, 11(11), 327–332, doi:10.1016/0025-326X(80)90051-X, 1980.
- 437 Best, M. A., Wither, A. W. and Coates, S.: Dissolved oxygen as a physico-chemical  
438 supporting element in the Water Framework Directive, *Mar. Policy*, 55, 53–64,  
439 doi:10.1016/j.marpolbul.2006.08.037, 2007.
- 440 Billen, G., Garnier, J., Ficht, A. and Cun, C.: Modeling the Response of Water Quality in the  
441 Seine River Estuary to Human Activity in its Watershed Over the Last 50 Years, *Estuaries*,  
442 24(6B), 977–993, doi:10.2307/1353011, 2001.
- 443 Billen, G., Garnier, J. and Rousseau, V.: Nutrient fluxes and water quality in the drainage  
444 network of the Scheldt basin over the last 50 years, *Hydrobiologia*, 540(1), 47–67,  
445 doi:10.1007/s10750-004-7103-1, 2005.

446 Breitburg, D., Levin, L. A., Oschlies, A., Grégoire, M., Chavez, F. P., Conley, D. J., Garçon,  
447 V., Gilbert, D., Gutiérrez, D., Isensee, K., Jacinto, G. S., Limburg, K. E., Montes, I., Naqvi,  
448 S. W. A., Pitcher, G. C., Rabalais, N. N., Roman, M. R., Rose, K. A., Seibel, B. A.,  
449 Telszewski, M., Yasuhara, M. and Zhang, J.: Declining oxygen in the global ocean and  
450 coastal waters, *Science* (80-. ), 359(February), doi:10.1126/science.aam7240, 2018.

451 Conley, D. J., Carstensen, J., Vaquer-Sunyer, R. and Duarte, C. M.: Ecosystem thresholds  
452 with hypoxia, *Hydrobiologia*, 629(1), 21–29, doi:10.1007/s10750-009-9764-2, 2009

453 Diaz, R. J.: Overview of hypoxia around the world., *J. Environ. Qual.*, 30(2), 275–281,  
454 doi:10.2134/jeq2001.302275x, 2001.

455 EPA: Real time control of urban drainage networks, Washington, Office of Research and  
456 Development., 2006.

457 Etcheber, H., Taillez, A., Abril, G., Garnier, J., Servais, P., Moatar, F. and Commarieu, M.-  
458 V.: Particulate organic carbon in the estuarine turbidity maxima of the Gironde, Loire and  
459 Seine estuaries: origin and lability, *Hydrobiologia*, 588(1), 245–259, doi:10.1007/s10750-  
460 007-0667-9, 2007.

461 Etcheber, H., Schmidt, S., Sottolichio, A., Maneux, E., Chabaux, G., Escalier, J.-M.,  
462 Wennekes, H., Derriennic, H., Schmeltz, M., Quémener, L., Repecaud, M., Woerther, P. and  
463 Castaing, P.: Monitoring water quality in estuarine environments: lessons from the MAGEST  
464 monitoring program in the Gironde fluvial-estuarine system, *Hydrol. Earth Syst. Sci.*, 15(3),  
465 831–840, doi:10.5194/hess-15-831-2011, 2011.

466 Even, S., Mouchel, J. M., Servais, P., Flipo, N., Poulin, M., Blanc, S., Chabanel, M. and  
467 Paffoni, C.: Modelling the impacts of Combined Sewer Overflows on the river Seine water  
468 quality, *Sci. Total Environ.*, 375(1–3), 140–151, doi:10.1016/j.scitotenv.2006.12.007, 2007.

469 Gonwa, W.: Efficient Real Time Control and Operation of Interconnected Wastewater  
470 Collection Systems, Marquette University., 1993.

471 Goosen, N. K., Kromkamp, J., Peene, J., Rijswijk, P. van and Breugel, P. van: Bacterial and  
472 phytoplankton production in the maximum turbidity zone of three European estuaries: the  
473 Elbe, Westerschelde and Gironde, *J. Mar. Syst.*, 22, 151–171, 1999.

474 Howarth, R. W., Swaney, D. P., Butler, T. J. and Marino, R.: Rapid Communication:  
475 Climatic Control on Eutrophication of the Hudson River Estuary, *Ecosystems*, 3(2), 210–215,  
476 doi:10.1007/s100210000020, 2000

477 Jalón-Rojas, I., Schmidt, S. and Sottolichio, A.: Turbidity in the fluvial Gironde Estuary  
478 (southwest France) based on 10-year continuous monitoring: sensitivity to hydrological  
479 conditions, *Hydrol. Earth Syst. Sci.*, 19(2001), 2805–2819, doi:10.5194/hess-19-2805-2015,  
480 2015.

481 Kemp, W. M., Testa, J. M., Conley, D. J., Gilbert, D. and Hagy, J. D.: Coastal hypoxia  
482 responses to remediation, *Biogeosciences Discuss.*, 6, 6889–6948, doi:10.5194/bgd-6-6889-  
483 2009, 2009.

484 Lajaunie-salla, K., Sottolichio, A., Schmidt, S., Litrico, X., Binet, G. and Abril, G.: Future  
485 intensification of summer hypoxia in the tidal Garonne River (SW France) simulated by a  
486 coupled hydro sedimentary-biogeochemical model, *Environ. Sci. Pollut. Res.*,  
487 doi:10.1007/s11356-018-3035-6, 2018.

488 Lajaunie-Salla, K., Wild-Allen, K., Sottolichio, A., Thouvenin, B., Litrico, X. and Abril, G.:  
489 Impact of urban effluents on summer hypoxia in the highly turbid Gironde Estuary , applying  
490 a 3D model coupling hydrodynamics , sediment transport and biogeochemical processes, *J.*  
491 *Mar. Syst.*, 174, 89–105, doi:10.1016/j.jmarsys.2017.05.009, 2017.

492 Lanoux, A.: Caratérisation et rôle respectif des apports organiques amont et locaux sur  
493 l’oxygénation des eaux de la Garonne estuarienne, Université de Bordeaux., 2013.

494 Lanoux, A., Etcheber, H., Schmidt, S., Sottolichio, A., Chabaud, G., Richard, M. and Abril,  
495 G.: Factors contributing to hypoxia in a highly turbid, macrotidal estuary (the Gironde,  
496 France), *Environ. Sci. Process. Impacts*, 15(3), 585–595, doi:10.1039/c2em30874f, 2013.

497 Lehmann, A., Hinrichsen, H. H., Getzlaff, K. and Myrberg, K.: Quantifying the heterogeneity  
498 of hypoxic and anoxic areas in the Baltic Sea by a simplified coupled hydrodynamic-oxygen  
499 consumption model approach, *J. Mar. Syst.*, 134, 20–28, doi:10.1016/j.jmarsys.2014.02.012,  
500 2014.

501 Lemaire, E.: Biomarqueurs pigmentaires dans les estuaires macrotidaux européens, Ec. Dr.  
502 des Sci. du vivant, géosciences Sci. l’environnement, Doctorat, 236, 2002.

503 Lemaire, E., Abril, G., De Wit, R. and Etcheber, H.: Effet de la turbidité sur la dégradation  
504 des pigments phytoplanctoniques dans l’estuaire de la Gironde, *Geoscience*, 334(4), 251–258,  
505 2002.

506 Maeda, M., Mizushima, H. and Ito, K.: Development of the Real-Time Control (RTC)  
507 System for Tokyo Sewage System, *Glob. Solut. Urban Drain.*, 1–16, doi:doi:

508 10.1061/40644(2002)317, 2002.

509 Pleau, M., Colas, H., Lavallée, P., Pelletier, G. and Bonin, R.: Global optimal real-time  
510 control of the Quebec urban drainage system, *Environ. Model. Softw.*, 20(4), 401–413,  
511 doi:http://dx.doi.org/10.1016/j.envsoft.2004.02.009, 2005.

512 Rabalais, N. N., Levin, L. A., Turner, R. E., Gilbert, D. and Zhang, J.: Dynamics and  
513 distribution of natural and human-caused coastal hypoxia, *Biogeosciences*, 7, 585–619,  
514 doi:10.5194/bgd-6-9359-2009, 2010.

515 Robitaille, L., Komorowski, F., Fortier, V., Chadoutaud, E. and Rousseau, J.-P.: Gestion  
516 Dynamique des RUTP du bassin versant Louis Fargue à Bordeaux: en route vers une seconde  
517 phase de déploiement, *NOVATECH 2016.*, 2016.

518 Schmidt, S., Bernard, C., Escalier, J.-M., Etcheber, H. and Lamouroux, M.: Assessing and  
519 managing the risks of hypoxia in transitional waters: a case study in the tidal Garonne River  
520 (South-West France), *Environ. Sci. Pollut. Res.*, doi:10.1007/s11356-016-7654-5, 2017.

521 Skerratt, J., Wild-Allen, K., Rizwi, F., Whitehead, J. and Coughanowr, C.: Use of a high  
522 resolution 3D fully coupled hydrodynamic, sediment and biogeochemical model to  
523 understand estuarine nutrient dynamics under various water quality scenarios, *Ocean Coast.  
524 Manag.*, 83, 52–66, doi:10.1016/j.ocecoaman.2013.05.005, 2013.

525 Soetaert, K., Middelburg, J. J., Heip, C., Meire, P., Van, S., Maris, T. and Damme, S. Van:  
526 Long-term change in dissolved inorganic nutrients in the heterotrophic Scheldt estuary  
527 (Belgium, The Netherlands), *Limnol. Oceanogr.*, 51(1), 409–423, 2006.

528 Sottolichio, A., Hir, P. Le and Castaing, P.: Modeling mechanisms for the stability of the  
529 turbidity maximum in the Gironde estuary, France, *Proc. Mar. Sci.*, 3(Coastal and Estuarine  
530 Fine Sediment Processes), 373–386 [online] Available from: 10.1016/S1568-2692(00)80132-  
531 1, 2000.

532 Talke, S. A., Swart, H. E. and de Jonge, V. N.: An Idealized Model and Systematic Process  
533 Study of Oxygen Depletion in Highly Turbid Estuaries, *Estuaries and Coasts*, 32(4), 602–  
534 620, doi:10.1007/s12237-009-9171-y, 2009.

535 Tinsley, D.: The Thames estuary: a history of the impact of humans on the environment and a  
536 description of the current approach to environmental management, in *A Rehabilitated  
537 Estuarine Ecosystem SE - 2*, edited by M. Attrill, pp. 5–26, Springer US., 1998.

538 Vanderborght, J.-P., Folmer, I. M., Aguilera, D. R., Uhrenholdt, T. and Regnier, P.: Reactive-

539 transport modelling of C, N, and O<sub>2</sub> in a river–estuarine–coastal zone system: Application to  
540 the Scheldt estuary, *Mar. Chem.*, 106(1–2), 92–110, doi:10.1016/j.marchem.2006.06.006,  
541 2007.

542 Vaquer-Sunyer, R. and Duarte, C. M.: Thresholds of hypoxia for marine biodiversity., *Proc.*  
543 *Natl. Acad. Sci. U. S. A.*, 105(40), 15452–15457, doi:10.1073/pnas.0803833105, 2008.

544 Veyssy, E.: Transferts de matière organiques des bassins versants aux estuaires de la Gironde  
545 et de l’Adour (Sud-Ouest de la France), Université de Bordeaux., 1998.

546 Willmott, C. J.: Some comments on the evaluation of model performance, *Bull. Am.*  
547 *Meteorol. Soc.*, 63(11), 1982.

548 Zhang, P., Pang, Y., Pan, H., Shi, C., Huang, Y. and Wang, J.: Factors Contributing to  
549 Hypoxia in the Minjiang River Estuary, Southeast China, *Int. J. Environ. Res. Public Health*,  
550 12(8), 9357–9374, doi:10.3390/ijerph120809357, 2015.

**Table 1: Forcing of the different scenarios simulated with the model.** (Q<sub>ref</sub>: river flow of 2006; Q<sub>G/D</sub>: river flow of Garonne and Dordogne  
Q<sub>ww</sub>: wastewater flow; SO: sewage overflow)

Scenarios	River flow	Wastewater flow
<b>Reference</b>	Q <sub>ref</sub> = Q <sub>G/D</sub> 2006 + Q <sub>G</sub> = 40 m <sup>3</sup> .s <sup>-1</sup> from 15/07 to 30/09	Q <sub>ww</sub> 2006
<b>WW of 2014 (WWTP rehabilitated)</b>	Q <sub>ref</sub>	Q <sub>ww</sub> 2014
<b>SO -10%</b>	Q <sub>ref</sub>	Q <sub>ww</sub> 2014 – 10% SO
<b>SO -20%</b>	Q <sub>ref</sub>	Q <sub>ww</sub> 2014 – 20% SO
<b>SO -30%</b>	Q <sub>ref</sub>	Q <sub>ww</sub> 2014 – 30% SO
<b>SO -40%</b>	Q <sub>ref</sub>	Q <sub>ww</sub> 2014 – 40% SO
<b>SO -50%</b>	Q <sub>ref</sub>	Q <sub>ww</sub> 2014 – 50% SO
<b>Outlet relocated to KP15</b>	Q <sub>ref</sub>	Q <sub>ww</sub> 2014 at Parempuyre
<b>Outlet relocated to KP25</b>	Q <sub>ref</sub>	Q <sub>ww</sub> 2014 at Bec d'Ambès
<b>+10 m<sup>3</sup>.s<sup>-1</sup></b>	Q <sub>ref</sub> ; Q <sub>G</sub> < 50 m <sup>3</sup> .s <sup>-1</sup> : Q <sub>G</sub> +10 m <sup>3</sup> .s <sup>-1</sup> over 67 days	Q <sub>ww</sub> 2006
<b>+20 m<sup>3</sup>.s<sup>-1</sup></b>	Q <sub>ref</sub> ; Q <sub>G</sub> < 50 m <sup>3</sup> .s <sup>-1</sup> : Q <sub>G</sub> +20 m <sup>3</sup> .s <sup>-1</sup> over 33 days	Q <sub>ww</sub> 2006
<b>+30 m<sup>3</sup>.s<sup>-1</sup></b>	Q <sub>ref</sub> ; Q <sub>G</sub> < 50 m <sup>3</sup> .s <sup>-1</sup> : Q <sub>G</sub> +30 m <sup>3</sup> .s <sup>-1</sup> over 22 days	Q <sub>ww</sub> 2006
<b>+100 m<sup>3</sup>.s<sup>-1</sup></b>	Q <sub>ref</sub> ; Q <sub>G</sub> +100 m <sup>3</sup> .s <sup>-1</sup> over 3 days	Q <sub>ww</sub> 2006
<b>+200 m<sup>3</sup>.s<sup>-1</sup></b>	Q <sub>ref</sub> ; Q <sub>G</sub> +200 m <sup>3</sup> .s <sup>-1</sup> over 3 days	Q <sub>ww</sub> 2006
<b>+400 m<sup>3</sup>.s<sup>-1</sup></b>	Q <sub>ref</sub> ; Q <sub>G</sub> +400 m <sup>3</sup> .s <sup>-1</sup> over 3 days	Q <sub>ww</sub> 2006
<b>-50% +10 m<sup>3</sup>.s<sup>-1</sup></b>	Q <sub>ref</sub> ; Q <sub>G</sub> < 50 m <sup>3</sup> .s <sup>-1</sup> : Q <sub>G</sub> +10 m <sup>3</sup> .s <sup>-1</sup> over 67 days	Q <sub>ww</sub> 2014 – 50% SO
<b>-50% + KP15 +10 m<sup>3</sup>.s<sup>-1</sup></b>	Q <sub>ref</sub> ; Q <sub>G</sub> < 50 m <sup>3</sup> .s <sup>-1</sup> : Q <sub>G</sub> +10 m <sup>3</sup> .s <sup>-1</sup> over 67 days	Q <sub>ww</sub> 2014 – 50% SO at Parempuyre



**Table 2:** Minimum simulated DO (in % of saturation and in mg.L<sup>-1</sup>), the corresponding temperature and the number of hypoxia days in Bordeaux and Portets for each scenario. (WW: wastewater)

Scenarios	Bordeaux				Portets			
	T (°C)	DO <sub>min</sub> (%)	DO <sub>min</sub> (mg.L <sup>-1</sup> )	Days of hypoxia	T (°C)	DO <sub>min</sub> (%)	DO <sub>min</sub> (mg.L <sup>-1</sup> )	Days of hypoxia
<b>Reference</b>	27.4	13.5	1.0	13	24.4	8	0.7	52
<b>WW of 2014</b>	27.3	16.4	1.3	17	24.4	8.5	0.7	39
<b>-10%</b>	27.3	16.5	1.3	16	24.4	8.6	0.7	38
<b>-20%</b>	27.3	16.5	1.3	16	24.4	8.6	0.7	38
<b>-30%</b>	27.3	16.5	1.3	16	24.4	8.6	0.7	38
<b>-40%</b>	27.3	16.6	1.3	14	24.4	8.6	0.7	37
<b>-50%</b>	27.3	16.6	1.3	13	24.4	8.6	0.7	37
Outlet relocated to <b>KP15</b>	26.9	23.5	1.8	4	24.4	9.7	0.8	33
Outlet relocated to <b>KP25</b>	26.9	26.9	2.1	0	24.4	10	0.8	32
<b>+10 m<sup>3</sup>.s<sup>-1</sup></b>	26.9	13.8	1.1	13	24.4	12.7	1.0	29
<b>+20 m<sup>3</sup>.s<sup>-1</sup></b>	26.8	15.3	1.2	11	24.4	8.3	0.7	39
<b>+30 m<sup>3</sup>.s<sup>-1</sup></b>	26.8	17	1.3	11	24.4	8.3	0.7	40
<b>+100 m<sup>3</sup>.s<sup>-1</sup></b>	26.9	12.3	1.0	12	24.4	8.4	0.7	48
<b>+200 m<sup>3</sup>.s<sup>-1</sup></b>	27.4	14.5	1.1	10	24.4	8.3	0.7	44
<b>+400 m<sup>3</sup>.s<sup>-1</sup></b>	27.7	16.7	1.3	5	24.4	9.1	0.7	37
<b>-50% +10 m<sup>3</sup>.s<sup>-1</sup></b>	26.9	14.5	2	14	24.4	12.5	1	26
<b>-50% + KP15 +10 m<sup>3</sup>.s<sup>-1</sup></b>	26.9	24.9	2	2	26.9	14.1	1.1	22

**Table 3:** Differences (in %) of biogeochemical process rates impacting DO between the scenarios and reference simulations during summer in Bordeaux and Portets (WW: wastewater; WS: watershed)

Scenarios	Bordeaux				Portets				
	total	nitrification	mineralization TOC <sub>WS</sub>	mineralization TOC <sub>WW</sub>	total	nitrification	mineralization TOC <sub>WS</sub>	mineralization TOC <sub>WW</sub>	
<b>Management of wastewater discharges</b>	<b>WW of 2014</b>	-1%	+11%	0	-13%	-1%	+4%	0	-16%
	<b>-10%</b>	-2%	+12%	0	-16%	-1%	+4%	0	-16%
	<b>-20%</b>	-3%	+13%	0	-20%	-1%	+6%	0	-23%
	<b>-30%</b>	-4%	+13%	+1%	-24%	-1%	+6%	+1%	-26%
	<b>-40%</b>	-5%	+14%	+1%	-28%	-1%	+6%	+1%	-29%
	<b>-50%</b>	-6%	+14%	+1%	-31%	-1%	+6%	+1%	-33%
	Outlet relocated to <b>KP15</b>	-33%	-47%	+2%	-65%	-8%	-17%	-3%	-76%
Outlet relocated to <b>KP25</b>	-47%	-66%	+3%	-95%	-8%	-20%	-2%	-94%	
<b>Support of low river flow</b>	<b>+10 m<sup>3</sup>.s<sup>-1</sup></b>	1%	-6%	+6%	0	-2%	-20%	-1%	-4%
	<b>+20 m<sup>3</sup>.s<sup>-1</sup></b>	0%	-6%	+5%	0	+1%	-14%	+2%	-2%
	<b>+30 m<sup>3</sup>.s<sup>-1</sup></b>	0%	-6%	+4%	0	-2%	-13%	-2%	-3%
	<b>+100 m<sup>3</sup>.s<sup>-1</sup></b>	0%	-2%	+2%	0	-5%	-4%	-5%	-3%
	<b>+200 m<sup>3</sup>.s<sup>-1</sup></b>	0%	-5%	+4%	-1%	-9%	-10%	-9%	-6%
	<b>+400 m<sup>3</sup>.s<sup>-1</sup></b>	0%	-11%	+9%	-1%	-13%	-14%	-13%	-8%
<b>Combined options</b>	<b>-50% +10 m<sup>3</sup>.s<sup>-1</sup></b>	-2%	+10%	+11%	-30%	+2%	-9%	+5%	-36%
	<b>-50% + KP15 +10 m<sup>3</sup>.s<sup>-1</sup></b>	-46%	-70%	+14%	-100%	-2%	-31%	+6%	-100%

**Table 4:** Summary of management solution efficiency and recommendations (WW: wastewater; WS: watershed)

Management solutions	Efficiency to mitigate hypoxia		Recommendation
	Lower TGR	Upper TGR	
SO reduction: -50%	++	+	Implementation of SOs
WW discharges at KP15	+++	+	WWTP outfall relocation
WW discharges at KP25	+++	+	WWTP outfall relocation
LTS	+	++	Preventive measures against hypoxia: reduction in freshwater subtraction during summer
STS	++	+++	Curative measures at spring tide during severe drought
LTS - SO reduction -50%	+	++	Reduction in freshwater subtraction during summer and implementation of SOs
LTS - SO reduction: -50% - WW discharges at KP15	+++	++	Reduction in freshwater subtraction during summer, implementation of SOs and WWTP outfall relocation

**Figure 1:** The Gironde-Garonne-Dordogne estuary, including the Tidal Garonne River in southwestern France (Inset B). “KP” denotes the distances in km from the city center of Bordeaux; the control grid cell at Bordeaux is at KP4 and Portets is at KP20. Inset A precises position of the sewage overflows (purple triangles) and of the two wastewater treatment plants (green squares). The area in orange represents the area of Bordeaux for which the biogeochemical fluxes were calculated.

**Figure 1:** Time series of Garonne River (black) and Dordogne River (gray) flow of the reference simulation (a & d,  $\text{m}^3 \cdot \text{s}^{-1}$ ), wastewater discharges (WWTP±SO) for 2006 (green) and 2014 (blue) (b & e,  $\text{m}^3 \cdot \text{s}^{-1}$ ): a & b present the whole simulation period, from January to October; d & e present a zoom from May to October. Comparison of simulated DO<sub>min</sub> evolution (over tidal cycle in %sat) in Bordeaux with urban effluents of 2014 (blue) and with a 50% reduction in SOs (red) (c). The contribution on DO consumption (%) of degradation of watershed organic matter (brown), WWTP (red), SO (green) and nitrification (blue) in Bordeaux (f). For nitrification processes, ammonium comes from watershed and wastewater.


**Figure 3:** Snapshot of the vertical transect of simulated DO saturation along the Garonne tidal river for the scenarios with urban effluent discharge points in Bordeaux (a), KP15 (b) and KP25 (c). P1, P2 and P3 indicate the locations of Bec d’Ambès, Bordeaux and Portets, respectively. The contribution on DO consumption (%) of degradation of watershed (brown), WWTP (red), SO (green) and nitrification (blue) processes at Bordeaux (d). For nitrification processes, ammonium comes from watershed and wastewater.

**Figure 4:** Snapshot of the vertical transect of simulated DO concentration in %sat along the Garonne tidal river for the scenarios of reference (a), short river flow increases by  $100 \text{ m}^3 \cdot \text{s}^{-1}$  (b),  $200 \text{ m}^3 \cdot \text{s}^{-1}$  (c) and  $400 \text{ m}^3 \cdot \text{s}^{-1}$  (d). P1, P2 and P3 indicate the locations of Bec d’Ambès, Bordeaux and Portets, respectively.


**Figure 5:** Time series of river flow (top,  $\text{m}^3 \cdot \text{s}^{-1}$ ), DO<sub>min</sub> (over tidal cycle) at Bordeaux (middle, %sat) and DO at Portets (bottom, %sat) for the scenarios of short river flow increases by  $100 \text{ m}^3 \cdot \text{s}^{-1}$  (a, d and g),  $200 \text{ m}^3 \cdot \text{s}^{-1}$  (b, e and h) and  $400 \text{ m}^3 \cdot \text{s}^{-1}$  (c, f and i). The blue line represents the simulation of reference.

**Figure 6:** Spatiotemporal evolution of daily average surface DO (saturation in %) along the Tidal Garonne River section for the scenarios of reference (a) combining  $+10 \text{ m} \cdot \text{s}^{-1}$  of river flow and reduction of 50% of SO releases (b), and  $+10 \text{ m}^3 \cdot \text{s}^{-1}$  of river flow, a reduction of 50% of SO releases and urban effluent discharges at KP15 (c). The y-axis represents the kilometric points, and the white lines represent Bordeaux and Portets.

Figure 1

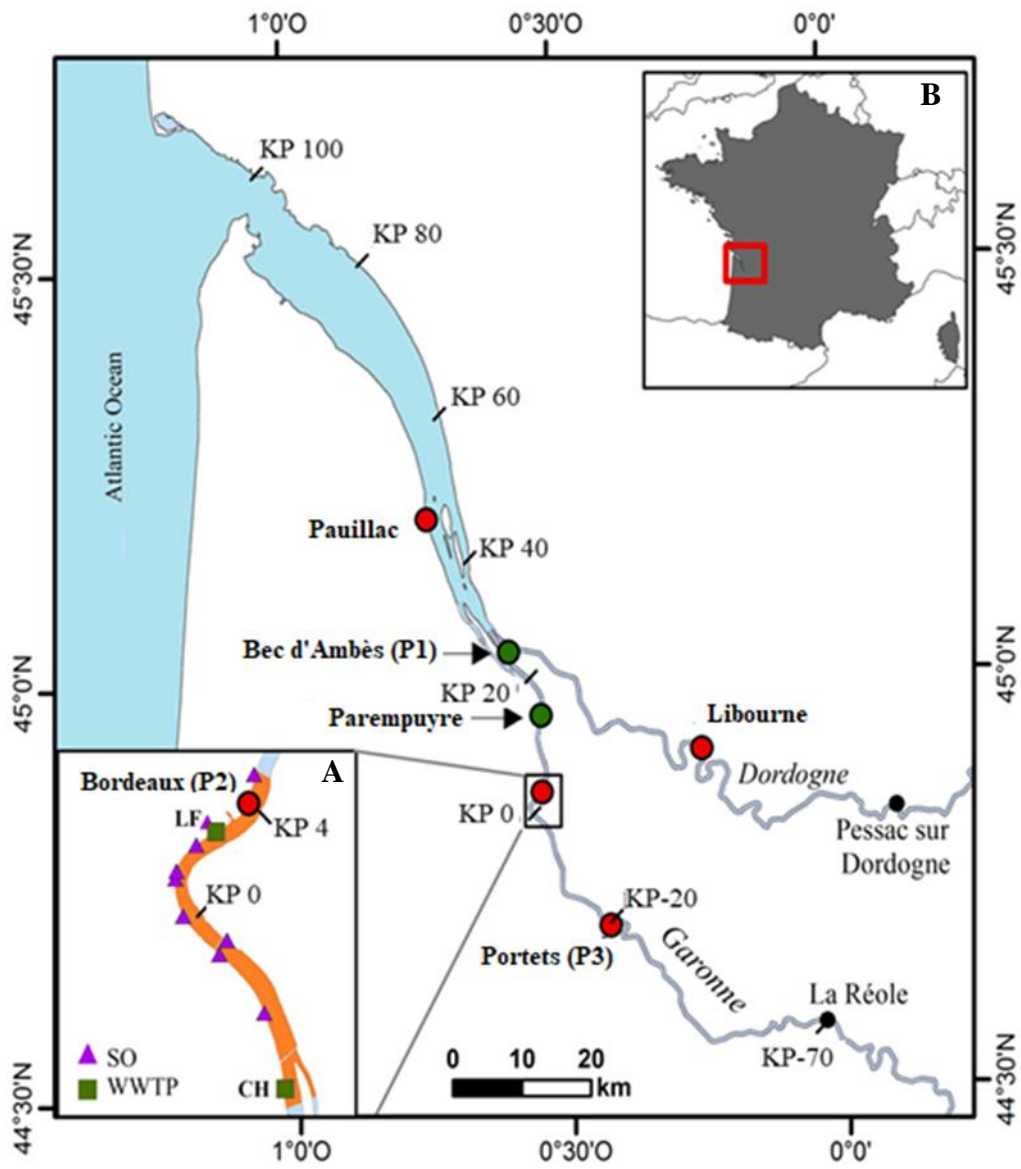

**Figure 2**

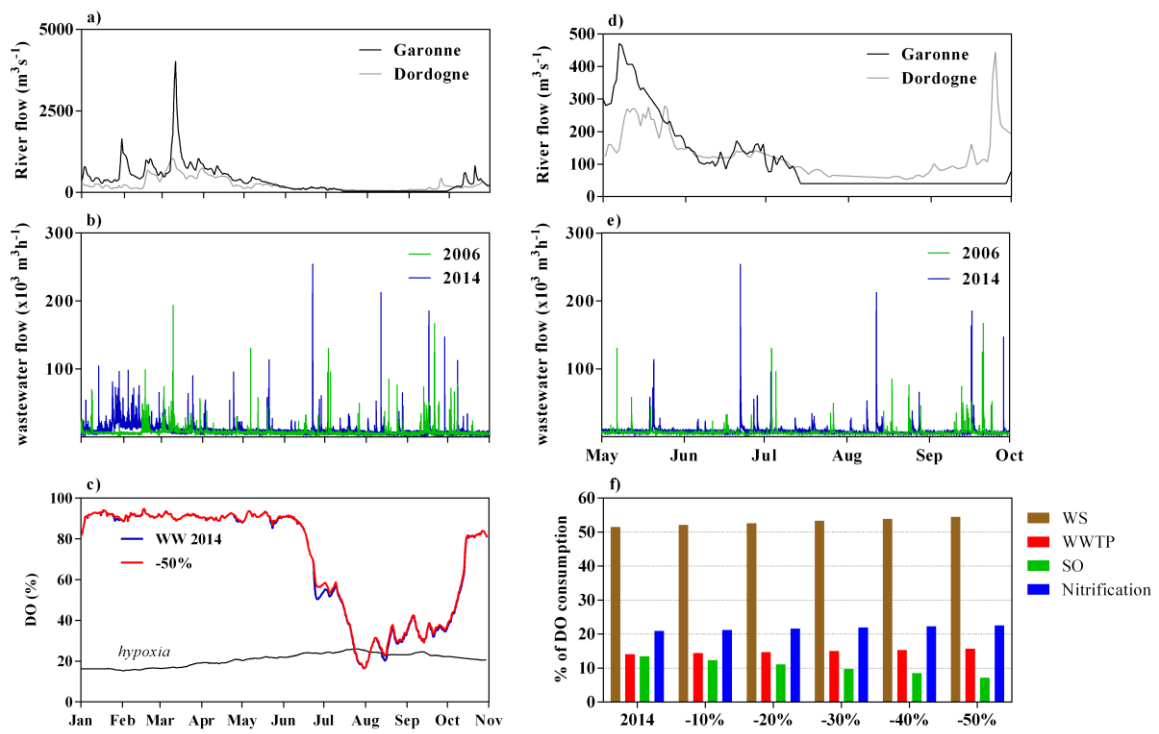

**Figure 3**


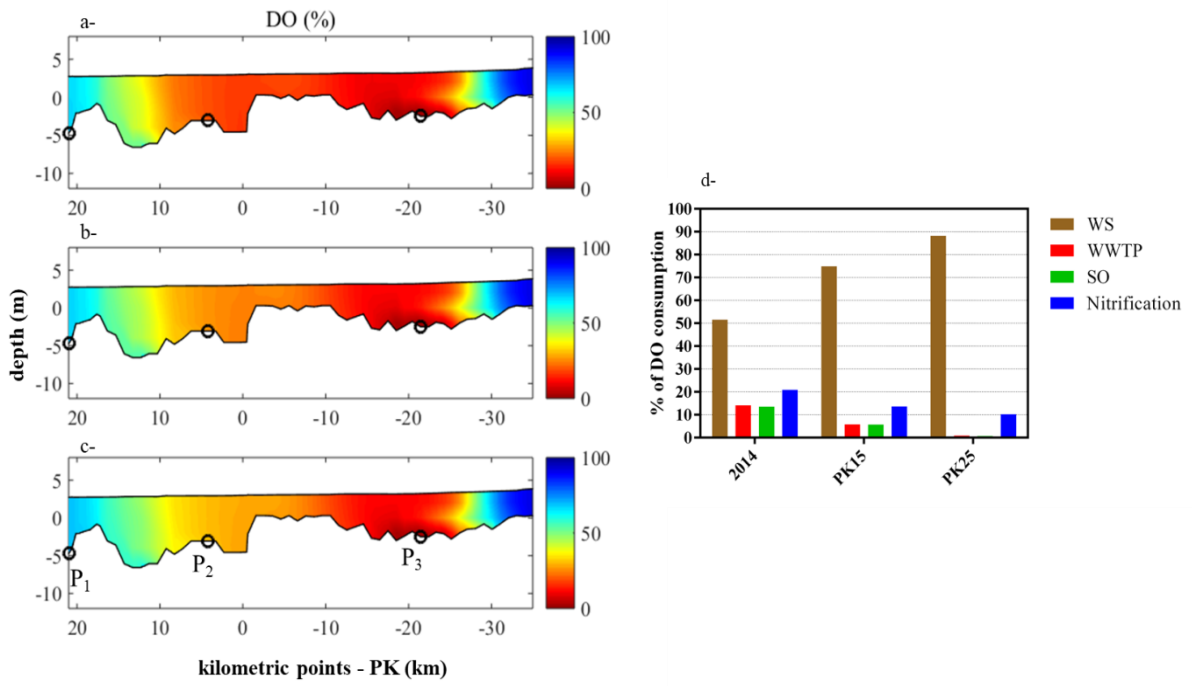


Figure 4



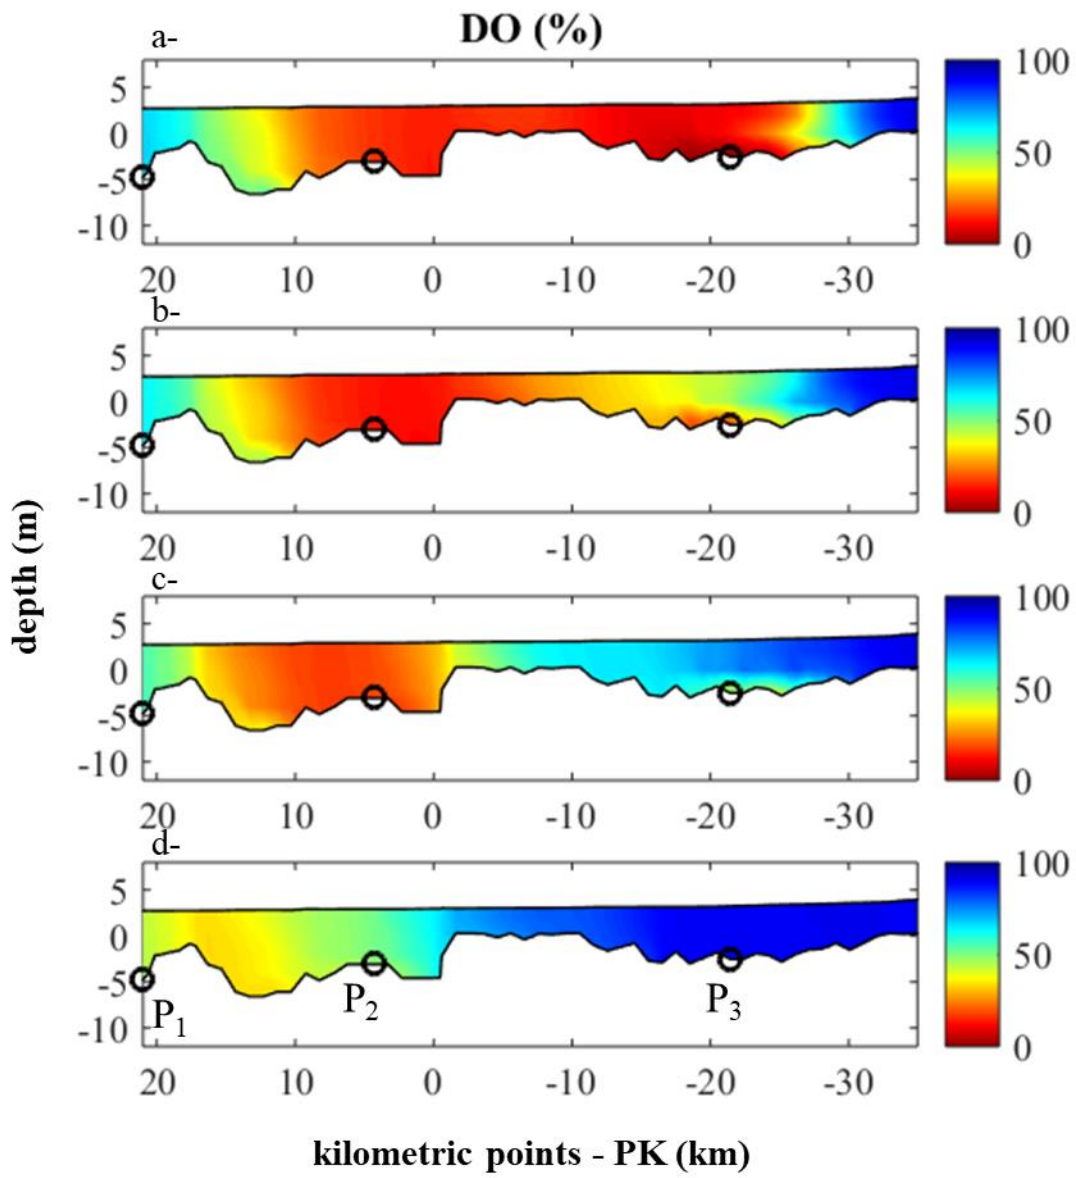

**Figure 5**

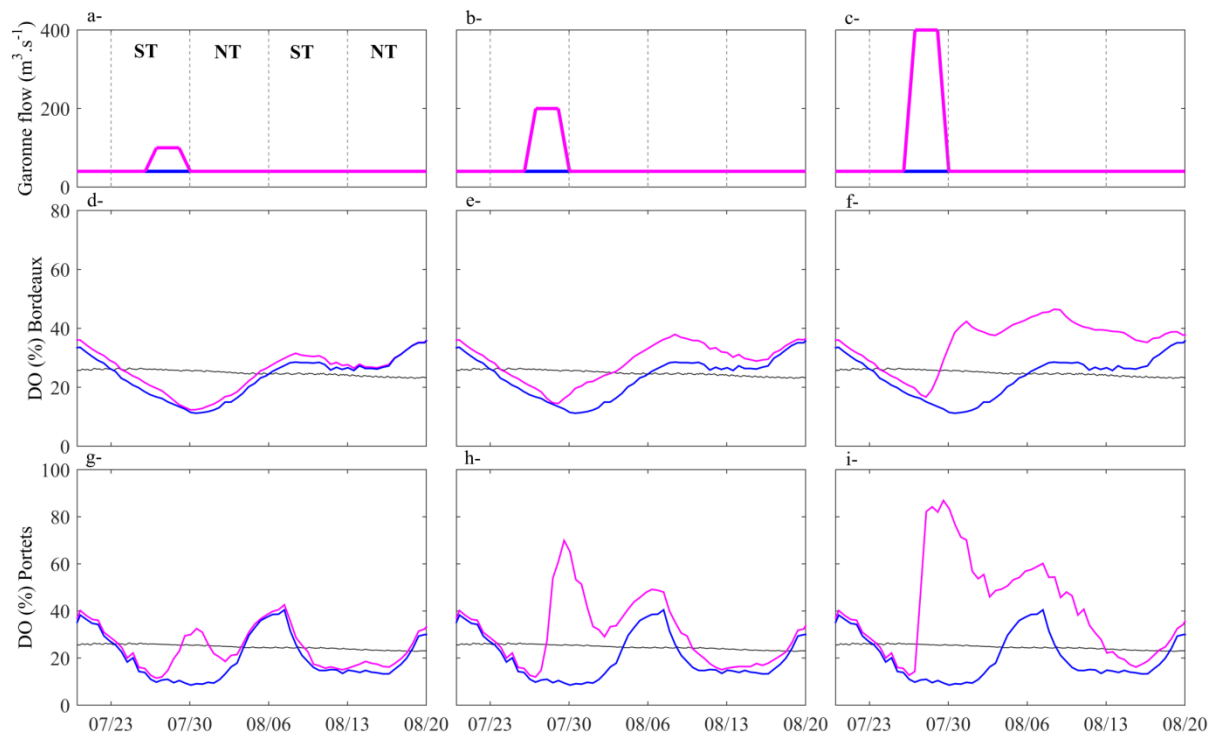


Figure 6

