



Framework to prioritize watersheds for diffuse pollution management in Korea: application of multicriteria analysis using the Delphi method

Gyumin Lee¹, Kyung Soo Jun², Minji Kang³

5 ¹Construction and Environmental Research Center, Sungkyunkwan University, Suwon, 16419, Republic of Korea

²Graduate School of Water Resources, Sungkyunkwan University, Suwon, 16419, Republic of Korea

³Water Environment Policy Division, Ministry of Environment, Sejong, 30103, Republic of Korea

Correspondence to: Minji Kang(skyjina@korea.kr)

10 **Abstract.**

This study aimed to develop a risk-based approach for determining control areas to manage non-point source pollution, developing a framework to prioritize catchments by considering the characteristics of polluted runoff from non-point sources. The best management, decision-making, and scientific approaches, such as TOPSIS and Delphi technique, are required for the designation of control areas and the application of the best management practices to the control areas. Multicriteria decision-making methods can handle the diversity and complexity of non-point source pollution. The Delphi technique was employed for selecting the assessment criteria/sub-criteria and determining their weights. Sub-criteria for each catchment unit were scored with either a quantitative or qualitative scale. All non-point pollution sources in South Korea mainland were included, with the exception of a few islands, with catchment prioritization and pollution vulnerability evaluations shown as thematic maps. This study contributes to the field by developing a new risk-based approach for ranking and prioritizing catchments; this provides valuable information for the Ministry of Environment to use to identify control areas and manage non-point source pollution.

1 **Introduction**

Diffuse pollution (Non-point source pollution) is a major issue in water quality management and catchment management (Hoppe et al., 2004; Huang and Xia, 2001; Lee and Bae, 2002; Orr et al., 2007). Pollutants accumulated on diverse diffuse sources generally moves by runoff and makes water quality problems worse. The water quality problems caused from diffuse pollution are influenced by meteorological, hydrologic and demographic characteristics of catchments. Insights and tools addressing complexity and uncertainty of the problems are required to solve the problems.

The diversity and complexity of diffuse pollution can be described by Catchment-based risk assessments (Candela et al. 2009; Wang and Yang, 2008) and the assessments can be undertaken by multi-criteria analysis (Huang et al., 2013). The multi-criteria analysis is suitable to draw a consultation for management on a complicated system. The approach is practical to deal



with many decision problems in environmental management which involve multiple conflicting evaluation criteria as well as a large number of spatial units (Zhang and Huang, 2011). Diverse methods were applied broad in water-related matter because catchment-based water management is complex and interactive due to the inherent trade-offs between social, political, ecological and economic factors (Kiker et al., 2005). Giupponi et al. (1999) developed a multi-criteria analysis system for producing risk maps of agricultural pollution. Munafo et al. (2005) developed a potential non-point pollution index (PNPI) to assess the global pressure on surface water bodies. Zhang and Huaug (2011) developed a GIS-based multi-criteria analysis method to assess the potential contributions of different land areas in diffuse nutrient export at the basin scale. Chun et al. (2012) took a risk-based approach to prioritize catchments for diffuse metal pollution management. Huang et al. (2013) employed multi-angle indicators of non-point source pollution, deficient waste treatment, and public awareness of environmental risk to identify key environmental risk sources contributing to water eutrophication and to suggest certain risk management strategies for rural area.

The Ministry of Environment (MOE) of Korea has tried to deal with diffuse pollution issue after the 2000s. The MOE currently enforces programs for the control of diffuse pollution under the Water Quality and Ecosystem Conservation Act (WQECA): the report on facility installation to reduce diffuse pollutants from new development sites or industrial sites, the designation and management of control areas to be required to manage diffuse pollution, and so on. The programs have been implemented under insufficient data, tools, information and knowledge for diffuse pollution. It makes it difficult to assess existing diffuse pollution, to establish the measures including selection and spatial allocation of management practices, or to evaluate the measures. Recently, sound decision making system and efficient resource allocation are significant issues in the Korean diffuse pollution management. The current decision making support system should be reorganized based on expert advice and scientific basis for more efficient policy implement.

We were interested in the development of a decision-aiding tool for the selection/designation of control areas. This study aimed to develop a framework to evaluate and to prioritize Korean watersheds in terms of the need of diffuse source management. The above-mentioned multi-criteria analysis was used for the purpose. Moreover, the Delphi method to obtain the most reliable consensus of a group of experts (Dalkey and Helmer, 1963; Linstone and Turoff, 1975, 2002; Okoli and Pawlowski, 2004) was employed to reflect expert's opinions in the framework development.

2 Methodology

2.1 Background and study procedure

The Ministry of Environment in South Korea has a plan to continuously expand diffuse pollution management areas until 2020. In 2009, the candidate management areas for industrial sites and small watersheds had been additionally determined for



conducting a feasibility study and preparing selection criteria. Relevant authorities also established the Second Comprehensive Plan for Diffuse Pollution Management ('12~ '20) in a collaborative project. As a part of this plan, an improvement scheme(draft) for the criteria of determining and assessing management areas has been prepared and implemented in order to expand diffuse pollution management areas and improve the related systems. Accordingly, the order of priority needs to be set on a scientific basis so that more desperate areas for diffuse pollution management could be systematically preferred. For the diffuse pollution policy, a vulnerability analysis and a map of vulnerable areas are required.

Some studies (Bang et al., 1997; Yoon et al., 2007; Choi et al., 2009; Park et al., 2014) by the Ministry of Environment and the Korea Environment Corporation have been conducted so far on the nomination of diffuse pollution management area. However, most of these studies assumed scenarios after considering significant factors and merely analyzed the scenarios to predict the results of assumptions. Consequently, determining, allocating and scoring the evaluation items and weights have become key research issues to identify vulnerable areas to non-point source pollution. To identify and prioritize vulnerable areas for diffuse pollution management, the evaluation items to be made as well as the weighting and scoring methods for each item are to be importantly considered and determined. In this regard, many experts have constantly expressed the opinion that research and survey are needed to propose specific indexes quantifying the contribution rates and weights, and to determine a selection method for the vulnerability assessment (Park et al., 2013).

The degradation of water quality and aquatic ecosystem due to diffuse pollution sources is related to uncertain factors such as emission characteristics of various pollutants, and climate and soil properties. Naturally, diverse solutions are being proposed by experts and interested parties, which prevent the clear policies from being firmly implemented. For efficient policy implementation, a quantitative, objective and scientific analysis needs to be conducted for factors causing diffuse pollution, and then the management areas are to be expanded. This will result in not only systematic policy implementation but also highly efficient low investment.

The process of the study to prioritize watersheds for diffuse pollution management in Korea is presented in Fig. 1.

Step 1 sets an evaluation framework and performs a Delphi survey for experts to determine evaluation items and weights.

Step 2 collects and quantifies data of each evaluation item for each watershed. The TOPSIS method, which is one of MCDM techniques, is applied for evaluation.

Step 3 prepares the vulnerable area map by using evaluation results, and selects major vulnerable areas.

2.2 Determining criteria with modified Delphi method

The Delphi method was developed by the RAND Corporation in the 1950's aimed to reduce the range of group responses and to strive for expert consensus. The Delphi method as a method for structuring a group communication process is accomplished by some feedback of individual contributions of information and knowledge, some assessment of the group judgment or view, some opportunity for individuals to revise views and some degree of anonymity in individual responses (Linstone and Turoff, 1975). A series of questionnaires with controlled opinion feedback is typically used for collecting and distilling knowledge from a group of experts (Rowe et al., 1991; Adler and Ziglio, 1996; Angus et al., 2003).The process that experts reply to



questionnaires, subsequently receive feedback, and modify their opinion is repeated until arriving at the most reliable consensus.

The Delphi method is effective in allowing a group of individuals, as a whole, to deal with a complex problem. (Mohorjy and Aburizaiza, 1997) and has been applied in various fields such as information system, planning, environmental impact
5 assessment, social policy and public health (Angus et al., 2003; Linstone and Turoff, 2002; Okoli and Pawlowski, 2004). Also, there were several applications in studies on water resources uses and management, water quality assessment and so on (Cude, 2001; Kim et al., 2013; Lee et al., 2013; Parparove et al., 2006; Parparov and Hambright, 2007).

For successful progress, there are two important considerations. First important thing is to select experts participating in our survey. We considered that the respondents should be experts with plenty of experiences and have a high level of responsibility.
10 Second important thing is to reach an agreement involving experts. Making consensus will take a long time as far as that goes because every experts have their own opinion that sometimes it is extremely different.

We have simplified Delphi process. The nub of modified Delphi procedure is that experts were provided detailed and concrete information for candidate criterion by organizing group. Fig. 2 explain the procedure of our modified Delphi.

Firstly, we selected a group of experts in diffuse pollution management of Korea. The experts are ones who have extensive
15 experiences with a high level of responsibility or have carried out a lot of research on diffuse pollution. Then we created an evaluation framework with the candidates of criteria and sub-criteria after examining literature and brainstorming. This is because it is time-consuming and inefficient to reach an agreement after every expert suggests an evaluation framework. A questionnaire was prepared to obtain opinion of experts for the framework's structure, the candidates of criteria and sub-criteria. After collecting and analyzing the judgments of a group of experts, the evaluation framework consisting of criteria and their
20 weights was determined if the consensus of the group emerged.

2.3 Assessing potential risk with TOPSIS

In this study, the criteria scores were estimated by the Technique for Order of Preference by Similarity to Ideal Solution (TOPSIS) method of multi-criteria decision analysis methods (Fishburn, 1967; Hwang and Yoon, 1981). The TOPSIS choose
25 the alternative of the shortest geometric distance from the positive ideal solution and the longest geometric distance from the negative ideal solution (Lai et al., 1994; Chu, 2002; Jun et al., 2011; Lee et al., 2013).

In addition, assessment results for all alternatives can be easily calculated and presented from multi- attribute perspective (Kim et al., 1997; Shih et al., 2007; Lee and Chung, 2007; Chung and Lee, 2009).

Here the Positive Ideal Solution (PIS) is the most vulnerable area and the Negative Ideal Solution (NIS) is the lowest vulnerable area. The TOPSIS procedure is as follows:

30 Construct the weighted decisions matrix (v_{ij})

$$v_{ij} = w_j \times x_{ij} \quad (1)$$



Where w_j is the weight of j^{th} criterion, x_{ij} are built by alternative A_j ($j = 1, \dots, n$) which are evaluated against criteria C_i ($i = 1, \dots, m$). the standardized data of each assessment unit area.

Determine the PIS(A^+) and NIS(A^-) of unit area

$$A^+ = v_1^+, \dots, v_n^+ \quad (2a)$$

$$5 \quad A^- = v_1^-, \dots, v_n^- \quad (2b)$$

Here $v_i^+ = \max(v_{ij})$, $v_i^- = \min(v_{ij})$

Calculate the distance from the positive ideal (d_i^+) and the negative ideal (d_i^-) solution for each alternative

$$d_i^+ = \left\{ \sum_{j=1}^n (v_{ij} - v_j^+)^2 \right\}^{1/2}, \quad i = 1 \dots, n \quad (3a)$$

$$d_i^- = \left\{ \sum_{j=1}^n (v_{ij} - v_j^-)^2 \right\}^{1/2}, \quad i = 1 \dots, n \quad (3b)$$

10 Calculate the optimum membership degree (D_i^+)

$$D^+ = \frac{d_i^-}{d_i^+ - d_i^-}, \quad (i = 1, \dots, m) \quad (4)$$

The priority of watersheds in terms of the need of diffuse pollution management was decided according to the criteria scores aggregated for watersheds. The priority of diffuse pollution management was represented in a map with a geographic information system (GIS).

15 3 Application

3.1 Study Area

The MOE shall regularly survey the kinds of sources of pollution in order to ascertain the current status of water quality and aquatic ecosystems by river-system spheres of influence and shall develop the basic plan for preserving the water quality and aquatic ecosystems (WQECA Article 22 and Article 23, 1997). The spatial extent of the investigation is the whole country of
 20 Korea.

The river-system spheres of influence are classified by small, medium and large areas of influence. In the study, the potential risk of diffuse pollution was evaluated for 814 watersheds which are the small areas of influence and the subjects of the pollution survey.

3.2 Determination of the evaluation framework by the Delphi survey

25 The evaluation framework, criteria and their weight were determined by the expert's agreement through the Delphi survey. The weights of multi-criteria were decided by the ranking method.

A nonpartisan expert pool and asked them whether they will participate or not. Total 12 experts gave us a positive answer. They worked in the following different sectors: government-funded research institutes (8%), private engineering companies



(17%), public servant (17%) and university (58%). All had doctoral-level training and most (80%) have been researching on diffuse source pollution management over 10 years.

Candidates of criteria and sub-criteria were organized based on brainstorming with literature research. Then, the draft questionnaire including candidate criteria was distributed for experts. This is the start of the first round. After we collected and analyzed the raw data from the questionnaires, we then revised the questionnaire. The modified questionnaire included the analysis result of previous survey. The round processed in the same way continued until consensus emerges.

A draft framework to prioritize the watersheds by evaluating the potential risk of diffuse pollution was developed in consideration of the availability of data related to diffuse pollution in Korea and the characteristics of diffuse pollution discussed in other studies (Chon et al., 2012; Novotny, 2002; Jang et al., 2012; Jung et al., 2011; Park et al. 2010). Although the diffuse pollution is irregular, variable and indefinable and its risk varies depending on the watershed (Candela et al., 2009; EA, 2007; U.S.EPA, 1997), the ‘source-pathway-receptor’ concept is applicable and useful for the evaluation. Chon et al. (2012) defined criteria of activities and land-use representing pollution source, rainfall and runoff characteristics, physical, chemical, and ecological status of receptor adopting the concept. Similarly, Jang et al. (2012) used the characteristics related to the process of generation, discharge and delivery to receiving waters of agricultural areas. In this study, pollution source, hydrologic process, and status of receiving water were employed as the groups to classify criteria.

The criteria of land use, activities in urban areas and agricultural areas and the sub-criteria such as population density, livestock numbers, fertilizer use, and area of different land use were selected for the pollution source; the criteria of rainfall and runoff and the sub-criteria such as annual rainfall, rainy days, drainage area, and runoff ratio for the hydrologic process, the criteria of water resource, water quality and aquatic ecosystem and the sub-criteria such as river flow, water quality of BOD, SS, and the indicator of aquatic ecosystem health for the status of receiving water. The criteria and the sub-criteria of the draft of evaluation framework are as shown in Table 1.

The Delphi survey was carried out to get the approval of experts for the evaluation framework. We selected the total 13 experts with intention of participating in the survey. The experts with experience, education and training at the doctoral-level have been working for government-funded research institutes, government-affiliated organizations or universities and most of them have been involved in the diffuse source pollution management over 10 years. The experts were asked to check the structure of the evaluation framework, to exclude/add the criteria and the sub-criteria and to decide their weight. At the first round, they supported the group and the criteria of the draft of evaluation framework but requested to modify some of the sub-criteria. The sub-criteria were classified by ‘Acceptance’, ‘Reject’, and ‘Addition’ and were revised for the second round. The feedback on the modified questionnaires was positive and the expert’s consensus was built as shown in Table 2.

In this study, two type of the weight sets selected by the expert panels are used. First type is the ranking sets (w_i^{rank}). For a given set of variables, each participant determines the ranking in the order of its highest value for each of the factors in a manner that determines and quantifies its importance. Thus, the most important factor becomes rank 1, and the next most important one is rank 2. At this point, the component may be ranked in the same order. The constructed ranks are aggregated



through the conversion, with Rank 1 being converted into $m-1$ and Rank 2 being converted into $m-2$. Where m is the total number of factors. Calculate the order of these conversions by the following eq. (5) and (6).

$$R_i = \sum_{j=1}^n R_{ij} \quad (5)$$

$$w_i^{rank} = R_i / \sum_{i=1}^m R_i \quad (6)$$

5 where R_i is the sum of transformed ranks, R_{ij} is the transformed rank what the rank selected by the j^{th} panel of experts subtracted from the total number of criteria is, m is the total number of criteria, n is the total number of expert panels.

The weights of the group, the criteria and the sub-criteria were determined by the ranks suggested by the experts. The experts judged that the pollution source (0.4853) is more important than the hydrologic process or the receiving water in the Group.

10 Second type of weights set is the rating sets (w_i^{rate}). It is a way to compare importance of criteria to distribute weights. The survey respondents will determine the weights for each criteria, but will then select values within the range given. The range of weights is a continuous section, generally ranging from 0.0 to 1.0 or up to 100.0. In addition, the sum of the weights given to all variables under comparison is equal to the maximum range given. A factor equivalent to 0.0, the lowest limit of the section, is of no importance to the assessment, whereas a maximum value means that a maximum number of possible values of significance are applied.

15 The weights may be calculated from the following eq. (7) and (8). It is also possible to set the same value by allocating the relative importance of each factor.

$$w_{ij} = p_{ij} / \sum_{i=1}^m p_{ij} \quad (7)$$

$$w_i^{rate} = \sum_{j=1}^n w_{ij} / \sum_{j=1}^n \sum_{i=1}^m w_{ij} \quad (8)$$

p_{ij} is the weight of criteria i , determined by Panel j .

20 The evaluation framework thus established can be applied flexibly in various conditions including securing of relevant data. In other words, if data are insufficient or uncertain, evaluations are conducted either by removing or applying such insufficiency or uncertainty, and the evaluation results are analyzed to improve the framework. This "Adaptive Management" method is an iterative approach (Holling, 1978; Waters, 1986) that enhances the management ability by accumulating accurate understanding and knowledge of response for a target system.

25 3.3 Collection, quantification and standardization of evaluation data

(1) Data collection and quantification for each evaluation item

Data such as population density, urbanization level and fertilizer use were collected from the source of either the statistics of local governments or the Statistics Korea, and the precipitation data including annual rainfall were provided by the Korea Meteorological Administration. In addition, land use map, industrial condition, combined/sanitary sewer system, livestock numbers, livestock barn area, watershed map, water resource and water quality were derived from the data surveyed by the Ministry of Environment (Table 4).



When values of each evaluation item for 814 small watersheds were determined, some data items were not measured or missed. As for the water quality data, if there is a water quality observatory in a watershed, the data were obtained from it, and if there is no such observatory and thus no measurement was available, data from an adjacent watershed or lake were analyzed and utilized. As for flow rate, if a small watershed consists of a single basin, the measurement of flow rate is attributable to the watershed. On the other hand, if there is another upstream small watershed, the measurement cannot indicate the characteristic of a single small watershed. In order to improve this problem, the flow rate, rainfall, and areas of the upstream basin and small watershed were used to calculate a specific discharge and determine the flow rate of each small watershed.

$$Q_2 = \frac{P_2 A_2}{P_1 A_1} Q_1 \quad (9)$$

where, Q is flow rate, P is rainfall and A is the basin area at the calculation point of flow rate. The subscript 1 means the reference point, and the subscript 2 indicates the calculation point of flow rate.

Since many small watersheds including estuaries do not have any measurement even at the level of middle watersheds, such watersheds were left unmeasured and a low score was given without using data of adjacent small watersheds. In addition, if necessary, flow rate data of a dam were also utilized to represent runoff characteristics of small watersheds.

25 (2) Standardization of evaluation items

Because each dataset for evaluation items has different units and properties, standardization is required to use datasets for evaluation. The re-scaling method was adopted in the standardization process. The overall range of data was normalized to assign values between 0 and 1, as described in the equation (10).

$$X_i = \frac{x_i - x_{min}}{x_{max} - x_{min}} \quad (10)$$

20 where, X_i is the i -th standardized value, x_i is the i -th data value, x_{max} is the maximum value, and x_{min} is the minimum value. However, in case the data collected are used to standardize evaluation items without modification, the standardized scores are often either biased or equalized in their range and distribution according to characteristics and types of data. Accordingly, since it seemed to be unreasonable to apply the above equation with no modification, the data collected were prioritized and the consequential order of priority was scored before the equation was used for standardization.

25 3.4 Assessing Vulnerability

The vulnerability of every small watershed to diffuse pollution was evaluated by using data and weights for each factor, and the vulnerable areas were determined based on this assessment (Fig. 3). In addition, the small watersheds were prioritized again in each of 4 large watersheds, and top 30 small watersheds are illustrated in Fig. 4. This was because the pollution source management and relevant policies were organized based on the large watersheds. Both ranking and ratio methods were applied to calculate weights.

Among top 50 small watersheds in the order of priority in each large watershed, main rivers and small watersheds, which required diffuse pollution source management, were derived in each river system.



Han River basin has 3 priority control target river: down stream of Namhan River, Mid-down stream of Han River and Anseong stream. Geum River basin has 4 priority control target river: mid stream of Geum River, Dongjin River, Mankyeng River and Sapgyo stream.

Youngsan River basin has 2 priority control target river: Youngsan River and Sumjin River. Most vulnerable area of Nakdong River basin is in main stream of Nakdong River.

The evaluation results were analyzed in terms of effects of each evaluation factor. It turned out that if a large number of livestock are reared and much fertilizer is used in a basin, the land area is wide and the public water has much soil and high SS concentration, such a watershed needs to be preferentially managed.

10 3 Conclusion

There are little studies to assess watersheds in respect of the diffuse pollution management in Korea. This study has suggested a scientific analysis method for selecting priority areas in the current diffuse pollution management system. As various uncertain factors are included in assessing vulnerable areas to diffuse pollution sources, such factors need to be quantified and analyzed objectively and scientifically. The Delphi method was used to determine the vulnerability evaluation items, which included basin characteristics, pollution source and water quality, and weights for diffuse pollution, on the basis of expert opinions. Criteria and sub-criteria were allocated into three groups of pollution source, hydrologic process, and receiving water. Based on the weights and evaluation items thus obtained, data of each item were applied, and the vulnerability to diffuse pollution was assessed by the TOPSIS method. The proposed evaluation process will promote efficient policy implementation and set a foundation for scientific/clear diffuse pollution management.

In addition, this study attempted a small watershed-based analysis for more selective/intensive policy enforcement. However, it was difficult to standardize quantitatively each evaluation item, which was needed to determine management areas, at the level of small watershed. Accordingly, a runoff model needs to be applied to improve the estimations for unmeasured areas. A vulnerability assessment system for diffuse pollution is also to be established in order to promote efficient policy enforcement. Such system should update relevant data and enable cyclic reevaluation.

Finally, this study has not reflected the current diffuse pollution management policy in the list of evaluation items. It was because the effect of the policy could not be accurately quantified. A further study will solve this problem and include the current policy in assessment.



Acknowledgement

This study was financially supported by the Basic Science Research Program of the National Research Foundation of Korea (NRF), which is funded by the Ministry of Education (NRF-2016R1A6A3A11932509).

References

- 5 Adler, M. and Ziglio, E.: Gazing into the Oracle: The Delphi method and its application to social policy and public health, Kingsley Publishers, London, 1996.
- Angus, A.J., Hodge, I. D., McNally, S. and Sutton, M.A.: The setting of standards for agricultural nitrogen emissions: a case study of the Delphi technique. *J. Environ. Manage.*, 69, 323-33, <https://doi.org/10.1016/j.jenvman.2003.09.006>, 1996.
- Bang, K. W., Lee, J. H., and Yu, M. J.: Study of the runoff characteristics of nonpoint sources in small urban watersheds, *J. Korean Soc. Water Qual.*, 13, 79-99, 1997. [Korean Literature]
- 10 Candela A, Freni G, Mannina G, Viviani G.: Quantification of diffuse and concentrated pollutant loads at the watershed-scale: An Italian case study, *Water Sci. Technol.*, 59, 2125–2135, <https://doi.org/10.2166/wst.2009.882>, 2009.
- Choi, J. W., Lee, H., Shin, D. S., and Cheon, S. U.: Evaluation of Estimated Storm Runoff and Non-Point Pollutant Discharge from Upper Watershed of Daecheong Reservoir during Rainy Season Using L-THIA ArcView GIS Model, *J. Korean Soc. Water Environ.*, 25, 984-993, available at: <https://www.kci.go.kr/kciportal/ci/sereArticleSearch/ciSereArtiView.kci?sereArticleSearchBean.artiId=ART001394342> (last access: 30 November 2018), 2009. [Korean Literature]
- 15 Chun, H.-S., Ohandja, D.-G. and Voulvoulis, N.: A risk-based approach catchments for diffuse metal pollution management, *Sci. Total Environ.*, 437, 42-52, <https://doi.org/10.1016/j.scitotenv.2012.07.045>, 2012.
- 20 Chung, E. S. and Lee, K. S.: Prioritization of water management for sustainability using hydrologic simulation model and multicriteria decision making techniques, *J. Environ. Manage.*, 90, 1502–1511, <https://doi.org/10.1016/j.jenvman.2008.10.008>, 2009.
- Cude, C. G.: Oregon water quality index: a tool for evaluation water quality management effectiveness1, *J. Am. water Resour. As.*, 37, 125-137, <https://doi.org/10.1111/j.1752-1688.2001.tb05480.x>, 2001.
- 25 Chu, TC.: Selecting plant location via a Fuzzy TOPSIS approach, *Int. J. Adv. Manuf. Technol.*, 20, 859–864, <https://doi.org/10.1007/s001700200>, 2002.
- Dalkey, N. C. and Helmer-Hirschberg, O.: An experimental application of the Delphi method to the use of experts. Santa Monica, CA: RAND Corporation, available at: https://www.rand.org/pubs/research_memoranda/RM727z1.html (last access:30 November 2018), 1962.
- 30 EA(Environment Agency): The unseen threat to water quality: Diffuse water pollution in England and Wales report, Bristol, 2007.



- Fishburn, P. C.: Additive utilities with incomplete product set: Applications to priorities and assignments, *Oper. Res.*, 15, 537-542, <http://www.jstor.org/stable/168461>, 1967
- Giupponi C. and Rosato, P.: Agricultural land use changes and water quality: A case study in the watershed of the Lagoon of Venice, *Water Sci. Technol.*, 39, 135-148, [https://doi.org/10.1016/S0273-1223\(99\)00045-1](https://doi.org/10.1016/S0273-1223(99)00045-1), 1999.
- 5 Holling C.S.: Adaptive environmental assessment and management, John Wiley & Sons, Chichester, UK. ISBN 9781932846072, 1978.
- Hoppe, H., Weilandt, M. and Orth, H.: A Combined water management approach based on river water quality standards, *J. Environ. Inform.*, 3, 67-76, <https://doi.org/10.3808/jei.200400028>, 2004.
- Huang, G. H. and Xia, J.: Barriers to sustainable water-quality management, *J. Environ. Manage.*, 61, 1-23,
10 <https://doi.org/10.1006/jema.2000.0394>, 2001.
- Huang, L., Ban, J., Han, Y. T., Yang, J. and Bi, J.: Multi-angle in dicators system of non-point pollution source assessment in rural areas: a case study near Taihu lake, *Environ. Manage.*, 51, 939-950, <https://doi.org/10.1007/s00267-013-0024-x>, 2013.
- Hwang, B. H., Kim, D. I., Yoon, Y. S., and Han, K. Y.: Non-Point Source Quantification Analysis Using Swat in Nakdong River Watershed, *J.Korea Water Resour. Assoc.*, 43, 367-381, available at:
15 <https://www.kci.go.kr/kciportal/ci/sereArticleSearch/ciSereArtiView.kci?sereArticleSearchBean.artiId=ART001439183> (last access: 30 November 2018), 2010. [Korean Literature]
- Hwang, C. L. and Yoon, K.: Multiple attribute decision making: Methods and applications. New York: Springer-Verlag, <https://doi.org/10.1007/978-3-642-48318-9>, 1981.
- Jang, N. J., Kim, B. G., Im, S. H., and Kim, T. K.: A study on evaluation of target region for the agricultural non-point sources
20 management, *J. Korean Soc. Environ Eng.*, 34, 23-31, available at:
<https://www.kci.go.kr/kciportal/ci/sereArticleSearch/ciSereArtiView.kci?sereArticleSearchBean.artiId=ART001661415> (last access: 30 November 2018), 2012. [Korean Literature]
- Jung, W. H., Yi, S. J., Kim, G. H., and Jeong, S. M.: Watershed selection for diffuse pollution management based on flow regime alteration and water quality variation analysis, *J. Korean Soc. Water Qual.*, 27, 228-234, 2011. [Korean Literature]
- 25 Jun, K. S., Chung, E. S., Kim, J. Y., and Lee, K. S.: Development of spatial water resources vulnerability index considering climate change impacts. *Sci. Total Environ.*, 409, 5228–5242, <https://doi.org/10.1016/j.scitotenv.2011.08.027>, 2011.
- Kiker, G. A., Bridges, T. S., Varghese, A., Seager, T. P. and Linkov, I.: Application of multicriteria decision analysis in environmental decision making, *Integr. Environ. Asses.*, 1, 95-108, https://doi.org/10.1897/IEAM_2004a-015.1, 2005.
- Kim, G., Park, C. S., and Yoon, K. P.: Identifying investment opportunities for advanced manufacturing systems with
30 comparative-integrated performance measurement, *Int. J. Prod. Econ.*, 50, 23–33, [https://doi.org/10.1016/S0925-5273\(97\)00014-5](https://doi.org/10.1016/S0925-5273(97)00014-5), 1997.
- Kim, Y. and Chung, E. S.: Assessing climate change vulnerability with group multi-criteria decision making approaches, *Climatic Change*, 121, 301-315, <https://doi.org/10.1007/s10584-013-0879-0>, 2013.



- Lai, Y. J., Liu, T.Y. and Hwang, C.L.: TOPSIS for MODM, *European Journal of Operational Research*, 76, 486-500, [https://doi.org/10.1016/0377-2217\(94\)90282-8](https://doi.org/10.1016/0377-2217(94)90282-8), 1994.
- Lee, H. D. and Bae, C. H.: Runoff characteristics and strategies for nonpoint source reduction, *J. Korean Soc. Water Qual.*, 18, 569-576, 2002. [Korean Literature]
- 5 Lee, G., Jun, K.S. and Chung, E.S.: Integrated multi-criteria flood vulnerability approach using fuzzy TOPSIS and Delphi technique, *Nat. Hazards Earth Syst. Sci.*, 13, 1293-1312, <https://doi.org/10.5194/nhess-13-1293-2013>, 2013.
- Lee, K. S. and Chung, E. S.: Development of integrated watershed management schemes for an intensively urbanized region in Korea, *J. Hydro-Environ. Res.*, 1, 95–109, <https://doi.org/10.1016/j.jher.2007.07.004>, 2007.
- Linstone, H. A. and Turoff, M.: *The Delphi method: Techniques and applications*, Addison-Wesley Publishing Company, ISBN-10: 0201042932, 1975.
- 10 Mohorjy A. M. and Aburizaiza, O. S.: Impact assessment of an improper effluent control system: A Delphi approach, *Environ. Impact Asses.*, 17, 205-217, [https://doi.org/10.1016/S0195-9255\(97\)00012-7](https://doi.org/10.1016/S0195-9255(97)00012-7), 1997.
- Munafo, M., Cecchi, G., Baiocco, F. and Mancini, L.: River pollution from non-point sources: a new simplified method of assessment, *Journal of environmental management*, 77, 93-98, <https://doi.org/10.1016/j.jenvman.2005.02.016>, 2005.
- 15 Novotny V.: *Water quality: diffuse pollution and watershed management*. 2nd ed. John Wiley and Sons, Ltd, ISBN: 978-0-471-39633-8, 2002.
- Okoli, C. and Pawlowski, S. D.: The Delphi method as a research tool: an example, design considerations and applications, *Information and management*, 42, 15-29, <https://doi.org/10.1016/j.im.2003.11.002>, 2004.
- Orr, P., Colvin, J. and King, D.: Involving stakeholders in integrated river basin planning in England and Wales. *Water Resour. Manage.*, 21, 331-349. <https://doi.org/10.1007/s11269-006-9056-9>, 2007.
- 20 Park, B. K., Ahn, K. H., Kim, E. J., Kang, M.J., Park, J. D., Park, J. H., Jeong, J. H., Kim, Y. S. Rhew, D. H. and Lee, G.: Decision of prioritization of catchments and determination of control target for non-point source pollution management (II), *Watershed Environment Research Department Water Environment Research Department National Institute of Environmental Research* (NIER-RP2014-319), available at:
- 25 <http://www.ndsl.kr/ndsl/commons/util/ndslOriginalView.do?dbt=TRKO&cn=TRKO201500013947&rn=&url=&pageCode=PG18> (last access: 30 November 2018), 2014. [Korean Literature]
- Park, B. K., Kang, M.J., Kim, E. J., Ryu, J. C., Kim, S. J., Ahn, K. H., Kim, H. T., Park, J. H., Shin, D. S., Kim, Y. S. and Rhew, D. H.: Decision of prioritization of catchments and determination of control target for non-point source pollution management - fouce on the prioritization of catchments (I), *Water Environment Research Department, Water Pollution Load Management Research Division, National Institute of Environmental Research* (NIER-RP2013-276), available at: <http://webbook.me.go.kr/DLi-File/NIER/06/020/5570235.pdf> (last access: 30 November 2018), 2013. [Korean Literature]
- 30 Park, S. H., Jeong, W. H., Yi, S. J., and Lim, B. S.: A study for the selection method of control area of nonpoint pollution source, *J. Korean Soc. Water Environ.*, 26, 761-767, available at:



- <https://www.kci.go.kr/kciportal/ci/sereArticleSearch/ciSereArtiView.kci?sereArticleSearchBean.artiId=ART001486738> (last access: 30 November 2018), 2010. [Korean Literature]
- Parparov, A., Hambright, K.D., Hakanson, L. and Ostapenia, A.: Water quality quantification: Basics and implementation, *Hydrobiologia*, 560, 227–237, <https://doi.org/10.1007/s10750-005-1642-y>, 2006.
- 5 Parparov A. and Hambright K. D.: Composite water quality: Evaluation and management feedbacks, *Water Qual. Res. J. Can.*, 42, 20-25, <https://doi.org/10.2166/wqrj.2007.004>, 2007.
- Rowe, G., Wright, G. and Bolger, F.: Delphi: A reevaluation of research and theory, *Technol. Forecast. Soc.*, 39, 235-251, [https://doi.org/10.1016/0040-1625\(91\)90039-I](https://doi.org/10.1016/0040-1625(91)90039-I), 1991.
- Shih, H.-S., Shyur, H.-J., Lee, E.S.: An extension of TOPSIS for group decision making, *Math. Comp. Model.*, 45, 801-81, <https://doi.org/10.1016/j.mcm.2006.03.023>, 2007.
- 10 U.S. EPA. Exposure Factors Handbook (1997, Final Report). U.S. Environmental Protection Agency, Washington, DC, EPA/600/P-95/002F a-c, 1997.
- Walters C. J.: Adaptive Management of Renewable Resources, Macmillan Publishers Ltd. Basingstoke, UK., ISBN 0-02-947970-3, 1986.
- 15 Wang, J. L. and Yang, Y. S.: An approach to catchment-scale groundwater nitrate risk assessment from diffuse agricultural sources: a case study in the Upper Bann, Northern Ireland, *Hydrological Processes*, 22, 4274-4286, <https://doi.org/10.1002/hyp.7036>, 2008.
- WQECA(Water Quality and Ecosystem Conservation Act) Article 22 and Article 23, Ministry of Environment, available at: <http://www.moleg.go.kr/english/korLawEng?pstSeq=47543> (last access: 30 November 2018), 1997
- 20 Yoon, C. G., Shin, A. H., Jung, K. W., and Jang, J. H.: A Study on BASINs/WINHSPF for Evaluation of Non-Point Source Reduction Efficiency in the Upstream of Nam-Han River Watershed, *J. Korean Soc. Water Environ.*, 23, 951-960, available at: <https://www.kci.go.kr/kciportal/ci/sereArticleSearch/ciSereArtiView.kci?sereArticleSearchBean.artiId=ART001209003> (last access: 30 November 2018), 2007. [Korean Literature]
- Zhang, H. and Huang, G.H.: Assessment of non-point source pollution using a spatial multicriteria analysis approach, *Ecological modelling*, 222, 313-321, <https://doi.org/10.1016/j.ecolmodel.2009.12.011>, 2011.
- 25

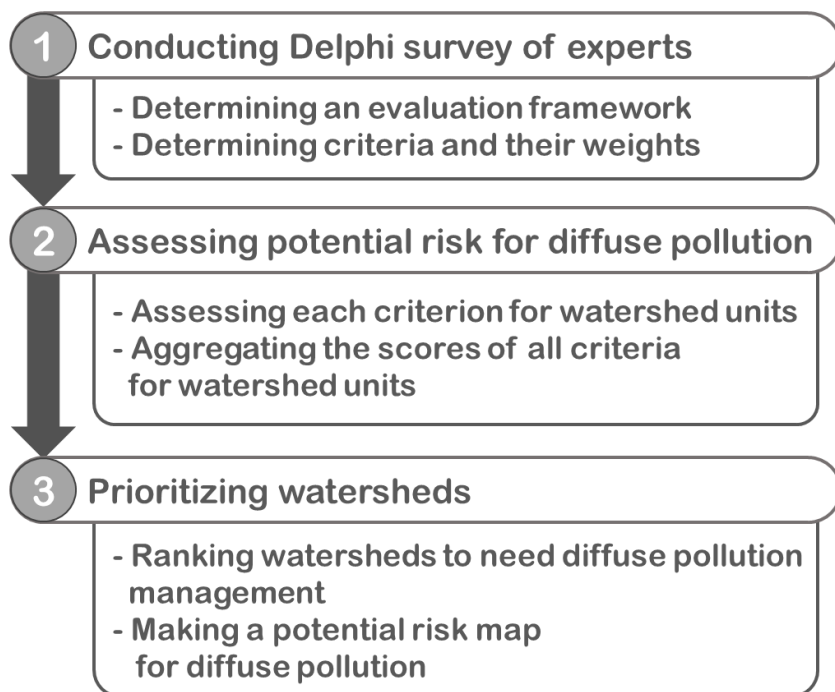


Figure 1: Study procedure.

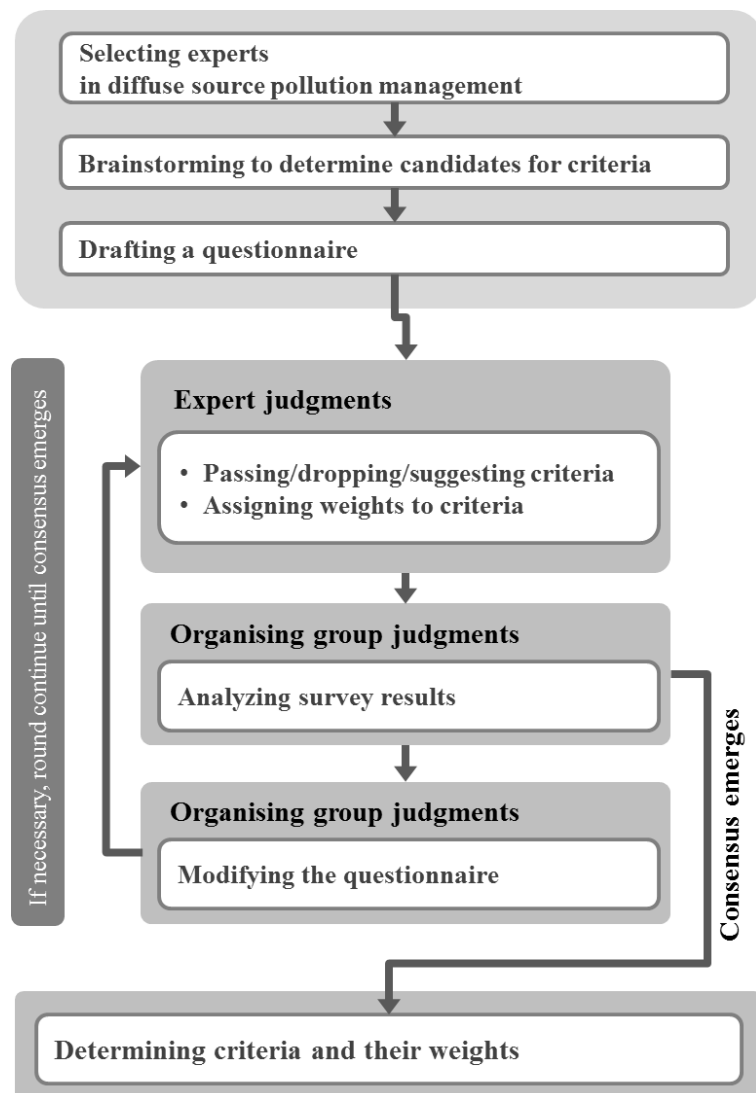


Figure 2: Delphi survey procedure.

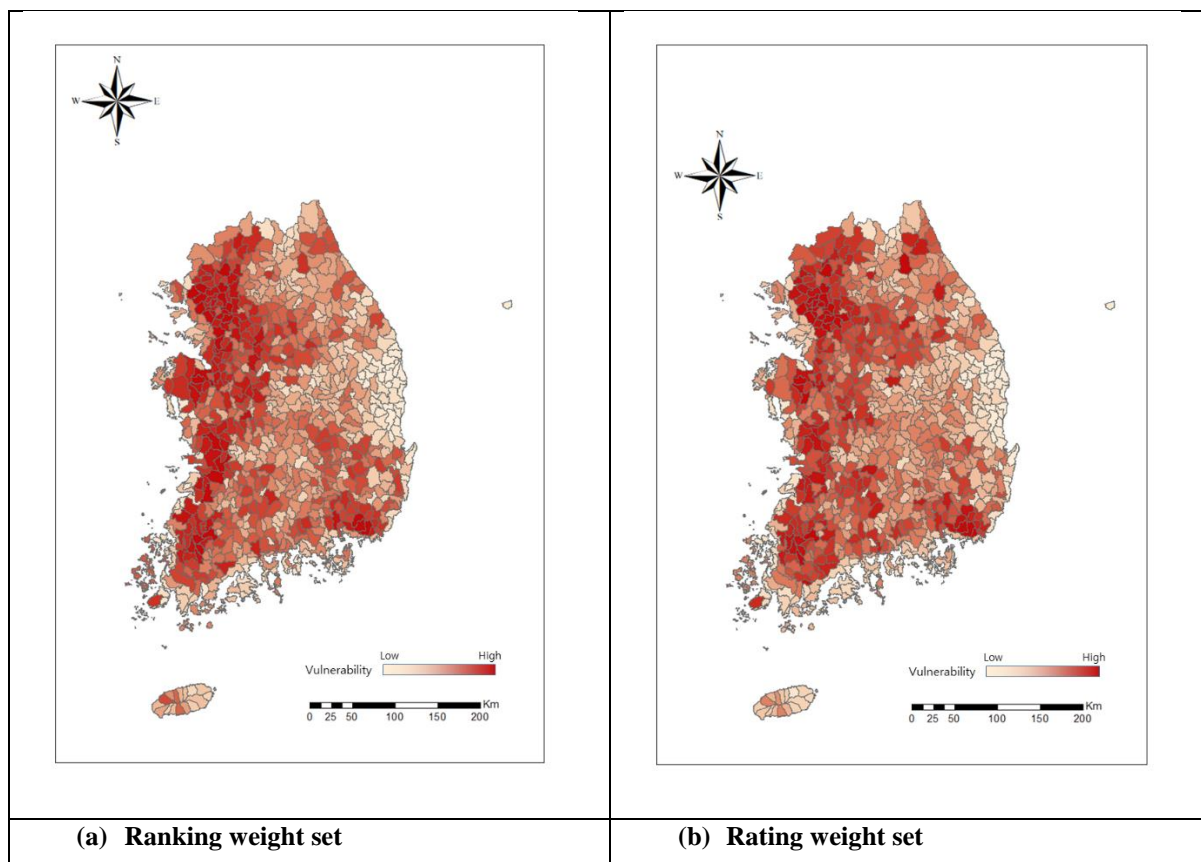


Figure 3: Spatial diffuse pollution vulnerability results for South Korea.

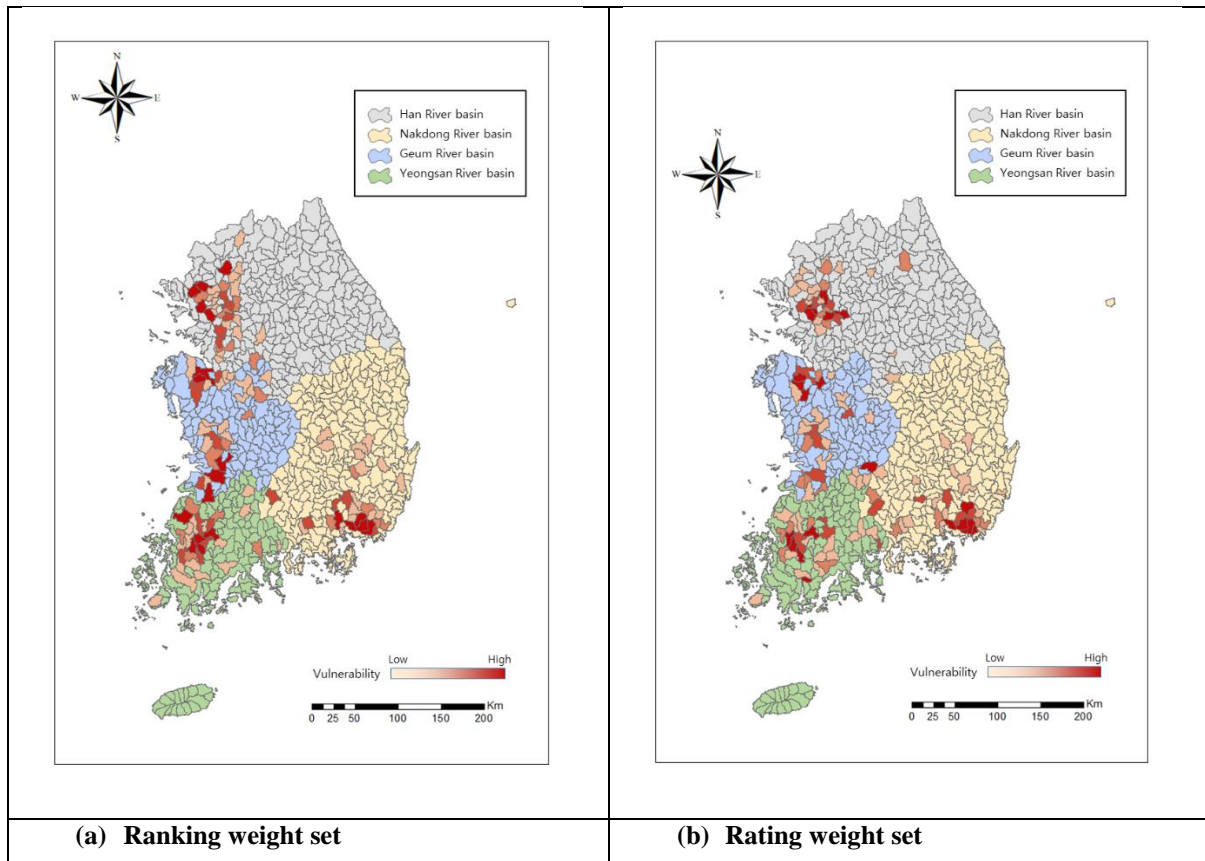


Figure 4: Top 30 small watersheds of diffuse pollution vulnerability for each 4 large watersheds.



Table 1. A set of criteria and sub-criteria for the draft of evaluation framework

Group	Pollution source			Hydrologic process		Receiving water		
Criterion	Activities in urban areas	Activities in agricultural areas	Land use	Rainfall	Runoff	Water resource	Water quality	Aquatic ecosystem
Sub-criterion	<ul style="list-style-type: none"> · Population density · Urbanization level · Industrial condition 	<ul style="list-style-type: none"> · Total area of Fish farm · Livestock numbers · Livestock barn area · Fertilizer use 	<ul style="list-style-type: none"> · Ratio of impervious area · Road area · Farming area · Forest area 	<ul style="list-style-type: none"> · Annual rainfall · Rainy days · Maximum rainfall 	<ul style="list-style-type: none"> · Drainage area · Runoff ratio · Soil permeability 	<ul style="list-style-type: none"> · River flow · River improvement 	<ul style="list-style-type: none"> · General items (BOD, TN, T-P) · Items for muddy water (SS, turbidity) · Other items 	<ul style="list-style-type: none"> · Aquatic ecosystem health



Table 2. Determination of the evaluation framework by the Delphi survey

Group	Criterion	1 st round		2 nd round	
		Sub-criterion	Judgment	Sub-criterion	Judgment
Pollution source	activities in urban areas	Population density	Acceptance	Population density	Acceptance
		Urbanization level	Acceptance	Urbanization level	Acceptance
		Industrial condition	Acceptance	Industrial condition	Acceptance
		-	Addition	Combined/Sanitary sewer system	Acceptance
	activities in agricultural areas	Total area of Fish farm	Reject	-	-
		Livestock numbers	Acceptance	Livestock numbers	Acceptance
		Livestock barn area	Acceptance	Livestock barn area	Acceptance
		fertilizer use	Acceptance	fertilizer use	Acceptance
	Land use	Ratio of impervious area	Modification	urban area(impervious area)*	Acceptance
		Road area	Modification		Acceptance
		Farming area	Modification	Paddy area*	Acceptance
			Modification	Farming area*	Acceptance
		Forest area	Modification	Forest area*	Acceptance
-		-	Other areas*	Acceptance	
Hydrologic process	Rainfall	Annual rainfall	Acceptance	Annual rainfall	Acceptance
		Rainy days	Acceptance	Rainy days	Acceptance
		Maximum rainfall	Reject	-	-
		-	Addition	Average rainfall intensity	Acceptance
		-	Addition	Average rainfall duration	Reject
	Runoff	Watershed area	Acceptance	watershed area	Acceptance
		Runoff ratio	Modification	Land cover	Modification (CN)
		Soil permeability	Acceptance	Soil permeability	
		-	Addition	Watershed Shape	Acceptance
		-	Addition	Average slope of a watershed	Acceptance
Receiving water	Water resource	River flow	Acceptance	River flow	Acceptance
		River improvement	Acceptance	River improvement	Acceptance
	Water quality	BOD, TN, T-P	Acceptance	BOD, TN, T-P	Acceptance
		SS, turbidity	Acceptance	SS, turbidity	Modification (SS)
		Other items	Acceptance	Other items	Acceptance
	Aquatic ecosystem health	Aquatic ecosystem health	Acceptance	Aquatic ecosystem health	Acceptance



Table 3. Determination of the weights by the Delphi survey

Group	Weights		Criterion	Weights		Sub-criterion	Weights				
	W_{Rank}	W_{Rate}		W_{Rank}	W_{Rate}		W_{Rank}	W_{Rate}			
Pollution source	0.4853	0.5077	Activities in urban area	0.3333	0.3300	Population density	0.0479	0.2597			
						Urbanization level	0.0336	0.2338			
						Industrial condition	0.0427	0.2687			
						Combined/Sanitary sewer system	0.0375	0.2378			
			Activities in agricultural areas	0.3611	0.3500	Land use	0.3056	0.3200	Livestock numbers	0.0696	0.3850
									Livestock barn area	0.0361	0.2350
									Fertilizer use	0.0696	0.3800
									Urban area	0.0452	0.3380
			Hydrologic process	0.2206	0.2218	Rainfall	0.3714	0.3960	Paddy area	0.0349	0.2200
									Farming area	0.0392	0.2400
									Forest area	0.0179	0.1060
									Other areas	0.0111	0.0960
									Annual rainfall	0.0361	0.3767
									Rainy days	0.0229	0.2867
Receiving water	0.2941	0.2705	Runoff	0.6286	0.6040	Average rainfall intensity	0.0229	0.3366			
						Watershed area	0.0319	0.2269			
						Curve Number	0.0540	0.3594			
						Watershed shape	0.0196	0.1718			
						Average slope of a watershed	0.0331	0.2419			
						Water resource	0.2985	0.3000			
Aquatic ecosystem	0.4925	0.4850	Water quality	0.2090	0.2150	River flow	0.0585	0.7200			
						River improvement	0.0293	0.2800			
						BOD, TN, T-P	0.0476	0.3000			
						SS	0.0692	0.4900			
						Other items	0.0281	0.2100			
Aquatic ecosystem health	0.0615	1.0000									



Table 4. Methods of collection and quantification for Criteria

Group	Criterion	Sub-criterion	Methods of collection and quantification
Pollution source	Activities in urban area	Population density	Population per unit area (man/km ²)
		Urbanization level	Percentage of the total population living in urban areas
		Industrial condition	Estimation with the business scale ¹⁾ , the emission of specific/specified substance harmful to the quality of water²⁾ , and the tolerance area of the quality standard ³⁾ 1) level 1 - 5 point, level 2 - 4 point, level 3 - 3 point, level 4 - 2 point, level 5 - 1 point 2) emission - 2 point, non-1 point 3) Exceptional area 4 points, clean area 3 points, area type 1- 2 points, area type 2- 1 point
		Combined/Sanitary sewer system	Estimate the sum of values with the weights ¹⁾ using the ratio of the sewage system, combined sewer system, the area without public sewage system 1) the ratio of the sewage system 0.25, the ratio of combined sewer system 0.5, the ratio of the area without public sewage system 1.0
	Activities in agricultural areas	Livestock numbers	Estimation of livestock numbers with the weights ¹⁾ by the type of livestock ¹⁾ 1) The type of livestock on Total Maximum Daily Loads system parts 2) Wastewater unit Discharge Flow and Loading Rates by the type of livestock (Milk cow 0.5673, Korean native cattle 0.1816, Horse 0.1207, Pig 0.1070, Sheep and deer 0.0087, Dog 0.0137, Poultry 0.0010)
		Livestock barn area	Estimate the sum of farm area on the type of livestock
		Fertilizer use	Total consumption of nitrogen, phosphorous, and fertilizer per year
	Land use	Urban area	Calculate the sum of urban area in land use
		Paddy area	Calculate the sum of paddy area in land use
		Farming area	Calculate the sum of farming area in land use
		Forest area	Calculate the sum of forest area in land use
		Other areas	Calculate the sum of other area in land use
	Hydrologic process	Rainfall	Annual rainfall
Rainy days			Calculate the sum of rainy days per year
Average rainfall intensity			Mean value of hourly rainfall intensity of the rainfall event per year
Runoff		Watershed area	Area of watershed
		Curve Number	Calculate the average CN Number using land cover area and hydrologic soil group
		Watershed shape	Shape Factor ¹⁾ 1) Basin shape factor is the ratio of basin length to effective basin width
		Average slope of a watershed	Calculating mean slope aspect each cell in DEM (Digital Elevation Model)
Receiving water	Water resource	River flow	Average discharge of measuring points



	River improvement	Assessment score of inhabitation/waterside environment ¹⁾ 1) natural longitudinal and transverse shoal of river, width of Riverside, sediment quality, river-crossing structures, channel characteristics, embankment material, land use in inner and outer land, treatment Facilities, and etc.
Water quality	BOD, TN, T-P	Calculate the sum of standardized ¹⁾ BOD, TN, TP on measuring points 1) the ratio of each water watershed to total watershed of average resource
	SS	Standardized SS of water quality measurement site
	Other items (COD, Chlorophyll a, water temperature)	Calculate the sum of standardized COD, Chlorophyll a, water temperature on measuring points
Aquatic ecosystem	Aquatic ecosystem health	Total score of aquatic ecosystem health ¹⁾ 1) Mean of Trophic Diatom Index of attached algae, Korea Purity biotic Index (KPI) using benthic macroinvertebrates, and Index of Biological Integrity (IBI) of fish