

Back-calculation of the 2017 Piz Cengalo-Bondo landslide cascade with r.avaflow

Martin Mergili, Michel Jaboyedoff, José Pullareello, Shiva P. Pudasaini

Response to the comments of Referee #2 (Brian McArdell)

We would like to thank the reviewer for the constructive remarks. Below, we address each comment in full detail. Our response is written in blue colour. Changes in the manuscript are highlighted in yellow colour.

This manuscript describes the application of r.avaflow to a two-process sediment cascade involving a rock avalanche and subsequent debris flows. While the manuscript is interesting, clear and concise and is certainly of interest to users of r.avaflow, the manuscript has the character of a case study and the application of the model and concepts to other field sites is limited by the fact that the model must be calibrated for every new application. This suggests that r.avaflow is perhaps only useful for post-event analysis and not for predictive hazard analyses.

Yes, this is an important point. Indeed, we currently do not recommend r.avaflow for predictive simulations of complex landslides, as the understanding of the parameterization is not good enough. It is exactly this type of study presented here which we consider important to improve this understanding and the related challenges. We have tried to better highlight this key point of the work in the discussion and the conclusions of the revised manuscript. At the beginning of the last paragraph of the discussion, we have therefore added the following sentence (L364-366):

The present work is seen as a further step towards a better understanding of the challenges and the parameterization concerning the integrated simulation of complex mass flows. More case studies are necessary to derive guiding parameter sets facilitating predictive simulations of such events (Mergili et al., 2018a, b).

And at the end of the conclusions (L389-390):

Finally, more case studies of complex mass flows have to be performed in order to derive guiding parameter sets serving for predictive simulations.

r.avaflow is not the only model capable of describing such coupled processes, but readers may well get this impression after reading the manuscript. At a minimum, a discussion of other models and how they also described similar process transitions would be helpful for the reader, e.g. Iverson et al.'s work on runout modelling of the Oso landslide. The manuscript requires some new literature sections (other models), some new discussion sections (shortcomings and advantages of both models), and a few relatively minor clarifications (below) before it can be published. Some minor points are listed below.

See detailed comments below.

General Comments

1. Is it accurate to call r.avaflow a GIS-based model? Certainly the user interface relies extensively on a GIS interface, but I was under the impression that the model is based on a numerical solution of the shallow-water equations for granular flows, e.g. the flow model written mainly by Shiva Pudasaini.

This is a good point. In our opinion, it is an issue of wording. We would certainly call r.avaflow a GIS-based *tool*, as it strongly relies on GIS data as input, and also provides GIS data as output. The Pudasaini (2012) *model* is not directly GIS-based, we fully agree with that. Therefore, we refer to r.avaflow as a GIS-based *tool* in the revised manuscript, instead of a GIS-based numerical *model*.

2. While it is certainly efficient to refer to previous publications about the model and to not re-state the equations used in the model, I think that some description of the equations solved in the model would be appropriate for the reader. Otherwise, it is impossible to understand the manuscript without referring to the paper where the model is described. Does it include terms to describe the influence of curvature on the solution?

This is, in our opinion, a very controversial issue with this type of case studies. Even though we can follow the thoughts behind the suggestion, the problem is that just showing the main equations would open up more questions than it would answer – covering the equations in sufficient detail would make the paper extremely lengthy and would distract the readers from the actual topic of trying to reproduce the Piz Cengalo-Bondo event and push the work in a direction which differs from the intended one. Therefore, we strongly prefer to refrain from re-describing the fundamental equations behind the tool. The effects of curvature are implicitly reflected in the optimized parameter set, but are not explicitly considered in this specific set of simulations. A comprehensive and proper implementation of curvature terms will be an important aspect in the future (we are already working on it), but is not subject of the present work.

3. Section 5: Please define CSI, D2PC, and FoC. Interested readers should at least be able to see how they are defined without having to refer to the Mergili et al., 2018b paper. This is only a few sentences and it would save interested readers a fair amount of work.

Yes, this is a good point. In the revised manuscript, we have added a brief description of these three parameters at the end of the first paragraph of Section 5 (L239-243):

CSI and D2PC measure the correspondence of the observed and simulated impact areas. Both indicators can range between 0 and 1, whereby values of CSI close to 1 and values of D2PC close to 0 point to a good correspondence. FoC indicates whether the observed impact areas are overestimated ($FoC > 1$), or underestimated by the simulation ($FoC < 1$). More details are provided by Formetta et al. (2015) and by Mergili et al. (2017, 2018a).

4. Lines 211, 284, 290,340, and possibly elsewhere: I have no idea what you mean by the term “empirical adequacy” which sounds like it could include anything that is physically possible (instead of physically plausible). Please use a different expression.

Empirical adequacy just means that the simulation results are in line with the reference data, telling nothing about physical plausibility. The term was used e.g. by Oreskes et al. (1994) and, in our opinion, describes exactly what we want it to describe. We would not know about a better term for that.

Oreskes, N., Shrader-Frechette, K., & Belitz, K. (1994). Verification, validation, and confirmation of numerical models in the earth sciences. *Science*, 263(5147), 641-646.

5. Lines 284-292: I've heard similar statements by Prof. Florian Amann and I believe it was also mentioned by S. Demmel in her masters thesis, or in the WSL 2017 report. I have seen this idea presented this several times at different conferences, so it is unfair to not at least mention that it is not your hypothesis.

We cannot follow this point of criticism. The first paragraph of the discussion mainly discusses some challenges of the model and the simulation results at a general level, thereby citing the work of Huggel et al. (2005) and the report of WSL (2017). We do not see where to add more references.

6. Others (e.g. Iverson & George) have developed similar two-phase models that are capable of describing process chains. This paper gives a false impression that r.avaflow is the only model capable of describing the runout of coupled processes. Please include a few paragraphs describing and/or comparing and contrasting your model with previous ones.

Yes, we can follow this point of criticism. In the revised manuscript, the model of Iverson and George (2014) and the software D-Claw are mentioned in the introduction, and also in the Discussion. However, in our opinion this approach shows various shortcomings, compared to the Pudasaini (2012) model: Iverson and George (2014) presented a depth-averaged two-phase mass flow model which includes five field variables: the evolution of the solid volume fraction, basal pore-fluid pressure, flow thickness and the bulk velocities. The source terms account for the influence of the granular dilation rate. The model is based on several postulates and empirical relations, including the dilation rate. However, the model assumes that the solid and fluid velocities are the same. Instead of naturally occurring six field variables, in their model, there are only five field variables. So, from the general two-phase perspective, their system is not complete, as in general, the relative velocity between the solid and fluid phase is not negligible. Moreover, their pore fluid pressure evolution equation only includes pore pressure advection and some source terms associated with dilation, but ignores the pore fluid diffusion, another potentially important aspect of fluid flow dynamics in mixture mass flows (Iverson and Denlinger, 2001; Pudasaini et al., 2005). There are no real interfacial momentum transfers, such as the drag force, virtual mass force and buoyancy between the solid and fluid phases. Furthermore, as the fluid pressure evolution is assumed to play a substantial role in their debris flow model, then the solid and fluid dynamics cannot be similar, and thus assumption of negligible relative velocity between solid and fluid is questionable (Pitman and Le, 2005; Pudasaini, 2012). Iverson and George (2014) do not consider viscous shear stress, which can play crucial role in the natural debris flows (Pitman and Le, 2005; Takahashi, 2007; Pudasaini, 2012). Moreover, in situations when the solid material behaves as isotropic material, in Iverson and George (2014) there is no dynamical coupling between the pore fluid pressure evolution and the bulk momentum equations, interactions appear only via source terms that also disappear in liquefaction.

As discussed, the Pudasaini (2012) model is the most general two-phase mass flow model that exists today, that includes all the basic mechanics and flow dynamical aspects of real two-phase solid fluid mixture mass flows with strong interfacial momentum transfer between the phases. The model can be used for any mixture composition of solid and fluid, including dry and fluid limits. So, it has been successfully applied to different flow scenarios including the cascading natural events (Mergili et al., 2017, 2018a, 2018b).

Although the Iverson and George (2014) model is restricted from the real phase-interactions, this model could still be useful for very dense debris flows where the solid particles and fluid molecules move together. The model has been solved with in an open source software, called D-Claw (George and Iverson, 2014). And the model output has been compared with some results from two sets of large-scale debris flow experiments of debris-flow mobilization (Iverson RM, Reid ME, Iverson NR, LaHusen RG, Logan M, Mann JE, Brien DL 2000 Acute sensitivity of landslide rates to initial soil porosity. Science 290, 513-516. (doi:10.1126/science.290.5491.513)), and debris-flow dynamics and deposition (Iverson RM, Logan M, LaHusen RG, Berti M 2010 The perfect debris flow? aggregated results from 28 large-scale experiments. J. Geophys. Res. 115, 1-29. (doi:10.1029/2009JF001514)), both with dense debris materials.

Since there are no explicit and independent equations for the solid and fluid phase momentum transfer the model by Iverson and George (2014) cannot be applied for cascading mass flows, such as landslides impacting fluid reservoirs (Pudasaini, 2014; Kafle et al., 2016, 2019), or glacial lake outburst floods (Kattel et al., 2016).

Consequently, the model of Iverson and George (2014) is mentioned in the introduction of the revised manuscript, and the following statement has been added to the discussion (L317-321):

Still, the Pudasaini (2012) model – and the extended multi-phase model (Pudasaini and Mergili, 2019) – are currently considered best practice. Other bulk mixture or two-phase models, most notably the approach presented by Iverson and George (2014) implemented in the software D–Claw, are less general and do not consider the relative velocity between the phases, pore fluid diffusion, and interfacial momentum transfers at a comparable level, and are therefore less useful for the simulation of cascading effects.

Specific comments

Lines 85-86: The statement that the deposit did not connect to the main channel of Val Bondasca is incorrect. The 2011 deposit certainly covered the uppermost part of the Val Bondasca and therefore is connected hydrologically and geomorphologically. The main torrent channel after the 2011 event went over and eroded the deposits of the 2011 rock avalanche deposit. Please correct this error, or more precisely state how it was “not connected”. This is clearly evident in publications of others, e.g. Frank et al. (2019) which illustrates the triggering of debris flows in Val Bondasca following the 2011 rock avalanche. Frank, F., Huggel, C., McArdeil, B. W., & Vieli, A.(2019). Landslides and increased debris-flow activity: a systematic comparison of six catchments in Switzerland. Earth Surface Processes and Landforms, 44(3), 699-712.<https://doi.org/10.1002/esp.4524>.

Thanks a lot for this comment and the reference. We have changed the text accordingly (L79-82):

On 27 December 2011, a rock avalanche with a volume of 1.5–2 million m³ developed out of a rock toppling from the NE face of Piz Cengalo, travelling for a distance of 1.5 km down to the uppermost part of the Val Bondasca (Haeberli et al., 2013; De Blasio and Crosta, 2016; Amann et al., 2018). This rock avalanche reached the main torrent channel. Erosion of the deposit thereafter resulted in increased debris flow activity (Frank et al., 2019).

Lines 102-103. These data are almost certainly from the Canton of Grisons and not from the WSL, although they were certainly repeated in the WSL 2017 report.

We only found the data in the WSL report and have completed the reference as follows:

data from the Canton of Grisons reported by WSL, 2017

Lines 129-130. This statement about the pore-water pressure rise is somewhat speculative and should be treated as a hypothesis and not as a fact. Rock avalanche deposits (e.g. the 2011 deposits) are often described as having relatively low porosity, and therefore one could, possibly, also expect dilation upon compression which would cause a drop in pore-water pressure and not a rise. The river-bed sediments, and possibly the moraine deposits, upon which the 2017 rock avalanche flowed would be more reasonable candidates for the mechanism you describe here.

We absolutely agree that the pore water pressure rise is a hypothesis rather than a fact. This is also clearly indicated by the start of the sentence: *Walter et al. (2019) claim that ...*

Lines 221-222: Did you try other grid resolutions? This resolution, based on my own experience using CFD models (also with a GIS user interface) indicates to me that the grid size is fine for the rock avalanche runout modelling but too coarse for the debris-flow runout modelling.

This is an important issue, indeed. We have also tried 5 m resolution, but the results for this specific case were not substantially different, only the computational time increased considerably.

Line 237: What do you mean by total discharge? The sum of the discharge of all of the phases, or the sum of different flow paths comprising the flow. Or do you mean maximum discharge or the maximum discharge sum of all of the phases? From the text it appears to be a peak discharge value and not just a total value.

With total discharge, we meant solid+fluid discharge. The text was reformulated accordingly in order to avoid confusion.

Line 346: A brief re-statement of the Scenarios would be reasonable here for the reader.

We have reformulated the start of the conclusions as follows (L377-378):

Both of the investigated Scenarios S1 (debris flow developing at the front of the rock avalanche) and S2 (debris flow developing at the back of the rock avalanche, overtopping the deposit) ...

Table 1: It's confusing to have Zones A, B, and so on, as well as scenario sets A & B. perhaps you could use lower-case letters for scenarios a and b, or use something like SA or SB to make it completely unambiguous.

Yes, this is true – we have changed the names of the scenarios to S1 and S2.

Figure 5 is a nice graphical depiction of the two scenarios.

Thank You!

Back-calculation of the 2017 Piz Cengalo-Bondo landslide cascade with r.avaflow

Martin Mergili^{1,2}, Michel Jaboyedoff³, José Pullarello³, Shiva P. Pudasaini⁴

¹ Institute of Applied Geology, University of Natural Resources and Life Sciences (BOKU), Peter-Jordan-Straße 82, 1190 Vienna, Austria

² Geomorphological Systems and Risk Research, Department of Geography and Regional Research, University of Vienna, Universitätsstraße 7, 1010 Vienna, Austria

³Institute of Earth Sciences, University of Lausanne, Quartier UNIL-Mouline, Bâtiment Géopolis, 1015 Lausanne, Switzerland

⁴ Institute of Geosciences, Geophysics Section, University of Bonn, Meckenheimer Allee 176, 53115 Bonn, Germany

Correspondence to: M. Mergili (martin.mergili@boku.ac.at)

Abstract

In the morning of 23 August 2017, around 3 million m³ of granitoid rock broke off from the east face of Piz Cengalo, SE Switzerland. The initial rock slide-rock fall entrained 0.6 million m³ of a glacier and continued as a rock(-ice) avalanche, before evolving into a channelized debris flow that reached the village of Bondo at a distance of 6.5 km after a couple of minutes. Subsequent debris flow surges followed in the next hours and days. The event resulted in eight fatalities along its path and severely damaged Bondo. The most likely candidates for the water causing the transformation of the rock avalanche into a long-runout debris flow are the entrained glacier ice and water originating from the debris beneath the rock avalanche. In the present work we try to reconstruct conceptually and numerically the cascade from the initial rock slide-rock fall to the first debris flow surge and thereby consider two scenarios in terms of qualitative conceptual process models: (i) entrainment of most of the glacier ice by the frontal part of the initial rock slide-rock fall and/or injection of water from the basal sediments due to sudden rise in pore pressure, leading to a frontal debris flow, with the rear part largely remaining dry and depositing mid-valley; and (ii) most of the entrained glacier ice remaining beneath/behind the frontal rock avalanche, and developing into an avalanching flow of ice and water, part of which overtops and partially entrains the rock avalanche deposit, resulting in a debris flow. Both scenarios can be numerically reproduced with the two-phase mass flow model (Pudasaini, 2012) implemented with the simulation software r.avaflow, based on plausible assumptions of the model parameters. However, these simulation results do not allow to conclude on which of the two scenarios is the more likely one. Future work will be directed towards the application of a three-phase flow model (rock, ice, fluid) including phase transitions, in order to better represent the melting of glacier ice, and a more appropriate consideration of deposition of debris flow material along the channel.

Keywords: Debris flow, Entrainment, High-mountain process chain, Rock avalanche, Two-phase flow model, r.avaflow

1 Introduction

Landslides lead to substantial damages to life, property, and infrastructures every year. Whereas initial landslides in hilly terrain have mostly local effects, landslides in high-mountain areas, with elevation differences of thousands of metres over a few kilometres may form the initial points of process chains which, due to their interactions with glacier ice, snow, lakes, or basal material, sometimes evolve into long-runout debris avalanches, debris flows or floods. Such complex landslide events may occur in remote areas, such as the 2012 Alpl rock-snow avalanche in Austria (Preh and Sausgruber, 2015) or the 2012 Santa Cruz multi-lake outburst event in Peru (Mergili et al., 2018a). If they reach inhabited areas, such events lead to major destruction even several kilometres away from the source and have led to major disasters in the past, such as the 1949 Khait rock avalanche-loess flow in Tajikistan (Evans et al., 2009b); the 1962 and 1970 Huascarán rock fall-debris avalanche events in Peru (Evans et al., 2009a; Mergili et al., 2018b); the 2002 Kolka-Karmadon ice-rock avalanche in Russia (Huggel et al., 2005); the 2012 Seti River debris flood in Nepal (Bhandari et al., 2012); or the 2017 Piz Cengalo-Bondo rock avalanche-debris flow event in Switzerland. The initial fall or slide sequences of such process chains are commonly related to a changing cryosphere such as glacial debuttressing, the formation of hanging glaciers, or a changing permafrost regime (Harris et al., 2009; Krautblatter et al., 2013; Haeberli and Whiteman, 2014; Haeberli et al., 2017).

Computer models assist risk managers in anticipating the impact areas, energies, and travel times of complex mass flows. Conventional single-phase flow models, considering a mixture of solid and fluid components (e.g. Voellmy, 1955; Savage and Hutter, 1989; Iverson, 1997; McDougall and Hungr, 2004; Christen et al., 2010), do not serve for such a purpose. Instead, simulations rely on (i) model cascades, changing from one approach to the next at each process boundary (Schneider et al., 2014; Somos-Valenzuela et al., 2016); or (ii) bulk mixture models or two- or even multi-phase flow models (Pitman and Le, 2005; Pudasaini, 2012; Iverson and George, 2014; Mergili et al., 2017). Worni et al. (2014) have highlighted the advantages of (ii) for considering also the process interactions and boundaries. Two- or multi-phase flow models separately consider the solid and the fluid phase, but also phase interactions.

The aim of the present work is to learn about our ability to reproduce sophisticated transformation mechanisms involved in complex, cascading landslide processes, with GIS-based tools. For this purpose, we apply the computational tool r.avaflow (Mergili et al., 2017), which employs an enhanced version of the Pudasaini (2012) two-phase flow model, to back-calculate the 2017 Piz Cengalo-Bondo landslide cascade in SE Switzerland, which was characterized by the transformation of a rock avalanche to a long-runout debris flow. We consider two scenarios in terms of hypothetical qualitative conceptual models of the physical transformation mechanisms. On this basis, we try to numerically reproduce these scenarios, satisfying the requirements of physical plausibility of the model parameters, and empirical adequacy in terms of correspondence of the results with the documented and inferred impact areas, volumes, velocities, and travel times. Based on the outcomes, we identify the key challenges to be addressed in future research.

Thereby we rely on the detailed description, documentation, and topographic reconstruction of this recent event. The event documentation, data used, and the conceptual models are outlined in Section 2. We briefly introduce the simu-

lation framework r.avaflow (Section 3) and explain its parametrization and our simulation strategy (Section 4) before presenting (Section 5) and discussing (Section 6) the results obtained. Finally, we conclude with the key messages of the study (Section 7).

2 The 2017 Piz Cengalo-Bondo landslide cascade

2.1 Piz Cengalo and Val Bondasca

The Val Bondasca is a left tributary valley to the Val Bregaglia in the canton of the Grisons in SE Switzerland (Fig. 1). The Bondasca stream joins the Mera River at the village of Bondo at 823 m asl. It drains part of the Bregaglia Range, built up by a mainly granitic intrusive body culminating at 3678 m asl. Piz Cengalo, with a summit elevation of 3368 m asl, is characterized by a steep, intensely fractured NE face which has repeatedly been the scene of landslides, and which is geomorphologically connected to the Val Bondasca through a steep glacier forefield. The glacier itself has largely retreated to the cirque beneath the rock wall.

On 27 December 2011, a rock avalanche with a volume of 1.5–2 million m³ developed out of a rock toppling from the NE face of Piz Cengalo, travelling for a distance of 1.5 km down to the uppermost part of the Val Bondasca (Haeberli et al., 2013; De Blasio and Crosta, 2016; Amann et al., 2018). This rock avalanche reached the main torrent channel. Erosion of the deposit thereafter resulted in increased debris flow activity (Frank et al., 2019). No entrainment of glacier ice was documented for this event. As blue ice had been observed directly at the scarp, the role of permafrost for the rock instability was discussed. An early warning system was installed and later extended (Steinacher et al., 2018). Displacements at the scarp area, measured by radar interferometry and laser scanning, were few centimetres per year between 2012 and 2015, and accelerated in the following years. In early August 2017, increased rock fall activity and deformation rates alerted the authorities. A major rock fall event occurred on 21 August 2017 (Amann et al., 2018).

2.2 The event of 23 August 2017

The complex landslide which occurred on 23 August 2017 was documented mainly by reports of the Swiss Federal Institute for Forest, Snow and Landscape Research (WSL), the Laboratory of Hydraulics, Hydrology and Glaciology (VAW) of the ETH Zurich, and the Amt für Wald und Naturgefahren (Office for Forest and Natural Hazards) of the canton of Grisons.

At 9:31 am local time, a volume of approx. 3 million m³ detached from the NE face of Piz Cengalo, as indicated by WSL (2017); Amann et al. (2018); and the point cloud we obtained through structure from motion using pictures taken after the event. Documented by videos and by seismic records (Walter et al., 2018), it impacted the glacier beneath the rock face and entrained approx. 0.6 million m³ of ice (VAW, 2017; WSL, 2017), was sharply deflected at an opposite rock wall, and evolved into a rock(-ice) avalanche. Part of this avalanche immediately converted into a debris flow which flowed down the Val Bondasca. It was detected at 9:34 by the debris flow warning system which had been installed near the hamlet of Prä approx. 1 km upstream from Bondo. According to different sources, the debris flow

surge arrived at Bondo between 9:42 (derived from WSL, 2017) and 9:48 (Amt für Wald und Naturgefahren, 2017). The rather low velocity in the lower portion of the Val Bondasca is most likely a consequence of the narrow gorge topography, and of the viscous behaviour of this first surge. Whereas approx. 540,000 m³ of material were involved, only 50,000 m³ arrived at Bondo immediately (data from the Canton of Grisons reported by WSL, 2017). The remaining material was partly remobilized by six further debris flow surges recorded during the same day, one on 25 August, and one – triggered by rainfall – on 31 August 2017. All nine surges together deposited a volume of approx. 500,000–800,000 m³ in the area of Bondo, less than half of which was captured by a retention basin (Bonanomi and Keiser, 2017).

The vertical profile of the main flow path is illustrated in Fig. 4. The total angle of reach of the process chain from the initial release down to the outlet of the Bondasca Valley was approx. 17.4°, computed from the travel distance of 7.0 km and the vertical drop of approx. 2.2 km. The initial landslide to the terminus of the rock avalanche showed an angle of reach of approx. 25.8°, derived from the travel distance of 3.4 km and the vertical drop of 1.7 km. This value is lower than the 22° predicted by the equation of Scheidegger (1973), probably due to the sharp deflection of the initial landslide. Following the concept of Nicoletti and Sorriso-Valvo (1991), the rock avalanche was characterized by channelling of the mass. Only a limited run-up was observed, probably due to the gentle horizontal curvature of the valley in that area (no orthogonal impact on the valley slope; Hewitt, 2002). There were eight fatalities, concerning hikers in the Val Bondasca, extensive damages to buildings and infrastructures, and evacuations for several weeks or even months.

2.3 Data and conceptual model

Reconstruction of the rock and glacier volumes involved in the event was based on an overlay of a 2011 swisstopo MNS-Digital Elevation Model (DEM) (contract: swisstopo–DV084371), derived through airborne laser scanning in 2011 and available at a raster cell size of 2 m, and a Digital Surface Model (DSM) obtained through Structure from Motion (SfM) techniques after the 2017 event. This analysis resulted in a detached rock volume of 3.27 million m³, which is slightly more than the value of 3.15 million m³ reported by Amann et al. (2018), and an entrained ice volume of 770,000 m³ (Fig. 5). However, these volumes neglect smaller rock falls before and after the large 2017 event, and also glacial retreat. The 2011 event took place after the DTM had been acquired, but it released from an area above the 2017 scarp. The boundary between the 2011 and the 2017 scarps, however, is slightly uncertain, which explains the discrepancies between the different volume reconstructions. Assuming some minor entrainment of the glacier ice in 2011 and some glacial retreat, we arrive at an entrained ice volume of 600,000 m³, a value which is very well supported by VAW (2017).

There is still disagreement on the origin of the water having led to the debris flow, particularly to the first surge. Bonanomi and Keiser (2017) clearly mention meltwater from the entrained glacier ice as the main source, whereby much of the melting is assigned to impact, shearing and frictional heating directly at or after impact, as it is often the situation in rock-ice avalanches (Pudasaini and Krautblatter, 2014). WSL (2017) has shown, however, that the energy re-

leased was only sufficient to melt approx. half of the glacier ice. Water pockets in the glacier or a stationary water source along the path might have played an important role (Demmel, 2019). Walter et al. (2019) claim that much of the glacier ice was crushed, ejected and dispersed (Fig. 3b), whereas water injected into the rock avalanche due to pore pressure rise in the basal sediments would have played a major role. In any case, the development of a debris flow from a landslide mass with an overall solid fraction of as high as ~ 0.85 (considering the water equivalent of the glacier ice) requires some spatio-temporal differentiation of the water/ice content. We consider two qualitative conceptual models – or scenarios – possibly explaining such a differentiation:

S1 The initial rock slide-rock fall led to massive entrainment, fragmenting and melting of glacier ice, mixing of rock with some of the entrained ice and the meltwater, and injection of water from the basal sediments into the rock avalanche mass quickly upon impact due to overload-induced pore pressure rise. As a consequence, the front of the rock avalanche was characterized by a high content of ice and water, highly mobile, and therefore escaped as the first debris flow surge, whereas the less mobile rock avalanche behind – still with some water and ice in it – decelerated and deposited mid-valley. The secondary debris flow surges occurred mainly due to backwater effects. This scenario largely follows the explanation of Walter et al. (2019) that the first debris flow surge was triggered at the front of the rock avalanche by overload and pore pressure rise, whereas the later surges overtopped the rock avalanche deposits, as indicated by the surficial scour patterns.

S2 The initial rock slide-rock fall impacted and entrained the glacier. Most of the entrained ice remained beneath and developed into an avalanching flow of melting ice behind the rock avalanche. The rock avalanche decelerated and stopped mid-valley. Part of the avalanching flow overtopped and partly entrained the rock avalanche deposit – leaving behind the scour traces observed in the field – and evolved into the channelized debris flow which arrived at Bondo a couple of minutes later. The secondary debris flow surges started from the rock avalanche deposit due to melting and infiltration of the remaining ice, and due to backwater effects. This scenario is similar to the theory developed at the WSL Institute for Snow and Avalanche Research (SLF), who also did a first simulation of the rock avalanche (WSL, 2017).

Fig. 6 illustrates the conceptual models attempting to explain the key mechanisms involved in the rock avalanche-debris flow transformation.

3 The simulation framework r.avaflow

r.avaflow represents a comprehensive GIS-based open source framework which can be applied for the simulation of various types of geomorphic mass flows. In contrast to most other mass flow simulation tools, r.avaflow utilizes a general two-phase-flow model describing the dynamics of the mixture of solid particles and viscous fluid and the strong interactions between these phases. It further considers erosion and entrainment of surface material along the flow path. These features facilitate the simulation of cascading landslide processes such as the 2017 Piz Cengalo-Bondo event. r.avaflow is outlined in full detail by Mergili and Pudasaini (2019). The code, a user manual, and a collection of

test datasets are available from Mergili (2019). Only those aspects directly relevant for the present work are described in this section.

Essentially, the Pudasaini (2012) two-phase flow model is employed for computing the dynamics of mass flows moving from a defined release area (solid and/or fluid heights are assigned to each raster cell) or release hydrograph (at each time step, solid and/or fluid heights are added at a given profile, moving at a given cross-profile velocity) down through a DEM. The spatio-temporal evolution of the flow is approximated through depth-averaged solid and fluid mass and momentum balance equations (Pudasaini, 2012). This system of equations is solved through the TVD-NOC Scheme introduced by Nessyahu and Tadmor (1990), adapting an approach presented by Tai et al. (2002) and Wang et al. (2004). The characteristics of the simulated flow are governed by a set of flow parameters (some of them are shown in the Tables 1 and 2). Compared to the Pudasaini (2012) model, some extensions have been introduced which include (i) ambient drag or air resistance (Kattel et al., 2016; Mergili et al., 2017); and (ii) fluid friction, governing the influence of basal surface roughness on the fluid momentum (Mergili et al., 2018b). Both extensions rely on empirical coefficients, C_{AD} for the ambient drag and C_{FF} for the fluid friction. Further, drag and viscosity are computed according to enhanced concepts. As in Domnik et al. (2013) and Pudasaini and Mergili (2019), the fluid viscosity is enhanced by the yield strength. Most importantly, the internal friction angle φ and the basal friction angle δ of the solid are scaled with the solid fraction in order to approximate effects of reduced interaction between the solid particles and the basal surface in fluid-rich flows.

Entrainment is calculated through an empirical model. In contrast to Mergili et al. (2017), where an empirical entrainment coefficient is multiplied with the momentum of the flow, here we multiply the entrainment coefficient C_E ($s\ kg^{-1}\ m^{-1}$) with the kinetic energy of the flow:

$$q_{E,s} = C_E |T_s + T_f| \alpha_{s,E}, \quad q_{E,f} = C_E |T_s + T_f| (1 - \alpha_{s,E}), \quad (1)$$

where $q_{E,s}$ and $q_{E,f}$ ($m\ s^{-1}$) are the solid and fluid entrainment rates, T_s and T_f (J) are the kinetic energies of the solid and fluid fractions of the flow, and $\alpha_{s,E}$ is the solid fraction of the entrainable material. Solid and fluid flow heights and momenta, and the change of the basal topography, are updated at each time step (see Mergili et al., 2017 for details).

As *r.avaflow* operates on the basis of GIS raster cells, its output essentially consists of raster maps –for all time steps and for the overall maximum – of solid and fluid flow heights, velocities, pressures, kinetic energies, and entrained heights. In addition, output hydrograph profiles may be defined at which solid and fluid heights, velocities, and discharges are provided at each time step.

4 Parameterization of *r.avaflow*

One set of simulations is performed for each of the Scenarios S1 and S2 (Fig. 6), considering the process chain from the release of the rock slide-rock fall to the arrival of the first debris flow surge at Bondo. Neither triggering of the event nor subsequent surges or distal debris floods beyond Bondo are considered in this study. Equally, the dust cloud associ-

ated to the rock avalanche (WSL, 2017) is not the subject here. Initial sliding of the glacier beneath the rock avalanche, as assumed in **Scenario S2**, cannot directly be modelled. That would require a three-phase model, which is beyond the scope here. Instead, release of the glacier ice and meltwater is assumed in a separate simulation after the rock avalanche has passed over it. We consider this workaround an acceptable approximation of the postulated scenario (Section 6).

We use the 2011 swisstopo MNS-DEM, corrected for the rock slide-rock fall scarp and the entrained glacier ice by overlay with the 2017 SfM DSM (Section 2). The maps of release height and maximum entrainable height are derived from the difference between the 2011 swisstopo DTM and the 2017 SfM DSM (Fig. 5; Section 2). The release mass is considered completely solid, whereas the entrained glacier is assumed to contain some solid fraction (coarse till). The glacier ice is assumed to melt immediately on impact and is included in the fluid along with fine till. We note that the fluid phase does not represent pure water, but a mixture of water and fine particles (Table 2). The fraction of the glacier allowed to be incorporated in the process chain is empirically optimized (Table 3). Based on the same principle, the maximum depth of entrainment of fluid due to pore pressure overload in **Scenario S1** is set to 25 cm, whereas the maximum depth of entrainment of the rock avalanche deposit in **Scenario S2** is set to 1 m.

The study area is divided into six zones A–F (Fig. 4 and Fig. 7; Table 1). Each of these zones represents an area with particular **geomorphic characteristics and dominant process types**, which can be translated into model parameters. Due to the impossibility to directly measure the key parameters in the field (Mergili et al., 2018a, b), the parameters summarized in Table 1 and Table 2 are the result of an iterative optimization procedure, where multiple simulations with different parameter sets are performed in order to arrive at one “optimum” simulation for each scenario. It is thereby important to note that we largely derive one single set of optimized parameters, which is valid for both of the scenarios. Optimization criteria are (i) the empirical adequacy of the model results, and (ii) the physical plausibility of the parameters. Thereby, the empirical adequacy is quantified through comparison of the results with the documented impact area, the travel times to the output hydrograph profiles O2, O3, and O4 (Fig. 7), and the reported volumes (Amt für Wald und Naturgefahren, 2017; Bonanomi and Keiser, 2017; WSL, 2017). The physical plausibility of the model parameters is evaluated on the basis on the parameters suggested by Mergili et al. (2017) and on the findings of Mergili et al. (2018a, b). The values of the basal friction angle (δ), the ambient drag coefficient (C_{AD}), the fluid friction coefficient (C_{FF}), and the entrainment coefficient (C_E) are differentiated between and within the zones (Table 1), whereas global values are defined for all the other parameters (Table 2). **It is further important to note that δ scales linearly with the solid fraction – this means that the values given in Table 1 only apply for 100% solid.**

Durations of $t = 1800$ s are considered for both scenarios. At this point of time, the first debris flow surge has largely passed and left the area of interest, except for some remaining tail of fluid material. Only heights ≥ 0.25 m are taken into account for the visualization and evaluation of the simulation results. Considering the size of the event, a cell size of 10 m is considered the best compromise between capturing a sufficient level of detail and ensuring an adequate computational efficiency, and is therefore applied for all simulations.

5 Simulation results

5.1 Scenario S1 – Frontal debris flow surge

Fig. 8 illustrates the distribution of the simulated maximum flow heights, maximum entrained heights, and deposition area after $t = 1800$ s, when most of the initial debris flow surge has passed the confluence of the Bondasca stream and the Maira river. The comparison of observed and simulated impact areas results in a critical success index $CSI = 0.558$, a distance to perfect classification $D2PC = 0.167$, and a factor of conservativeness $FoC = 1.455$. These performance indicators are derived from the confusion matrix of true positives, true negatives, false positives, and false negatives. CSI and $D2PC$ measure the correspondence of the observed and simulated impact areas. Both indicators can range between 0 and 1, whereby values of CSI close to 1 and values of $D2PC$ close to 0 point to a good correspondence. FoC indicates whether the observed impact areas are overestimated ($FoC > 1$), or underestimated by the simulation ($FoC < 1$). More details are provided by Formetta et al. (2015) and by Mergili et al. (2017, 2018a).

Interpreting these values as indicators for a reasonably good correspondence between simulation and observation in terms of impact area, we now consider the dimension of time, focussing on the output hydrographs OH1–OH4 (Fig. 9; see Fig. 7 and Fig. 8 for the location of the corresponding hydrograph profiles O1–O4). Much of the rock avalanche passes the profile O1 between $t = 60$ s and $t = 100$ s. OH2 (Fig. 9a; located in the upper portion of Val Bondasca) sets on before $t = 140$ s and quickly reaches its peak, with a volumetric solid ratio of approx. 30% (maximum 900 m³/s of solid and 2,200 m³/s of fluid discharge). Thereafter, this first surge quickly tails off. The solid flow height, however, increases to around 3 m and remains so until the end of the simulation, whereas the fluid flow height slowly and steadily tails off. Until $t = 1800$ s the profile O2 is passed by a total of 221,000 m³ of solid and 308,000 m³ of fluid material (the fluid representing a mixture of fine mud and water with a density of 1,400 kg m⁻³; see Table 2). The hydrograph profile O3 in Prä, approx. 1 km upstream of Bondo, is characterized by a surge starting before $t = 280$ s and slowly tailing off afterwards. Discharge at the hydrograph OH4 (Fig. 9b; O4 is located at the outlet of the canyon to the debris fan of Bondo) starts at around $t = 700$ s and reaches its peak of solid discharge at $t = 1020$ s (167 m³/s). Solid discharge decreases thereafter, whereas the flow becomes fluid-dominated with a fluid peak of 202 m³/s at $t = 1320$ s. The maximum total flow height simulated at O4 is 2.53 m. This site is passed by a total of 91,000 m³ of solid and 175,000 m³ of fluid material, according to the simulation – an overestimate, compared to the documentation (Table 3).

Fig. 10 illustrates the travel time and the frontal velocities of the rock avalanche and the initial debris flow. The initial surge reaches the hydrograph profile O3 – located 1 km upstream of Bondo – at $t = 280$ s (Fig. 10a; Fig. 9c). This is in line with the documented arrival of the surge at the nearby monitoring station (Table 3). Also the simulated travel time to the profile O4 corresponds to the – though uncertain – documentation. The initial rock avalanche is characterized by frontal velocities >25 m/s, whereas the debris flow largely moves at 10–25 m/s. Velocities drop below 5 m/s in the lower part of the valley (Zone E) (Fig. 10b).

5.2 Scenario S2 – Debris flow surge by overtopping and entrainment of rock avalanche

Fig. 11 illustrates the distribution of the simulated maximum flow heights, maximum entrained heights, and deposition area after $t = t_0 + 1740$ s, where t_0 is the time between the release of the initial rock avalanche and the mobilization of the entrained glacier. The simulated impact and deposition areas of the initial rock avalanche are also shown in Fig. 11. However, we now concentrate to the debris flow, triggered by the entrainment of $145,000 \text{ m}^3$ of solid material from the rock avalanche deposit. Flow heights – as well as the hydrographs presented in Fig. 9c and d and the temporal patterns illustrated in Fig. 12 – only refer to the debris flow developing from the entrained glacier and the entrained rock avalanche material. The confusion matrix of observed and simulated impact areas reveals partly different patterns of performance than for the Scenario S1: $CSI = 0.590$; $D2PC = 0.289$; and $FoC = 0.925$. The lower FoC value and the lower performance in terms of $D2PC$ reflect the missing initial rock avalanche in the simulation results. The output hydrographs OH2 and OH4 differ from the hydrographs obtained through the Scenario S1, but also show some similarities (Fig. 9c and d). Most of the flow passes through the hydrograph profile O1 between $t = t_0 + 40$ s and $t_0 + 80$ s, and through O2 between $t = t_0 + 100$ s and $t_0 + 180$ s. The hydrograph OH2 is characterized by a short peak of $3,500 \text{ m}^3/\text{s}$ of solid and $4,500 \text{ m}^3/\text{s}$ of fluid, with a volumetric solid fraction of 0.44 and quickly decreasing discharge afterwards (Fig. 9c). In contrast to Scenario S1, flow heights drop steadily, with values below 2 m from $t = t_0 + 620$ s onwards. The hydrograph OH3 is characterized by a surge starting around $t = t_0 + 240$ s. Discharge at the hydrograph OH4 (Fig. 9d) sets on around $t = t_0 + 600$ s, and the solid peak of $240 \text{ m}^3/\text{s}$ is simulated at approx. $t = t_0 + 780$ s. The delay of the peak of fluid discharge is more pronounced when compared to Scenario S1 ($310 \text{ m}^3/\text{s}$ at $t = t_0 + 960$ s). Profile O4 is passed by a total of $65,000 \text{ m}^3$ of solid and $204,000 \text{ m}^3$ of fluid material. The volumetric solid fraction drops from above 0.60 at the very onset of the hydrograph to around 0.10 (almost pure fluid) at the end. The maximum total flow height at O4 is 3.1 m.

Fig. 12 illustrates the travel times and the frontal velocities of the rock avalanche and the initial debris flow. Assuming that t_0 is in the range of some tens of seconds, the time of arrival of the surge at O3 is in line with the documentation also for the Scenario S2 (Fig. 12a; Table 3). The frontal velocity patterns along Val Bondasca are roughly in line with those derived in the Scenario S1 (Fig. 12b). However, the scenarios differ among themselves in terms of the more pronounced, but shorter peaks of the hydrographs in Scenario S2 (Fig. 9). This pattern is a consequence of the more sharply defined debris flow surge. In Scenario S1, the front of the rock avalanche deposit constantly “leaks” into Val Bondasca, providing supply for the debris flow also at later stages. In Scenario S2, entrainment of the rock avalanche deposit occurs relatively quickly, without material supply afterwards. This type of behaviour is strongly coupled to the value of C_E and the allowed height of entrainment chosen for the rock avalanche deposit.

6 Discussion

Our simulation results reveal a reasonable degree of empirical adequacy and physical plausibility with regard to most of the reference observations. Having said that, we have also identified some important limitations which are now

discussed in more detail. First of all, we are not able to decide on the more realistic of the two **Scenarios S1 and S2**. In general, the melting and mobilization of glacier ice upon rock slide-rock fall impact is hard to quantify from straightforward calculations of energy transformation, as Huggel et al. (2005) have demonstrated on the example of the 2002 Kolka-Karmadon event. In the present work, the assumed amount of melting (approx. half of the glacier ice) leading to the empirically most adequate results corresponds well to the findings of WSL (2017), indicating a reasonable degree of plausibility. It remains equally difficult to quantify the amount of water injected into the rock avalanche by overload of the sediments and the resulting pore pressure rise. **The confirmation or rejection of conceptual models with regard to the physical mechanisms involved in specific cases would have to be based on better constrained initial conditions, and the availability of robust parameter sets.**

We note that with the approach chosen we are not able (i) to adequately simulate the transition from solid to fluid material; and (ii) to consider rock and ice separately with different material properties, which would require a three-phase model, not within the scope here. Therefore, entrained ice is considered viscous fluid from the beginning. A physically better founded representation of the initial phase of the event would require an extension of the flow model employed. Such an extension could build on the rock-ice avalanche model introduced by Pudasaini and Krautblatter (2014). Also

the vertical patterns of the situation illustrated in **Fig. 5** cannot be modelled with the present approach, which (i) does not consider melting of ice; and (ii) only allows one entrainable layer at each pixel. The assumption of fluid behaviour of glacier ice therefore represents a necessary simplification which is supported by observations (Fig. 3b), but neglects the likely presence of remaining ice in the basal part of the eroded glacier, which melted later and so contributed to the successive debris flow surges. **Still, the Pudasaini (2012) model – and the extended multi-phase model (Pudasaini and Mergili, 2019) – are currently considered best practice. Other two-phase or bulk mixture models, most notably the approach presented by Iverson and George (2014) implemented in the software D-Claw, are less general and do not consider the relative velocity between the phases, pore fluid diffusion, and interfacial momentum transfers at a comparable level, and are therefore less useful for the simulation of cascading effects.**

The initial rock slide-rock fall and the rock avalanche are simulated in a plausible way, at least with regard to the deposition area. Whereas the simulated deposition area is clearly defined in **Scenario S2**, this is to a lesser extent the case in **Scenario S1**, where the front of the rock avalanche directly transforms into a debris flow. Both scenarios seem to overestimate the time between release and deposition, compared to the seismic signals recorded – an issue also reported by WSL (2017) for their simulation. We observe a relatively gradual deceleration of the simulated avalanche, without clearly defined stopping and note that also in the **Scenario S2**, there is some diffusion after the considered time of 120 s, so that the definition of the simulated deposit is somehow arbitrary. The elaboration of well-suited stopping criteria, going beyond the very simple approach introduced by Mergili et al. (2017), remains a task for the future. However, as the rock avalanche has already been successfully back-calculated by WSL (2017), we focus on the first debris flow surge: the simulation input is optimized towards the back-calculation of the debris flow volumes entering

the valley at the hydrograph profile O2 (Table 3). The travel times to the hydrograph profiles O3 and O4 are reproduced in a plausible way in both scenarios, and so are the impact areas (Figs. 8 and 11). Exceedance of the lateral limits in the lower zones is attributed to an overestimate of the debris flow volumes there, and to numerical issues related to the narrow gorge. The same is true for the fan of Bondo. The solid ratio of the debris flow in the simulations appears realistic, ranging around 40–45% in the early stage of the debris flow, and around 30–35% and lower (depending on the cut-off time of the hydrograph) in the final stage. This means that solid material tends to stop in the transit area rather than fluid material, as it can be expected. Nevertheless, the correct simulation of the deposition of debris flow material along Val Bondasca remains a major challenge (Table 3). Even though a considerable amount of effort was put in reproducing the much lower volumes reported in the vicinity of O4, the simulations result in an overestimate of the volumes passing through this hydrograph profile. This is most likely a consequence of the failure of r.avaflow to adequately reproduce the deposition pattern in the zones D and E. Whereas some material remains there at the end of the simulation, more work is necessary to appropriately understand the mechanisms of deposition in viscous debris flows (Pudasaini and Fischer, 2016b). Part of the discrepancy, however, might be explained by the fact that part of the fluid material – which does not only consist of pure water, but of a mixture of water and fine mud – left the area of interest in downstream direction and was therefore not included in the reference measurements.

The simulation results are strongly influenced by the initial conditions and the model parameters. Parameterization of both scenarios is complex and highly uncertain, particularly in terms of optimizing the volumes of entrained till and glacial meltwater, and injected pore water. In general, the parameter sets optimized to yield empirically adequate results are physically plausible, in contrast to Mergili et al. (2018b) who had to set the basal friction angle in a certain zone to a negligible value in order to reproduce the observed overtopping of a more than 100 m high ridge (1970 Huascarán landslide). In contrast, reproducing the travel times to O4 in the present study requires the assumption of a low mobility of the flow in Zone E. This is achieved by increasing the friction (Table 1), accounting for the narrow flow channel, i.e. the interaction of the flow with the channel walls, which is not directly accounted for in r.avaflow. Still, the high values of δ given in Table 1 are not directly applied, as they scale with the solid fraction. This type of weighting has to be further scrutinized. We emphasize that also reasonable parameter sets are not necessarily physically true, as the large number of parameters involved (Tables 1 and 2) creates a lot of space for equifinality issues (Beven et al., 1996).

We have further shown that the classical evaluation of empirical adequacy, by comparing observed and simulated impact areas, is not enough in the case of complex mass flows: travel times, hydrographs, and volumes involved can provide important insight in addition to the classical quantitative performance indicators used, for example, in landslide susceptibility modelling (Formetta et al., 2015). Further, the delineation of the observed impact area is uncertain as the boundary of the event is not clearly defined particularly in Zone C.

The present work is seen as a further step towards a better understanding of the challenges and the parameterization concerning the integrated simulation of complex mass flows. More case studies are necessary to derive guiding param-

eter sets facilitating predictive simulations of such events (Mergili et al., 2018a, b). A particular challenge of such case studies consists in the parameter optimization procedure: in principle, automated methods do exist (e.g. Fischer, 2013). However, they have been developed for optimizing globally defined parameters (which are constant over the entire study area) against runout length and impact area, and such tools do a very good job for exactly this purpose. However, they cannot directly deal with spatially variable parameters, as they are defined in the present work. With some modifications they might even serve for that – but the main issue is that optimization also considers shapes and maximum values of hydrograph discharges, or travel times at different places of the path. It would be a huge effort to trim optimization algorithms to this purpose, and to make them efficient enough to prevent excessive computational times – we consider this as an important task for the future which is out of scope of the present work. Therefore, we have used a step-wise expert-based optimization strategy.

7 Conclusions

Both of the investigated Scenarios S1 (debris flow developing at the front of the rock avalanche) and S2 (debris flow developing at the back of the rock avalanche, overtopping the deposit) lead to empirically reasonably adequate results, when back calculated with r.avaflow using physically plausible model parameters. Based on the simulations performed in the present study, final conclusions on the more likely of the mechanisms sketched in Fig. 6 can therefore not be drawn purely based on the simulations. The observed jet of glacial meltwater (Fig. 3b) points towards Scenario S1. The observed scouring of the rock avalanche deposit, in contrast, rather points towards Scenario S2, but could also be associated to subsequent debris flow surges. Open questions include at least (i) the interaction between the initial rock slide-rock fall and the glacier; (ii) flow transformations in the lower portion of Zone C (Fig. 7), leading to the first debris flow surge; and (iii) the mechanisms of deposition of 90% of the debris flow material along the flow channel in the Val Bondasca. Further research is therefore urgently needed to shed more light on this extraordinary landslide cascade in the Swiss Alps. In addition, improved simulation concepts are needed to better capture the dynamics of complex landslides in glacierized environments: such would particularly have to include three-phase models, where ice – and melting of ice – are considered in a more explicit way. Finally, more case studies of complex mass flows have to be performed in order to derive guiding parameter sets serving for predictive simulations.

Acknowledgements

Shiva P. Pudasaini gratefully thanks the Herbette Foundation for providing financial support for his sabbatical visit to the University of Lausanne, Switzerland in the period April–June 2018, where this contribution was triggered. Similarly, this work has been financially supported by the German Research Foundation (DFG) through the research project PU 386/5-1: “A novel and unified solution to multi-phase mass flows”. It strongly builds on the outcomes of the international cooperation project “A GIS simulation model for avalanche and debris flows (avaflow)” supported by the German Research Foundation (DFG, project number PU 386/3-1) and the Austrian Science Fund (FWF, project number I 1600-N30).

399 We would like to thank Brian McArdell and another anonymous reviewer for providing constructive comments and
400 suggestions that helped to enhance the paper substantially, and are grateful to Sophia Demmel and Florian Amann for
401 valuable discussions and to Matthias Benedikt for comprehensive technical assistance.

402 References

- 403 Amann, F., Kos, A., Phillips, M., and Kenner, R.: The Piz Cengalo Bergsturz and subsequent debris flows, *Geophys.*
404 *Res. Abstr.*, 20, 14700, 2018.
- 405 Amt für Wald und Naturgefahren: Bondo: Chronologie der Ereignisse, 2 pp.,
406 [https://www.gr.ch/DE/institutionen/verwaltung/bvfd/awn/dokumentenliste_afw/20170828_Chronologie_Bondo_2017](https://www.gr.ch/DE/institutionen/verwaltung/bvfd/awn/dokumentenliste_afw/20170828_Chronologie_Bondo_2017_12_13_dt.pdf)
407 [_12_13_dt.pdf](https://www.gr.ch/DE/institutionen/verwaltung/bvfd/awn/dokumentenliste_afw/20170828_Chronologie_Bondo_2017_12_13_dt.pdf), accessed on 31 May 2019.
- 408 Beven, K.: Equifinality and Uncertainty in Geomorphological Modelling, in: *The Scientific Nature of Geomorphology:*
409 *Proceedings of the 27th Binghamton Symposium in Geomorphology, 27-29 September 1996*, John Wiley & Sons, 289–
410 313, 1996.
- 411 Bonanomi, Y., and Keiser, M.: Bericht zum aktuellen Bergsturz am Piz Cengalo 2017, *Bergeller Alpen im Engadin*, 19.
412 *Geoforum Umhausen*, 19.–20. Oktober 2017, 55–60, 2017.
- 413 Christen, M., Kowalski, J., and Bartelt, P.: RAMMS: Numerical simulation of dense snow avalanches in three-
414 dimensional terrain, *Cold Reg. Sci. Technol.*, 63, 1–14, <https://doi.org/10.1016/j.coldregions.2010.04.005>, 2010.
- 415 De Blasio, F. V., and Crosta, G. B.: Extremely Energetic Rockfalls: Some preliminary estimates, in: *Landslides and En-*
416 *gineered Slopes. Experience, Theory and Practice*, 759–764, CRC Press, 2016.
- 417 Demmel, S.: Water Balance in Val Bondasca. Initial hydrological conditions for debris flows triggered by the 2017 rock
418 avalanche at Pizzo Cengalo. Master Thesis, ETH Zurich, 50 pp., 2019.
- 419 Domnik, B., Pudasaini, S. P., Katzenbach, R., and Miller, S. A.: Coupling of full two-dimensional and depth-averaged
420 models for granular flows, *J. Non-Newtonian Fluid Mech.*, 201, 56–68, <https://doi.org/10.1016/j.jnnfm.2013.07.005>,
421 2013.
- 422 Evans, S. G., Bishop, N.F., Fidel Smoll, L., Valderrama Murillo, P., Delaney, K.B., and Oliver-Smith, A.: A re-
423 examination of the mechanism and human impact of catastrophic mass flows originating on Nevado Huascarán, Cor-
424 dillera Blanca, Peru in 1962 and 1970, *Eng. Geol.*, 108, 96–118, <https://doi.org/10.1016/j.enggeo.2009.06.020>, 2009.
- 425 Fischer, J.-T., Kowalski, J., and Pudasaini, S. P.: Topographic curvature effects in applied avalanche modeling, *Cold*
426 *Reg. Sci. Technol.*, 74, 21–30, <https://doi.org/10.1016/j.coldregions.2012.01.005>, 2012.
- 427 Fischer, J.-T., Kofler, A., Fellin, W., Granig, M., and Kleemayr, K.: Multivariate parameter optimization for computa-
428 tional snow avalanche simulation in 3d terrain, *J. Glaciol.*, 61(229), 875–888, <https://doi.org/10.3189/2015JoG14J168>,
429 2015.

Formetta, G., Capparelli, G., and Versace, P.: Evaluating performances of simplified physically based models for landslide susceptibility, *Hydrol. Earth Syst. Sci. Discuss.*, 12, 13217–13256, <https://doi.org/10.5194/hessd-19-1-2015>, 2015.

Frank, F., Huggel, C., McArdeell, B. W., and Vieli, A.: Landslides and increased debris-flow activity: a systematic comparison of six catchments in Switzerland. *Earth Surf. Proc. Landforms*, 44(3), 699–712, <https://doi.org/10.1002/esp.4524>, 2019.

Haeberli, W.: Mountain permafrost—research frontiers and a special long-term challenge, *Cold Reg. Sci. Technol.*, 96, 71–76, <https://doi.org/10.1016/j.coldregions.2013.02.004>, 2013.

Haeberli, W., and Whiteman, C. (Eds.): *Snow and Ice-related Hazards, Risks and Disasters*, Elsevier, <https://doi.org/10.1016/B978-0-12-394849-6.00001-9>, 2014.

Haeberli, W., Schaub, Y., and Huggel, C.: Increasing risks related to landslides from degrading permafrost into new lakes in de-glaciating mountain ranges, *Geomorphology*, 293(B), 405–417, <https://doi.org/10.1016/j.geomorph.2016.02.009>, 2017.

Harris, C., Arenson, L. U., Christiansen, H. H., Etzelmüller, B., Frauenfelder, R., Gruber, S., Haeberli, W., Hauck, C., Hölzle, M., Humlum, O., Isaksen, K., Kääb, A., Kern-Lütschg, M. A., Lehning, M., Matsuoka, N., Murton, J. B., Nötzli, J., Phillips, M., Ross, N., Seppälä, M., Springman, S. M., and Vonder Mühll, D.: Permafrost and climate in Europe: Monitoring and modelling thermal, geomorphological and geotechnical responses, *Earth-Sci. Rev.*, 92, 117–171, <https://doi.org/10.1016/j.earscirev.2008.12.002>, 2009.

Hewitt, K.: Styles of rock-avalanche depositional complexes conditioned by very rugged terrain, Karakoram Himalaya, Pakistan, *Rev. Eng. Geol.*, 15, 345–377, 2002.

Huggel, C., Zraggen-Oswald, S., Haeberli, W., Kääb, A., Polkvoj, A., Galushkin, I., and Evans, S.G.: The 2002 rock/ice avalanche at Kolka/Karmadon, Russian Caucasus: assessment of extraordinary avalanche formation and mobility, and application of QuickBird satellite imagery, *Nat. Hazards Earth Syst. Sci.*, 5, 173–187, <https://doi.org/10.5194/nhess-5-173-2005>, 2005.

Iverson, R. M.: The physics of debris flows, *Rev. Geophys.*, 35, 245–296, <https://doi.org/10.1029/97RG00426>, 1997.

Kattel, P., Khattri, K. B., Pokhrel, P. R., Kafle, J., Tuladhar, B. M., and Pudasaini, S. P.: Simulating glacial lake outburst floods with a two-phase mass flow model, *Ann. Glaciol.*, 57(71), 349–358, <https://doi.org/10.3189/2016AoG71A039>, 2016.

Krautblatter, M., Funk, D., and Günzel, F. K.: Why permafrost rocks become unstable: a rock–ice–mechanical model in time and space, *Earth Surf. Process. Landf.*, 38, 876–887, <https://doi.org/10.1002/esp.3374>, 2013.

McDougall, S., and Hungr, O.: A Model for the Analysis of Rapid Landslide Motion across Three-Dimensional Terrain, *Can. Geotech. J.*, 41, 1084–1097, <https://doi.org/10.1139/t04-052>, 2004.

461 Mergili, M., Pudasaini, S. P.: r.avaflow – The open source mass flow simulation model, <https://www.avaflow.org/>, last
462 access: 7 July 2019.

463 Mergili, M., Fischer, J.-T., Krenn, J., and Pudasaini, S. P.: r.avaflow v1, an advanced open source computational
464 framework for the propagation and interaction of two-phase mass flows, *Geosci. Model Dev.*, 10, 553–569,
465 <https://doi.org/10.5194/gmd-10-553-2017>, 2017.

466 Mergili, M., Emmer, A., Juřicová, A., Cochachin, A., Fischer, J.-T., Huggel, C., and Pudasaini, S.P.: How well can we
467 simulate complex hydro-geomorphic process chains? The 2012 multi-lake outburst flood in the Santa Cruz Valley
468 (Cordillera Blanca, Perú), *Earth Surf. Process. Landf.*, 43(7), 1373–1389, <https://doi.org/10.1002/esp.4318>, 2018a.

469 Mergili, M., Frank, B., Fischer, J.-T., Huggel, C., and Pudasaini, S. P.: Computational experiments on the 1962 and
470 1970 landslide events at Huascarán (Peru) with r.avaflow: Lessons learned for predictive mass flow simulations, *Geo-*
471 *morphology*, 322, 15–28, <https://doi.org/10.1016/j.geomorph.2018.08.032>, 2018b.

472 Nessyahu, H., and Tadmor, E.: Non-oscillatory central differencing for hyperbolic conservation laws, *J. Comput.*
473 *Phys.*, 87, 408–463, [https://doi.org/10.1016/0021-9991\(90\)90260-8](https://doi.org/10.1016/0021-9991(90)90260-8), 1990.

474 Nicoletti, G. P., and Sorriso-Valvo, M.: Geomorphic controls of the shape and mobility of rock avalanches, *GSA Bull.*,
475 103(10), 1365–1373, [https://doi.org/10.1130/0016-7606\(1991\)103<1365:GCOTSA>2.3.CO;2](https://doi.org/10.1130/0016-7606(1991)103<1365:GCOTSA>2.3.CO;2), 1991.

476 Pitman, E.B., and Le, L.: A two-fluid model for avalanche and debris flows. *Philos. Trans. R. Soc. A*, 363, 1573–1601,
477 <https://doi.org/10.1098/rsta.2005.1596>, 2005.

478 Pudasaini, S. P.: A general two-phase debris flow model, *J. Geophys. Res. Earth Surf.*, 117, F03010,
479 <https://doi.org/10.1029/2011JF002186>, 2012.

480 Pudasaini, S. P.: A full description of generalized drag in mixture mass flows, *Phys. Fluids*, submitted manuscript,
481 2019.

482 Pudasaini, S. P., and Krautblatter, M.: A two-phase mechanical model for rock-ice avalanches, *J. Geophys. Res. Earth*
483 *Surf.*, 119, doi:10.1002/2014JF003183, 2014.

484 Pudasaini, S. P., and Fischer, J.-T.: A mechanical model for phase-separation in debris flow, arXiv:1610.03649, 2016a.

485 Pudasaini, S.P., and Fischer, J.-T.: A mechanical erosion model for two-phase mass flows, arXiv:1610.01806, 2016b.

486 Pudasaini, S.P., and Mergili, M.: A Multi-Phase Mass Flow Model, *J. Geophys. Res. Earth Surf.*, JGRF21102,
487 <https://doi.org/10.1029/2019JF005204>, 2019.

488 Preh, A., and Sausgruber, J. T.: The Extraordinary Rock-Snow Avalanche of Alpl, Tyrol, Austria. Is it Possible to Pre-
489 dict the Runout by Means of Single-phase Voellmy- or Coulomb-Type Models?, in: *Engineering Geology for Society*
490 *and Territory–Volume 2*, edited by: Lollino, G. et al., Springer, Cham, https://doi.org/10.1007/978-3-319-09057-3_338,
491 2015.

492 Saltelli, A., and Annoni, P.: How to avoid a perfunctory sensitivity analysis, *Environ. Model. Softw.*, 25, 1508–1517,
493 <https://doi.org/10.1016/j.envsoft.2010.04.012>, 2010.

494 Savage, S. B., and Hutter, K.: The motion of a finite mass of granular material down a rough incline, *J. Fluid Mech.*,
495 199, 177–215, <https://doi.org/10.1017/S0022112089000340>, 1989.

496 Scheidegger, A. E.: On the Prediction of the Reach and Velocity of Catastrophic Landslides, *Rock Mech.*, 5, 231–236,
497 <https://doi.org/10.1007/BF01301796>, 1973.

498 Schneider, D., Huggel, C., Cochachin, A., Guillén, S., and García, J.: Mapping hazards from glacier lake outburst floods
499 based on modelling of process cascades at Lake 513, Carhuaz, Peru, *Adv. Geosci.*, 35, 145–155,
500 <https://doi.org/10.5194/adgeo-35-145-2014>, 2014.

501 Somos-Valenzuela, M. A., Chisolm, R. E., Rivas, D. S., Portocarrero, C., and McKinney, D. C.: Modeling a glacial lake
502 outburst flood process chain: the case of Lake Palcacocha and Huaraz, Peru, *Hydrol. Earth Syst. Sci.*, 20, 2519–2543,
503 <https://doi.org/10.5194/hess-20-2519-2016>, 2016.

504 Steinacher, R., Kuster, C., Buchli, C., and Meier, L.: The Pizzo Cengalo and Val Bondasca events: From early warnings
505 to immediate alarms, *Geophys. Res. Abstr.* 20, 17536, 2018.

506 Tai, Y. C., Noelle, S., Gray, J. M. N. T., and Hutter, K.: Shock-capturing and front-tracking methods for granular ava-
507 lanches, *J. Comput. Phys.*, 175(1), 269–301, <https://doi.org/10.1006/jcph.2001.6946>, 2002.

508 VAW: Vadrec dal Cengal Ost: Veränderungen in Vergangenheit und Zukunft. Laboratory of Hydraulics, Hydrology
509 and Glaciology of the Swiss Federal Institute of Technology Zurich, 17 pp.,
510 [https://www.gr.ch/DE/institutionen/verwaltung/bvfd/awn/dokumentenliste_afw/Cengalo%20Gletscherentwicklung%](https://www.gr.ch/DE/institutionen/verwaltung/bvfd/awn/dokumentenliste_afw/Cengalo%20Gletscherentwicklung%20ETH_2nov_final.pdf)
511 [20ETH_2nov_final.pdf](https://www.gr.ch/DE/institutionen/verwaltung/bvfd/awn/dokumentenliste_afw/Cengalo%20Gletscherentwicklung%20ETH_2nov_final.pdf), accessed on 31 May 2019, 2017.

512 Voellmy, A.: Über die Zerstörungskraft von Lawinen, *Schweizerische Bauzeitung*, 73, 159–162, 212–217, 246–249,
513 280–285, 1955.

514 Walter, F., Wenner, M., and Amann, F.: Seismic Analysis of the August 2017 Landslide on Piz Cengalo (Switzerland),
515 *Geophys. Res. Abstr.*, 20, 3163-1, 2018.

516 Walter, F., Amann, F., Kos, A., Kenner, R., Phillips, M., de Preux, A., Huss, M., Tognacca, C., Clinton, J., Diehl, T., and
517 Bonanomi, Y.: Direct observations of a three million cubic meter rock-slope collapse with almost immediate initiation
518 of ensuing debris flows, *Earth Planet. Sci. Lett.*, submitted manuscript, 2019.

519 Wang, Y., Hutter, K., and Pudasaini, S. P.: The Savage-Hutter theory: A system of partial differential equations for
520 avalanche flows of snow, debris, and mud, *ZAMM – J. Appl. Math. Mech.*, 84(8), 507–527,
521 <https://doi.org/10.1002/zamm.200310123>, 2004.

522 Worni, R., Huggel, C., Clague, J. J., Schaub, Y., and Stoffel, M.: Coupling glacial lake impact, dam breach, and flood
523 processes: A modeling perspective, *Geomorphology*, 224, 161–176, <https://doi.org/10.1016/j.geomorph.2014.06.031>,
524 2014.

525 WSL.: SLF Gutachten G2017.20: Modellierung des Cengalo Bergsturzes mit verschiedenen Rahmenbedingungen, Bon-
526 do, GR. WSL-Institut für Schnee- und Lawinenforschung SLF, 69 pp.,
527 [https://www.gr.ch/DE/institutionen/verwaltung/bvfd/awn/dokumentenliste_afw/SLF_G2017_20_Modellierung_Cenga](https://www.gr.ch/DE/institutionen/verwaltung/bvfd/awn/dokumentenliste_afw/SLF_G2017_20_Modellierung_Cengalo_Bergsturz_030418_A.pdf)
528 [lo_Bergsturz_030418_A.pdf](https://www.gr.ch/DE/institutionen/verwaltung/bvfd/awn/dokumentenliste_afw/SLF_G2017_20_Modellierung_Cengalo_Bergsturz_030418_A.pdf), accessed on 31 May 2019, 2017.

529

531 Table 1. Descriptions and optimized parameter values for each of the zones A–F (Fig. 4 and Fig. 7). The names of the
 532 model parameters are given in the text and in Table 2. The values provided in Table 2 are assigned to those parameters
 533 not shown. (S1) and (S2) refer to the corresponding scenarios.

Zone	Description	Model parameters	Initial conditions
A	Rock zone – NE face of Piz Cengalo with rock slide-rock fall release area	$\delta = 20^\circ$ (S1) ¹⁾ $\delta = 13^\circ$ (S2) ²⁾ $C_{AD} = 0.2$	Release volume: 3.2 million m ³ , 100 % solid ³⁾
B	Glacier zone – Cirque glacier beneath zone A, entrainment of glacier ice ¹⁾	$\delta = 20^\circ$ (S1) $\delta = 13^\circ$ (S2) $C_E = 10^{-6.5}$	Entrainment of glacier ice and till (Table 3) ⁴⁾
C	Slope zone – steep, partly debris-covered glacier forefield leading down to the Val Bondasca	$\delta = 20^\circ$ (S1) $\delta = 13^\circ$ (S2) $C_E = 10^{-6.5}$ (S1) $C_E = 10^{-8.0}$ (S2)	Entrainment of injected water in Scenario S1 Entrainment of rock avalanche deposit in Scenario S2
D	Upper Val Bondasca zone – clearly defined flow channel becoming narrower in downstream direction	$\delta = 20\text{--}45^\circ$	No entrainment allowed, increasing friction
E	Lower Val Bondasca zone – narrow gorge	$\delta = 45^\circ$ $C_{FF} = 0.5$	No entrainment allowed, high friction due to lateral confinement
F	Bondo zone – deposition of the debris flow on the cone of Bondo	$\delta = 20^\circ$	No entrainment allowed

534 ¹⁾ Note that in all zones and in both of the scenarios S1 and S2, δ is assumed to scale linearly with the solid fraction.
 535 This means that the values given only apply in case of 100% solid.

536 ²⁾ This only applies to the initial landslide, which is assumed completely dry in Scenario S2. Due to the scaling of δ
 537 with the solid fraction, a lower basal friction is required to obtain results similar to Scenario S1, where the rock ava-
 538 lanche contains some fluid. The same values of δ as for Scenario S1 are applied for the debris flow in Scenario S2
 539 throughout all zones.

540 ³⁾ This volume is derived from our own reconstruction (Fig. 5). In contrast, WSL (2017) gives 3.1 million m³, and
 541 Amann et al. (2018) 3.15 million m³.

542 ⁴⁾ In Scenario S2, the glacier is not directly entrained, but instead released behind the rock avalanche. In both scenarios,
 543 ice is considered to melt immediately on impact and included in the viscous fluid fraction. See text for more de-
 544 tailed explanations.

545

546 Table 2. Model parameters used for the simulations.

Symbol	Parameter	Unit	Value
ρ_s	Solid material density (grain density)	kg m^{-3}	2,700
ρ_F	Fluid material density	kg m^{-3}	1,400 ¹⁾
φ	Internal friction angle	Degree	27 ²⁾
δ	Basal friction angle	Degree	Table 1
ν	Kinematic viscosity of the fluid	$\text{m}^2 \text{s}^{-1}$	10
τ_Y	Yield strength of the fluid	Pa	10
C_{AD}	Ambient drag coefficient	–	0.04 (exceptions in Table 1)
C_{FF}	Fluid friction coefficient	–	0.0 (exceptions in Table 1)
C_E	Entrainment coefficient	–	Table 1

547 ¹⁾ Fluid is here considered as a mixture of water and fine particles. This explains the higher density, compared to pure
548 water.

549 ²⁾ The internal friction angle φ always has to be larger than or equal to the basal friction angle δ . Therefore, in case of
550 $\delta > \varphi$, φ is increased accordingly.

551

Table 3. Selected output parameters of the simulations for the Scenarios S1 and S2 compared to the observed or documented parameter values. S = solid; F = fluid; fractions are expressed in terms of volume; t_0 = time from the initial release to the release of the first debris flow surge. Reference values are extracted from Amt für Wald und Naturgefahren (2017a), Bonanomi and Keiser (2017), and WSL (2017). *** = empirically adequate (within the documented range of values); ** = empirically partly adequate (less than 50% away from the documented range of values); * = empirically inadequate (at least 50% away from the documented range of values). The arithmetic means of minimum and maximum of each range are used for the calculations.

Parameter	Documentation/Observation	Scenario S1	Scenario S2
Entrained ice (m ³)	600,000 ¹⁾	—	—
Entrained S (m ³)	—	60,000	60,000 ²⁾
Entrained F (m ³)	—	305,000	240,000
Duration of initial landslide (s)	60–90 ³⁾	100–120**	100–120**
Travel time to O2 (s)	90–120 ⁴⁾	140**	t_0 +120***
Travel time to O3 (s)	210–300 ⁵⁾	280***	t_0 +240***
Travel time to O4 (s)	630–1020 ⁶⁾	700***	t_0 +640***
Debris flow volume at O2 (m ³)	540,000	530,000** (43% S)	430,000** (45% S)
Debris flow volume at O4 (m ³)	50,000	265,000* (34% S)	270,000* (24% S)

¹⁾ Not all the material entrained from the glacier was relevant for the first debris flow surge (Fig. 6), therefore lower volumes of entrained S (coarse till, in Scenario S2 also rock avalanche deposit) and F (molten ice and fine till, in Scenario S1 also pore water) yield the empirically most adequate results. The F volumes originating from the glacier in the simulations represent approx. half of the water equivalent of the entrained ice, corresponding well to the findings of WSL (2017).


²⁾ This value does not include the 145,000 m³ of solid material remobilized through entrainment from the rock avalanche deposit in Scenario S2.

³⁾ WSL (2017) states that the rock avalanche came to rest approx. 60 s after release, whereas the seismic signals ceased 90 s after release.

⁴⁾ A certain time (here, we assume a maximum of 30 s) has to be allowed for the initial debris flow surge to reach O2, located slightly downstream of the front of the rock avalanche deposit.

⁵⁾ WSL (2017) gives a travel time of 3.5 minutes to Prä, roughly corresponding to the location of O3. It remains unclear whether this number refers to the release of the initial rock slide-rock fall or (more likely) to the start of the first debris flow surge. Bonanomi and Keiser (2017) give a travel time of roughly four minutes between the initial release and the arrival of the first surge at the sensor of Prä.

⁶⁾ Amt für Wald und Naturgefahren (2017) gives a time span of 17 minutes between the release of the initial rock slide-rock fall and the arrival of the first debris flow surge at the “bridge” in Bondo. However, it is not indicated to which bridge this number refers. WSL (2017), in contrast, give a travel time of 7–8 minutes from Prä to the “old bridge” in Bondo, which, in sum, results in a shorter total travel time as indicated in Amt für Wald und Naturgefahren (2017). Depending on the bridge, the reference location for these numbers might be downstream from O4. In the simulation, this hydrograph shows a slow onset – travel times refer to the point when 5% of the total peak discharge are reached.

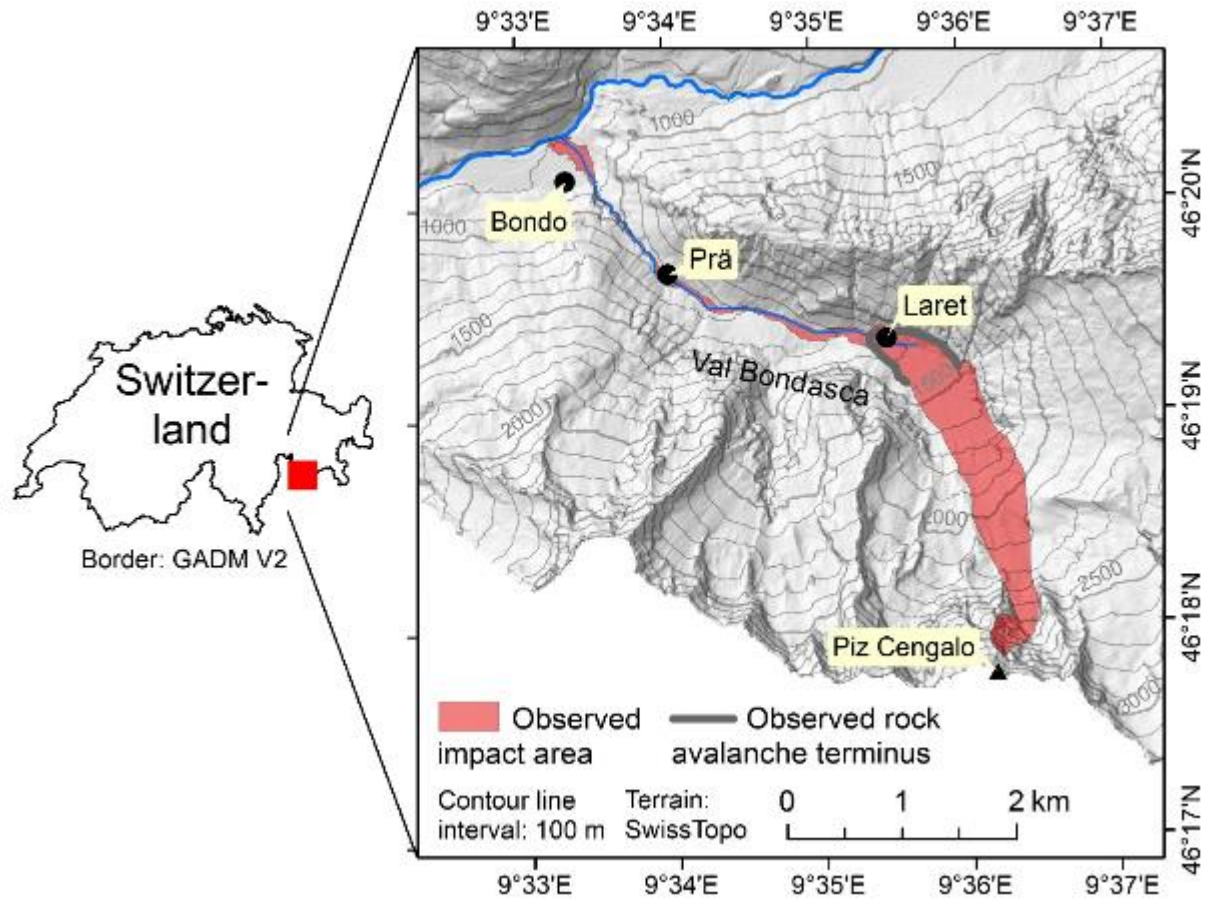

583
584 **Figure 1.** Study area with the impact area of the 2017 Piz Cengalo-Bondo landslide cascade. The observed rock ava-
585 lanche terminus was derived from WSL (2017).
586

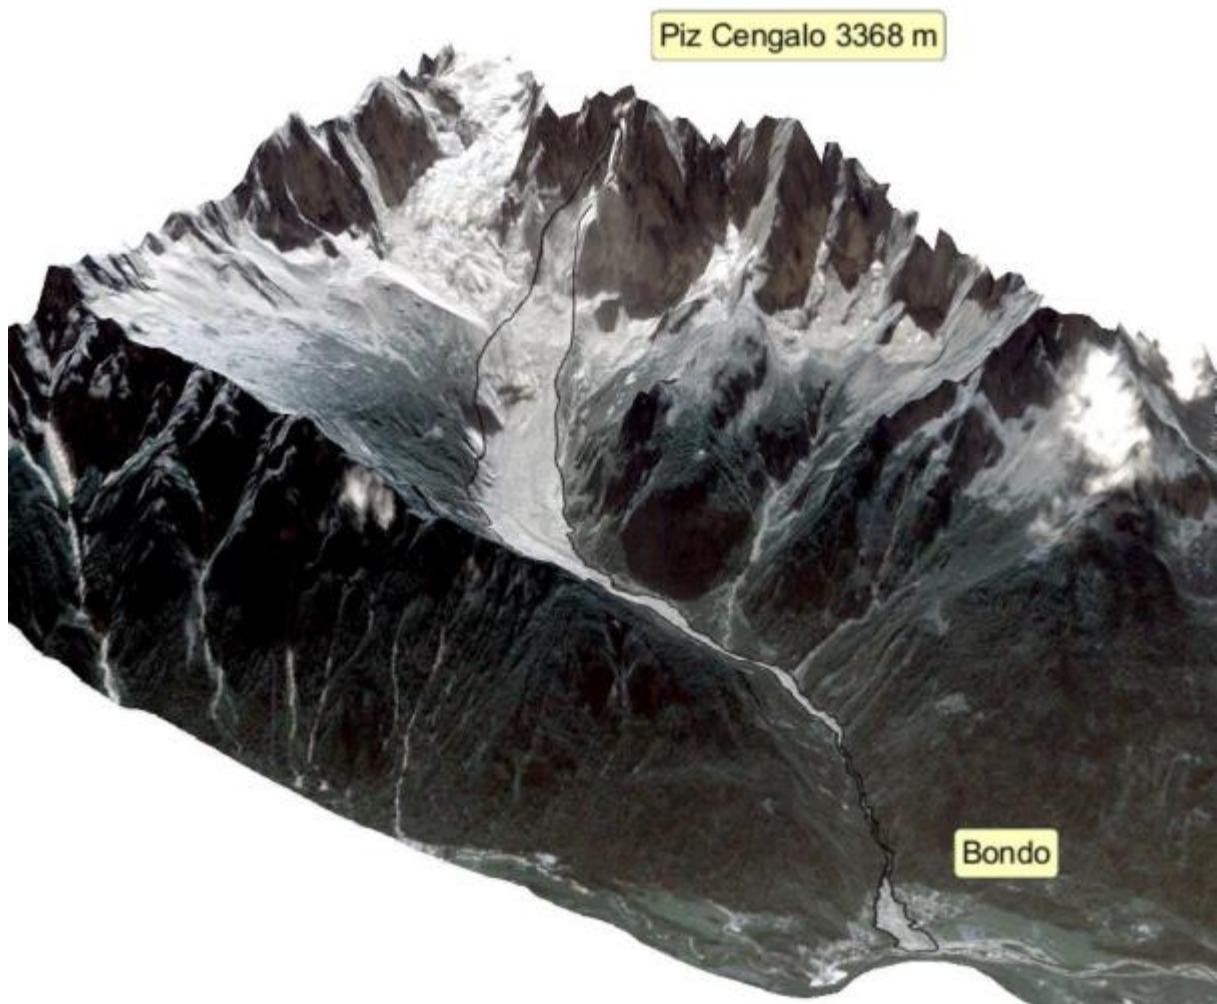


Figure 2. Oblique view of the impact area of the event, orthophoto draped over the 2011 DTM. Data sources: swisstopo.

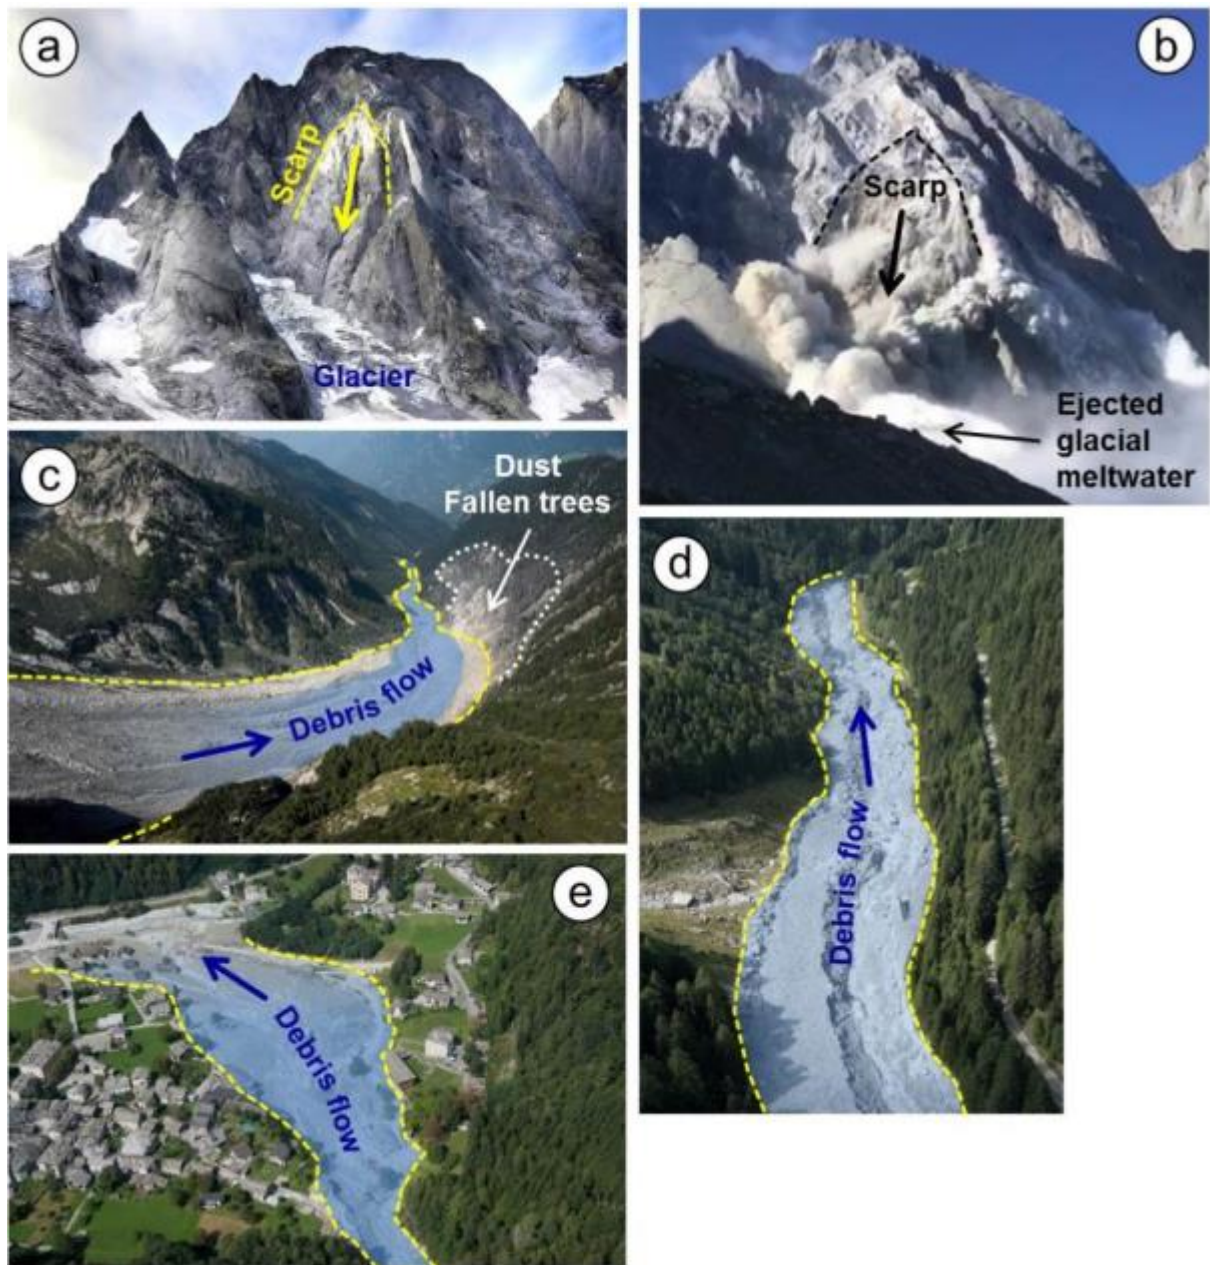


Figure 3. The 2017 Piz Cengalo-Bondo landslide cascade. (a) Scarp area on 20 September 2014. (b) Scarp area on 23 September 2017 at 9:30, 20 s after release, frame of a video taken from the Capanna di Sciora. Note the fountain of water and/or crushed ice at the front of the avalanche, most likely representing meltwater from the impacted glacier. (c) Upper part of the Val Bondasca, where the channelized debris flow developed. Note the zone of dust and pressure-induced damages to trees on the right side of the valley. (d) Traces of the debris flows in the Val Bondasca. (e) The debris cone of Bondo after the event. Image sources: Daniele Porro (a), Diego Salasc (b), VBS swisstopo Flugdienst (c)–(e).

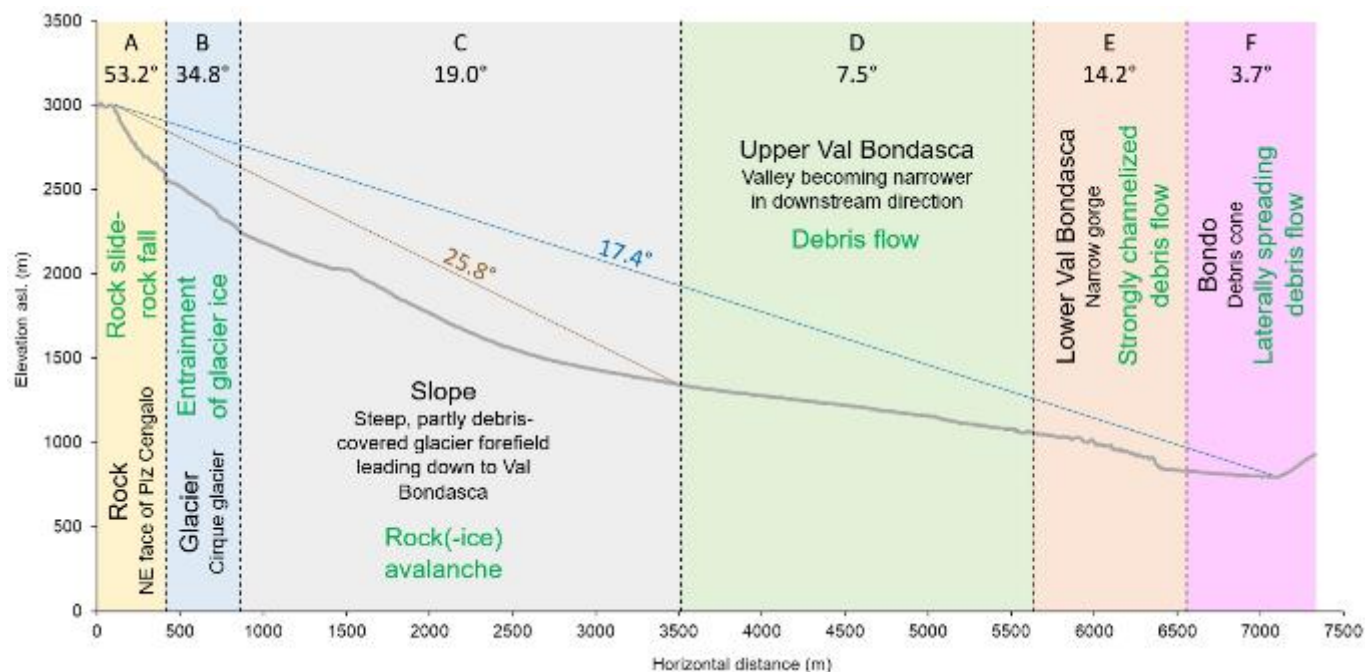


Figure 4. Profile along the main flow path of the Piz Cengalo-Bondo landslide cascade. The letters A–F indicate the individual zones (Table 1 and Fig. 7), whereas the associated numbers indicate the average angles of reach along the profile for each zone. The brown number and line show the angle of reach of the initial landslide (rock slide-rock fall and rock(-ice) avalanche), whereas the blue number and line show the angle of reach of the entire landslide cascade. The geomorphic characteristics of the zone (in black) are indicated along with the dominant process type (in green).

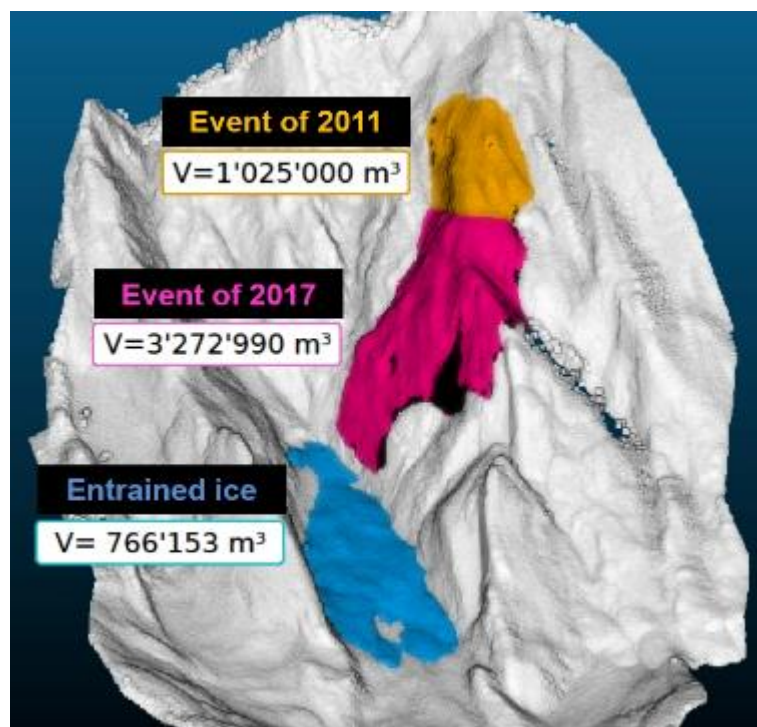


Figure 5. Reconstruction of the released rock volume and the entrained glacier volume in the 2017 Piz Cengalo-Bondo landslide cascade. Note that the boundary between the 2011 and 2017 release volumes is connected to some uncertainties, explaining the slight discrepancies among the reported volumes. The glacier volume shown is neither corrected for entrainment related to the 2011 event, nor for glacier retreat in the period 2011–2017.

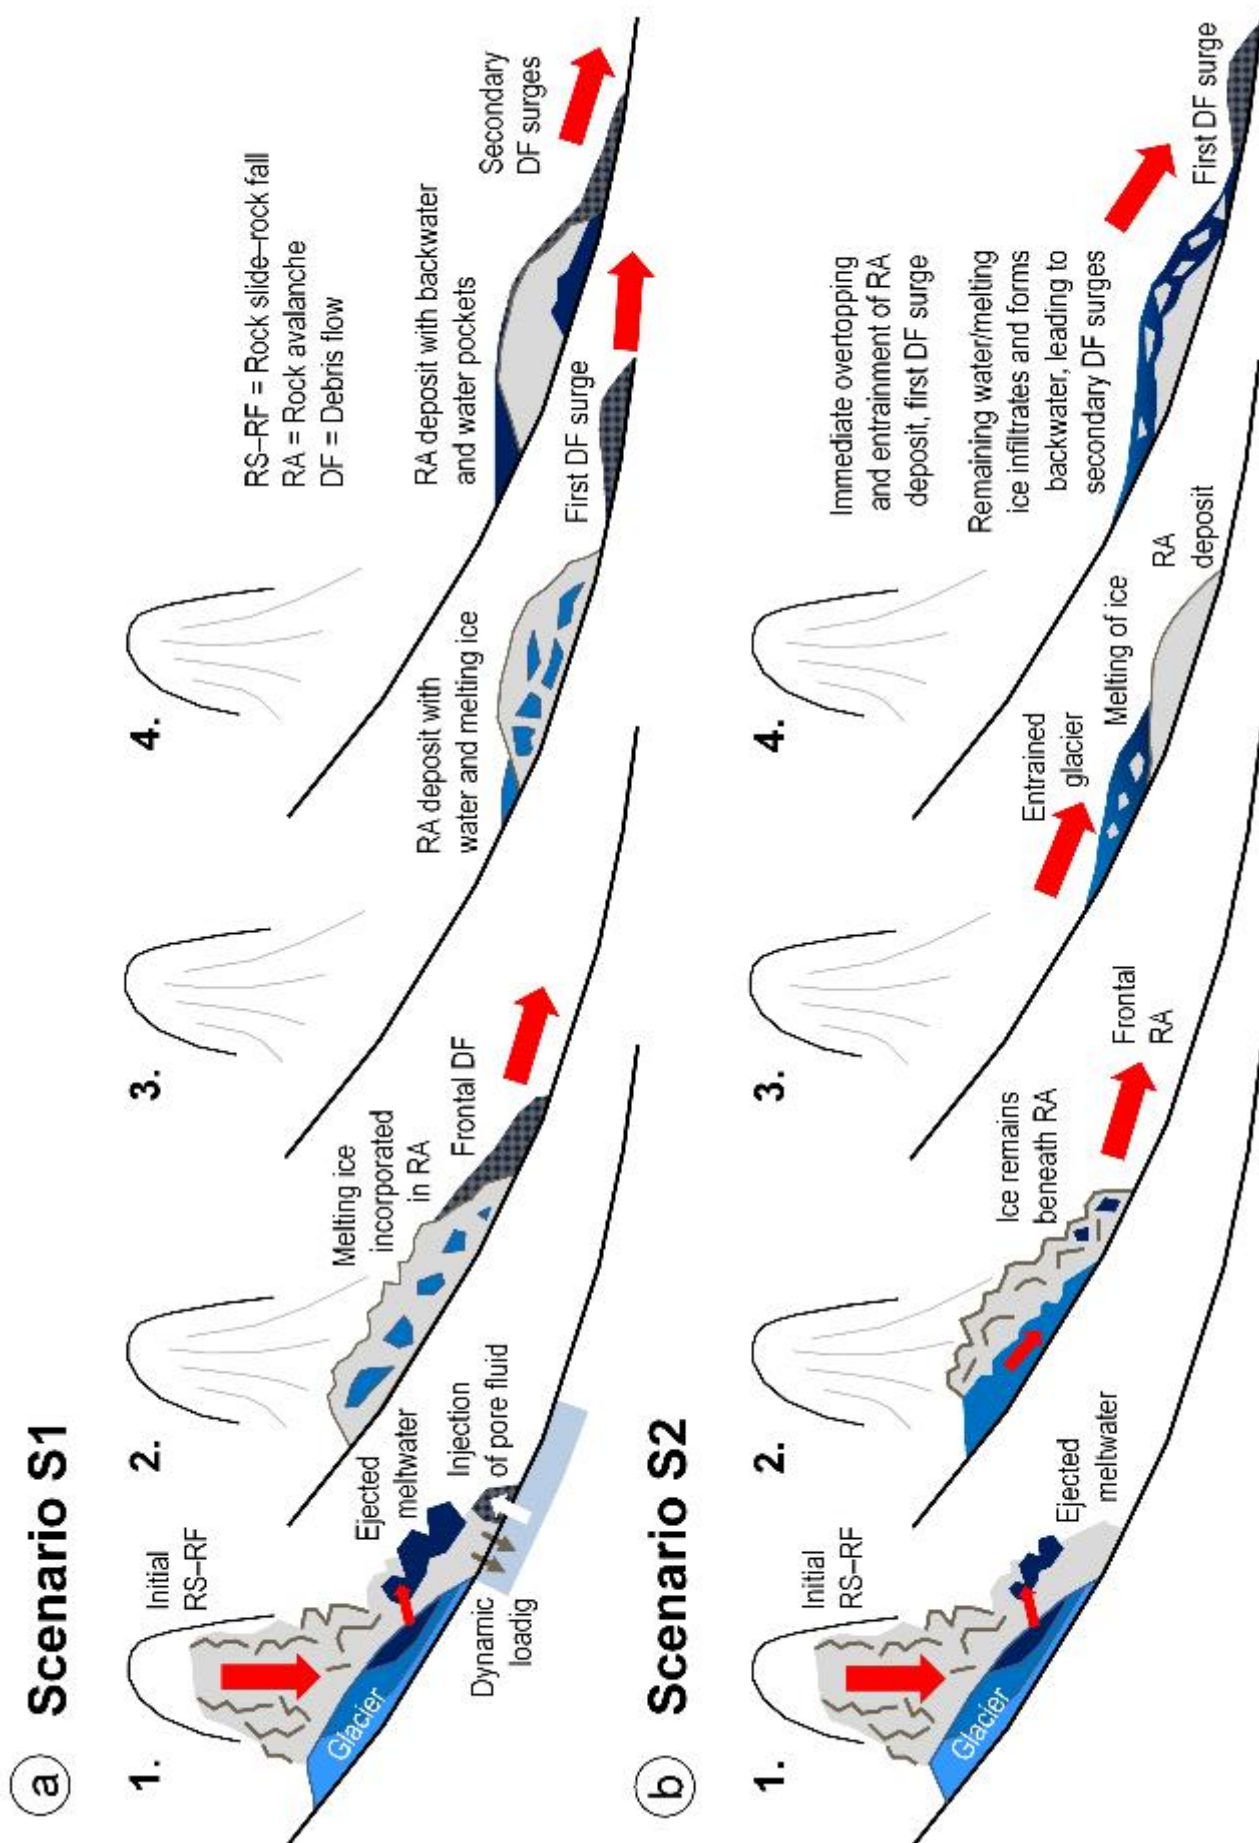


Figure 6. Qualitative conceptual models of the rock avalanche-debris flow transformation. (a) **Scenario S1**; (b) **Scenario S2**. See text for the detailed description of the two scenarios.

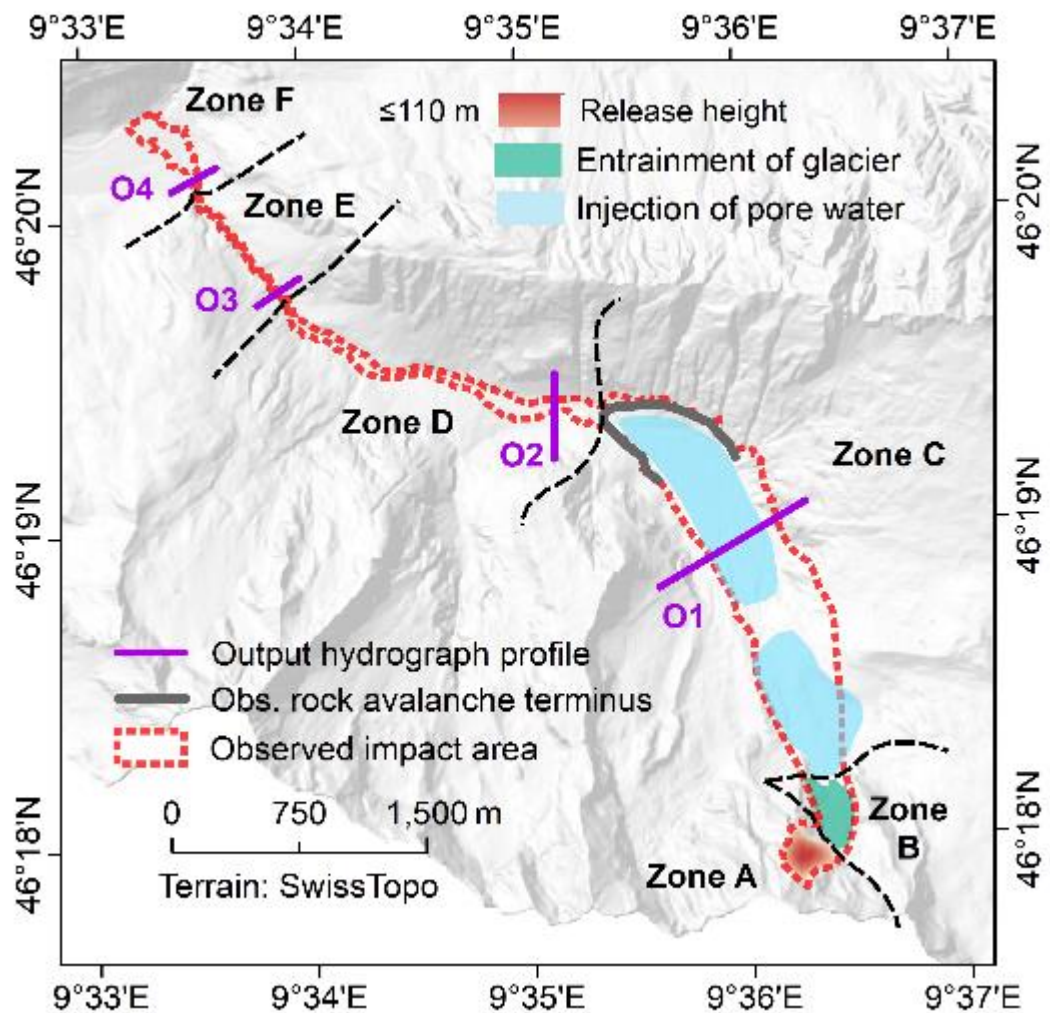


Figure 7. Overview of the heights and entrainment areas as well as the zonation performed as the basis for the simulation with r.avaflo. Injection of pore water only applies to the Scenario A. The zones A–F represent areas with largely homogeneous surface characteristics. The characteristics of the zones and the model parameters associated to each zone are summarized in Table 1 and Fig. 4. O1–O4 represent the output hydrograph profiles. The observed rock avalanche terminus was derived from WSL (2017).

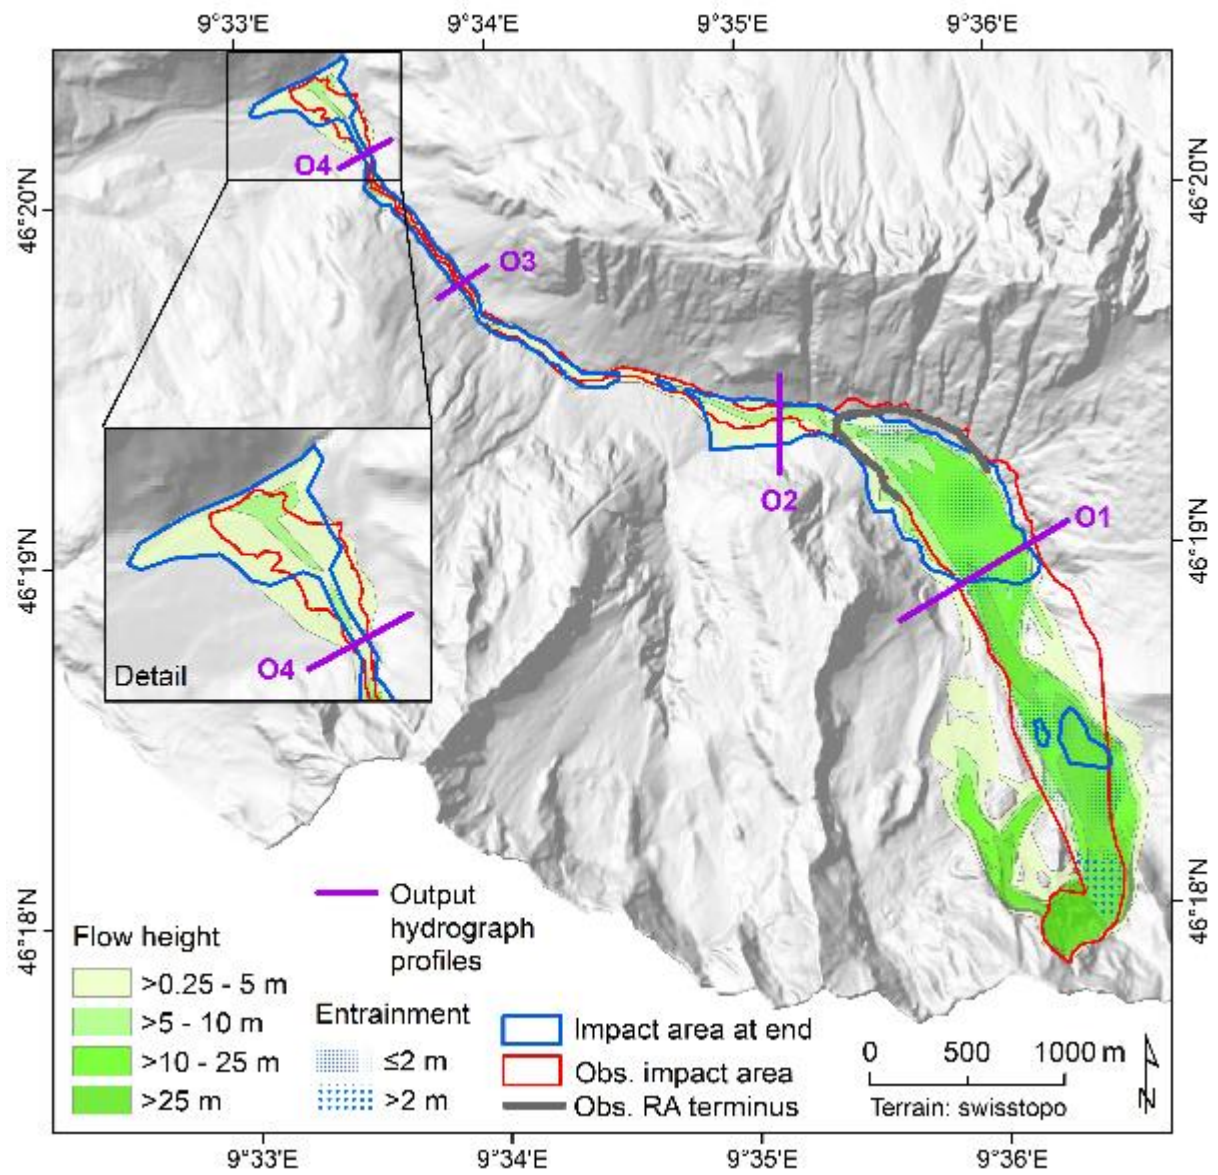


Figure 8. Maximum flow height and entrainment derived for **Scenario S1**. RA = rock avalanche; the observed RA terminus was derived from WSL (2017).

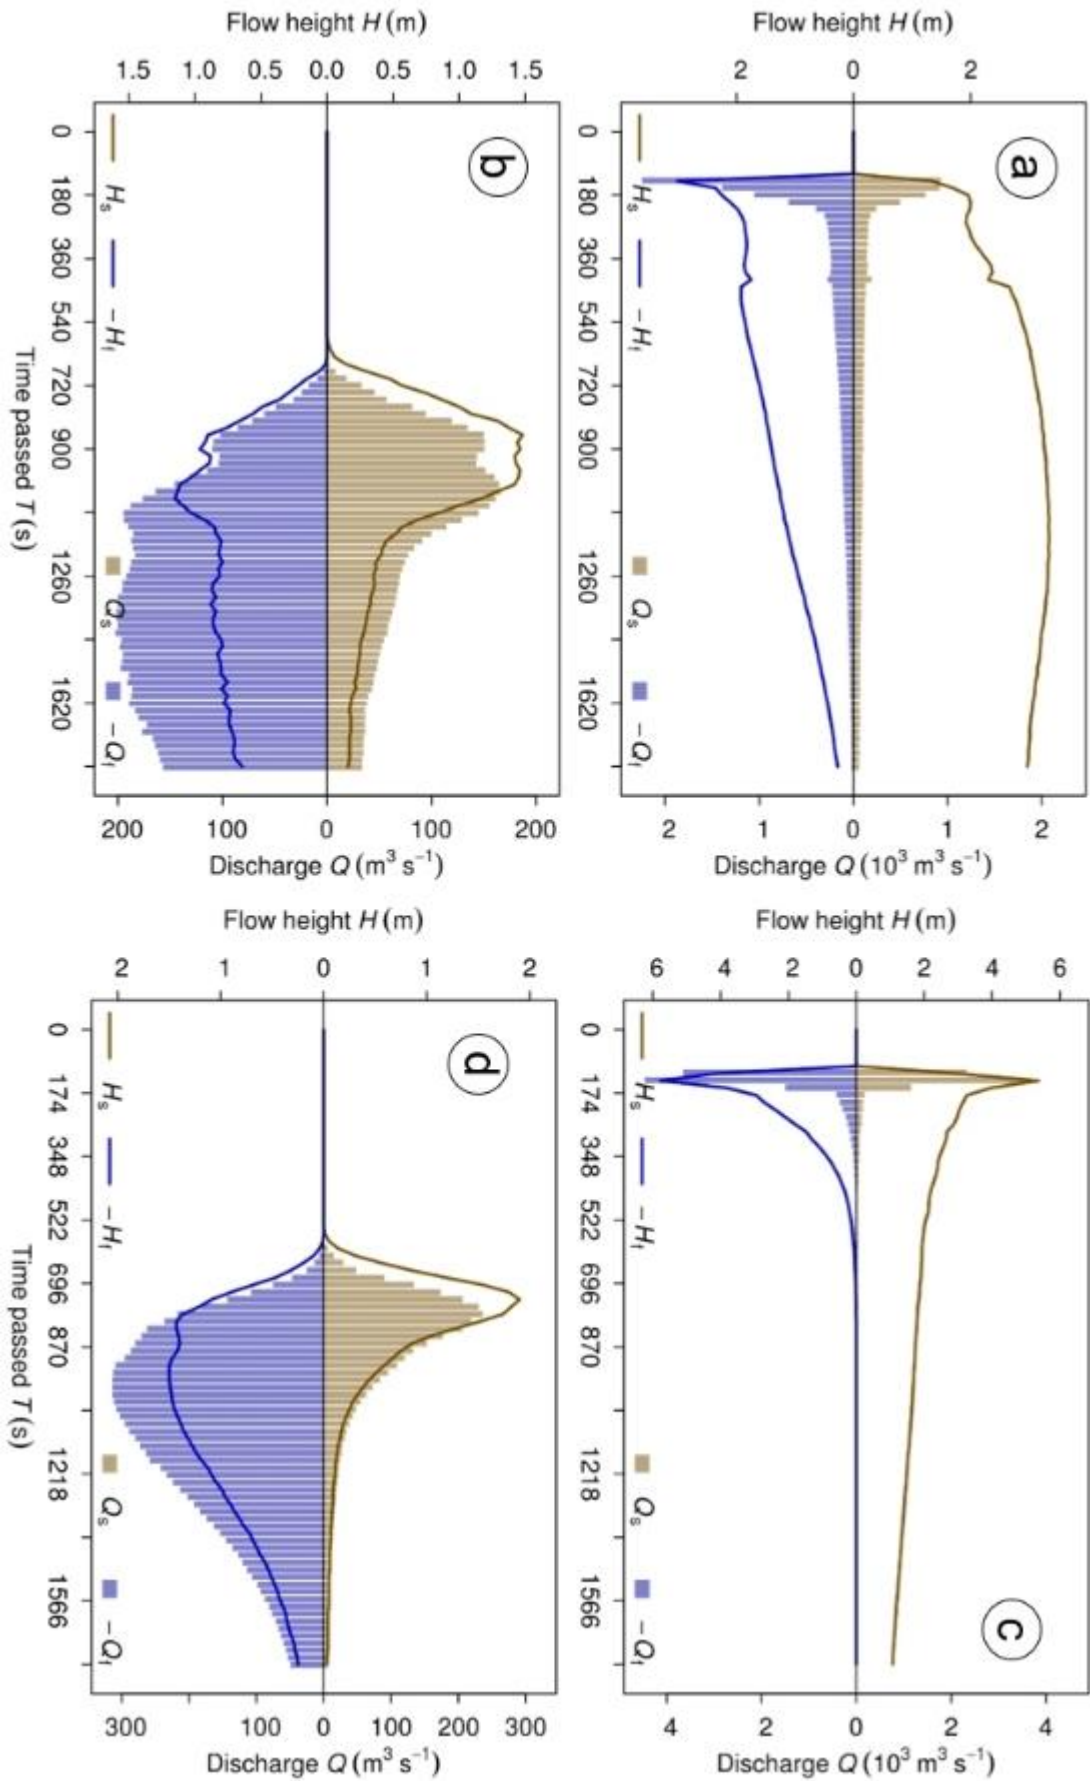


Figure 9. Output hydrographs OH2 and OH4 derived for the scenarios S1 and S2. (a) OH2 for Scenario S1. (b) OH4 for Scenario S1. (c) OH2 for Scenario S2. (d) OH4 for Scenario S2. See Fig. 7 and Fig. 8 for the locations of the hydrograph profiles O2 and O4. H_s = solid flow height; H_f = fluid flow height; Q_s = solid discharge; Q_f = fluid discharge.

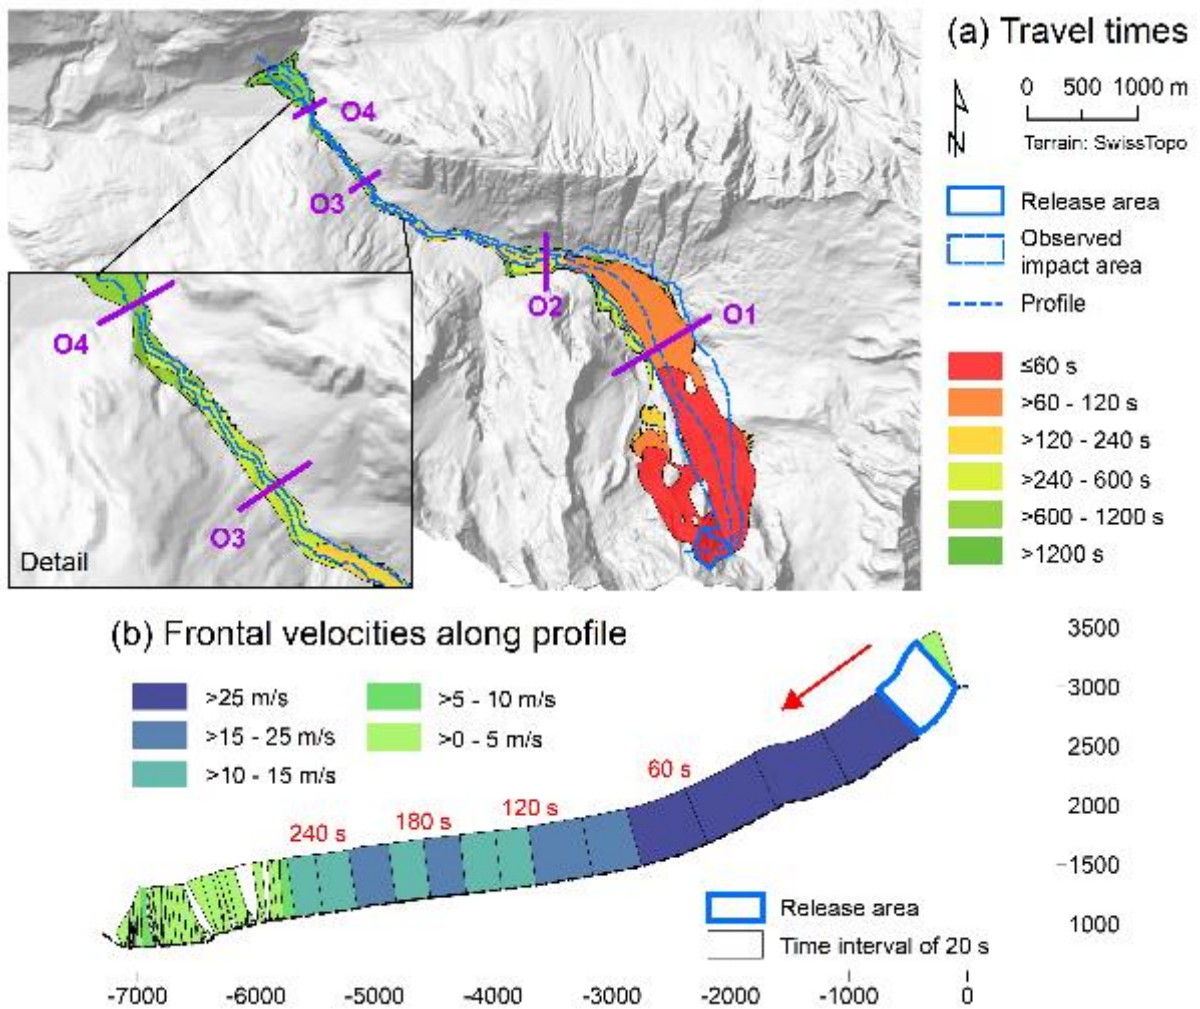


Figure 10. Spatio-temporal evolution and velocities of the event obtained for **Scenario S1**. (a) Travel times, starting from the release of the initial rock slide-rock fall. (b) Frontal velocities along the flow path, shown in steps of 20 s. Note that the height of the velocity graph does not scale with flow height. White areas indicate that there is no clear flow path.

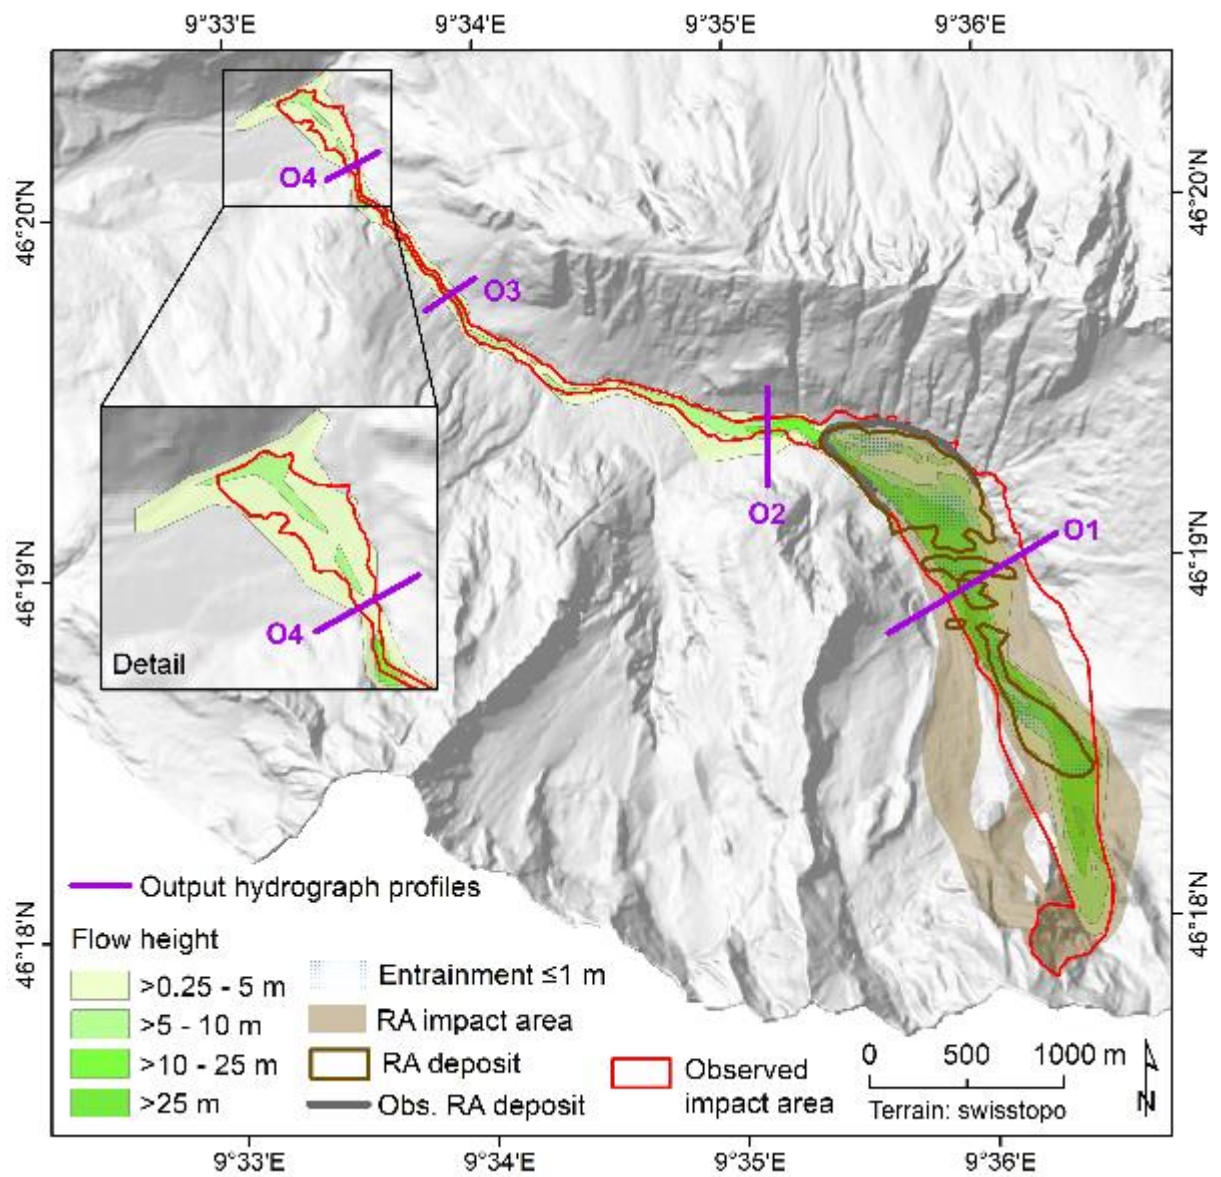


Figure 11. Maximum flow height and entrainment derived for Scenario S2. RA = rock avalanche; the observed RA terminus was derived from WSL (2017).

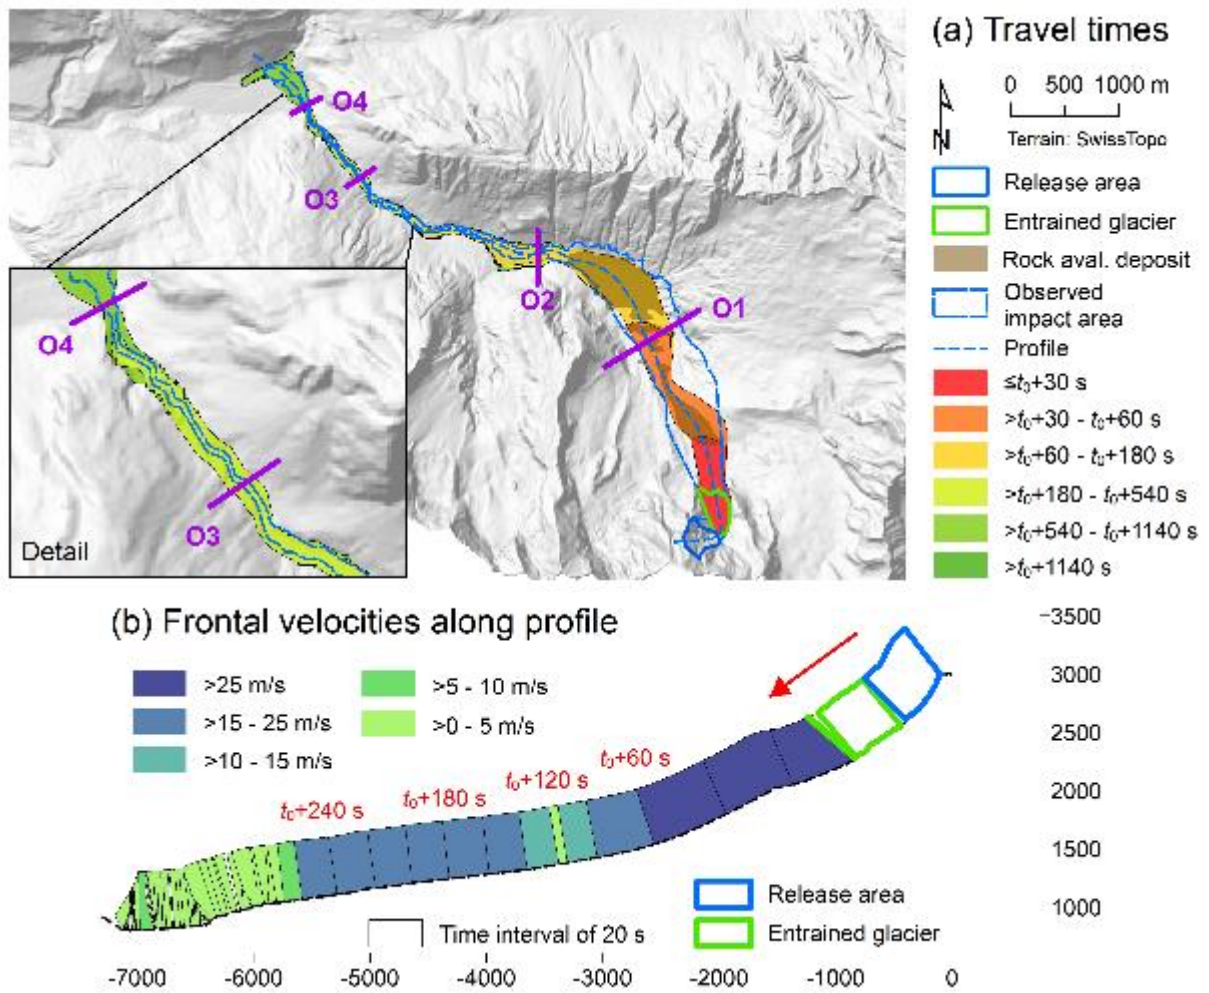


Figure 12. Spatio-temporal evolution and velocities of the event obtained for **Scenario S2**. (a) Travel times, starting from the release of the initial rock slide-rock fall. Thereby t_0 (s) is the time between the release of the rock slide-rock fall and the mobilization of the entrained glacier. (b) Frontal velocities along the flow path, shown in steps of 20 s. Note that the height of the velocity graph does not scale with flow height. White areas indicate that there is no clear flow path.