

We thank both reviewers for their comments. They allowed a deeper analysis of the results obtained in the study and contributed to increase the relevance of the results. The reviewers' comments were taken into account in the revised version of the manuscript, as explained below. The reviewers' comments appear in black and the answers appear in blue. The lines numbers refer to the lines numbers of the revised manuscript.

5

## Answers to Reviewer#1 comments

1/ This manuscript presents an innovative model regarding the risk of pluvial local flooding and the possible impacts on a traffic infrastructure, in this case a railroad line. The manuscript mainly presents the model concept and an application to the Rouen – Le Havre railway in NW France.

The contents of the paper is innovative, it is written in a well-structured and mostly clear manner and the research and the results are of high relevance for NHESS. The results of the paper are convincing!

I suggest the publication with a few minor amendments and some additional explanations:

We thank Reviewer#1 for his/her positive appraisal of the paper.

15

2/ Page 2, line 1-5: I think that the options of using a physically based model are written in a rather pessimistic manner. I think that such a model could be applied with a similar data base and with similar results. However, the big difference would be the required time for setting-up such a model and the required computational time. But it could be run with a rather high temporal resolution instead. Maybe you could elaborate a bit more on those differences.

20 We agree with Reviewer#1 that the comparison of the IRIP model with other types of models was quite short. We improved the presentation as suggested by Reviewer#1. One of the major difference between the IRIP model and hydrological models is that the model is a static model and there is no quantitative simulation of discharge (see also answer to comment 3/).

We modified the sentences as follows:

25 “As runoff can occur everywhere on a territory, there is a need to provide maps of susceptibility to surface runoff at the scale of a whole territory or an entire transport network. Physically based distributed models may be deployed (e.g. Dabney et al., 2011; Le Bissonnais et al., 2002; Schmocker-Fackel et al., 2007, Smith et al., 1995). They have the ability to provide the spatial and temporal evolution of runoff dynamics (water depth and sometimes velocity). However, they require many input data for their set up and calibration that may not be available everywhere. Thus, this kind of model may be difficult to deploy on large territories. An alternative solution, ....” [lines 38-40 p.1 and 1-3 p.2]

3.1/ Page 3, introducing the IRIP model: Can you talk a bit on the temporal resolution. I understood it is a quasi-static model, i.e. no temporal resolution. This should be mentioned.

35 Reviewer#1 is right. There is no temporal resolution in the IRIP model as it is a static model. It is now explicitly stated in the revised version of the manuscript.

“IRIP maps are static, therefore, the IRIP model does not have any temporal resolution and the maps do not provide quantitative information about runoff dynamics. However, the maps remain useful for prevention purpose, provided they are properly evaluated.” [lines 8-10 p.2]

40 3.2/ Furthermore, please explain if (and possibly how) variability of rainfall in space is considered and how one may approach/guess the critical rainfall intensity thresholds.

This point is partially discussed in the Discussion section 4.3 but was further elaborated in the discussion section (see also answer to point 9/). In the methodology section, the use of a rainfall intensity threshold to define the evaluation area is only presented as an illustrative example for the definition of the study area from a linear transportation network.

5 3.3/ I also think that one should mention the question of an appropriate / meaningful spatial resolution here. You discuss this well in the discussion chapter, but you may refer here already to this discussion, because it is essential for model application.

In the revised version of the manuscript, some elements about the appropriate spatial resolution of input data were added. Note that the IRIP model can be applied with data (in particular DTM) at various resolutions, depending on the objectives of the study. Coarse resolutions can be used when the objective is to get a broad view of sensitive-non sensitive areas over a territory.

10 If higher resolution data are included (eg Lidar DTM data), it is possible to get more precise information and to have explicit representation of linear features such as ditches or roads that improve the representation of water pathways.

The end of section 2.1 was modified as follows, taking also into account comment 9/ of Reviewer#1:

15 “The resolution of the susceptibility maps retains the resolution of the Digital Elevation Model (rasterized topography map) used as input data. To determine the thresholds separating the topographic indicator values (slope and topographic index respectively) into values favorable or not to runoff, an automatic classification, the [K-mean clustering method for grids](#) provided in [SAGA GIS](#) was used. The third option of the function that combines two methods: the iterative minimum distance (Forgy, 1965) and the hill-climbing method (Rubin, 1967) to divide the grid values into two classes was used. The principle of the method is to maximize the inter-class variance, while minimizing the intra-class variance. As the classification is performed using all the grid points located in the study area, the threshold value, separating the two classes (favorable or not to runoff), depends on the study area. The IRIP model can therefore be applied to various territories without a priori local knowledge on the area, as the thresholds can be automatically computed. If local knowledge about threshold values is available, the user can alternatively specify these threshold values.” [\[lines 39-41 p.3 and 1-9 p.4 \]](#)

4/ Page 3, line39: Typo (“reduced” instead “reduces”)

25 Taken into account

5/ Page 4, line 13: how to guess the “rainfall larger than a specified intensity”

See section 4.3 of the discussion [\[lines 28-39 p 14\]](#) for more details. See also answer to comment 9/.

30 6/ Page 4, step 2.2.2: Can you explain why the runoff susceptibility map is not important here

We do not say that the runoff susceptibility map to runoff generation is not important, but that it is not used for characterizing the hazard level, when data of localized impacts are used for the model evaluation. Indeed, those data are not directly related to runoff generation process but generally to transfer (erosion and water arrival) and accumulation processes (water stagnation and flooding). This highlights that there are generally no direct observation of runoff and in particular of the generation process.

35 So the map cannot be used for the comparison with localized impact data as the latter do not characterize the generation process. It does not mean that the map has no interest, on the contrary: by pointing out where the runoff generation areas are localized, the map can suggest mitigation measures to retain runoff where it is produced in order to limit its further transfer and accumulation (see discussion in section 4.4).

We modified the description of step 2.2.2 as follows:

40 “As the IRIP model provides three maps, it also means choosing the maps that will be considered in the evaluation. Previous experience (Lagadec et al., 2016b; 2018) showed that, when compared to localized impact data, susceptibility maps to transfer and accumulation were relevant, with the susceptibility map to transfer generally associated with erosion, and the susceptibility map to accumulation associated to sediment deposition and flooding. On the other hand, localized runoff related impact data

are not directly related to the runoff generation process. In such conditions, the susceptibility map to runoff generation cannot be used for characterizing the hazard level, and a composite of the susceptibility maps to runoff transfer and accumulation is used to define the hazard. ” [lines 34-38 p.4 and 1-2 p.5]

5 7/ Page 5, line 36: I cannot see easily the thalweg structure in figure 4, can you improve this visibility?

The figure was improved in the revised version (see answer to comment 14/.)

8/ Page 6, line 31: Figure 5 needs more explanations.

10 Reviewer#1 is right: the figure caption was enhanced to better explain the various parts of the figure. On p.6, the reference to the figure was only to illustrate the various types of railway profiles that can be encountered and that are illustrated in the second column of the figure).

The new caption reads as follows

15 “Figure 5: Vulnerability tree of the railway sections (also called earthworks) based on expert judgment. Each column corresponds to one criteria considered when computing the vulnerability of the section: the exposure (non-exposed sections are long tunnels or viaducts) (column 1)”, the type of railway profile (column 2), the length of the section (column 3) and the existence of a singularity (either level crossings, road bridges or tunnel inlets or outlets) (column 4). The +1 in the red circles indicate that 1 is added to the vulnerability score of the section to provide the final score that appears in the last column of the figure.”

20 9/ Page 11, line 38: Can you elaborate a bit more, if (and if yes, how) this model could account for individual rain storm events.

This would be rather interesting.

Since the submission of the paper, further work has been done on analyzing past events and some elements of methodology were added to the discussion. The approach that was proposed – in an operational use of the model, -not in the perspective of assessing the relevance of the evaluation method like in this paper is the following.

25 “The evaluation area can be defined using rainfall data and a given rainfall intensity threshold. Given that the event are often much localized, the use of radar rainfall data with a short time step (e.g. 5 min time step) is recommended, as shown by Marra et al. (2016) for landslides. The rainfall threshold triggering localized impacts can be assessed if a time series of spatialized rain and geo-referenced localized impacts are available for the same storm event. The principle consists in searching for the maximum rainfall for the different impacts, over different durations from 5 minutes to 1 hour. The durations of interest are  
30 based on the assumption that the higher the average hazard level that is located in the vicinity of the impact, the lower the amount of rain required to trigger the impact. Initial results points to a relevant duration of 15 minutes to 1 hour. Once the duration has been selected, the minimum rainfall intensity over this duration is selected and considered as the rainfall threshold necessary to trigger all observed impacts. This assumption allows restricting the model's evaluation area to the areas where it has rained enough. If data collection about impacts is comprehensive and information about protection infrastructure is  
35 available, POD and FAR values can be computed with a good accuracy.” [lines 38-42 p.14 and 1-7 p.15]

10/ Discussion section: Did you gain any information about possible blockage of culverts / drainage pipes under the railroad track during heavy rainstorms? If yes, it would be very interesting to read about this. I have been informed about such incidences in Germany during after flash floods. Those created a big problem, when the street or railroad dams were  
40 impounded, overflowed, eroded and partly broken. I think tis risk is under-estimated if not neglected at all.

Reviewer#1 is right: blockage of culverts/drainage pipes is a common problem in the railway context. In addition to blockage related to a particular intense event, progressive filling of the infrastructure by diffuse sediment transport is also a difficulty, since there is a large number of small hydraulic works that are difficult to maintain. Unfortunately, the information is rarely

documented in the reports about the impacts, found in the archives. Thus, it was not possible to consider this information in the evaluation methodology. On the other hand, IRIP map of susceptibility to transfer, by highlighting areas prone to sediment transport can allow management and warning to be concentrated on these areas.

These elements were added to the discussion section 4.1.

5 “One of the reason for this low predictive power of hydraulic works could be the following. Blockage of culverts/drainage pipes is a common problem in the railway context. In addition to blockage related to a particular intense event, progressive filling of the infrastructure by diffuse sediment transport is also a difficulty, since there is a large number of small hydraulic works that are difficult to maintain. Unfortunately, the information about blockage of hydraulic works is rarely documented in the reports about the impacts, found in the archives. On the other hand, other hydraulic works are well dimensioned and very  
10 efficient. Thus, hydraulic works can sometimes increase the vulnerability and sometimes decrease it. Therefore, it was not possible to consider this information as a reliable source of information for proven risk in the evaluation methodology nor in the vulnerability tree. On the other hand, the IRIP map of susceptibility to transfer, by highlighting areas prone to sediment transport can allow management and warning to be concentrated on these areas.” [lines 34-42 p11 and 1-2 p12]

15 11/ Discussion (or conclusions): can you add a paragraph summing the limitations of the model?

The following elements were added to the discussion section 4.1.

“There are limitations related to the IRIP model itself, the main one being that the model does not provide quantitative estimates of runoff. The other limitation is that the produced susceptibility maps are relative to the study area, as the thresholds that divide the factors maps into areas sensitive or not sensitive to runoff are computed on the study area. Therefore, it is not  
20 possible to compare maps from two areas, and if the study area changes a little, the map will also change. There are also limitations related to the application of the model. The IRIP map of transfer of accumulation strongly depend on the DEM quality, since 3 and 4 indicators over 5 are derived from the topography. The required computing time is large when large study areas are considered or if the DTM resolution is high. Finally, there are limitations in the evaluation itself as the maps of susceptibility to runoff generation were poorly evaluated, due to the lack of appropriate data.”

25 [lines 31-38 p.13]

12/ Table 3: Where can one get these estimates for model parameters from? Are these the default estimates? Can you give some reasonable parameter ranges?

The parameters presented in Table 3 are either obtained using the automatic classification, either from expertise of the IRIP  
30 model application in various contexts.

IRIP can be applied everywhere without prior knowledge of runoff over the area, however, the relevance of the maps improves significantly when some parameters are adjusted after a study of the area.

We added some elements in section 2.3.2 [lines 24-26 p.6]

“The IRIP model parameterization used in this study is presented in Table 3. Given the low local knowledge of the study area,  
35 the thresholds defining the classes favorable or not favorable to runoff were computed using the classification method proposed by default in the IRIP model, contrarily to the application by Lagadec et al. (2018) that used values derived from local expertise. Thresholds for topographic index and slope indicators were therefore defined using the classification method. The threshold of the drained area indicator was fixed to 2.5 ha following sensitivity tests performed by Lagadec (2017) to identify, in this specific catchment, a minimum surface from which significant surface runoff can be generated. Other thresholds for soil depth,  
40 hydraulic conductivity, slacking, erodibility, upslope area sensitive to runoff generation were chosen as in Lagadec et al. (2018).”

And the impact of the choice of the parameters is further discussed in section 4.2 [lines 15-30 p.13]:

“Results of the evaluation method also depend on the values of the parameters chosen to compute the three susceptibility maps (as specified in Table 1). The IRIP model can be applied everywhere without prior knowledge of runoff over the area. However, the relevance of the maps improves significantly when some parameters are adjusted using local knowledge about the area. Examples of such adjustments can be the following:

- 5 • The drained area threshold depends on the level of detail expected at the head of the basin, but it remains between 0.5 and 5 ha. Above 5 ha too much information is lost (Lagadec, 2017). Note also that localized impacts of runoff were recorded for catchments of a few hectares and this consideration also guided the choice of the threshold value.
- 10 • The break of slope threshold depends on the calculation method used to compute the break of slope factor, as the user can chose the number of pixels over which the factor is computed. The number is always an odd number and 3 pixels is the minimum number that must be used. If the number of pixels increases, information about micro-topography becomes less accurate. The number of pixels must be adapted according to the resolution of the DTM: for instance, 3 to 7 pixels are recommended for a DTM of 25 m resolution, and between 9 and 25 for a DTM of 5 m resolution.
- 15 • The types of land use that are considered favorable to runoff can also be modified, for example according to the agriculture cycle on a same plot. The modification of these parameters and the evaluation of their relevance depends on the expert conducting the study, his.her knowledge of the area, but also on his.her objective (precise study, or large mesh for larger territories).”

13/ Figure 2: somehow difficult to understand

20 The figure caption was modified as follows:

“Figure 2: Scheme of the evaluation methodology to assess the relevance of susceptibility maps to runoff, using localized runoff-related impacts proxy data. The grey boxes indicate the information that is used in the various steps of the methodology. Yellow circles presents the various steps of the evaluation methodology leading to the final quantitative evaluation (orange box).“

25

14/ Figure 4: Please improve / extend this figure a bit:

- Include an inlet, where you show the location of this region within France
- Names of the river are hardly readable.
- Dry thalwegs difficult to guess.
- 30 • Rouen and Le Havre urban areas could be shown?

This figure was improved following the Reviewer’s recommendations and the caption was modified as follows:

“Figure 4: Map of the study area in Normandy (northern France). The yellow contour is the boundary of the catchments intercepted by the Rouen- Le Havre railway (line in black and white). Blue lines are the permanent river courses. One can note the dense network of dry talwegs (darker on the DEM) upstream de rivers that can be activated during a rainfall event.”

35

## Answers to Reviewer#2 comments

1/ The paper focuses on the use and evaluation of the Indicator of Intense Pluvial Runoff (IRIP) method. The method is used to provide susceptibility maps for a railway line in Northern France. The paper is well written and organized. The topic is also of high interest. However, one major issue in the methodology may undermine the results of the entire work.

We thank Reviewer#2 for his.her encouraging comments regarding the interest of our work. We also thank him.her for his.her suggestions regarding the evaluation methodology. We provide a detailed answer below and we took the suggestions into account in the revised version of the manuscript and the main remark of the reviewer allowed us to deepen the analysis of our results and to improve the robustness of the conclusions of the paper.

45

2/ Moreover, the authors should be very careful in not using the same figures and same wording used in their previous works. See answer to comment 8/ below.

### 3/ Major comments:

This is the critical issue: In Step 4 it is written that “If an area classified at risk has a specific supervision measure or mitigation structures have been built, it is moved from ‘false alarm’ to ‘hit’ as the implementation of mitigation measures means that the area was indeed at risk, but that no impact as recorded due to the efficiency of the mitigation measure.” Step 4 brings a significant a bias in the evaluation, which can be seen as a unidirectional attempt to improve model performance. If authors could like to use an approach taking into account mitigation measures, they should also do the opposite: “If an area not classified at risk has a measure or structure, and no impact was recorded, it should be moved from ‘Correct negative’ to ‘miss’”, or, at least, according to section 2.4, if the area was in the “bad weather tour”.

We thank Reviewer#2 for raising this point. We acknowledge that this point is worth being considered in step 4 of the evaluation methodology, provided that the proxy data can really be related to runoff-related risks. If this is the case, we agree with Reviewer#2 that step 4 of the methodology must be modified and that “If an area not classified at risk has a measure or structure, and no impact was recorded, it should be moved from “Correct negative” to “miss””.

We modified the description of step 4 as follows [lines 33-42 p.5 and 1-5 p.6]:

“This fourth step is necessary to properly take into account the fact that, if an area is at risk, the stakeholder may have taken mitigation measures that may explain the absence of observed impact. Such mitigation measures are therefore likely to explain a certain amount of false alarms. For instance, mitigation structures can be protection to buildings, retention basins, hydraulic works crossing below transport infrastructures, etc... They can also be resilience actions like a reinforced supervision in case of high rainfall amount warning. Their aim is to reduce damage consequences by issuing early warning or by performing local work to reduce potential damages during an event. If an area classified at risk has a specific supervision measure or mitigation structures have been built, it is moved from ‘false alarm’ to ‘hit’ as the implementation of mitigation measures means that the area was indeed at risk, but that no impact was recorded due to the efficiency of the mitigation measure. This step will be referred to Step 4.1 in the following. If mitigation measures can be considered as a reliable source of information regarding runoff risk, the section must also be moved from ‘correct negative’ to ‘miss’ if a mitigation measure is present and the area was not classified at risk (this step will be referred as Step 4.2 in the following). The performance measures are then recomputed, based on the modified contingency tables of Step 4.1 or Step 4.2 if the latter is relevant.

After these four steps, the final values of the quantitative performance measures are obtained, characterizing the performance of the IRIP mapping model. “

Furthermore, in order to investigate the impact of considering Reviewer#2’ suggestion in the evaluation, we performed additional computations of the evaluation criteria, taking into account Reviewer#2 suggestion, to see how it modifies the computed performance criteria of the IRIP model (see modified step 4 in section 2.4 [lines 21-35 p.8])

“Step 4: Mitigation measures were considered in a second step. Structural and non-structural mitigation measures were considered and inventoried along the whole railway. Structural measures include all the hydraulic structures (drainage structures along or below the railway track, retention ponds, etc...) that were built to help water flow circulation. At SNCF, non-structural measures include surveillance patrols in case of bad weather. These patrols target as a priority the sections registered in what is called the ‘bad weather tours’. The latter are defined using local knowledge about the hazard exposure or about the specific infrastructure vulnerabilities. They provide increased and targeted monitoring in case of bad weather and early response if needed.

We modified the computation of the performance criteria by taking into account mitigation measures (presence of a hydraulic structure in one section, or section registered in the ‘bad weather tour’) as follows. In Step 4.1, we moved the sections where a mitigation measure is present but no impact was recorded from ‘false alarm’ to ‘hit’. In Step 4.2, we moved the sections where a mitigation measure is present but no impact was recorded from ‘false alarm’ to ‘hit’ AND moved the sections where

a mitigation measure is present and the section was not tagged at risk by the IRIP model from ‘correct negative’ to ‘miss’. In order to quantify the impact of each mitigation measure on the evaluation criteria, they were recomputed:

- by taking into account hydraulic works only
- by taking into account ‘bad weather tours’ only
- by taking into account both hydraulic works and ‘bad weather tours’.

After, this step 4, the final evaluation criteria of the IRIP model were obtained. “

A new Table 5 was included in the manuscript and the “results” section modified as follows [lines 23-42 p.9 an 1-5 p. 10]:

“The results of the evaluation along the whole railway line are reported in Table 5. Five results are presented: column (1) - when neither the vulnerability nor the mitigation measures are taken into account (meaning that hazard and vulnerability are combined following Figure 3a); column (2) - when only the vulnerability is taken into account following Figure 3c; and columns (3) to (5) - when the vulnerability (Figure 3c) and the mitigation measures are taken into account including respectively: hydraulic works (column (3)), ‘bad weather tours’ (column (4)), and both hydraulic works and bad weather tours (column (5)). In columns (3) to (5), performance criteria are given for step 4.2 and the values in parenthesis correspond to step 4.1.

The results show that the POD increases from 86 % (column (1)), to 93% (column (2)) and the FAR decreases from 62% to 58% when vulnerability is taken into account in computing them. The results in terms of  $\square^2$  present the same trend, with the significance increasing when vulnerability is considered. It can be noticed that from column (1) to column,(2), 4 ‘missed’ impacts are moved into ‘hit’. These are impacts that occurred on highly vulnerable railway sections that can experience damages with a very low hazard exposure level. Likewise, 6 ‘false alarms’ are moved into ‘correct negatives’, because the railway sections were not enough vulnerable.

The results of Table 5 (columns (3) to (5)) show that the impact of taking into account mitigation measures on the performance criteria is large. When considering step 4.1 only (figures in parenthesis), the number of ‘miss’ remains the same as in columns (2) but the number of ‘false alarms’ dramatically decreases. This leads to a similar POD, but a significant decrease of FAR. When considering step 4.2, i.e. assuming that the existence of mitigation measures proves the existence of a risk, the number of ‘false alarms’ is the same as for step 4.1, but the number of ‘miss’ increases as compared to column (2), the larger value being obtained when both hydraulic works and ‘bad weather tours’ are taken into account. As compared to step 4.1, FAR remains the same, but POD decreases as compared to column (2). Nevertheless, POD values remain similar to the one obtained when no vulnerability is taken into account (column (1)). The values of the  $\square^2$  shows that the relation between risk and impacts is significant in column (1) when vulnerability is not taken into account and highly significant when vulnerability and mitigation measures are taken into account. The results in columns (2) to (5) present very encouraging values, highlighting the added value of the IRIP maps, and of the vulnerability and mitigation measures characterization, for the evaluation of the IRIP model. ”

*Table 5: Performance criteria assessing the predictive power of the IRIP model in identifying sections with a proven risk using different methods to take into account vulnerability and mitigation measures: without taking vulnerability into account according to Figure 3a (column (1)); when taking vulnerability into account according to Figure 3c but not mitigation measures (column (2)); when taking vulnerability into account according to Figure 3c and mitigation measures (column (3) to (5)). In columns (3) to (5), the figures correspond to Step 4.2 and those in parenthesis to Step 4.1 of the methodology.*

|  |  |  |  |  |  |
|--|--|--|--|--|--|
|  | (1) Without taking vulnerability into account<br>(cf Fig 3a) | (2) When taking vulnerability into account (Fig. 3c) but not mitigation measures | (3) When taking vulnerability (Fig. 3c) and hydraulic works into account | (4) When taking vulnerability (Fig. 3c) and “bad weather tours” into account | (5) When taking vulnerability (Fig. 3c) hydraulic works and “bad weather tours” into account |
|--|--|--|--|--|--|

|                                   |    |    |             |          |             |
|-----------------------------------|----|----|-------------|----------|-------------|
| Number of 'Hit'                   | 51 | 55 | 85 (85)     | 67 (67)  | 95 (95)     |
| Number of 'False Alarm'           | 83 | 77 | 47 (47)     | 65 (65)  | 37 (37)     |
| Number of 'Correct Negative'      | 40 | 46 | 43 (46)     | 37 (46)  | 35 (46)     |
| Number of 'Miss'                  | 8  | 4  | 7 (4)       | 13 (4)   | 15 (4)      |
| Probability of Detection: POD (%) | 86 | 93 | 92 (96)     | 84 (94)  | 86 (96)     |
| False Alarm Ratio: FAR (%)        | 62 | 58 | 36 (36)     | 49 (49)  | 28 (28)     |
| $\chi^2$                          | 7  | 19 | 36.8 (46.1) | 9 (27.9) | 26.7 (59.8) |

*Table 6: Performance criteria assessing the predictive power of the presence of hydraulic works or “bad weather tours” in identifying sections with a proven risk.*

|                                   | (1) Impacts explained by hydraulic works | (2) Impacts explained by “bad weather tours” | (3) Impacts explained by hydraulic works or “bad weather tours” |
|-----------------------------------|--|--|---|
| Number of 'Hit'                   | 22                                       | 29   | 40  |
| Number of 'False Alarm'           | 33                                       | 21   | 51  |
| Number of 'Correct Negative'      | 90                                       | 102  | 72  |
| Number of 'Miss'                  | 37                                       | 30   | 19  |
| Probability of Detection: POD (%) | 37                                       | 49   | 68  |
| False Alarm Ratio: FAR (%)        | 60                                       | 42   | 56  |
| $\chi^2$                          | 2 (not significant)                      | 20.6   | 11.1  |

5 The discussion of the results was enhanced to discuss more in depth the impact of the way mitigation measures are taken into account on the values of the performance criteria. For that purpose, we proposed a new Table 6 where we computed the performance criteria to assess the predictive power of, respectively, hydraulic works only (Table 6, column (1)); “bad weather tours” only (Table 6, column (2)); and a combination of both sources of information (hydraulic works OR “bad weather tours”) (Table 6, column (3)) in explaining the recorded runoff-related impacts. The contingency tables presented in Table 2 were

10 computed assuming that a section was at risk if a hydraulic work or a “bad weather tour” was present in this section (i.e. assuming that they could be considered as proven risk). The discussion now reads [[lines 1-42 p.11 and 1-2 p.12](#)]:

“The results presented in Table 5 also highlight the large impact of the way mitigation measures are taken into account (step 4 of the methodology) on the final values of the performance criteria. Considering only step 4.1 (moving the sections where a mitigation measure is present but no impact was recorded from ‘false alarm’ to ‘hit’) slightly increases POD values and

15 dramatically decreases FAR values (see values in parenthesis in columns (3) to (5) in Table 5). The decrease of FAR is larger when ‘bad weather tours’ only are accounted for that when hydraulic structures only are taken into account. The lowest FAR values are obtained when considering both mitigation measures. When considering also step 4.2 (additionally moving from ‘correct negative’ to ‘miss’ the sections where a mitigation measure is present but the section was not tagged at risk by the IRIP model) leads to a decrease of POD but does not change the FAR as compared to step 4.1. Applying step 4.2, implicitly

20 means giving the same status of proven risk to mitigation measures and to localized observed impact. Thus, it could be possible to directly use the presence of a hydraulic work or a ‘bad weather tour’ as explaining factors of the observed localized impacts and to compute the corresponding contingency tables. The results are presented in Table 6 where the performance criteria were computed using respectively, hydraulic works only (Table 6, column (1)); ‘bad weather tours’ only (Table 6, column (2)); and

a combination of both sources of information (hydraulic works OR “bad weather tours”) (Table 6, column (3)) for explaining the recorded runoff-related impacts. The results show that the hypothesis that hydraulic works and runoff-related risks are independent cannot be rejected ( $\chi^2$  not significant), i.e. hydraulic works have low predictive power about the occurrence of a risk. On the other hand, ‘bad weather tours’ have a predictive power but lower values of POD (49%) than the IRIP model without mitigation measures (93%) (comparison of column (2) of Table 6 and column (2) of Table 5). The FAR value is lower than for the IRIP model without mitigation measures (42% as compared to 58%) but is not so different. Finally, when the presence of hydraulic works and ‘bad weather tours’ are combined (Table 6, column (3)), the POD increases to 68% as compared to considering hydraulic works only or ‘bad weather tours’ only. The FAR is 56%, an intermediate value between the one of hydraulic work only (60%) and ‘bad weather tour’ only (42%). In any case, the predictive power of the IRIP model is higher than when considering hydraulic works or ‘bad weather tours’ as proxy for the risk of intense runoff.

This shows that the use of mitigations measures as proxy data must be done with caution. The correct use depends on the accuracy of the data and the degree to which they are related to proven risk. In the context of the railway case study, the following elements must be taken into account. The construction of hydraulic works or the design of tours take into account not only the hazard parameter, but also the vulnerability and the criticality of the stake. A ‘bad weather tour’ is preferably designed on a section that is critical regarding the train traffic management, or on sections with known structural weaknesses. ‘Bad weather tours’ are not precise, they often involve long linear of the railway, and the whole sections of the tours may not be relevant to runoff risk. This is why we used them in step 4 to refine the computation of performance criteria, and in particular as explanatory factors of false alarms, and not as elements proving the existence of a risk. The results of the evaluation criteria obtained after step 4.2 assumes that the existence of a mitigation measures means a proven risks, which is not the case. Therefore, they provide the most pessimistic POD values for the evaluation of the IRIP maps. The results presented in Table 6 also highlight that the ‘bad weather tour’ is a more reliable proxy data for runoff related risk than hydraulic works. But this may be due to the number of railway sections concerned by one ‘bad weather tour’ whereas local mitigation measures only affect one section.

One of the reason for this low predictive power of hydraulic works could be the following. Blockage of culverts/drainage pipes is a common problem in the railway context. In addition to blockage related to a particular intense event, progressive filling of the infrastructure by diffuse sediment transport is also a difficulty, since there is a large number of small hydraulic works that are difficult to maintain. Unfortunately, the information about blockage of hydraulic works is rarely documented in the reports about the impacts, found in the archives. On the other hand, other hydraulic works are well dimensioned and very efficient. Thus, hydraulic works can sometimes increase the vulnerability and sometimes decrease it. Therefore, it was not possible to consider this information as a reliable source of information for proven risk in the evaluation methodology nor in the vulnerability tree. On the other hand, the IRIP map of susceptibility to transfer, by highlighting areas prone to sediment transport can allow management and warning to be concentrated on these areas.”

4/ Since this may worsen performance, may be the authors should either create a different model for areas with mitigation measures, or entirely remove them from the evaluation.

In our case study, this solution would have the drawback of excluding a large part of the runoff-related impacts from the analysis (22 impacts out of 59 also have a hydraulic works; 29 impacts out of 59 also have a “bad weather tour”), and this would decrease the strength of the analysis.

Instead, we preferred to modify the evaluation methodology as presented in answer to comment 3/ and to modify the results accordingly.

5/ The performance boost that results in the last column of Table 5 is due to the inappropriate method mentioned above.

As shown by the additional results provided in the answer to comment 3/, taking into account the revision of the methodology proposed by Reviewer#2 leads to results that are similar to those of the present version of the paper for FAR and are slightly lower for POD. Nevertheless, the performance criteria remain satisfactory and confirm the benefit of the IRIP model in identifying sections at risk. Furthermore, considering that mitigation measures only indicate a potential risk and not a proven risk, the final POD obtained by taking Reviewer#2 suggestion into account is the lowest value that can be expected, as it is the most pessimistic way to take into account information about mitigation measures.

5  
10 In the revised version of the manuscript, we preferred to modify the evaluation methodology as presented in answer to comment 3/ and we modified the results accordingly. In particular, we modified Table 5 as presented in answer to comment 3/ so that the reader can appreciate the impact of the way mitigation measures are taken into account in the evaluation methodology. See detailed answer to comment 3/

6/ This aspect is crucial for the entire paper, because the “Results” section concludes with this sentence:

“The results in the last column present very encouraging values, highlighting the added value of the IRIP maps, and of the vulnerability and mitigation measures characterization, for the evaluation of the IRIP model.”

15 But the last column is affected by this issue, and this casts a shadow on the entire paper.

As shown in the complementary results presented in the answer to comment 3/, a modification of the methodology following Reviewer#2 suggestion does not change dramatically the conclusions of the study and the sentence underlined by Reviewer#2 remains correct, as well as our conclusions that remain supported by the analysis.

20 Furthermore, we would like to highlight that the present work showed how it was crucial to take into account the information about vulnerability and mitigation measures in the evaluation methodology. In general, only impacts data are considered, because the vulnerability and mitigation measures are more complex to incorporate. In this paper the novelty of the approach is to have included vulnerability and mitigation measures in the methodology.

We added the following sentence in the conclusions: “Due to the quality of the data set, we were able to quantify the impact of taking into account or not the information about vulnerability but also different methods for accounting for mitigation measures on the computation of performance criteria.” We added this sentence in the conclusion [lines 21-23p.16].

8/ Figure 1 is the same as Figure 4 already published in Lagadec et al., 2018. I understand that you are using the same method. But if a figure has been already published, this should be mentioned in the paper. Moreover, the description of the IRIP method on page 3 uses exactly the same words used in Lagadec et al., 2018. [Lagadec, L.-R., Moulin, L., Braud, I., Chazelle, B., and Breil, P.: A surface runoff mapping method for optimizing risk assessment on railways, Safety Science, 110, 253-267, <https://doi.org/10.1016/j.ssci.2018.05.014>, 2018. ]

35 Figure 1 was not exactly the same as the one published in Lagadec et al. (2018). Nevertheless we modified the figure and we mention that the figure is “adapted from Lagadec et al. (2018)” in the figure caption. In terms of description of the IRIP method, we have already mentioned in the current version of the paper (p.3 line 19-21) that the provided description was mainly borrowed from Lagadec et al. (2018): “The present description is mainly taken from Lagadec et al. (2018) that retained improvements proposed by Lagadec (2017) to the IRIP model.” We however modified the description as follows to make it less similar to that of Lagadec et al. (2018), and to include also the answer to Reviewer#2 comment 9/ and Reviewer#1 comment 3.3/ in the description.

40 “The IRIP model is briefly described here, but more details can be found in the literature (Dehotin and Breil, 2011; Lagadec et al., 2018). The present description is mainly taken from Lagadec et al. (2018) that retained improvements proposed by Lagadec (2017) to the IRIP model. The IRIP model provides three maps representing three processes involved in storm runoff hazard: generation, transfer and accumulation of runoff. Runoff generation occurs in areas with low infiltration capacity,

shallow soils or saturated soils, leading to runoff produced by infiltration excess and/or saturation excess. Runoff transfer occurs in areas where water can be transferred downwards, be accelerated and can induce erosion, depending on soil erodibility. Runoff accumulation occurs in areas where water can slow down, concentrate and be accumulated to produce floods and sediment load deposits. The IRIP model focuses on runoff occurring outside the river network. It is therefore complementary to flooding risk mapping along river networks. Each IRIP map is produced by combining five indicators derived from geographic information layers (Figure 1, Table 1). Each indicator is classified into two categories: not favorable to runoff, where 0 is attributed to the pixel, or favorable to runoff, where 1 is attributed to the pixel. This yields five binary maps that are then added to create a susceptibility map with 6 levels, from 0 (not susceptible) to 5 (very susceptible). The indicators used for producing each of the three susceptibility maps are presented in Figure 1. The generation map is produced using one indicator derived from a land use map, one indicator derived from the topography, and three indicators derived from a soil map. The indicator related to topography is a combination of the slope and the topographic index (Beven and Kirkby, 1979) and is assigned 1 if both are favorable, and 0 if one is not favorable. The generation map is then considered as one of the input indicators for the two other maps of susceptibility to transfer and accumulation. This allows accounting for the need of significant runoff generation, to increase the susceptibility to runoff transfer and/or accumulation. Maps of susceptibility to transfer and accumulation of runoff are produced using mainly indicators based on topography. But the indicators have opposed conditions for being favorable to runoff. For instance, the slope indicator is favorable for transfer in the case of steep slopes, and for accumulation in the case of low slopes. The break of slope indicator is favorable for transfer in the case of convex break of slopes and for accumulation in the case of concave break of slopes. Topographic indicators are computed for each pixel relatively to their upstream sub-catchment allowing accounting for upstream to downstream water transfer. The resolution of the susceptibility maps retains the resolution of the Digital Elevation Model (rasterized topography map) used as input data. To determine the thresholds separating the topographic indicator values (slope and topographic index respectively) into values favorable or not to runoff, an automatic classification, the [K-mean clustering method for grids](#) provided in [SAGA GIS](#) was used. The third option of the function that combines two methods: the iterative minimum distance (Forgy, 1965) and the hill-climbing method (Rubin, 1967) to divide the grid values into two classes was used. The principle of the method is to maximize the inter-class variance, while minimizing the intra-class variance. As the classification is performed using all the grid points located in the study area, the threshold value, separating the two classes (favorable or not to runoff), depends on the study area. The IRIP model can therefore be applied to various territories without a priori local knowledge on the area, as the thresholds can be automatically computed. If local knowledge about threshold values is available, the user can alternatively specify these threshold values.” [lines 18-41 p.3 and 1-9 p.4]

30

9/ Page 3 lines 36-40: Please specify the classification method used. These lines are very unspecific and the conclusions from these lines are not supported.

We modified the text as follows:

“To determine the thresholds separating the topographic indicator values (slope and topographic index respectively) into values favorable or not to runoff, an automatic classification, the [K-mean clustering method for grids](#) provided in [SAGA GIS](#) was used. The third option of the function that combines two methods: the iterative minimum distance (Forgy, 1965) and the hill-climbing method (Rubin, 1967) to divide the grid values into two classes was used. The principle of the method is to maximize the inter-class variance, while minimizing the intra-class variance. As the classification is performed using all the grid points located in the study area, the threshold value, separating the two classes (favorable or not to runoff), depends on the study area. The IRIP model can therefore be applied to various territories and with different resolution of the DTM without a priori local knowledge on the area, as the thresholds can be automatically computed. If local knowledge about threshold values is available, the user can alternatively specify these threshold values.” [lines 1-9 p.4]

10/ Page 5 lines 15-16: this statement is incorrect. The results of the chi-square do not demonstrate that the relationship is highly significant, but that it possible to reject the null hypothesis of independence, because it is unlikely that the null hypothesis of independence is true.

The sentence was modified as follows:

- 5 “Thus, a value of  $\chi^2$  larger than 10.83 means that the null hypothesis (independence between the risk levels and the IRIP map) can be rejected at the 0.1% level.” [lines 30-31 p.5]

11/ Page 10 lines 2-8: the demonstration (or assumption?) that each section had the chance to experience a rare event is obscure to me.

- 10 The point mentioned by Reviewer #2 was raised in the manuscript to support the fact that the chosen case study was adequate to assess the relevance of the proposed evaluation methodology. In particular, the evaluation of the methodology would be biased if the duration of data collection was not long enough so that each section of the railway has had the opportunity to be affected by a heavy rainfall event. In this case, the IRIP model could indicate a risk in a section without reported runoff-related impact because no intense rainfall event would have occurred at that location. To show that the hypothesis that each railway section has had an equal opportunity to experience a high rainfall event, we computed the probability of experiencing [resp. not experiencing] rainfall events of several return periods over a duration of 100 years. This probability is  $(1-(1-0.1)^{100}) = 0.99997$  [resp. less than 0.0001%] for a 10-year return period,  $(1-(1-0.05)^{100}) = 0.994$  [resp. less than 1%] for a 20-year return period, and  $(1-(1-0.02)^{100}) = 0.867$  [resp. 13%] for a 50-year return period. Therefore, the working hypothesis is valid and we can conclude that our application of the evaluation methodology is not biased and that the case study was adequate to assess the relevance of the proposed evaluation methodology. We reformulated the sentences as follows:

- “Furthermore, although it covers more than one century of data, the database may not be comprehensive, which could affect the false alarm ratio if all the occurred impacts have not been recorded. Moreover, the evaluation was conducted assuming (see section 2.3.3) that each section of the railway had the opportunity to be affected by runoff, i.e. that each section of the railway had the opportunity to be affected by an intense rainfall event. If it was not the case, the IRIP model could indicate a risk in a section that would not have been impacted in the absence of any intense rainfall event at that location. To assess the validity of this working hypothesis: ‘each section had the opportunity to be affected by an intense runoff event’, we can calculate the probability of not having experienced a rainfall event of a given return period during one century. This probability is less than 0.001% for a 10-year return period  $[(1/10)^{100}]$ , less than 1%  $[(1/20)^{100}]$  for a 20-year return period, and 13%  $[(1/50)^{100}]$  for a 50-year return period respectively. Therefore, it can be assumed that each section of the railway had the opportunity to experience a rare event at least once during the data collection period. This shows that, if the database is long enough and of course comprehensive (i.e. all the occurred runoff-related impacts were properly reported), the working hypothesis can be accepted and therefore, performance measures can be considered as not biased. In the present case, the comprehensiveness of the database is exceptional, but far from being perfect. However, it was the best that could be collected, and the duration of data collection (more than one century) ensures that the chosen case study was relevant to assess the accuracy of the proposed evaluation methodology.” [lines 4-20 p.12]

#### Minor comments:

- 12/ Page 3 line 39: reduces->reduced Corrected.
- 40 13/ Page 6 line 15: either...or Corrected.
- 14/ Table 2: please specify also in the table the number of d.o.f for the chi-square test.  
The number of degrees of freedom is 1. This was added to the caption of Table 3.

## References

- Dabney, S.M., Yoder, D.C., Vieira, D.A.N., Bingner, R.L., 2011. Enhancing RUSLE to include runoff-driven phenomena. *Hydrol. Process.* 25, 1373–1390. <http://dx.doi.org/10.1002/hyp.7897>.
- 5 Forgy, E., 1965. Cluster Analysis of multivariate data: efficiency vs. interpretability of classifications, *Biometrics*, 21, 768-780.
- Lagadec, L.-R., Moulin, L., Braud, I., Chazelle, B., and Breil, P.: A surface runoff mapping method for optimizing risk assessment on railways, *Safety Science*, 110, 253-267, 2018.
- Lagadec, L.-R., Patrice, P., Braud, I., Chazelle, B., Moulin, L., Dehotin, J., Hauchard, E., and Breil, P.: Description and evaluation of a surface runoff susceptibility mapping method, *Journal of Hydrology*, 541, Part A, 495-509, 2016.
- 10 Le Bissonnais, Y., Montier, C., Jamagne, M., Daroussin, J., and King, D.: Mapping erosion risk for cultivated soil in France, *CATENA*, 46, 207-220, [https://doi.org/10.1016/S0341-8162\(01\)00167-9](https://doi.org/10.1016/S0341-8162(01)00167-9), 2002.
- Rubin, J., 1967. Optimal Classification into Groups: An Approach for Solving the Taxonomy Problem, *J. Theoretical Biology*, 15,103-144.
- Schmocker-Fackel, P., Naef, F., and Scherrer, S.: Identifying runoff processes on the plot and catchment scale, *Hydrology and*
- 15 *Earth System Sciences*, 11, 891-906, 2007.
- Smith, R.E., Goodrich, D.C., Woolhiser, D.A., Unkrich, C.L., 1995. KINEROS – a kinematic runoff and erosion model. *Comput. Models Watershed Hydrol.* 20, 627–668.

# Evaluation of a method to use proxy data of runoff-related impacts for the evaluation of a model for mapping intense pluvial storm runoff hazard using proxy data of runoff-related impacts. Application to the railway context

5 Isabelle Braud<sup>1</sup>, Lilly-Rose Lagadec<sup>2,1,3</sup>, Loïc Moulin<sup>3</sup>, Blandine Chazelle<sup>4</sup>, Pascal Breil<sup>1</sup>,

<sup>1</sup>INRAE~~rstea~~, UR-RiverLy, Lyon-Villeurbanne Center, 5 Rue de la Doua, CS 20244, F-69625, Villeurbanne~~cédex~~, France.

<sup>2</sup>SNCF Réseau (French Railway Company), Engineering and Projects South-West, PIEG General Studies, 54 bis rue Amédée Saint Germain, 33077 Bordeaux, France.

10 <sup>3</sup>SNCF Réseau (French Railway Company), Engineering & Projects Direction, Railways, Tracks & Environment Department, 6 avenue Francois Mitterrand, 93210 La-Plaine-Saint-Denis, France.

<sup>4</sup>SNCF Réseau (French Railway Company), Engineering and Projects South-East, General Studies, 31 Avenue Albert-et-Elisabeth, 63037 Clermont-Ferrand Cedex, France.

Correspondence to: Isabelle Braud (isabelle.braud@[inrae-rstea.fr](mailto:isabelle.braud@inrae-rstea.fr))

**Abstract.** The IRIP method, for “Indicator of intense pluvial runoff”, in French, is a geomatics method ~~which-that~~ allows mapping the susceptibility of a territory to surface runoff, and that provides three maps of susceptibility to the generation, transfer and accumulation of runoff. It is based on the combination of binary maps that represent the impact of a given factor (favourable or not favourable) to runoff. These factors are summed up to provide susceptibility maps to runoff with levels ranging from 0 to 5. To be used for risk prevention, the quality and limitations of the produced maps must be assessed. However, direct runoff data are very scarce and not available everywhere in a territory. Proxy data of impacts related to runoff can provide information useful for the evaluation of the IRIP maps. However, both information cannot be compared directly and a specific methodology to compare susceptibility maps and proxy data must be proposed. This paper presents such a method that accounts for the hazard level, the vulnerability of the study area and possible mitigation actions taken to reduce the risk. The evaluation method is assessed using a comprehensive database of runoff-related impacts collected runoff-related impacts on railways as proxy data to compare with the maps. The evaluation is made on an 80 km railway line in Normandy (North of France), ~~where a comprehensive database of runoff related impacts on the railway has been gathered over and covering~~ the whole 20<sup>th</sup> century. The results show that the evaluation method is robust, ~~and~~-relevant, and generic enough for evaluating a non-quantitative method of runoff hazard mapping using localized runoff-related proxy data. In addition, the good performance of the IRIP model in the case study confirms The comparison with runoff-related impacts on the railway also shows that the susceptibility maps produced by the IRIP model provide relevant information related to runoff and that they can be used to design risk management strategies, as illustrated in the railway context.

## 1 Introduction

Runoff occurring outside the river network is a natural hazard that is often quite localized but has a high societal impact. In France, Moncoulon et al. (2014) mention that about half of insurance claims due to flooding occur outside areas mapped as at risk of river flooding in the framework of the European Union Flood Directive. Runoff consequences can be fatalities, damages to buildings or infrastructures, disruption of transport networks. In addition, surface runoff events are often associated with sediment transport and deposition, causing losses to agricultural land and increasing the damages to infrastructures. Linear transport networks, such as railways, are very sensitive to runoff hazards: they cross various small catchments and water and mud can damage the railway track and electric installations (Chazelle et al., 2014; Lagadec et al., 2018). Maurer et al. (2012) estimated that the median cost (direct and indirect) of an hydrometeorological event on the European railway network was 2.69 M€.

As runoff can occur everywhere on a territory, there is a need to provide maps of susceptibility to surface runoff at the scale of a whole territory or an entire transport network. Physically based distributed models may be deployed (e.g. Dabney et al., 2011; Le Bissonnais et al., 2002; Schmocker-Fackel et al., 2007, Smith et al., 1995). They have the ability to provide the spatial and temporal evolution of runoff dynamics (water depth and sometimes velocity). However, they require many input data for their set up and calibration that may not be available everywhere. Thus, this kind of model may be difficult to deploy on large territories. ~~Physically based models may be deployed (e.g. Le Bissonnais et al., 2002; Schmocker-Fackel et al., 2007) but they require lots of data for their set up and calibration that may not be available everywhere.~~ An alternative solution, called IRIP for “Indicator of Intense Pluvial Runoff”, was proposed by Dehotin and Breil (2011) for mapping the susceptibility to surface runoff. The IRIP model allows the creation of three maps ~~representing~~ documenting three different phases of the surface runoff phenomenon: generation, transfer, and accumulation. It is based on a score method using a set of indicators derived from easily available information (digital terrain model, land use map and soil map). The result is composed of three susceptibility maps with scores ranging from 0 (no susceptibility) to 5 (high susceptibility) for the generation, transfer and accumulation of runoff. IRIP maps are static, therefore, the IRIP model does not have any temporal resolution and the maps do not provide quantitative information about runoff dynamics. However, the maps remain useful for prevention purpose, provided they are properly evaluated. Thus, ~~t~~he IRIP model and its evaluation is the focus of this paper.

Indeed, ~~t~~o be used for hazard prevention and risk management, the validity of the produced maps must be assessed and the limits of the methodology clearly defined. However, runoff located outside the river network is a phenomenon that is difficult to observe as it can occur everywhere and over very short durations. There are therefore very few direct observations of runoff, apart from artificial runoff simulation experiments or some rare research experiments (see Dehotin et al., 2015 for more details). On the other hand, indirect information of runoff-related impacts can be more easily available as runoff may have damaging consequences such as flooding of buildings or of transport networks (roads or railways), mud flows, erosion, landslides. Information about these impacts can be collected and reported based on various media: post-event surveys to collect the location of impacts on infrastructures or on transport networks (Versini et al., 2010b; Naulin et al., 2013; Defrance et al., 2014; Lagadec et al., 2016b, 2018), insurance claims on buildings or infrastructures (Moncoulon et al., 2014; Le Bihan et al., 2017), analyses of the press and social media (Llasat et al., 2013; Saint Martin et al., 2018; Petrucci et al., 2019) ~~or~~ ~~of~~ citizen science (Gourley et al., 2010; Le Coz et al., 2016). All these data are referred to as “proxy data” in this paper. Such data have been used for the evaluation of quantitative flash flood forecasting models (e.g. Gourley et al., 2010; Defrance et al., 2014; Javelle et al., 2014; Saint-Martin et al., 2016), road cutting warning models (Versini et al., 2010b; Naulin et al., 2013) or flooding impact models on buildings (Le Bihan et al., 2017). The evaluation is based on criteria that are used for the evaluation of meteorological or hydrological forecasts (WWRP/WGNE Joint Working Group on Forecast Verification Research, 2015), i.e. the computation of probability of detection, false alarm ratio and success ratio. Such approach has been extended for the evaluation of non-quantitative prediction model such as the IRIP model by Lagadec et al. (2016b). It was further improved by Lagadec et al. (2018) using a comparison with expert judgement, taking into account the vulnerability of the railway. However, these evaluations remained ~~quite qualitative~~ qualitative. It was necessary to generalize the evaluation methodology and to propose a more systematic and quantitative manner to deal with proxy data of localized runoff-related impacts. It was also necessary to use a large and comprehensive data set of runoff-related impacts to assess the relevance and robustness of the proposed evaluation methodology and to highlight the ~~and~~ limitations of the IRIP maps, before their use in risk management strategies.

Indeed, although proxy data provide useful information about the occurrence of runoff, these data cannot be compared directly to susceptibility maps of runoff hazards because the information they carry is not the same. Impacts are related to the occurrence of a risk, thus taking into account the vulnerability of the stakes (for instance an infrastructure will be less vulnerable to runoff if there is a protection structure), whereas susceptibility maps are only describing hazards. Susceptibility maps to runoff are continuous in space whereas proxy data are generally point data (impacts on buildings or transport networks).

Impacts are generally observed where there are stakes. So the information may not be comprehensive, in particular when runoff occurred without stakes. This comprehensive information would be required to accurately estimate false alarm ratio (Calianno et al., 2013). In addition, proxy data are not always well geolocalized and the description of impacts is subjective and depends on the observer.

5 The paper focuses on one kind of proxy data that are localized runoff-related impacts, such as impact on transport networks. The ~~first~~ objective of the paper is to propose a methodology to use these proxy data for the evaluation of a non-quantitative method of runoff hazard mapping, such as the IRIP method. This implies identifying which data and information processing are required to perform such an evaluation, and the criteria that can be used for a quantitative comparison. Then, ~~the second objective is to assess the~~ feasibility and relevance of the proposed methodology is assessed using a well-documented case study in the railway context. The study takes advantage of the availability of databases of damages and incidents on the French railway network. The case study is a particularly well-documented 80 km railway between Rouen and Le Havre in northern France, where the IRIP model was set up and where a comprehensive database of runoff-related impacts has been collected for about one century. This provided a comprehensive proxy data set that allowed the assessment of the robustness and applicability of the proposed evaluation methodology. The data set also allowed the assessment of the relevance of the IRIP model for runoff hazard mapping on a wide area in the railway context.

10 The paper is organized as follows. The “Materials and Methods” section presents the IRIP model, the proposed evaluation methodology, the case study and how the IRIP model and the evaluation methodologies were set up on the case study. Then the “Results” section presents the results of the IRIP model and of the evaluation on the 80 km railway between Rouen and Le Havre. In the “Discussion” section, we discuss the ~~hypotheses behind~~ relevance of the evaluation method; its sensitivity to the data accuracy and model set up, and the genericity of the proposed methodology. The use of the IRIP model for risk assessment in the railway context is also discussed, before providing the main conclusions of this study.

15

20

## 2. Materials and methods

### 2.1 The IRIP mapping model

The IRIP model is briefly described here, but more details can be found in the literature (Dehotin and Breil, 2011; Lagadec et al., 2018). The present description is mainly taken from Lagadec et al. (2018) that retained improvements proposed by Lagadec (2017) to the IRIP model. The IRIP model provides three maps representing three processes involved in storm runoff hazard: generation, transfer and accumulation of runoff. Runoff generation occurs in areas with low infiltration capacity, shallow soils or saturated soils, leading to runoff produced by infiltration excess and/or saturation excess. Runoff transfer occurs in areas where water can be transferred downwards, be accelerated and can induce erosion, depending on soil erodibility. Runoff accumulation occurs in areas where water can slow down, concentrate and be accumulated to produce floods and sediment load deposits. The IRIP model focuses on runoff occurring outside the river network. It is therefore complementary to flooding risk mapping along river networks. Each IRIP map is produced by combining five indicators derived from geographic information layers (Figure 1, Table 1). Each indicator is classified into two categories: not favorable to runoff, where 0 is attributed to the pixel, or favorable to runoff, where 1 is attributed to the pixel. This yields five binary maps that are then added to create a susceptibility map with 6 levels, from 0 (not susceptible) to 5 (very susceptible). The indicators used for producing each of the three susceptibility maps are presented in Figure 1. The generation map is produced using one indicator derived from a land use map, one indicator derived from the topography, and three indicators derived from a soil map. The indicator related to topography is a combination of the slope and the topographic index (Beven and Kirkby, 1979) and is assigned 1 if both are favorable, and 0 if one is not favorable. The generation map is then considered as one of the input indicators for the two other maps of susceptibility to transfer and accumulation. This allows accounting for the need of significant runoff generation, to increase the susceptibility to runoff transfer and/or accumulation. Maps of susceptibility to transfer and

25

30

35

40

accumulation of runoff are produced using mainly indicators based on topography. But the indicators have opposed conditions for being favorable to runoff. For instance, the slope indicator is favorable for transfer in the case of steep slopes, and for accumulation in the case of low slopes. The break of slope indicator is favorable for transfer in the case of convex break of slopes and for accumulation in the case of concave break of slopes. Topographic indicators are computed for each pixel relatively to their upstream sub-catchment allowing accounting for upstream to downstream water transfer. The resolution of the susceptibility maps retains the resolution of the Digital Elevation Model (rasterized topography map) used as input data. To determine the thresholds separating the topographic indicator values (slope and topographic index respectively) into values favorable or not to runoff, an automatic classification, the K-mean clustering method for grids provided in SAGA GIS was used. The third option of the function that combines two methods: the iterative minimum distance (Forgy, 1965) and the hill-climbing method (Rubin, 1967) to divide the grid values into two classes was used. The principle of the method is to maximize the inter-class variance, while minimizing the intra-class variance. As the classification is performed using all the grid points located in the study area, the threshold value, separating the two classes (favorable or not to runoff), depends on the study area. The IRIP model can therefore be applied to various territories without a priori local knowledge on the area, as the thresholds can be automatically computed. If local knowledge about threshold values is available, the user can alternatively specify these threshold values. The IRIP model provides three maps representing three processes involved in storm runoff hazard: generation corresponding to areas with low infiltration capacity and where production of runoff at the soil surface is likely; transfer corresponding to areas where water can be transferred downwards, accelerate and produce erosion; accumulation corresponding to areas where water can slow down, concentrate and produce floods and deposits. The IRIP model focuses on runoff occurring outside the river network and is therefore complementary to flooding risk mapping along river networks. The IRIP maps combine indicators derived from geographic information layers (Figure 1, Table 1). Each indicator is classified into two categories: favorable to runoff, where 1 is attributed to the pixel, or not favorable to runoff, where 0 is attributed. This yields 5 binary maps. The maps are then added to create a susceptibility map with 6 levels, from 0 (not susceptible) to 5 (very susceptible). The indicators used for each of the three susceptibility maps are presented in Figure 1. The generation map is created thanks to three indicators derived from a soil map, one indicator derived from a land use map, and one indicator derived from the topography. The latter is a combination of the slope and the topographic index (Beven and Kirkby, 1979): 1 if both are favorable, 0 if one is not favorable. The generation map is then considered as an input indicator for the two other maps of susceptibility to transfer and accumulation in order to account for the need of runoff generation, before its possible transfer and/or accumulation. Maps of susceptibility to transfer and accumulation of runoff are created mainly by associating indicators based on topography. But the indicators have opposed conditions for being favorable to runoff. For example, the slope indicator is favorable for transfer in the case of steep slopes, and for accumulation in the case of low slopes. The break of slope indicator is favorable for transfer in the case of convex break of slopes and for accumulation in the case of concave break of slopes. Topographic indicators are computed for each pixel relatively to their upstream sub-catchment in order to follow the hydrological upstream to downstream water transfer. The resolution of the susceptibility maps retains the resolution of the Digital Elevation Model (rasterized topography map) used as input data. To determine the thresholds separating the topographic indicator values into values favorable or not to runoff, a classification method (Rubin, 1967), dividing the observed values in two classes, is used. Thus, the threshold value, separating the two classes (favorable or not to runoff), depends on the study area, but their impact on the final maps is reduced as they only influence four indicators out of 15 in Figure 1. The IRIP model can therefore be applied to various territories without a priori local knowledge.

## 2.2 The evaluation framework

The proposed evaluation framework is shown in Figure 2. It extends the work of Lagadec et al. (2016b, 2018) but remains based on the use of contingency tables and the computation of a detection rate and a false alarm ratio (see details below) to propose a quantitative comparison between the IRIP maps and the localized runoff-related impacts. The method takes into

account the following elements: the different nature of the impacts (localized) and the IRIP maps (continuous score maps), the vulnerability of the stakes for which runoff-related impacts are reported, and the existence of mitigation measures that may reduce the occurrence of risks. The four steps of the method are detailed below.

### 2.2.1 Step 1: Definition of the evaluation area

5 The IRIP maps can be computed over a whole territory. The evaluation area, i.e. the area where quantitative measures are computed must be relevant ~~with regards~~ to the available runoff-related impact data. This is particularly important to get a reliable estimate of false alarm ratio. The evaluation area will therefore depend on the runoff-related impact database, as illustrated by the following examples. In case of impacts following a specific localized rainfall event, the evaluation area may be defined as the area experiencing rainfall larger than a specified intensity (see discussion about the choice of the threshold in section 4.3), as if there is no rain, there is no runoff. In the case of a transport network, the IRIP maps are established for all the catchments that are intercepted by the transport network. If impacts are only recorded on the transport network, the evaluation area will be the transport track itself, with a buffer zone consistent with the resolution of the DTM used to compute the IRIP maps. This buffer accounts for inaccuracy in the DTM and in the geolocalization of the impact data. When a comprehensive database of runoff-related impacts is available over a territory, for a long historical period, it can be assumed that ~~all~~ the entire territory may have been affected by a rainfall event, and the ~~whole~~ entire catchment can be considered as the evaluation area for the application of the evaluation method.

### 2.2.2 Step 2: Characterization of the vulnerability and hazard ~~in the evaluation zone~~

The IRIP model provides susceptibility maps with score values ranging from 0 (no susceptibility) to 5 (high susceptibility). To compare these scores with runoff-related impact data it is necessary to choose which levels of susceptibility computed by the IRIP model ~~are considered at risk will generate a situation at risk. In this study, the risk is defined by combining a susceptibility level to a vulnerability level based on the exposure and known consequences of overland runoff on the railway elements.~~ As the IRIP model provides three maps, it also means choosing the maps that will be considered in the evaluation. Previous experience (Lagadee et al., 2016b; 2018) showed that, when compared to localized impact data, susceptibility maps to transfer and accumulation were relevant, with the susceptibility map to transfer generally associated with erosion, and the susceptibility map to accumulation associated to sediment deposition and flooding. On the other hand, localized runoff related impact data are not directly related to the runoff generation process. In such conditions, the susceptibility map to runoff generation cannot be used for characterizing the hazard level, and a composite of the susceptibility maps to runoff transfer and accumulation is used to define the hazard. Previous experience (Lagadee et al., 2016b; 2018) showed that, when compared to localized impact data, susceptibility maps to transfer and accumulation were relevant, with the susceptibility map to transfer generally associated with erosion, and the susceptibility map to accumulation associated to sediment deposition and flooding. Therefore a composite of the two maps was built for defining the hazard.

In addition, the notion of risk depends on the exposure and vulnerability of the stakes that are considered. Several methods can be used to assess the vulnerability of stakes. Saint-Martin et al. (2016) used the AHP (Analytic Hierarchy Process, Saaty, 1990) method to rank several stakes. Another possibility is to use a vulnerability tree based on expert judgement. For buildings, a vulnerability value can be affected to each building and the hazard level computed in a buffer zone around the building. In the case of a transport network, it is necessary to divide the network into sections that are meaningful ~~with regards~~ to runoff risk, and to assign a vulnerability value to each section. The hazard level must also be computed in each section. As a buffer zone around an impact or a transport network section contains several IRIP pixels with different values of susceptibility, a rule must be chosen to assign a susceptibility value to the buffer area or the section. For instance, the hazard level can be computed as the maximum value of the susceptibility inside the buffer area or the transport network section. This accounts for the

uncertainty in damage location and the observed possibility that intense runoff can flow along transport network before a damage.

Once established, the vulnerability scale is converted to a limited number of vulnerability classes. The latter are then combined with the hazard levels to define which combinations are at risk. The notion of area at risk is defined according to the principle that “the higher the vulnerability, the lower the hazard level triggering a risk”. Figure 3 provides examples of such choices, ~~the one in~~ Figure 3a corresponds ~~ing~~ to a case where the vulnerability of the stakes is not taken into account and where IRIP levels of hazard 4 and 5 are chosen at risk everywhere. Fig 3b and 3c corresponds to two different ways of combining hazard and vulnerability.

### 2.2.3 Step 3: Quantitative evaluation of the maps

The third step is the comparison between the areas identified at risk in the previous step and runoff-related impact data. For this purpose, a contingency table (Table 24) is built for a sample containing all the buffer areas or sections for which a risk level has been assigned in step 2. If an impact has been observed in an area considered at risk, the impact is counted as ‘hit’. If no impact has been observed in an area not considered at risk, the impact is counted as ‘correct negative’. If an impact has been observed and the area not declared at risk, the impact is counted as ‘miss’. Finally, if no impact has been observed but the area declared at risk, the impact is counted as ‘false alarm’. Based on the contingency table, three quantitative measures of performance are computed (Table 32): the probability of detection (POD) which represents the fraction of impacts that have been correctly identified in an area at risk. The false alarm ratio (FAR) indicates the proportion of areas at risk with false alarms. If the method was perfect, the POD would be equal to one and the FAR to zero. The  $\chi^2$  test is used to define if the dependency between risk levels and the occurrence of impacts is significant. For that, the  $\chi^2$  is compared to that of the theoretical distribution with full independency of risk and impacts. For a contingency table with one degree of freedom (as in our case), the probability to get a  $\chi^2$  larger than 10.83 is lower than 0.1%. Thus, a value of  $\chi^2$  larger than 10.83 means that the null hypothesis (independence between the risk levels and the IRIP map) can be rejected at the 0.1% level. This means that if the  $\chi^2$  is larger than 10.83, the relationship between risk levels derived from the IRIP maps and impacts is highly significant.

### 2.2.4 Step 4: Taking into account risk mitigation measures

This fourth step is necessary to properly take into account the fact that, if an area is at risk, the stakeholder may have taken mitigation measures that may explain the absence of observed impact. Such mitigation measures are therefore likely to explain a certain amount of false alarms. For instance, mitigation structures can be protection to buildings, retention basins, hydraulic works crossing below transport infrastructures, etc... They can also be resilience actions like a reinforced supervision in case of high rainfall amount warning. Their aim is to reduce damage consequences by issuing early warning or by performing local work to reduce potential damages during an event. If an area classified at risk has a specific supervision measure or mitigation structures have been built, it is moved from ‘false alarm’ to ‘hit’ as the implementation of mitigation measures means that the area was indeed at risk, but that no impact was recorded due to the efficiency of the mitigation measure. This step will be referred to Step 4.1 in the following. If mitigation measures can be considered as a reliable source of information regarding runoff risk, the section must also be moved from ‘correct negative’ to ‘miss’ if a mitigation measure is present and the area was not classified at risk (this step will be referred as Step 4.2 in the following). The performance measures are then recomputed, based on the modified contingency tables of Step 4.1 or Step 4.2 if the latter is relevant. ~~The performance measures are then recomputed, based on this modified contingency table.~~

After these four steps, the final values of the quantitative performance measures are obtained, characterizing the performance of the IRIP mapping model.

## 2.3 Case study

### 2.3.1 Presentation of the study area

The case study is the 80 km railway line between Rouen and Le Havre (Figure 4). This railway has been operating since 1847. It is a strong stake for the region, as it connects Paris to Le Havre within about 2 hours, and connects Paris to the major fluvial and sea ports of Rouen and Le Havre. It is located in Pays de Caux, an area known for being affected by intense surface runoff (e.g. Cerdan et al., 2002; Martin et al., 2010). The land use is mainly agricultural land. Soils, composed of silts and clays are sensitive to slacking (formation of a crust lowering significantly the infiltration capacity, Cerdan et al., 2002). The catchment intercepted by the railway has a total area of about 500 km<sup>2</sup>. Only two streams cross the railway but the dry talweg network that can be activated during a rainfall event is very dense (Figure 4).

### 2.3.2 Application of the IRIP model

Three input maps were used to produce the IRIP maps. The retained GISs layers are easily available and allow testing the IRIP model with standard data. The topography was described using the IGN BD ALTI© Digital Terrain Model (DTM), with a 25 m raster resolution. Land use was described using a 1/2500 land use map of Haute-Normandie region from 2009. Pedology was taken from the European Soil Database (ESDB) V2.0 with 500 m resolution. The IRIP model parameterization used in this study is presented in Table 13. Given the low local knowledge of the study area, the thresholds defining the classes favorable or not favorable to runoff were computed using the classification method proposed by default in the IRIP model, contrarily to the application by Lagadec et al. (2018) that used values derived from local expertise. Thresholds for topographic index and slope indicators were therefore defined using the classification method. The threshold of the drained area indicator was fixed to 2.5 ha following sensitivity tests performed by Lagadec (2017) to identify, in this specific catchment, a minimum surface from which significant surface runoff can be generated. Other thresholds for soil depth, hydraulic conductivity, slacking, erodibility, upslope area sensitive to runoff generation were chosen as in Lagadec et al. (2018).

### 2.3.3 The database of impacts on the railway

For its internal needs in terms of risks management, SNCF, the French railway company, has set up a quite systematic archiving system of all the incidents and disruptions of the train traffic, as well as of all the works carried out on the railway tracks. This information is archived either in digital databases since the 1990s, either-or in paper format. Paper archives are located in several places in France according to the date the documents were produced. For the present study, the objective was to gather, on the Rouen- Le Havre railway, all the registered impacts related to runoff and the associated information, since the creation of the line until today.

The database was created in two steps: a data collection step and a data processing step. The collection of impact data was carried out with the support of archival expertise. Four archive sites were visited, depending on the age of the documents. It was necessary to define a limited number of information that had to be collected and that were relevant with respect to runoff. They are provided in Table 4 that describes the two tables that were filled by the archivist when consulting the archives and that were relevant for the next phase of data processing. The first table describes the source documents of interest and the second table describes the runoff-related events. Archives are organized according to railway kilometric points (KP) and earthworks. The description of the -location of -runoff-related impacts makes reference to the KP and earthworks, so this information was retained in the event description (Table 4). Indeed, earthworks are relevant elements to divide the railway tracks into meaningful sections, with regards to its hydraulic functioningoperation. Earthworks are designed to insert the railway track within its environment, while respecting technical constraints such as a maximum allowed slope to ensure electric traction and braking in good conditions. Earthworks modify the natural surface topography and therefore water flow paths. Four types of earthworks can be distinguished: embankment to cross talwegs or valleys; excavations to follow

longitudinally valleys or to cross small ridges; mixed profile to cross hillslopes and quasi-flat profiles (see Figure 5 railway profiles). Note that a digital GIS layer describing the railway tracks and the location of the various earthworks and their characteristics was created for this study. The challenge in data collection ~~has been was~~ to manage the diversity of formats (paper, digital) and to manage duplicates. The document collection work took four months. 506 documents were retained and inventoried, dating from 1903 to 2017.

The data processing step consisted in retracing the history of each impacted area, the circumstances of the incidents, the work undertaken and this, up to the current situation. One difficulty was to manage the uncertainties, particularly for the location of impacts and to determine whether they were really direct consequences of an intense runoff event. Finally, the database consists of ~~5962~~ sections impacted at least once, ranging from point zones to a 1.3 km long section. All the sections impacted at least once represent a cumulative length of 12 km, over the 80 km of the railway, or 15% of the length studied. A geographic information layer of georeferenced impacts with their date, type and uncertainty ~~has was~~ finally ~~been~~ created, allowing its overlay with the IRIP maps.

There are two assumptions behind the use of this database for the evaluation of the IRIP maps. First: the duration of the period over which impacts are recorded (about one century) is long enough so that each section may have experienced a possible damaging event. ~~As a consequence~~ Consequently, the database can be assumed ~~to be comprehensive~~ comprehensive. Second, it is assumed that land use types have not changed drastically in this area dominated by agricultural land.

#### 2.4 Application of the evaluation methodology to the case study

Step 1: The database of runoff-related impacts covers more than one century. We can thus assume that all the catchments intercepted by the railway may have experienced a runoff event. We could therefore consider all the catchments intercepted by the railway as the evaluation area. However, recorded impacts are only located on the railway track. Thus, the evaluation area must be restricted to the railway track itself. However, to account for uncertainty on the location of impacts and of the DTM inaccuracy, a 25 m buffer area was considered, on both sides along the railway line. Other values of the buffer were tested in Lagadec (2017), but a 25 m buffer was considered as the most relevant value, given the 25 m resolution of the DTM. We also considered both sides, up and down slopes, as both progressive and regressive erosions were observed around the track.

Step 2: The railway track vulnerability was defined using a decision tree where scores were assigned to each branch of the tree (Figure 5). The decision tree was built from expert judgement and verified using the impact data (Lagadec, 2017). Four criteria were considered to build the decision tree for the 182 sections of earthworks that were used to divide the railway line into meaningful sections. Earthworks were divided into ~~correspond to the railway profile composed of~~ four types of earthworks: embankment, excavation, mixed profile, quasi-flat profile. Furthermore, this segmentation of the railway is consistent with impact recording that we are assigned to an earthwork type (see section 2.3.3). The four criteria considered to compute the vulnerability scores are:

- (1) The exposure: unexposed areas are sections of long tunnels or large viaducts. The other sections are considered as exposed and get a vulnerability score of 1.
- (2) The type of profile and (3) its length: The types of profiles considered ~~to be the~~ the most vulnerable are long excavations and short embankments. Long excavations are prone to flooding, they have to handle more water from the slopes they intersect and are more likely to experience malfunction of the drainage structures. Short embankments are suitable for loading by runoff. They can play a role of hydraulic barrier. The median earthwork length of the sample was used to separate short and long earthworks.
- (4) The presence of a singularity: The singularities are either level crossings, road bridges or tunnel inlets or outlets. These are areas likely to experience arrival of water on the platform. These singularities generally constitute

discontinuities in the topography of the work. If one of these singularities is present in the envelope of an earthwork, its vulnerability score is increased by 1.

For defining the hazard, two IRIP maps were considered: the susceptibility maps to transfer and to accumulation that ~~They can be related to erosion and flooding respectively (Lagadec et al., 2016b). Both maps were combined into a unique map were~~  
5 ~~combined to a unique map. They can be related to erosion and flooding respectively (Lagadec et al., 2016b).~~ that is the union of both maps, i.e. each pixel retains the maximum level of both maps. A value of hazard level was assigned to each 182 section of the railway track where a vulnerability score was also assigned. This value corresponds to the maximum value of susceptibility to transfer or to accumulation in the 25 m buffer zone on both sides of the railway section. Vulnerability and hazard were combined following Figure 3c, where red boxes are considered at risk. Performance indicators were also computed  
10 for ~~combination~~ the combination of hazard and vulnerability illustrated in Figure 3ae (where vulnerability of the railway track is not taken into account and levels 4 and 5 are considered at risk) in order to illustrate the impact of taking vulnerability into account in the evaluation method.

Step 3: Performance criteria of the IRIP model were computed using the measures defined in section 2.2.3.

Step 4: Mitigation measures were considered in a second step ~~to try to explain the false alarms~~. Structural and non-structural mitigation measures were considered and inventoried along the whole railway. Structural measures includes all the hydraulic structures (drainage structures along or below the railway track, retention ponds, etc...) that were built to help water flow circulation. At SNCF, non-structural measures include surveillance patrols in case of bad weather. These patrols target as a  
20 priority the sections registered in what is called the 'bad weather tours'. The latter are defined using local knowledge about the hazard exposure or about the specific infrastructure vulnerabilities. They provide increased and targeted monitoring in case of bad weather and early response if needed.

We modified the computation of the performance criteria by taking into account mitigation measures (presence of a hydraulic structure in one section, or section registered in the 'bad weather tour') as follows. In Step 4.1, we moved the sections where  
25 a mitigation measure is present but no impact was recorded from 'false alarm' to 'hit'. In Step 4.2, we moved the sections where a mitigation measure is present but no impact was recorded from 'false alarm' to 'hit' AND moved the sections where a mitigation measure is present and the section was not tagged at risk by the IRIP model from 'correct negative' to 'miss'. In order to quantify the impact of each mitigation measure on the evaluation criteria, they were recomputed:

- by taking into account hydraulic works only
- by taking into account 'bad weather tours' only
- by taking into account both hydraulic works and 'bad weather tours'.

~~If an hydraulic structure was present in one section, or if the section was registered in the 'bad weather tours', it was considered as evidence of hazard exposure of the section. This allowed the transformation of the corresponding 'false alarm' values to 'hit'. After, this step 4~~ Then, the performance indicators were recomputed, providing the final evaluation criteria of the IRIP  
35 model were obtained.

### 3. Results

#### 3.1 The IRIP maps

Figure 6 presents the IRIP susceptibility maps for the generation, transfer and accumulation of runoff. The map of susceptibility to runoff generation shows a high sensitivity to the genesis of runoff on agricultural plateaus, an even larger one in urbanized  
40 areas and a lower one on slopes that are more vegetated. The IRIP map of susceptibility to runoff transfer shows strong potential of erosion to produce mud and mass flows along the uphill slopes of the main talwegs. Other small talwegs with high

susceptibility level to runoff transfer are also scattered throughout the area, showing areas potentially sensitive to erosion. The map of susceptibility to runoff accumulation ~~shows highlights~~ all the preferential flow paths that have a high value of the susceptibility level. This includes, from the perennial streams ~~but also~~ dry talwegs, the latter being located in headwater catchments with flatter areas.

### 5 3.2 Results of the evaluation method

Using, Figure 3c to combine hazard and vulnerability, Figure 7 provides illustrations of the application of the evaluation method and of the building of the contingency tables.

On the left figure (Area A), for the two 'H' (see caption in Figure 7) sections, the vulnerability scores are greater than or equal to 2 and there are pixels with IRIP levels greater than or equal to 4, these sections have already been impacted at least once, they are therefore 'hits'. The 'CN' section has a vulnerability of 2, its maximum IRIP level is 3, there has been no impact, so the section is a 'correct negative'. The section 'FA' has a maximum vulnerability score of 4, so a level IRIP 3 is sufficient to consider this section at risk, nevertheless no impact was observed here. The section is ~~thus~~ counted as 'false alarm'.

The right figure (Area B) illustrates how mitigation measures are taken into account in the analysis. The 'H' section has a vulnerability score of 2 and a maximum IRIP level of 5, so it is considered at risk, yet no impact has been reported. This section should be assigned to the 'false alarm' class, but we note that it is equipped with a crossing work under the ~~railway~~ which railway that could play a role of protection against the hazard. The location of this infrastructure shows that the hazard is indeed present at this location and that the IRIP map is correct, so the section is finally rated 'hit', once mitigation measures are taken into account. The 'M' section has a vulnerability of 1 which requires a IRIP level of 5 to be considered at risk. But, the maximum IRIP level is 4, so the section is not considered at risk. However, as an impact ~~has~~ occurred, the section is considered as 'miss'. Note also that, even if no impact had been recorded, the section would have been moved to 'miss' according to step 4.2 of the methodology, as, although a mitigation structure is present but the IRIP model does not classify the section as being at risk.

The results of the evaluation along the whole railway lines are reported in Table 5. ~~Three-Five~~ results are presented: first column (1) - when ~~not taking into account~~ neither the vulnerability ~~nor~~ the mitigation measures are taken into account (meaning that hazard and vulnerability are combined following Figure 3a); second column (2) - when only the vulnerability is taken into account following Figure 3c); and third columns (3) to (5) - when the vulnerability (Figure 3c) and the mitigation measures are taken into account including respectively: hydraulic works (column (3)), 'bad weather tours' (column (4)), and both hydraulic works and bad weather tours (column (5)). In columns (3) to (5), performance criteria are given for step 4.2 and the values in parenthesis correspond to step 4.1.

The results show that the POD increases from 86 % (column (1)), to 93% (column (2)) and the FAR decreases from 62% to 58% when vulnerability more information (vulnerability, mitigation measures) is taken into account in computing them. It increases from 86 %, to 93%, and to 96%. In the same way, the FAR decreases when taking into account more information: from 62%, to 58%, and to 28 %. The results in terms of  $\chi^2$  present the same trend, with the significance increasing with the number of information when vulnerability is considered. It can be noticed that from ~~the first to second~~ column (1) to column (2), 4 'missed' impacts are change-moved into 'hit'. These are impacts that occurred on highly vulnerable railway sections which-that can experience damages with a very low hazard exposure level. Likewise, 6 'false alarms' are movedchange into 'correct negatives', because the railway sections were not enough vulnerable.

The results of Table 5 (columns (3) to (5)) show that the impact of taking into account mitigation measures on the performance criteria is large. When considering step 4.1 only (figures in parenthesis), the number of 'miss' remains the same as in columns (2) but the number of 'false alarms' dramatically decreases. This leads to a similar POD, but a significant decrease of FAR. When considering step 4.2, i.e. assuming that the existence of mitigation measures proves the existence of a risk, the number

of 'false alarms' is the same as for step 4.1, but the number of 'miss' increases as compared to column (2), the larger value being obtained when both hydraulic works and 'bad weather tours' are taken into account. As compared to step 4.1, FAR remains the same, but POD decreases as compared to column (2). Nevertheless, POD values remain similar to the one obtained when no vulnerability is taken into account (column (1)). From the second column to the third, 'correct negatives' and 'missed' do not change. Only 'false alarms' that are related to mitigation measures change into 'hit'. It accounts for 40 railway sections. The values of the  $\chi^2$  shows that the relation between risk and impacts is significant in the first column (1) when vulnerability is not taken into account and highly significant in columns 2 and 3 when vulnerability and mitigation measures are taken into account. The results in the last in columns (2) to (5) present very encouraging values, highlighting the added value of the IRIP maps, and of the vulnerability and mitigation measures characterization, for the evaluation of the IRIP model.

## 10 4. Discussion

### 4.1 Relevance and limitations of the evaluation method

The results of the evaluation method, as applied to the IRIP maps, show the interest of considering both the vulnerability of the railway and mitigation measures taken to lower risks in the computation of performance criteria. These two factors are essential to get an accurate and fair comparison between the localized runoff-related impacts data and the IRIP maps. When both are not considered, POD values are high, but the rate of false alarms is also very high. Note that the term false alarm, does not mean that the information is false but that it cannot be proven. Even if no past impact occurred, an impact could possibly happen in the future.

When both vulnerability and mitigation measures of the railway is taken into account, both the POD and FAR are improved (comparison of columns (1) and (2) in Table 5). probability of detection remains high, but false alarm ratio is much lower, reaching performance that are satisfactory. When evaluating the performance of a road cutting warning system, Versini et al. (2010a, b) and Naulin et al. (2013) also showed that it was essential to incorporate road vulnerability in their computation of POD and FAR to get meaningful results. However, the results of the performance criteria depend on the choice made to assign hazard to the section (here we chose to use the maximum hazard (as discussed in section 2.2.2) value within the section) and on the choice made to combine hazard and vulnerability (i.e Figure 3c). Lagadec (2017) compared combinations shown in Figures 3b and 3c but found similar performance criteria. The difference between performance criteria when vulnerability is not taken into account (column (1) in Table 5) or is taken into account (columns (2) and 3 in Table 5) shows that considering the vulnerability of the railway has a much higher impact on the performance criteria values than the way hazard and vulnerability are combined.

Lagadec et al. (2018) tested another way to assign the hazard value to one section by declaring that a section was at risk if the percentage of the section area with values larger than a susceptibility threshold (4 in Lagadec et al., 2018) was higher than a percentage threshold (10% in Lagadec et al., 2018). In this case, the user must choose two thresholds, the values of which will strongly impact affect the evaluation measures values. When assigning defining the hazard level using the maximum susceptibility value as hazared level to in one section, as used in this study, these subjective choices are avoided. However, when runoff-related impact data are available and if IRIP hazard are to be used for operational purpose, such adjustment of the method to assign IRIP hazard may be useful for operational purpose necessary so that areas tagged as at risk are meaningful for the territory managers and, in order to define which areas are at risks in a given territory and in order to prioritize areas requiring protection measures.

There are however limitations of the vulnerability/hazard combination, as illustrated in Figure 7 (right, Zone B). The section 'M' is rated as very little vulnerable with a score of 1. So a level 5 is required in the IRIP maps to consider this zone at risk. This is not the case as the maximum level of the IRIP maps is 4. However, this area has already been impacted by intense

runoff as impacts were recorded, and it is also equipped with a hydraulic structure crossing under the track. This section is therefore at risk but classified as missed impact. We can see that the IRIP map shows a specific arrival of runoff, so the map looks correct. But the section vulnerability score is only one, leading to consider it not at risk. Therefore, the vulnerability classification is obviously deficient in this example and should be modified to better take into account the specificities of this type of configuration (quasi-flat profile). Further discussion with railway experts could make increasing the vulnerability score of quasi-flat profiles.

The results presented in Table 5 also highlight the large impact of the way mitigation measures are taken into account (step 4 of the methodology) on the final values of the performance criteria. Considering only step 4.1 (moving the sections where a mitigation measure is present but no impact was recorded from 'false alarm' to 'hit') slightly increases POD values and dramatically decreases FAR values (see values in parenthesis in columns (3) to (5) in Table 5). The decrease of FAR is larger when 'bad weather tours' only are accounted for than when hydraulic structures only are taken into account. The lowest FAR values are obtained when considering both mitigation measures. When considering also step 4.2 (additionally moving from 'correct negative' to 'miss' the sections where a mitigation measure is present but the section was not tagged at risk by the IRIP model) leads to a decrease of POD but does not change the FAR as compared to step 4.1. Applying step 4.2, implicitly means giving the same status of proven risk to mitigation measures and to localized observed impact. Thus, it could be possible to directly use the presence of a hydraulic work or a 'bad weather tour' as explaining factors of the observed localized impacts and to compute the corresponding contingency tables. The results are presented in Table 6 where the performance criteria were computed using respectively, hydraulic works only (Table 6, column (1)); 'bad weather tours' only (Table 6, column (2)); and a combination of both sources of information (hydraulic works OR "bad weather tours") (Table 6, column (3)) for explaining the recorded runoff-related impacts. The results show that the hypothesis that hydraulic works and runoff-related risks are independent cannot be rejected ( $\chi^2$  not significant), i.e. hydraulic works have low predictive power about the occurrence of a risk. On the other hand, 'bad weather tours' have a predictive power but lower values of POD (49%) than the IRIP model without mitigation measures (93%) (comparison of column (2) of Table 6 and column (2) of Table 5). The FAR value is lower than for the IRIP model without mitigation measures (42% as compared to 58%) but is not so different. Finally, when the presence of hydraulic works and 'bad weather tours' are combined (Table 6, column (3)), the POD increases to 68% as compared to considering hydraulic works only or 'bad weather tours' only. The FAR is 56%, an intermediate value between the one of hydraulic work only (60%) and 'bad weather tour' only (42%). In any case, the predictive power of the IRIP model is higher than when considering hydraulic works or 'bad weather tours' as proxy for the risk of intense runoff. This shows that the use of mitigations measures as proxy data must be done with caution. The correct use depends on the accuracy of the data and the degree to which they are related to proven risk. In the context of the railway case study, the following elements must be taken into account. The construction of hydraulic works or the design of tours take into account not only the hazard parameter, but also the vulnerability and the criticality of the stake. A 'bad weather tour' is preferably designed on a section that is critical regarding the train traffic management, or on sections with known structural weaknesses. 'Bad weather tours' are not precise, they often involve long linear of the railway, and the whole sections of the tours may not be relevant to runoff risk. This is why we used them in step 4 to refine the computation of performance criteria, and in particular as explanatory factors of false alarms, and not as elements proving the existence of a risk. The results of the evaluation criteria obtained after step 4.2 assumes that the existence of a mitigation measures means a proven risks, which is not the case. Therefore, they provide the most pessimistic POD values for the evaluation of the IRIP maps. The results presented in Table 6 also highlight that the 'bad weather tour' is a more reliable proxy data for runoff related risk than hydraulic works. But this may be due to the number of railway sections concerned by one 'badweather tour' whereas local mitigation measures only affect one section.

One of the reason for this low predictive power of hydraulic works could be the following. Blockage of culverts/drainage pipes is a common problem in the railway context. In addition to blockage related to a particular intense event, progressive filling of the infrastructure by diffuse sediment transport is also a difficulty, since there is a large number of small hydraulic works that are difficult to maintain. Unfortunately, the information about blockage of hydraulic works is rarely documented in the reports about the impacts, found in the archives. On the other hand, other hydraulic works are well dimensioned and very efficient. Thus, hydraulic works can sometimes increase the vulnerability and sometimes decrease it. Therefore, it was not possible to consider this information as a reliable source of information for proven risk in the evaluation methodology nor in the vulnerability tree. On the other hand, the IRIP map of susceptibility to transfer, by highlighting areas prone to sediment transport can allow management and warning to be concentrated on these areas.

Another limitation of the evaluation presented in the paper study is related to the runoff-related impact database itself. As mentioned before, the location of impacts is sometimes not very accurate and may alter the computation of the performance measures. Furthermore, although it covers more than one century of data, the database may not be comprehensive, which could affect the false alarm ratio if all the occurred impacts have not been recorded. Moreover, the evaluation was conducted assuming (see section 2.3.3) that each section of the railway had the opportunity to be affected by runoff, i.e. that each section of the railway had the opportunity to be affected by an intense rainfall event. If it was not the case, the IRIP model could indicate a risk in a section that would not have been impacted in the absence of any intense rainfall event at that location. To assess the validity of this working hypothesis: 'each section had the opportunity to be affected by an intense runoff event', we can calculate the probability of not having experienced a rainfall event of a given return period during one century. This probability is less than 0.001% for a 10-year return period  $[(1/10)^{100}]$ , less than 1%  $[(1/20)^{100}]$  for a 20-year return period, and 13%  $[(1/50)^{100}]$  for a 50-year return period respectively. Therefore, it can be assumed that each section of the railway had the opportunity to experience a rare event at least once during the data collection period. This shows that, if the database is long enough and of course comprehensive (i.e. all the occurred runoff-related impacts were properly reported), the working hypothesis can be accepted and therefore, performance measures can be considered as not biased. In the present case, the comprehensiveness of the database is exceptional, but far from being perfect. However, it was the best that could be collected, and the duration of data collection (more than one century) ensures that the chosen case study was relevant to assess the accuracy of the proposed evaluation methodology. Another question is: had each portion of the railway the chance to experience a runoff event? To answer the question, we can compute the probability of not having experienced an event of a given return period over one century. This probability is lower than 0.001% for a 10-year return period event, and lower than 1% and 13% for a 20-year and 50-year return period respectively.

~~Therefore, it can be assumed that each section of the railway had a chance to experience a rare event at least once. This means that, if the database is comprehensive enough, the performance measures are not biased.~~ Another point that must be considered is the assumption of a constant land use map for the IRIP map building. It is clear that land use has changed over a whole century, with the development of intensive agriculture and urbanization. Indeed large field crops have replaced the mosaic of small fields crops with hedgerows (the so-called bocage) since the second world war. The IRIP model considers that urban and crop lands are both favorable to intense runoff generation. The largest cities of Rouen and Le Havre being located at the start and end of the railway line, urban -growth has no major effect in this context. Loss of grassland and forest is more sensitive. As the IRIP maps were established with the 2009 land use, change in land use over the last century would lead to a possible overestimation of false alarms, as current land use is more prone to runoff than it used to be in the past when the bocage was protecting the land surface from runoff. Land use change could also explain the increasing number of impacts in

the recent decade. ~~But~~ However, this increase could also be explained by a more comprehensive recording of impact statements in SNCF practices during this period.

#### 4.2 Impact of the uncertainty and resolution of the IRIP maps.

Regarding the influence of the resolution of the input maps on the final maps, several resolutions and qualities of DTMs were compared in Lagadec (2017), with five DTMs ranging from 250 m to 5 m on only 30 km of railway for which an accurate Lidar DTM at 5 m resolution was available. It showed that there is a spatial persistence of information from higher resolutions to coarser resolutions. The analysis also showed that the data acquired by Lidar provide very relevant information that helps to understand the phenomenon of runoff. In particular, Lidar data provide improved representation of runoff pathways as they explicitly include linear features such as ditches or roads that are not seen by coarse resolution DTM but are detected with high resolution ones. This information is relevant as it provides detailed explanatory elements about runoff pathways. Although it would be recommended to have similar resolutions for the three input maps, accuracy of the DTM is essential for the IRIP model application, as DTM is used to compute ~~3~~three factors maps in the transfer susceptibility map and ~~4~~four factors in the accumulation susceptibility map. On the other hand, ~~3~~three factors over ~~5~~five use the soil map in the building of the susceptibility to runoff generation map. The quality of this data is therefore essential for the interpretation of the susceptibility to runoff generation map. Efforts to spend in collecting accurate input data depends on the use of the final maps. Input data resolution also depends on the size of the study area and must be chosen to facilitate map reading and to optimize computing resources. For a large study area, it is recommended to zoom in through successive applications of the IRIP model: identify the most exposed areas with coarser resolutions first and then zoom in with higher resolutions.

When considering coarser resolutions, it becomes difficult to apply the evaluation method proposed in this paper (mainly 75 and 250 m resolution DTMs) as the evaluation zone must be enlarged to account for the larger pixel resolution. The size of the railway sections become small as compared to the pixel resolution, so it becomes more difficult to overlay point impacts and IRIP maps pixels. In the same way, high resolution maps imply to adjust some choices made for the evaluation process, such as the size of the buffer area both sides of the railway. The way hazard level is assigned to a section should also be ~~reconsidered~~reconsidered, as the chance to get one pixel with a high hazard level is larger if the resolution is higher and it may not be relevant anymore to mark the whole section at risk with only one pixel with a high hazard level. Computing a percentage of the section with high hazard level may be more relevant in this case. For these reasons, quantitative evaluation has not been tested yet with ~~high-resolution~~high-resolution maps. Only qualitative analyses are provided in Lagadec (2017).

Results of the evaluation method also depend on the values of the parameters chosen to compute the three susceptibility maps (as specified in Table 1). The IRIP model can be applied everywhere without prior knowledge of runoff over the area. However, the relevance of the maps improves significantly when some parameters are adjusted using local knowledge about the area. Examples of such adjustments can be the following:

- The drained area threshold depends on the level of detail expected at the head of the basin, but it remains between 0.5 and 5 ha. Above 5 ha too much information is lost (Lagadec, 2017). Note also that localized impacts of runoff were recorded for catchments of a few hectares and this consideration also guided the choice of the threshold value.
- The break of slope threshold depends on the calculation method used to compute the break of slope factor, as the user can chose the number of pixels over which the factor is computed. The number is always an odd number and 3 pixels is the minimum number that must be used. If the number of pixels increases, information about micro-topography becomes less accurate. The number of pixels must be adapted according to the resolution of the DTM: for instance, 3 to 7 pixels are recommended for a DTM of 25 m resolution, and between 9 and 25 for a DTM of 5 m resolution.
- The types of land use that are considered favorable to runoff can also be modified, for example according to the agriculture cycle on a same plot. The modification of these parameters and the evaluation of their relevance depends

on the expert conducting the study, his/her knowledge of the area, but also on his/her objective (precise study, or large mesh for larger territories).

There are limitations

related to the IRIP model itself, the main one being that the model does not provide quantitative estimates of runoff. The other limitation is that the produced susceptibility maps are relative to the study area, as the thresholds that divide the factors maps into areas sensitive or not sensitive to runoff are computed on the study area. Therefore, it is not possible to compare maps from two areas, and if the study area changes a little, the map will also change a little. There are also limitations related to the application of the model. The IRIP maps of transfer or accumulation strongly depend on the DEM quality, since 3 and 4 indicators over 5 are derived from the topography. The required computing time is large when large study areas are considered or if the DTM resolution is high. Finally, there are limitations in the evaluation itself as the maps of susceptibility to runoff generation were poorly evaluated, due to the lack of appropriate data.

The data set used in this study is very comprehensive and includes the three pieces of information required for the application of the evaluation methodology described in section 2. The quality of the dataset allowed its use for testing improvements of the IRIP model as done by Lagadec (2017) who used the quantitative measures to compare and improve the IRIP model by testing test alternative indicators for the building of IRIP maps. This led to recommendations to improve the method as proposed by Lagadec et al. (2018) and used in the present study. One example is the 2.5 ha threshold value of the drained area chosen to separate the conditions favorable and not favorable to runoff transfer and accumulation (see Figure 1 and Table 13). To choose this value, Lagadec (2017) performed six simulations with a drained area threshold ranging from 0.5 to 100 ha. A threshold value between 1 and 5 ha was a good compromise between performance in explaining impacts and the visual aspect of the maps. Thus, the 2.5 ha threshold was retained in the analysis.

Up to now, all the five factors involved in the IRIP maps are given the same weights. The evaluation methodology could be also used to compare non-equal weights in the building of the maps. Methods such as the one proposed by Neuhäuser et al. (2011) could be used for this purpose.

#### **4.3 Genericity of the evaluation method**

The evaluation method presented in this paper was applied using proxy data of runoff-related impacts on the railway. In this case, the evaluation area was defined as a buffer zone along the railway to account for inaccuracy in the impact location and DTM. Apart from the compilation of a database of impacts on the railway, the combination of hazard and vulnerability required a complete analysis of the vulnerability of the railway and of its characteristics, and an inventory of all the hydraulic structures set up to limit impacts related to runoff. This was a huge effort, as all the corresponding information was not digitized yet, but such effort was very valuable and can be used for other studies. As more and more companies or administrations are setting up databases of the infrastructures they are controlling, such database are becoming more and more common. We have seen that information about vulnerability and mitigation measures was necessary to decrease the false alarm ratio, andbut had little impactthat the impact on the probability of detection was depending on the way mitigation measures were taken into account. ThereforeIn any case, without information about vulnerability, but if a compilation of impact data is available, it is possible to compute reliable estimates of the probability of detection (POD), but not of false alarm ratio (FAR).

In this paper, the evaluation methodology was applied to the railway context, with proxy data related to runoff-related impacts on the railway. This led to a very specific definition of the evaluation area, thatarea that was restricted to a buffer zone on both sides of the railway. The approach can easily be extended to road networks or any other linear stakes.

Other applications of the evaluation method are in progress. ~~They, that~~ show that the method can be applied to other types of localized impact data. Two contexts can be distinguished:

- *The availability of a long term database of impacts over a territory*, like impacts on the protected forested domain managed by the French ONF agency (National Forest Organization) (see also Defrance et al., 2014). This database contains information about damages and protection infrastructure against landslides, gullying and flooding in the Alpes and the Pyrenees. It has been launched in the 1980s but also contains information about historical events. Given the duration of data collection, assumption that the whole surveyed territory may have been impacted can be made and the evaluation area can be defined as the whole forested area covered by the survey. Using these data, the probability of detection can be computed with a good degree of confidence, provided impacts localization is accurate enough, and especially if information about protection infrastructures can be incorporated in the analysis. It is much difficult to get information about vulnerability of the territory, and this information should be defined with local stakeholders.
- *The availability of impact data for a given hydrometeorological event*. In this case, information about rainfall is necessary to define the evaluation area, as no impact will be observed if no rainfall or only low intensity rainfall was recorded. The evaluation area can be defined using rainfall data and a given rainfall intensity threshold. ~~like a ten-year return period rainfall over a 1-h duration, that is used for natural disaster declaration in France.~~ Given that the event are often ~~very much~~ localized, the use of radar rainfall data with a short time step (e.g. 5 min time step) is recommended, as shown by Marra et al. (2016) for landslides. The rainfall threshold triggering localized impacts can be assessed if a time series of spatialized rain and geo-referenced localized impacts are available for the same storm event. The principle consists in searching for the maximum rainfall for the different impacts, over different durations from 5 minutes to 1 hour. The durations of interest are based on the assumption that the higher the average hazard level that is located in the vicinity of the impact, the lower the amount of rain required to trigger the impact. Initial results points to a relevant duration of 15 minutes to 1 hour. Once the duration has been selected, the minimum rainfall intensity over this duration is selected and considered as the rainfall threshold necessary to trigger all observed impacts. This assumption allows restricting the model's evaluation area to the areas where it has rained enough. If data collection about impacts is comprehensive and information about protection infrastructure is available, POD and FAR values can be computed with a good accuracy.

The evaluation methodology has been designed for localized impact data. However, the avenue of very high resolution remote sensing information, opens perspectives for the evaluation of a mapping method, like the IRIP model. Indeed, those techniques are now able to provide accurate information about erosion and gullying (e.g. Desprats et al., 2013; Eckert et al., 2017), that could be used as verification data for the IRIP maps. Such analysis is in progress using data from satellite Pleiades 1A and 1B which provide 0.7 m image resolution, for the 15-16 October 2018 rainfall event in the Aude department in France, with 15 fatalities and damages of about 220 M€. Even if river flooding is responsible of a large part of damages, runoff outside the river network ~~was also has also been~~ observed, that particularly affected agricultural land. A database of insurance claims related to damages in agricultural land is being collected. It will allow the assessment of the added value of high resolution satellite images in the evaluation of the IRIP maps as compared to the use of localized impacts. The evaluation method proposed in this paper may however need some adaptation to be used with remote sensing images.

#### 4.4 Relevance of the IRIP maps for risk assessment and design of mitigation measures in the railway context

The evaluation method presented in this paper, and the results obtained with a comprehensive database of runoff-related impacts raise confidence on the relevance of the IRIP maps and of ~~their~~ potential for a use in risk management studies and confirm this potential that. ~~This confirms the potential of the IRIP maps in various risk management tasks in the railway~~

~~context that were~~was highlighted in previous studies in the railway context. Lagadec et al. (2016a) showed qualitatively the usefulness of IRIP maps combined with high resolution radar images of rainfall, for post event survey after an intense rainfall event that damaged the St-Germain-des-Fossés - Nîmes line in the Gard in 2014. Lagadec et al. (2018) showed that IRIP maps were consistent with an expert hydraulic diagnostic of the Bréauté - Fécamp line in Normandy, in prioritizing railway track rehabilitation works. There are several advantages in using IRIP maps: time can be saved and accuracy on the results increased by using these maps as a new source of information to inform field expertise. The maps help to prepare the expertise, to better understand the context and once on site, they allow to focus on specific areas and to move to certain points in the catchment area (areas of runoff generation, erosion, deposition or stagnation). For studies on larger linear areas, the method automatically identifies all exposed areas. By crossing with the infrastructure configuration, a pre-diagnosis of the areas at risk is obtained. IRIP is therefore a relevant tool to help identify runoff hazard.

For the risk management and technical solution definition phases, runoff maps can also provide useful information. The maps represent the hydrological surface processes over the entire watershed around the railway. This can help in the implementation of actions on hillslopes, in choosing the location of solutions, and in adapting them to hydrological processes according to the zones (erosion, deposits, ~~stagnation and stagnation~~). ~~However, w~~Working outside the railway right-of-way is still difficult today. On the one hand, from a legal point of view, it is necessary to obtain the agreement of the plot owners and to establish contracts for maintenance operations. In addition, such nonstandard technical solutions are often not referenced in quality control procedures, as the latter rather propose dimensioning (in flow and volume) of complete networks bringing water to an outlet. On the other hand, the implementation of alternative techniques favors locally adapted ~~solution, that~~solution that can be validated through risk analysis. Nevertheless, acting on the slope is sometimes the only sustainable solution to manage runoff. Sediment inputs are difficult to manage by conventional hydraulic structures and the lack of space in the railway right-of-way makes it difficult to implement appropriate solutions. As the constraints of discharges into the environment are very restrictive, managing runoff may require the creation of retention basins, a solution that is often incompatible with the available space. It would be interesting to reduce inflows, for example by creating retention pools in accumulation areas, rehabilitating or creating wetlands (Fressignac et al, 2016), by setting up fascines on the transfer axes to trap sediments and avoid soil losses, by developing grassy stripes on the deposit areas to allow fines and sludge to spread, by avoiding bare land or by favoring vegetation to increase infiltration capacity on areas sensitive to runoff generation. These soft hydraulic techniques are to be used in addition to the traditional hydraulic techniques used to manage exceptional events. In the long term, the actions in the hillslope limit the degradation of railway infrastructure elements, increase safety and reduce economic losses. The interest is also ecological by creating wet or wooded areas with an improved social perception of railways in the landscape. The runoff problems encountered at a point of the railway infrastructure generally also have an impact upstream of the infrastructure. Whether for urban areas (flood risk) or agricultural areas (erosion risk), runoff also needs to be controlled upstream. It would seem more relevant and technically more efficient to manage runoff in a distributed manner throughout the watershed. There are many obstacles to such control: complex legislation, difficulty of communication, differences in deadlines and budget according to the actors. Having a visual and educational tool, illustrating the downstream impact of an upstream action, and the interconnection of issues on the territory, can promote such a synergy. IRIP map can be a tool to assist in such eco-design.

## 5. Conclusions

The paper presents an evaluation method, suitable for assessing the relevance of susceptibility maps to intense runoff, using proxy data of localized runoff-related impacts. ~~The methodology was validated using a comprehensive database of runoff-related impacts on an 80 km railway in northern France, covering more than one century of functioning, and applied to the maps produced using the IRIP “Indicator of Intense Pluvial Runoff” maps.~~The evaluation method ~~requires~~takes into account not only the hazard ~~knowledge of the hazard~~, but also the knowledge of the vulnerability of the study area ~~with regards~~

~~to~~concerning the considered hazard, and of mitigation measures taken to lower the risk. The methodology was validated using a comprehensive database of runoff-related impacts on an 80 km railway in northern France, covering more than one century of operation, and applied to the maps produced using the IRIP ‘Indicator of Intense Pluvial Runoff’ maps. Due to the quality of the data set, we were able to quantify the impact of taking into account or not the information about vulnerability but also  
5 different methods for accounting for mitigation measures on the computation of performance criteria. This information about vulnerability and mitigation measures can be time consuming to collect. However, it is, but is essential to get meaningful performance measures characterizing the accuracy of the map and it is also needed and to get a good appraisal of the risk. It would be interesting to gather the same type of information in other climatic, pedologic and land use contexts. The methodology proposed in the paper is generic enough and can be extended to other sources of localized impact data and to  
10 other mapping method of susceptibility to runoff. In order to capitalize on runoff-related impact data acquisition, a perspective is to build a platform where stakeholders could provide their runoff-related impact data and benefit from an on-line QGIS plugin implementing the IRIP model. This could contribute to increase runoff knowledge and understanding and to improve runoff risk management.

### Acknowledgements

15 We thank Judicaël Dehotin, a key proponent of the development of the IRIP method. Corentin Descourts helped in mapping the Rouen – Le Havre railway profile and its vulnerability during its internship. Sixtine de Bejarry performed the data collection of impacts/damages on the Rouen-Le Havre railway. We thank ANRT (Agence Nationale de la Recherche et de la Technologie) for its partial funding of this work. Funding from MTES (French Ministry of ecological and solidarity transition) also contributed to part of this study.

### 20 Data availability

The impact/damage data used in this study are confidential and property of SNCF Réseau~~x~~ and cannot be made available publicly. The study was performed using the iRIP© software, property of SNCF that cannot be made available either. A new version of the IRIP model is however under development as an open-source QGIS plugin.

25 **Competing interest:** The authors declare that they have no conflict of interest.

**Authors contributions.** Most of the work presented in this study was conducted by L.R. Lagadec during her PhD thesis under the supervision of I. Braud, L. Moulin, P. Breil and B. Chazelle. I. Braud wrote a first English version of the manuscript that was revised and complemented by the other authors.

### 30 References

- Beven, K. J., and Kirkby, M. J.: A physically based, variable contributing area model of basin hydrology / Un modèle à base physique de zone d'appel variable de l'hydrologie du bassin versant, Hydrological Sciences Bulletin, 24, 43-69, 10.1080/02626667909491834, 1979.
- Calianno, M., Ruin, I., and Gourley, J. J.: Supplementing flash flood reports with impact classifications, Journal of Hydrology, 35 477, 1-16, 10.1016/j.jhydrol.2012.09.036, 2013.
- Cerdan, O., Le Bissonnais, Y., Souchère, V., King, C., Antoni, V., Surdyk, N., Dubus, I., Arrouays, D., Desprats, J.-F. : Guide méthodologique pour un zonage départemental de l'érosion des sols Rapport no. 3: Synthèse et recommandations générales (No. BRGM-RP-55104-FR). BRGM – INRA, 2006. In French, available at <http://infoterre.brgm.fr/rapports/RP-55104-FR.pdf>

- Cerdan, O., Souchère, V., Lecomte, V., Couturier, A., and Le Bissonnais, Y.: Incorporating soil surface crusting processes in an expert-based runoff model: Sealing and Transfer by Runoff and Erosion related to Agricultural Management, CATENA, 46, 189-205, [https://doi.org/10.1016/S0341-8162\(01\)00166-7](https://doi.org/10.1016/S0341-8162(01)00166-7), 2002.
- Chazelle, B., Lambert, L., and Capoccioni, C. P.: Railway vulnerability in case of extremes floods. Knowledge and risk management, Houille Blanche-*Revue Internationale De L Eau*, 48-54, 10.1051/1hb/2014016, 2014.
- 5 [Dabney, S.M., Yoder, D.C., Vieira, D.A.N., and Bingner, R.L.: Enhancing RUSLE to include runoff-driven phenomena. \*Hydrol. Process.\* 25, 1373–1390. <http://dx.doi.org/10.1002/hyp.7897>, 2011.](https://doi.org/10.1016/S0341-8162(01)00166-7)
- Defrance, D., Javelle, P., Organde, D., Ecrepont, S., Andréassian, V., and Arnaud, P.: Using damage reports to assess different versions of a hydrological early warning system, *Hydrol. Earth Syst. Sci. Discuss.*, 2014, 4365-4401, 10.5194/hessd-11-4365-2014, 2014.
- 10 Dehotin, J., and Breil, P., 2011: Technical report of the IRIP project: mapping the flooding by runoff (Technical report). IRSTEA Hydrology-Hydraulic Research Unit.
- Dehotin, J., Breil, P., Braud, I., de Lavenne, A., Lagouy, M., and Sarrazin, B.: Detecting surface runoff location in a small catchment using distributed and simple observation method, *Journal of Hydrology*, 525, 113-129, <http://dx.doi.org/10.1016/j.jhydrol.2015.02.051>, 2015.
- 15 Desprats, J.-F., Raclot, D., Rousseau, M., Cerdan, O., Garcin, M., Le Bissonnais, Y., Ben Slimane, A., Fouché, J., and Monfort-Climent, D.: Mapping linear erosion features using high and very high resolution satellite imagery, *Land Degradation & Development*, 24, 22-32, 10.1002/ldr.1094, 2013.
- Eckert, S., Ghebremicael, S. T., Hurni, H., and Kohler, T.: Identification and classification of structural soil conservation measures based on very high resolution stereo satellite data, *Journal of Environmental Management*, 193, 592-606, [10.1016/j.jenvman.2017.02.061](https://doi.org/10.1016/j.jenvman.2017.02.061), 2017.
- 20 [Forgy, E.: Cluster Analysis of multivariate data: efficiency vs. interpretability of classifications. \*Biometrics\*, 21, 768-780, 1965.](https://doi.org/10.1016/j.jenvman.2017.02.061)
- Fressignac, C., Breil, P., Matillon, Y., Nullans, A., Chazelle, B., Sarrazin, B. and Vallod, D.: Assurer la maîtrise du ruissellement grâce aux zones humides au voisinage des infrastructures de transport dans une perspective de conservation de la biodiversité, *VertigO - la revue électronique en sciences de l'environnement* [En ligne], Hors-série 24 | juin 2016, mis en ligne le 10 juin 2016, consulté le 27 mai 2019. URL : <http://journals.openedition.org/vertigo/17406> ; DOI : 10.4000/vertigo.17406
- 25 Gourley, J. J., Erlingis, J. M., Smith, T. M., Ortega, K. L., and Hong, Y.: Remote collection and analysis of witness reports on flash floods, *Journal of Hydrology*, 394, 53-62, <http://dx.doi.org/10.1016/j.jhydrol.2010.05.042>, 2010.
- Javelle, P., Demargne, J., Defrance, D., Pansu, J., and Arnaud, P.: Evaluating flash-flood warnings at ungauged locations using post-event surveys: a case study with the AIGA warning system, *Hydrological Sciences Journal*, 59, 1390-1402, [10.1080/02626667.2014.923970](https://doi.org/10.1080/02626667.2014.923970), 2014.
- Lagadec L.-R. : Développement et évaluation de la méthode IRIP de cartographie du ruissellement intense pluvial. Application au contexte ferroviaire. Doctoral School Earth, Universe, Environment. Communauté Université Grenoble Alpes, 336 pp, <https://tel.archives-ouvertes.fr/tel-01778052>, 2017.
- 35 Lagadec, L. R., Breil, P., Chazelle, B., Braud, I., and Moulin, L.: Use of post-event surveys of impacts on railways for the evaluation of the IRIP method for surface runoff mapping, in: 3rd European Conference on Flood Risk Management, edited by: Lang, M., Klijn, F., and Samuels, P., E3S Web of Conferences, 2016a.
- 40 Lagadec, L.-R., Patrice, P., Braud, I., Chazelle, B., Moulin, L., Dehotin, J., Hauchard, E., and Breil, P.: Description and evaluation of a surface runoff susceptibility mapping method, *Journal of Hydrology*, 541, Part A, 495-509, <http://dx.doi.org/10.1016/j.jhydrol.2016.05.049>, 2016b.

- Lagadec, L.-R., Moulin, L., Braud, I., Chazelle, B., and Breil, P.: A surface runoff mapping method for optimizing risk assessment on railways, *Safety Science*, 110, 253-267, <https://doi.org/10.1016/j.ssci.2018.05.014>, 2018.
- Le Bihan, G., Payrastre, O., Gaume, E., Moncoulon, D., and Pons, F.: The challenge of forecasting impacts of flash floods: test of a simplified hydraulic approach and validation based on insurance claim data, *Hydrology and Earth System Sciences*, 21, 5911-5928, 10.5194/hess-21-5911-2017, 2017.
- Le Bissonnais, Y., Montier, C., Jamagne, M., Daroussin, J., and King, D.: Mapping erosion risk for cultivated soil in France, *CATENA*, 46, 207-220, [https://doi.org/10.1016/S0341-8162\(01\)00167-9](https://doi.org/10.1016/S0341-8162(01)00167-9), 2002.
- Le Coz, J., Patalano, A., Collins, D., Guillen, N. F., Garcia, C. M., Smart, G. M., Bind, J., Chiaverini, A., Le Boursicaud, R., Dramais, G., and Braud, I.: Crowdsourced data for flood hydrology: Feedback from recent citizen science projects in Argentina, France and New Zealand, *Journal of Hydrology*, 541, 766-777, 10.1016/j.jhydrol.2016.07.036, 2016.
- Llasat, M. C., Llasat-Botija, M., Petrucci, O., Pasqua, A. A., Rossello, J., Vinet, F., and Boissier, L.: Towards a database on societal impact of Mediterranean floods within the framework of the HYMEX project, *Natural Hazards and Earth System Sciences*, 13, 1337-1350, 10.5194/nhess-13-1337-2013, 2013.
- Marra, F., Nikolopoulos, E. I., Creutin, J. D., and Borga, M.: Space-time organization of debris flows-triggering rainfall and its effect on the identification of the rainfall threshold relationship, *Journal of Hydrology*, 541, 246-255, 10.1016/j.jhydrol.2015.10.010, 2016.
- Martin, P., Joannon, A., and Piskiewicz, N.: Temporal variability of surface runoff due to cropping systems in cultivated catchment areas: Use of the DIAR model for the assessment of environmental public policies in the Pays de Caux (France), *Journal of Environmental Management*, 91, 869-878, <https://doi.org/10.1016/j.jenvman.2009.11.003>, 2010.
- Maurer, H., Rudzikaite, L., Kiel, J., Partzsch, I., Pelikan, V., Sedlacek, N., Mitsakis, E., Stamos, I., Papanikolaou, A., Celano, M., Mezzasalma, P., Pavan, V., Alberoni, A., Genovese, E., Przyluski, V., Hallegatte, S.: Weather Extremes: Assessment of Impacts on Transport Systems and Hazards for European Regions, doi:<hal-00803668> , 2012.
- Moncoulon, D., Labat, D., Ardon, J., Leblois, E., Onfroy, T., Poulard, C., Aji, S., Remy, A., and Quantin, A.: Analysis of the French insurance market exposure to floods: a stochastic model combining river overflow and surface runoff, *Natural Hazards and Earth System Sciences*, 14, 2469-2485, 10.5194/nhess-14-2469-2014, 2014.
- Naulin, J. P., Payrastre, O., and Gaume, E.: Spatially distributed flood forecasting in flash flood prone areas: Application to road network supervision in Southern France, *Journal of Hydrology*, 486, 88-99, 10.1016/j.jhydrol.2013.01.044, 2013.
- Neuhäuser, B., Damm, B., and Terhorst, B.: GIS-based assessment of landslide susceptibility on the base of the Weights-of-Evidence model, *Landslides*, 9, 511-528, 10.1007/s10346-011-0305-5, 2012.
- Petrucci, O., Papagiannaki, K., Aceto, L., Boissier, L., Kotroni, V., Grimalt, M., Llasat, M. C., Llasat-Botija, M., Rossello, J., Pasqua, A. A., and Vinet, F.: MEFF: The database of MEditerranean Flood Fatalities (1980 to 2015), *Journal of Flood Risk Management*, 12, 10.1111/jfr3.12461, 2019.
- Rubin, J.: Optimal classification into groups: An approach for solving the taxonomy problem. *Journal of Theoretical Biology* 15, 103-144. doi:10.1016/0022-5193(67)90046-X, 1967.
- Saaty, T.L.: How to make a decision: the analytic hierarchy process, *European journal of operational research*, 48(1),9-26, 1990.
- Saint-Martin, C., Fouchier, C., Javelle, P., Douvinet, J., and Vinet, F.: Assessing the exposure to floods to estimate the risk of flood-related damage in French Mediterranean basins, in: 3rd European Conference on Flood Risk Management, edited by: Lang, M., Klijn, F., and Samuels, P., E3S Web of Conferences, 2016.
- Saint-Martin, C., Javelle, P., and Vinet, F.: DamaGIS: a multisource geodatabase for collection of flood- related damage data, *Earth System Science Data*, 10, 1019-1029, 10.5194/essd-10-1019-2018, 2018.
- Schmocker-Fackel, P., Naef, F., and Scherrer, S.: Identifying runoff processes on the plot and catchment scale, *Hydrology and Earth System Sciences*, 11, 891-906, 2007.

Smith, R.E., Goodrich, D.C., Woolhiser, D.A., and Unkrich, C.L.: KINEROS – a kinematic runoff and erosion model. Comput. Models Watershed Hydrol. 20, 627–668, 1995.

Versini, P. A., Gaume, E., and Andrieu, H.: Assessment of the susceptibility of roads to flooding based on geographical information – test in a flash flood prone area (the Gard region, France), Nat. Hazards Earth Syst. Sci., 10, 793-803, 5 10.5194/nhess-10-793-2010, 2010a.

Versini, P. A., Gaume, E., and Andrieu, H.: Application of a distributed hydrological model to the design of a road inundation warning system for flash flood prone areas, Nat. Hazards Earth Syst. Sci., 10, 805-817, 10.5194/nhess-10-805-2010, 2010b.

WWRP/WGNE Joint Working Group on Forecast Verification Research: Description of methods for forecast verification, 2015. [WWW Document]. URL <http://www.cawcr.gov.au/projects/verification/> (accessed 2019-05-28).

10

Table 1: Contingency table

|                           |                 |                     |
|---------------------------|-----------------|---------------------|
|                           | Observed impact | No observed impact  |
| Area declared at risk     | “Hits”          | “False alarms”      |
| Area declared not at risk | “Misses”        | “Correct negatives” |

Table 2: Evaluation criteria used in the study

|                                | Formula   | Interpretation   |
|--------------------------------|---|--|
| Probability of detection (POD) | $\frac{(Hits)}{(Hits) + (Misses)}$                    | Varies from 0 to 1<br>Perfect score:1  |
| False alarm ratio (FAR)        | $\frac{(False\ alarms)}{(Hits) + (False\ alarms)}$    | Varies from 0 to 1<br>Perfect score:0  |
| $\chi^2$ test                  | $\sum \frac{(Obtained - Theoretical)^2}{Theoretical}$ | $P(\chi^2 \geq 10,83) = 0,001$<br>« Highly significant »<br><br>$P(\chi^2 \geq 7,88) = 0,005$<br>« Very significant »<br><br>$P(\chi^2 \geq 6,63) = 0,01$<br>« Significant » |

**Table 13:** Parameterization of the IRIP model for the case study. The table provides values of the thresholds used for each indicator when condition is favorable (score = 1)

| IRIP maps    | Indicators                         | Thresholds used for favorable conditions (score =1)   |
|--------------|------------------------------------|---|
| Generation   | Soil permeability                  | Saturated hydraulic conductivity (Ks) < $10^{-6}$ m s <sup>-1</sup> + urban areas   |
|              | Soil thickness                     | Soil thickness < 50 cm + urban areas  |
|              | Soil slaking                       | Urban areas + slacking $\geq 3$<br>Slacking computed according to Cerdan et al. (2006)  |
|              | Topography                         | Slope > Threshold_1 OR topographic index > Threshold_2<br>Threshold_1 and Threshold_2 determined using a classification algorithm (Rubin, 1967) |
|              | Land use                           | Urban areas and agricultural lands  |
| Transfer     | Upstream generation susceptibility | Modal value of the upstream sub-catchment $\geq 3$  |
|              | Slope                              | Slope > Threshold_1   |
|              | Break of slope                     | Convex break of slope $\geq 0,0018$<br>(GRASS GIS r.param.scale function ; 3 pixels)  |
|              | Drained area                       | Drained area $\geq 2.5$ ha (Lagadec, 2017)  |
|              | Soil erodibility                   | <del>Erodibility</del> - Urban areas + <del>erodibility</del> $\geq 3$<br>Erodibility computed according to Cerdan et al. (2006)                |
| Accumulation | Upstream generation susceptibility | Modal value of the upstream sub-catchment $\geq 3$  |
|              | Slope                              | Slope $\leq$ Threshold_1  |
|              | Break of slope                     | Concave break of slope $\leq -0,0018$<br>(GRASS GIS r.param.scale function ; 3 pixels)  |
|              | Topographic index                  | Topographic index > Threshold_2   |
|              | Drained area                       | Drained area > 2.5 ha (Lagadec, 2017)   |

**Table 2: Contingency table**

|                                  | <u>Observed impact</u> | <u>No observed impact</u>  |
|----------------------------------|------------------------|----------------------------|
| <u>Area declared at risk</u>     | <u>“Hits”</u>          | <u>“False alarms”</u>      |
| <u>Area declared not at risk</u> | <u>“Misses”</u>        | <u>“Correct negatives”</u> |

**Table 3: Evaluation criteria used in the study. In the computation of the  $\chi^2$  test, the number of degrees of freedom is one.**

|                                       | <u>Formula</u>  | <u>Interpretation</u>   |
|---------------------------------------|---|---|
| <u>Probability of detection (POD)</u> | $\frac{(Hits)}{(Hits) + (Misses)}$                    | <u>Varies from 0 to 1</u><br><u>Perfect score:1</u>   |
| <u>False alarm ratio (FAR)</u>        | $\frac{(False\ alarms)}{(Hits) + (False\ alarms)}$    | <u>Varies from 0 to 1</u><br><u>Perfect score:0</u>   |
| <u><math>\chi^2</math> test</u>       | $\sum \frac{(Obtained - Theoretical)^2}{Theoretical}$ | <u><math>P(\chi^2 \geq 10,83) = 0,001</math></u><br><u>« Highly significant »</u><br><br><u><math>P(\chi^2 \geq 7.88) = 0,005</math></u><br><u>« Very significant »</u><br><br><u><math>P(\chi^2 \geq 6.63) = 0,01</math></u><br><u>« Significant »</u> |

**Table 4: Information collected about the documents collected in the archives about runoff-related impacts (left) and about the events related to runoff (right).**

| <b>Information about documents</b>   | <b>Information about runoff-related events</b> |
|--|--|
| Document number (unique identifier)  | Event number (unique identifier)               |
| Location of the document (where the document is archived)                          | Start Kilometric Point (KP)                    |
| Cote of the document   | End Kilometric Point (KP)                      |
| Date of the document   | Name of the earthwork                          |
| Typology of the document ( <del>e</del> correspondancecorrespondence, report, ...) | Date   |
| Link to the numerical copy   | Type (incident, works, observation, ...)       |
| Remarks  | Remarks  |


5

**Table 5: Performance criteria assessing the predictive power of the IRIP model in identifying sections with a proven risk using different methods to take into account vulnerability and mitigation measures**~~Performance of the IRIP model for three configurations: without taking vulnerability into account according to Figure 3a (column (1)); –when taking vulnerability into account according to Figure 3c, –but not mitigation measures (column (2)); when taking vulnerability into account according to Figure 3c and mitigation measures (column (3) to (5)). In columns (3) to (5), the figures correspond to Step 4.2 and those in parenthesis to Step 4.1 of the methodology~~when taking vulnerability and mitigation measures into account.

|                                   | <u>(1) Without taking vulnerability into account (cf Fig 3a)</u> | <u>(2) When taking vulnerability into account (Fig. 3c) but not mitigation measures</u> | <u>(3) When taking vulnerability (Fig. 3c) and hydraulic works into account</u> | <u>(4) When taking vulnerability (Fig. 3c) and “bad weather tours” into account</u> | <u>(5) When taking vulnerability (Fig. 3c) hydraulic works and “bad weather tours” into account</u> |
|-----------------------------------|--|---|---|---|---|
| Number of ‘Hit’                   | 51   | 55  | <u>85 (85)</u>  | <u>67 (67)</u>  | <u>95 (95)</u>  |
| Number of ‘False Alarm’           | 83   | 77  | <u>47 (47)</u>  | <u>65 (65)</u>  | <u>37 (37)</u>  |
| Number of ‘Correct Negative’      | 40   | 46  | <u>43 (46)</u>  | <u>37 (46)</u>  | <u>35 (46)</u>  |
| Number of ‘Miss’                  | 8  | 4   | <u>7 (4)</u>  | <u>13 (4)</u>   | <u>15 (4)</u>   |
| Probability of Detection: POD (%) | 86   | 93  | <u>92 (96)</u>  | <u>84 (94)</u>  | <u>86 (96)</u>  |
| False Alarm Ratio: FAR (%)        | 62   | 58  | <u>36 (36)</u>  | <u>49 (49)</u>  | <u>28 (28)</u>  |
| $\chi^2$                          | 7  | 19  | <u>36.8 (46.1)</u>  | <u>9 (27.9)</u>   | <u>26.7 (59.8)</u>  |

**Table 6: Performance criteria assessing the predictive power of the presence of hydraulic works or “bad weather tours” in identifying sections with a proven risk.**

|  | <u>(1) Impacts explained by hydraulic works</u> | <u>(2) Impacts explained by “bad weather tours”</u> | <u>(3) Impacts explained by hydraulic works or “bad weather tours”</u> |
|--|---|---|--|
| <u>Number of ‘Hit’</u>                   | <u>22</u>                                       | <u>29</u>   | <u>40</u>  |
| <u>Number of ‘False Alarm’</u>           | <u>33</u>                                       | <u>21</u>   | <u>51</u>  |
| <u>Number of ‘Correct Negative’</u>      | <u>90</u>                                       | <u>102</u>  | <u>72</u>  |
| <u>Number of ‘Miss’</u>                  | <u>37</u>                                       | <u>30</u>   | <u>19</u>  |
| <u>Probability of Detection: POD (%)</u> | <u>37</u>                                       | <u>49</u>   | <u>68</u>  |
| <u>False Alarm Ratio: FAR (%)</u>        | <u>60</u>                                       | <u>42</u>   | <u>56</u>  |
| $\chi^2$                                 | <u>2 (not significant)</u>                      | <u>20.6</u>   | <u>11.1</u>  |

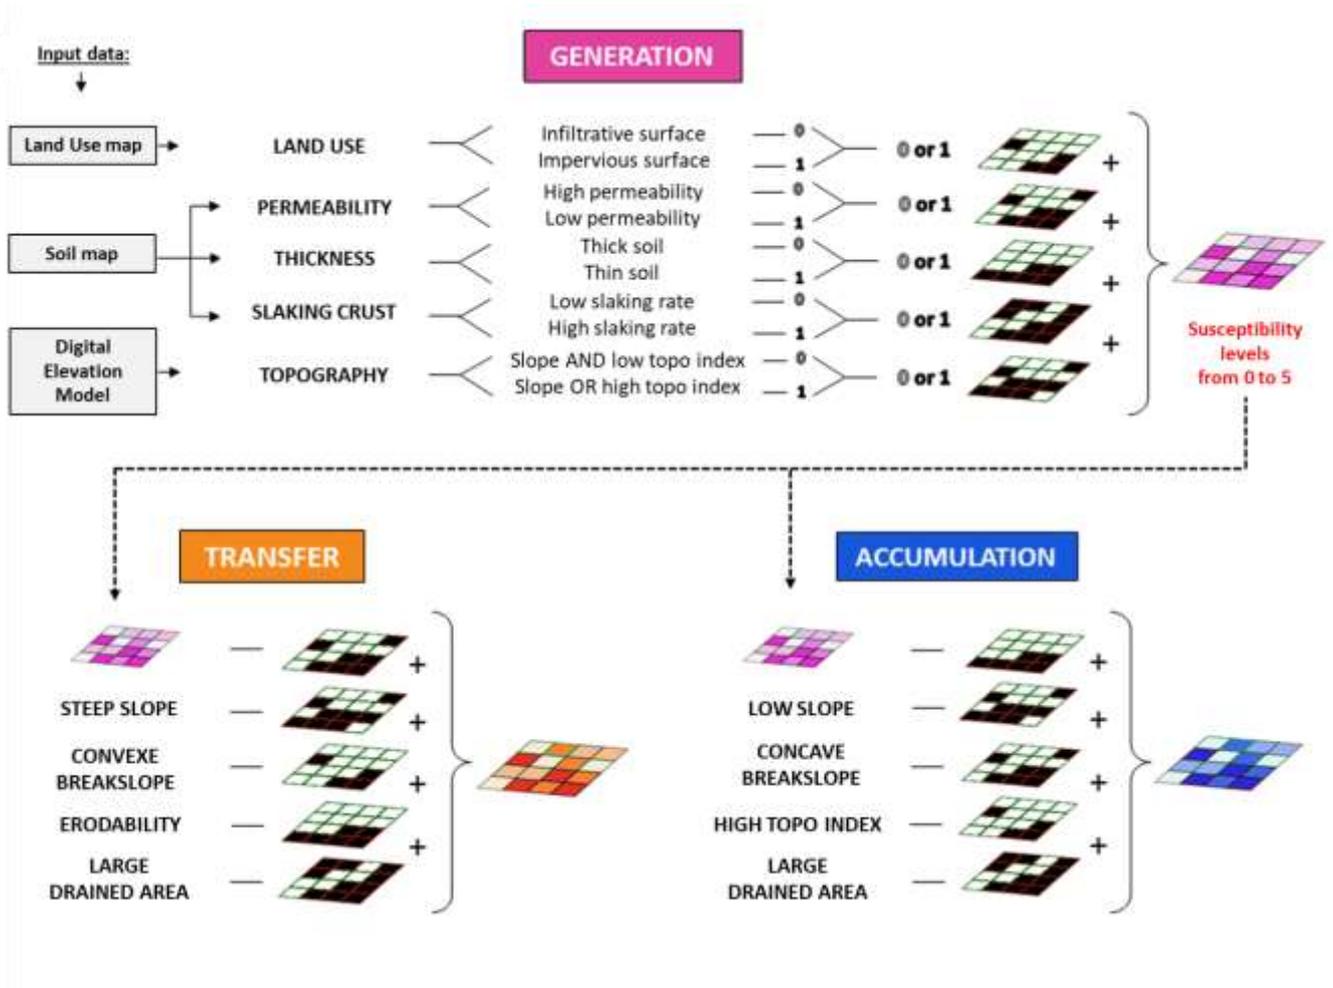


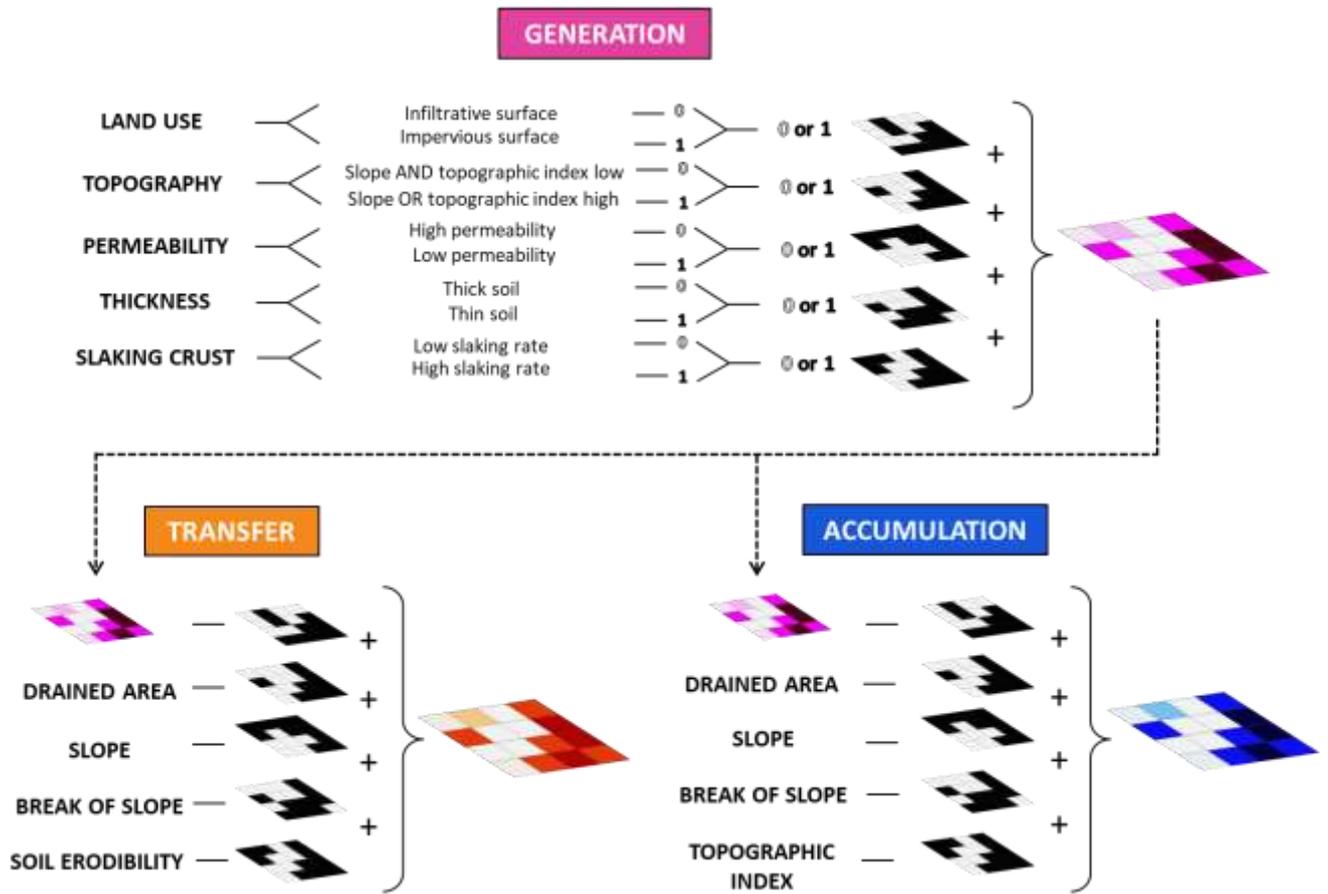


Figure 1: Scheme of the IRIP model presenting the various indicators computed to produce the susceptibility maps to runoff generation (top), transfer (bottom left) and accumulation (bottom right) [\(adapted from Lagadec et al., 2018\)](#).

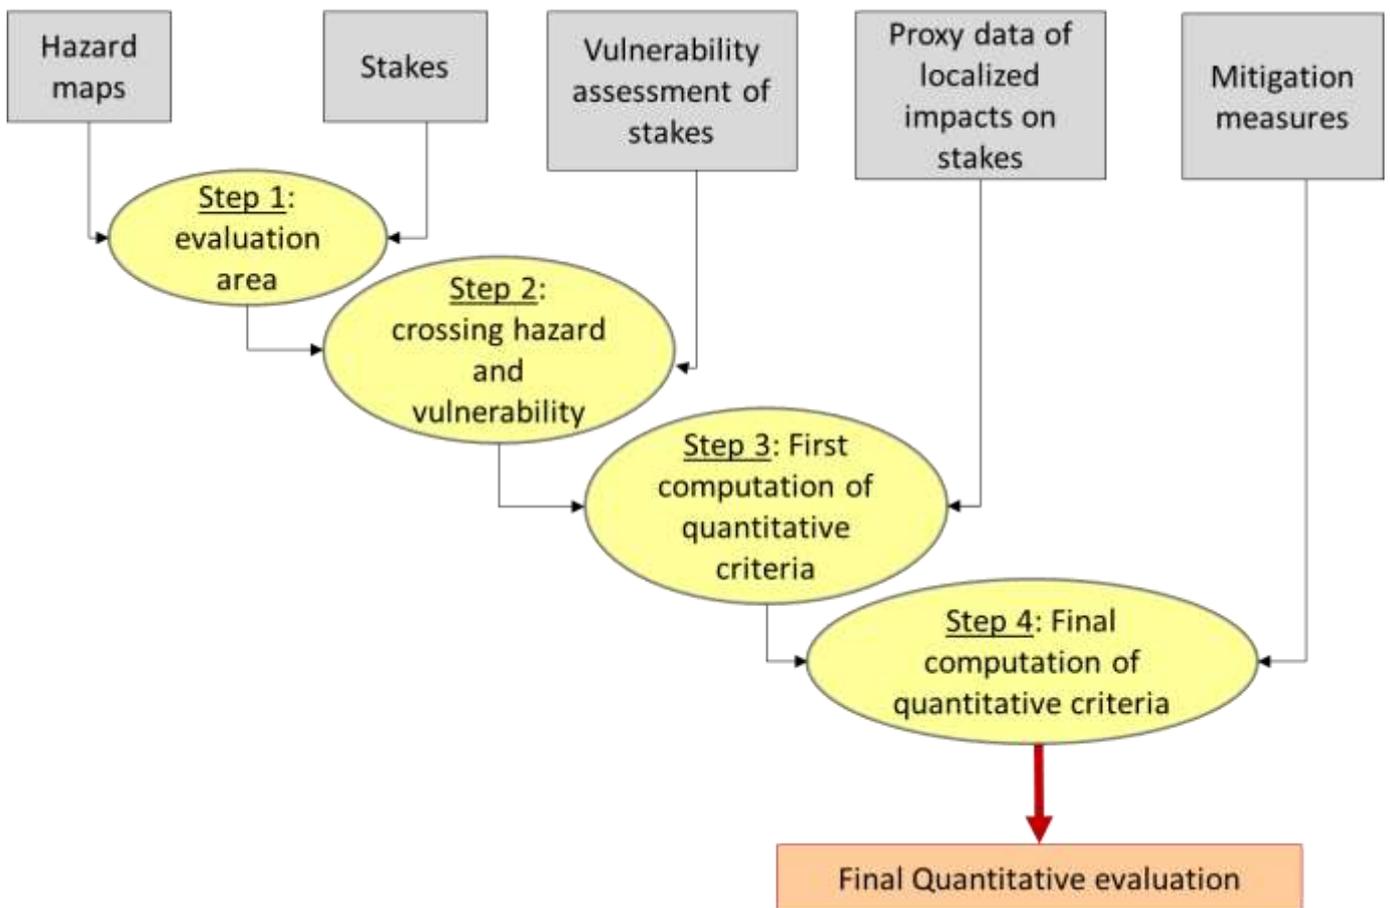

5 **Figure 2: Scheme of the evaluation methodology to assess the relevance of susceptibility maps to runoff, using localized runoff-related impacts proxy data.** Scheme of the evaluation methodology to assess the relevance of susceptibility maps to runoff, using localized runoff-related impacts proxy data. The grey boxes indicate the information that is used in the various steps of the methodology. Yellow circles presents the various steps of the evaluation methodology leading to the final quantitative evaluation (orange box)

(a)

| H\V | 0 | 1 | 2 | 3 | 4 |
|-----|---|---|---|---|---|
| 0   |   |   |   |   |   |
| 1   |   |   |   |   |   |
| 2   |   |   |   |   |   |
| 3   |   |   |   |   |   |
| 4   |   |   |   |   |   |
| 5   |   |   |   |   |   |

(b)

| H\V | 0 | 1 | 2 | 3 | 4 |
|-----|---|---|---|---|---|
| 0   |   |   |   |   |   |
| 1   |   |   |   |   |   |
| 2   |   |   |   |   |   |
| 3   |   |   |   |   |   |
| 4   |   |   |   |   |   |
| 5   |   |   |   |   |   |

(c)

| H\V | 0 | 1 | 2 | 3 | 4 |
|-----|---|---|---|---|---|
| 0   |   |   |   |   |   |
| 1   |   |   |   |   |   |
| 2   |   |   |   |   |   |
| 3   |   |   |   |   |   |
| 4   |   |   |   |   |   |
| 5   |   |   |   |   |   |


Figure 3: Examples of combination of hazard (H) (vertical) and vulnerability (V) (horizontal) to define the areas at risk with regards to runoff (red cells) when (a) vulnerability of stakes is not taken into account and IRIP hazard levels 4 and 5 are considered at risk, (b) and (c) vulnerability of stakes is taken into account in various manners based on the principle that “the higher the vulnerability, the lower the hazard level triggering risk”.

**Legend**

- Permanent rivers
- - Railway stretch
- ▭ Catchment boundaries
- Main cities

**Topography**

- 30
- 240

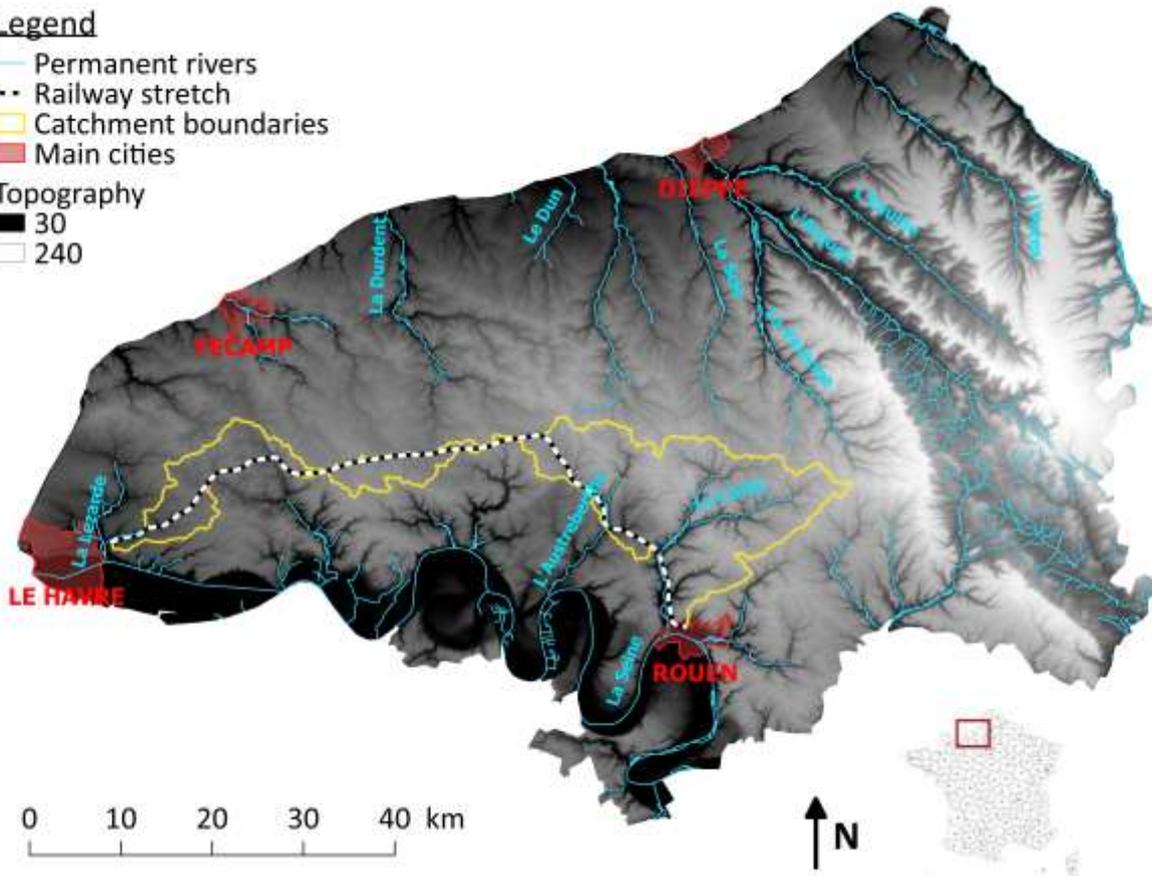


**Legend**

- Permanent rivers
- - Railway stretch
- ▭ Catchment boundaries

**Topography**

- 4
- 227

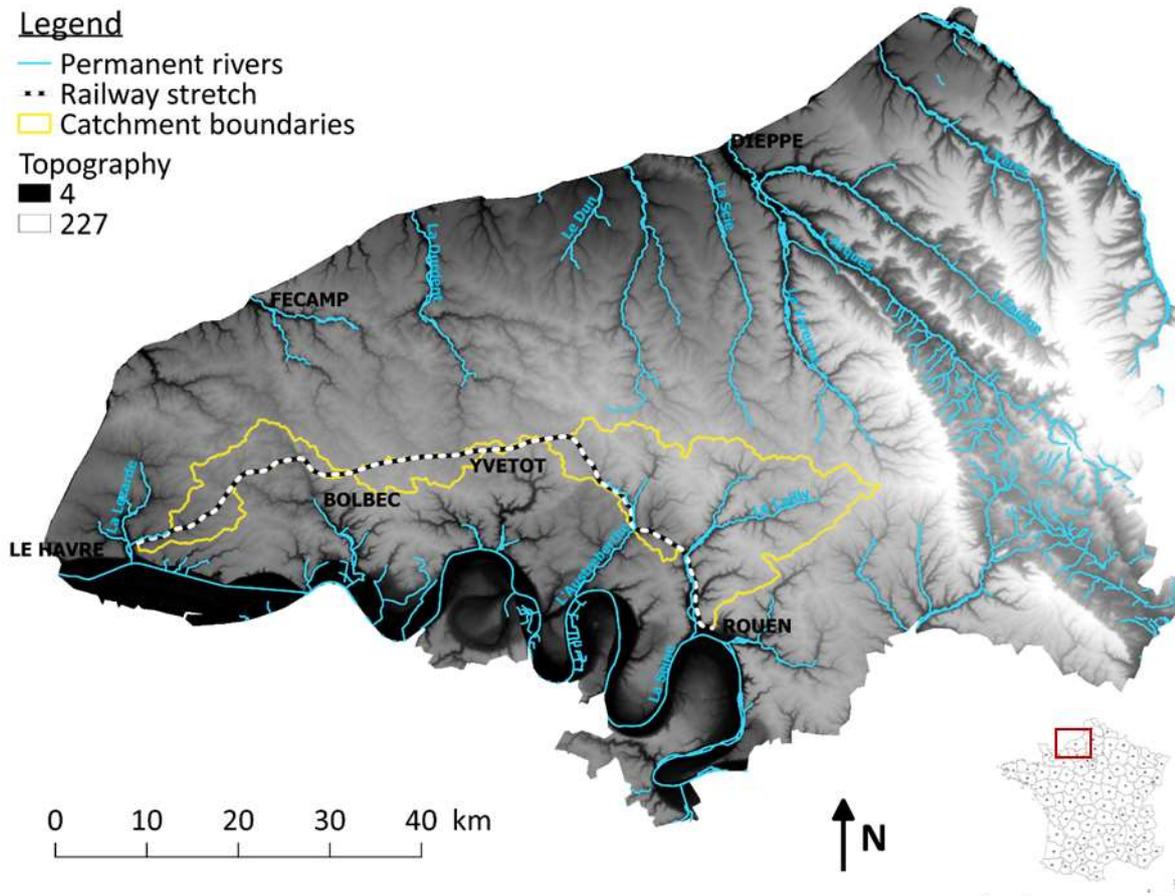

5

**Figure 4: Map of the study area in Normandy (northern France). The yellow contour is the boundary of the catchments intercepted by the Rouen- Le Havre railway (line in black and white). Blue lines are the permanent river courses. One can note the dense network of dry talwegs (darker on the DEM) upstream de rivers that can be activated during a rainfall event. ~~Map of the study area in Normandy (northern France). The yellow contour is the boundary of the catchments intercepted by the Rouen- Le Havre railway (line in black and white). Blue lines are the permanent river courses and the black lines correspond to a dense network of dry talwegs that can be activated during a rainfall event.~~**

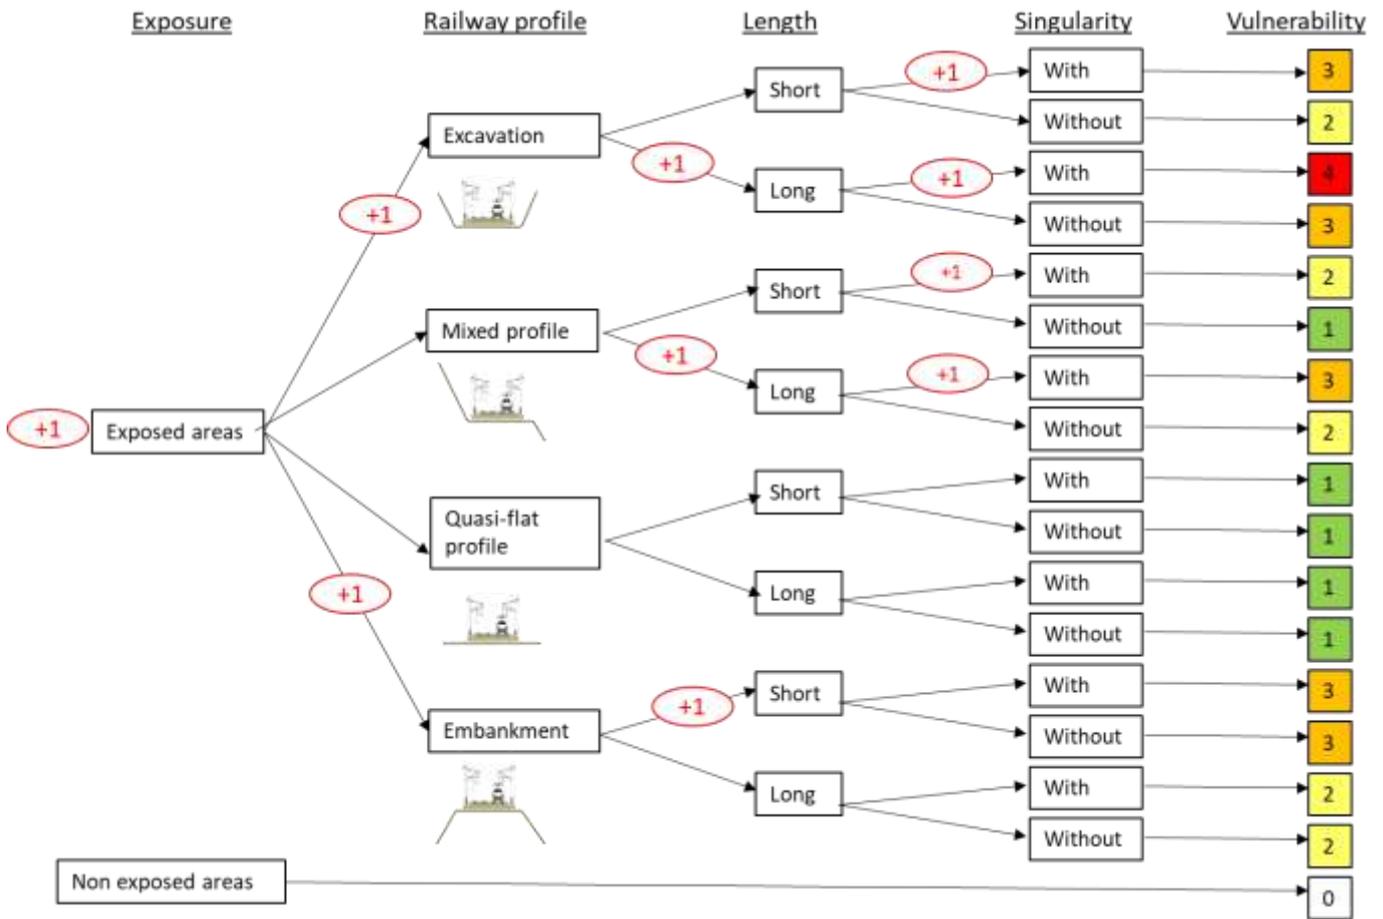


Figure 5: Vulnerability tree of the railway sections (also called earthworks) based on expert judgment. Each column corresponds to one criteria considered when computing the vulnerability of the section: the exposure (non-exposed sections are long tunnels or viaducts) (column 1), the type of railway profile (column 2), the length of the section (column 3) and the existence of a singularity (either level crossings, road bridges or tunnel inlets or outlets) (column 4). The +1 in the red circles indicate that 1 is added to the vulnerability score of the section to provide the final score that appears in the last column of the figure. Vulnerability tree of the railway based on expert judgment


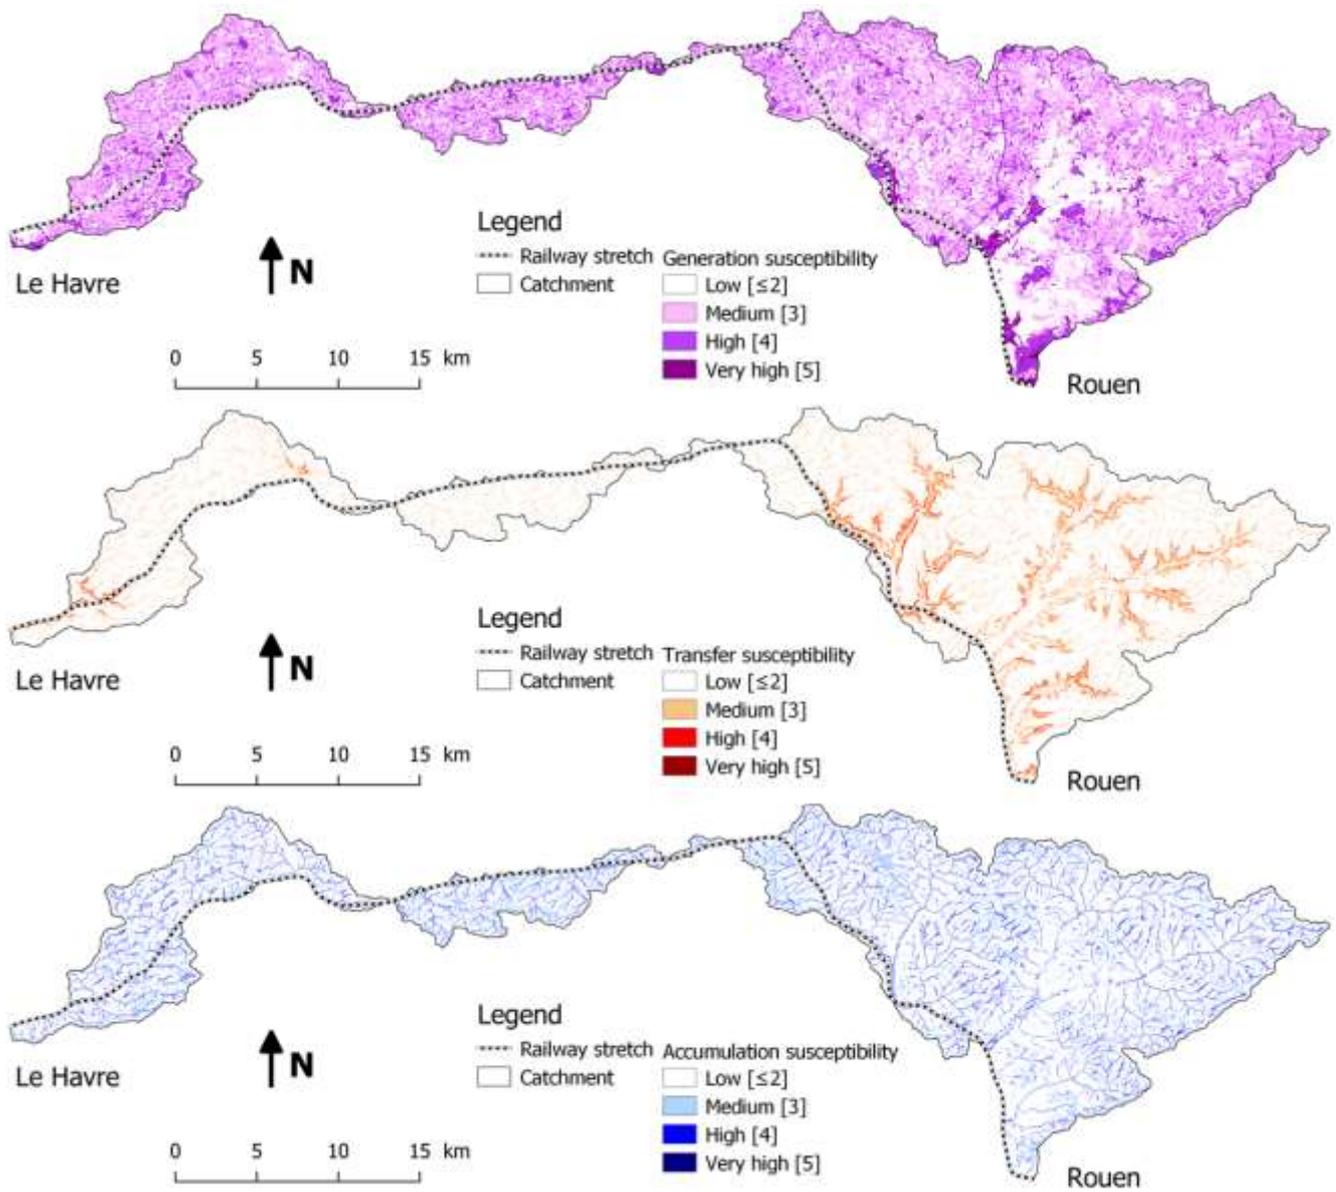


Figure 6: IRIP susceptibility maps to runoff generation (top), transfer (middle) and accumulation (bottom)

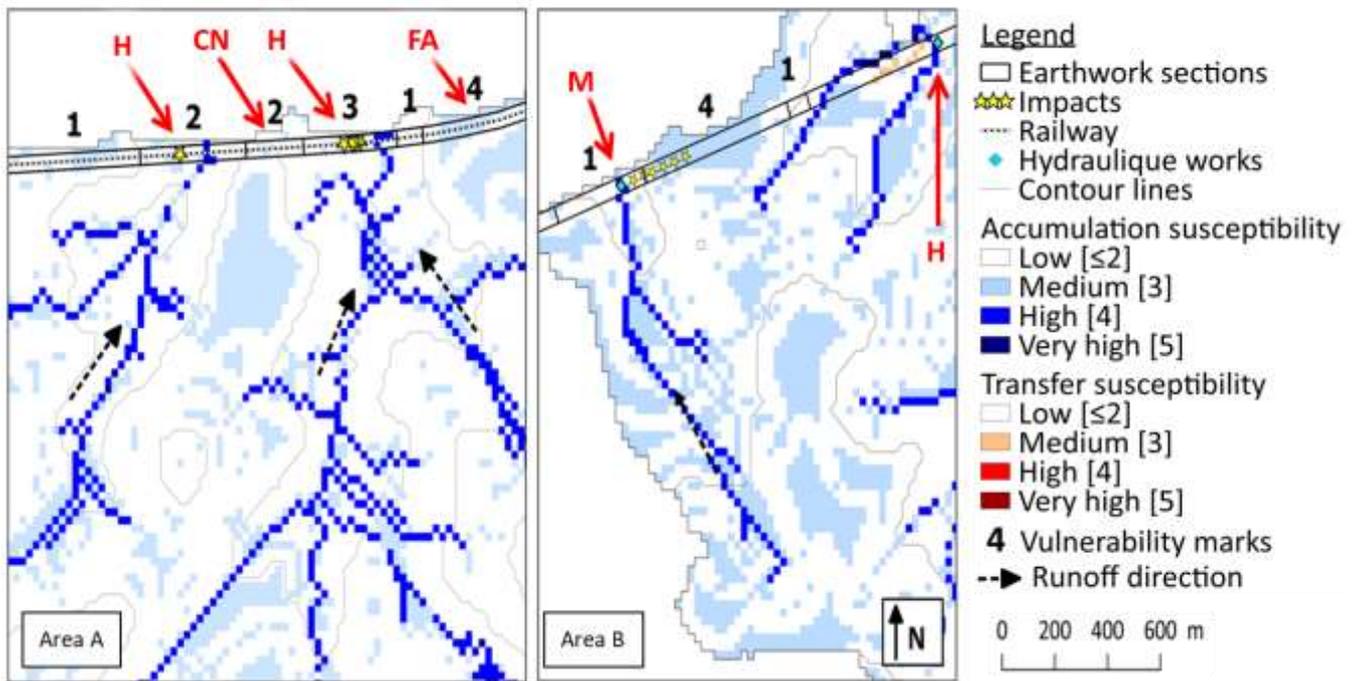

5 Figure 7: Illustration of the evaluation area and of the building of contingency tables on two sub-areas. The evaluation area is the buffer (black contours) along the railway line (black dotted line). The latter is divided into sections (earthwork sections) to which a vulnerability score is assigned (black numbers in the figure). Impacts are the yellow stars. Hydraulic infrastructures are figured with blue diamonds. IRIP susceptibility levels appear in red colors for transfer and blue colors for accumulation (only levels 3, 4 and 5 are drawn in the figure). Red arrows show the value assigned to the railway sections in the contingency table, where H means “Hit”, CN means “Correct Negative”, M means “Miss” and FA means “False Alarm”.

10