

La Palma landslide tsunami: calibrated wave source and assessment of impact in French territories.

Stéphane Abadie¹, Alexandre Paris^{1,2}, Riadh Ata³, Sylvestre Le Roy⁴, Gael Arnaud⁵, Adrien Poupardin^{2,6}, Lucie Clous¹, Philippe Heinrich², Jeffrey Harris³, Rodrigo Pedreros⁴, and Yann Krien⁵

¹Université de Pau et des Pays de l'Adour, E2S UPPA, SIAME, Anglet, France

²CEA, DAM, DIF, Arpaion 91297, France

³LHSV, Ecole des Ponts, CEREMA, EDF R et D, Chatou, France

⁴BRGM, Orléans, France

⁵Université des Antilles, Laboratoire LARGE, Campus de Fouillole, 97157 Pointe-a-Pitre, Guadeloupe

⁶Institut de Recherche en Constructibilité, Université Paris-Est, ESTP Paris, 28 avenue du Président Wilson, 94230, Cachan, France

Correspondence: Stephane Abadie (stephane.abadie@univ-pau.fr)

Abstract. In this paper, we present new results on the potential La Palma collapse event, previously described and studied in Abadie et al. (2012). Three scenarios (*i.e.*, slide volumes of 20, 40 and 80 km³) are considered, modeling the initiation of the slide to the water generation using THETIS, a 3D Navier-Stokes model. The slide is a Newtonian fluid whose viscosity is adjusted to approximate a granular behavior. After 5 minutes of propagation with THETIS, the generated water wave is transferred into FUNWAVE-TVD, to build a wave source suitable for propagation models. The results obtained for all the volumes, after 15 minutes of Boussinesq model simulation are made available through a public repository.

The signal is then propagated with two different Boussinesq models, FUNWAVE-TVD and Calypso. An overall good agreement is found between the two models, which secures the results validity. Finally, a detailed impact study is carried out on La Guadeloupe using a refined shallow water model, SCHISM, initiated with the FUNWAVE-TVD solution in the nearshore area.

Although the slide modeling approach applied in this study seemingly leads to smaller waves compared to former works, the wave impact is still very significant for the maximum slide volume considered on surrounding islands and coasts, as well as on remote most exposed coasts such as Guadeloupe. In Europe, the wave impact is significant (for specific areas in Spain and Portugal) to moderate (Atlantic French coast).

Keywords: Tsunamis, Atlantic Ocean, Numerical modeling, Volcanic hazards and risks

1 Introduction

Recent catastrophes due to exceptionally strong tsunamis (Athukorala and Resosudarmo, 2005; Mikami et al., 2012) have called the need for extensive tsunami hazard assessment or reassessment in several countries (e.g., National Tsunami Hazard Mitigation Program (NTHMP) in the USA (Tehranirad et al., 2015), or the Tsunamis in the Atlantic and the English Channel Definition of the Effects through numerical Modeling (TANDEM) project for France (Hebert, 2014)). In this context, the

hazard associated to various potentially tsunamigenic sources has to be evaluated. This work usually covers the most frequent sources, namely co-seismic displacements and submarine landslides, but long-return period sources, like volcano tsunami sources, must also be investigated. Volcanic islands may indeed have the potential to generate tsunamis (see for instance the recent case of Anak Krakatau (Paris et al., 2020; Grilli et al., 2019)), even mega-tsunamis, through a flank collapse process (Tappin et al., 2019), known to occur relatively regularly (Elsworth and Day, 1999). Footprints of such gigantic past events are large underwater landslide debris surrounding specific oceanic islands (Masson et al., 2002) and marine conglomerates at high elevation on the flanks of other ones (Paris et al., 2018). Unfortunately, the tsunami hazard associated to volcanic islands is very difficult to determine, due to the complexity of the processes involved as well as uncertainty of the associated return period. Nevertheless, although likely very rare, these events may have such dramatic consequences that they should be taken into account in extensive hazard assessment studies. The present paper is an attempt, in the framework of the previously cited TANDEM project, to assess the potential impact on France, some parts of Western Europe, and remote French territories (*i.e.*, the archipelago of Guadeloupe) of a tsunami generated by an hypothetical collapse of the Cumbre Vieja volcano at La Palma Island (Canary Islands, Spain).

This volcano has drawn a strong interest among the scientific community since the first alarming work published on that case (Ward and Day, 2001). There have been several attempts to numerically simulate the waves generated by the Cumbre Vieja collapse. The first work (Ward and Day, 2001) was severely criticized (Mader, 2001; Pararas-Carayannis, 2002) due to the allegedly extreme landslide volume considered and the linear wave model used. In more recent computations, Gisler et al. (2006) used a 3D compressible Navier-Stokes model to simulate the slide and the resulting wave. An extrapolation of near field decay led the authors to conclude, as in Mader (2001), that this wave height would not represent such a serious threat for the east coast of North America or South America. Starting from the Gisler et al. (2006) near field solution, Løvholt et al. (2008) simulated the transoceanic propagation of the tsunami source with a Boussinesq model, therefore including dispersive effects. The propagation is shown to be very complex due to the combined effects of dispersion, refraction, and interference. The authors also found smaller waves than Ward and Day (2001), but still potentially dangerous for the U.S. coasts. Abadie et al. (2012) proposed a similar approach but based on a 3D multi-phase incompressible Navier-Stokes model, to simulate the landslide and the generated wave. Because of the likelihood uncertainty, they proposed four different sliding volumes, ranging from 20 to 450 km³, obtained from a former slope stability study. The impact of these potential sources on U.S. coasts was studied in Tehranirad et al. (2015) in the framework of the NTHMP, with propagation computed using the FUNWAVE-TVD model. In the far-field, the generated tsunamis were wave trains of 3 to 5 long-crested waves of 9 to 12 min period. If the wave height appears very significant along the 200 m isobath (in the range of 20 m) for the largest volume considered, a strong decay is also observed due to bottom friction on the continental shelf. Moreover, besides the initial directionality of the sources, coastal impact is mostly controlled by focusing/defocusing effects resulting from the shelf bathymetric features. Based on the same source and methodology, but an inundation computed using a refined shallow water model, Grilli et al. (2016) found the CVV to cause the largest impact among possible far-field sources, with up to 20 m runup at the critical sites for the 450 km³ scenario.

Computations performed by Gisler et al. (2006) or Abadie et al. (2012) were both based on inviscid or quasi-inviscid slide flow. In the present paper, the computations carried out in Abadie et al. (2012) are redone, improving their accuracy by calibrating the slide fluid viscosity in order to approach a granular slide (Sections 2.1 and 3.1) with a Newtonian model. Then, the same filtering process as in Abadie et al. (2012) is applied with the new wave sources to produce a wave signal which
5 can be propagated by dispersive depth-averaged models (Sections 2.2 and 3.2). The three wave sources are then propagated using FUNWAVE-TVD (Section 2.3.1) and the results in the Caribbean Sea, in western Europe and in France (Section 3.3), analyzed. A detailed impact assessment is carried out in the Guadeloupe Archipelago using refined shallow water simulations initiated with the FUNWAVE-TVD former simulations in the nearshore area.

One of the goal of the TANDEM program was also the comparison of the models developed or used by the different partners
10 of the project for operational forecast in order to assess potential discrepancies. Here, we take the opportunity of this La Palma case study to compare the results obtained with two Boussinesq models after long distance propagation (section 3.4): namely, FUNWAVE-TVD and Calypso developed by CEA, the two models employing slightly different simulation strategies. Finally, results are interpreted and discussed in Section 4.

2 Method

15 2.1 Navier-Stokes simulation of wave source

The model used for wave source computations is the Navier-Stokes multi-fluid model THETIS already described in Abadie et al. (2010) and Abadie et al. (2012) in the context of waves generated by landslides. In this 3D model, water, slide and air are simulated based on the incompressible Navier-Stokes equations for Newtonian fluids. The interfaces between phases are tracked using the Volume-Of-Fluid (VOF) method. The same set-up as in Abadie et al. (2012) is used in this study, so the
20 reader is referred to this former work to find more details on the model.

The $\mu(I)$ -rheology (Jop et al., 2006) has also been implemented in THETIS to model dry dense granular flows and been validated by comparing with a dry granular column collapse (Lagrée et al., 2011). The three material-dependent parameters are I_0 , μ_s , and $\Delta\mu$. They define the friction coefficient, $\mu(I)$, which only depends on the inertial number, I . In THETIS, these variables are evaluated on each point of the slide, and the viscosity η is computed and imposed as the local fluid viscosity
25 value in the NS equations. This gives a viscosity in the slide that is space and time-dependent. In the present work, we used the usual values found in the literature for the model parameters, namely: $\mu_s = 0.43$, $\Delta\mu = 0.39$, and $I_0 = 0.27$. Note that this formulation is, so far, only valid for a dry collapse (Clous and Abadie, 2019), and is therefore only used here as a reference for the initial motion.

THETIS belongs to the immiscible multi-phase full Navier-Stokes type of solver. It has been validated against several
30 benchmark cases involving tsunami generated by 2D and 3D solid blocks (Abadie et al., 2010), and granular subaerial and submarine slides (Clous and Abadie, 2019). As such, it is more sophisticated with respect to the slide motion than models such as the SAGE model (Gisler et al., 2006), which rely on a compressible formulation of the equations or the 3D Navier-Stokes model described in Horrillo et al. (2013), which employed a simplified VOF method, taking advantage of the large aspect

ratio of the tsunami waves. Other recent models of interest regarding landslide tsunami generation include the NHWave model described in Ma et al. (2015); Kirby et al. (2016); Grilli et al. (2019) which is a two-layer Sigma coordinates model for granular landslide motion and surface wave generation with a depth-averaged description of the slide and a 3D non-hydrostatic tsunami wave. For submarine landslides, involving cohesive visco-plastic soils, the model BingClaw (Løvholm et al., 2017; Kim et al., 5 2019) based on a non-linear Herschel–Bulkley model, incorporates buoyancy, hydrodynamic resistance and remolding, which appear crucial to properly represent the underwater landslide dynamics. The latter model has been used to study the dynamics of the Storegga Slide about 8000 years ago as well as the 1929 Grand Banks landslide and tsunami. Finally, Eulerian-Eulerian two-phase models, such as the one described in Si et al. (2018b) and Si et al. (2018a) are very promising approaches able to describe the flow within the grains as well as the grain/grain interactions but their applicability to practical cases has not been 10 demonstrated yet.

As previously mentioned, the tsunami sources proposed in Abadie et al. (2012) were computed based on Navier-Stokes simulations using a Newtonian fluid of very low viscosity (quasi-inviscid) for the slide. In 2D preliminary tests, the generated waves were shown to increase gradually when lowering the slide viscosity. So the simulations performed in Abadie et al. (2012) represent the worst case possible with this model for a given slide volume. In the present paper, the aim is to propose a more 15 realistic source prediction by calibrating the previous Navier-Stokes model with respect to recent experimental measurements of waves generated by granular slides. The experimental results considered are: Viroulet et al. (2013) (see also Viroulet et al. (2014)) for subaerial slides, and Grilli et al. (2017) for submarine slides.

Viroulet et al. (2013) conducted a 2D physical experiment with glass beads in order to represent an equivalent granular slide. This experiment was carried out in a flume of dimensions 2.20 m long, 0.4 m high, and 0.2 m wide. The beads were placed 20 initially above water on a 45° slope as in the Figure 2. Glass beads had a density of 2500 kg·m⁻³ and a diameter of 1.5 mm in the first case, 10 mm in the second. Water depth was 14.8 cm and 15 cm for the first and second case, respectively. Four gauges monitored the surface elevation at $x_1 = 0.45$ m, $x_2 = 0.75$ m, $x_3 = 1.05$ m and $x_4 = 1.35$ m.

In the numerical model, used in the present paper, the slide is modeled as a fluid with a Newtonian rheology. A simulation with a $\mu(I)$ -rheology was also performed for comparison purpose on the same configuration as Viroulet et al. (2013). Nev- 25 ertheless, except the latter simulation, the rest of the simulations presented in this study with THETIS was carried out with a Newtonian rheology and a calibrated viscosity.

The space and time steps are $\Delta x = 5$ mm, $\Delta y = 2$ mm and $\Delta t = 10^{-3}$ s, respectively. The flow is solved with the projection algorithm and a VOF-Total Variation Diminishing (TVD) interface tracking is performed.

For the first experimental case, presented in Viroulet et al. (2013), simulations with different values of viscosity were carried 30 out. Figure 3 compares the height of the first wave at the four gauges. The wave simulated with the lowest viscosity, as in Abadie et al. (2012), appears to be almost twice as high as the experimental results. This first result shows the need to consider a better calibration of the model to produce more realistic results in the La Palma case. The first wave and the wave train which follows are well reproduced for a viscosity of 10 Pa·s, even if the slide at this viscosity is shown to be slower than in the experiment. The same overall behavior is observed in the second case, with glass beads diameter of 10 mm, but a higher 35 value of viscosity has to be set in order to fit the experimental wave heights. Note that the slide motion simulated is still

slower than in the experiment. This may be due to the one-fluid model formulation, which does not allow for the flow to pass through the granular medium as in reality. Energy transfers from slide to free surface, not detailed in the present study, were computed based on numerical results (Clous and Abadie, 2019) and show that waves are generated extremely quickly in this subaerial experiment. This is certainly why the differences observed in slide velocity after some time do not induce large wave
5 discrepancies.

The first benchmark case was also simulated with the $\mu(I)$ rheology. The results show that the wave height is quite close to the experimental results. Comparing to the computation with the Newtonian fluid, during the first 0.5 s, where the waves are generated, the equivalent viscosity calculated with $\mu(I)$ -rheology is homogeneous within the slide volume and close to the best Newtonian case. Therefore, this simulation shows that a well-calibrated Newtonian rheology can be used to model a complex
10 granular rheology at least in this specific case for which energy transfers are very fast. This will be the approach used in the present paper.

The experiment presented in Grilli et al. (2017) was also simulated using THETIS. The experiment consisted of 2 kg of 4 mm glass beads released underwater over a slope of 35° in a water depth of 0.330 m. The slide was modeled as a Newtonian fluid, first with parameters defined in Grilli et al. (2017), *i.e.*, a viscosity of 0.01 Pa·s and a density of $1951 \text{ kg}\cdot\text{m}^{-3}$. A few
15 other viscosity values were also tested to evaluate the sensitivity of the model. The results show that with a slide viscosity of 0.01 Pa·s, the first wave is higher than the experimental value and the wave train is not correctly reproduced on the first gauge. By reducing the viscosity, the generated waves are lower. We observe that with a viscosity of 1 Pa·s, the first wave is close to the experimental results as well as the first waves in the wave train. Overall the results on wave height appears satisfactory while the slide is still slower than in the experiment.

To extrapolate these results for the La Palma computations, the following reasoning is adopted. First, it is assumed that the real slide is well represented by the granular medium used in the experiment. This approach is not deterministic as there are important differences between this experiment and the real case but at least it may be considered as a better assumption than the worst case scenario presented in Abadie et al. (2012).
20

Second, the 2D cross section of the La Palma slide in Abadie et al. (2012) is $\sim 8 \text{ km}^2$ compared to ~ 4 for Viroulet's slide extrapolated at real scale. As these surfaces are of the same order, the slide dynamics are assumed to be roughly similar. Third, the La Palma slide is partially submerged but with a larger subaerial portion. Because of this, the real case would be more similar to the first experiment (Viroulet et al., 2014) than to the second one (Grilli et al., 2017).
25

The equivalent viscosity for the real case is then obtained by scaling the optimal viscosity obtained after calibrating the model against the experiments. Froude and Reynolds numbers should be the same at reduced and real scales leading to:

$$30 \quad \frac{u}{\sqrt{gh}} = \frac{u'}{\sqrt{gh'}} \quad (1)$$

$$\frac{\rho u h}{\mu} = \frac{\rho u' h'}{\mu'} \quad (2)$$

where g is the acceleration of gravity, $u(u')$ a characteristic velocity, $h(h')$ a characteristic length scale and $\mu(\mu')$ the equivalent viscosity at real scale (reduced scale respectively). Combining the two equations leads to:

$$\frac{\mu}{\mu'} = \sqrt{\frac{h^3}{h'^3}} \quad (3)$$

which for a viscosity $\mu' = 10$ Pa·s at reduced scale gives $\mu = 4.4 \times 10^7$ Pa·s at real scale given the length ratio. The slide considered in Abadie et al. (2012) (Figure 1) being partially submerged, the latter viscosity value is arbitrarily reduced to $\mu = 2 \times 10^7$ Pa·s to take into account of the result obtained with Grilli et al. (2017)'s experiment.

Based on these hypothesis, simulations were performed with three initial slide volumes corresponding to 20, 40 and 80 km³, respectively. The largest slide volume considered in Abadie et al. (2012), namely 450 km³ is not considered in this paper (see section 4).

10 2.2 Transition from Navier-Stokes to propagation models

As noted in the original THETIS simulations presented in Abadie et al. (2012), the landslide, as modeled, continues to move for a very long time (more than half an hour), but the slide local Froude number is super-critical for only a short time (less than 100 s), and it is only during this super-critical period when the resulting tsunami wave continues to grow significantly. As a result, it is not necessary to model the entire slide run-out in order to capture the generation of waves that will affect distant shorelines.

Taking the result from the THETIS model after 300 s of simulated time, once several wave fronts have already propagated away from the generation site, integrating velocity over depth, we transfer the state of the model to the Boussinesq wave model FUNWAVE-TVD (see Section 2.3.1). However, the water around the still-moving slide includes highly turbulent three-dimensional effects that cannot be represented correctly in a Boussinesq model. To remove the residual flow (that is not expected to generate significant waves) near the slide, we apply an *ad hoc* filter, as determined by numerical experimentation. It consisted in multiplying the output of THETIS (*i.e.*, free surface elevation and each velocity component) by a spatially varying function, removing the interior flow while keeping a smooth initial condition for FUNWAVE. This function is Gaussian, with a standard deviation of 15 km and the center is located at coordinates (−10 km, −10 km). For more details, including validation of this approach, see Abadie et al. (2012).

After this filter is applied, local Boussinesq wave modeling is conducted on a 500-m resolution bathymetric grid taken from the Global Multi Resolution Topography (GMRT) (Ryan et al., 2009). In order to take advantage of the fully nonlinear version of FUNWAVE-TVD, a Cartesian coordinate grid system is used. To project this onto the local area, a transverse secant Mercator projection is used (similar to the UTM system, but centered at 28.5°N and 18.5°W corresponding to (+68 km, +14 km)). The distortion of the entire grid is less than 1%.

After this initial phase of propagation, the results of wave elevation and horizontal velocity are transferred to larger-scale simulations to predict propagation and impact on various coastlines, as detailed in Section 2.3.

2.3 Models used for long distance propagation

As dispersive effects are expected to play a significant role in this case (Løvholt et al., 2008), models based on the Boussinesq equations are required for long distance propagation. Here, we present the results obtained with two Boussinesq models : FUNWAVE-TVD and Calypso.

5 2.3.1 FUNWAVE-TVD

FUNWAVE-TVD is the most recent implementation of the Boussinesq model FUNWAVE (Wei et al., 1995), initially developed and extensively validated for nearshore wave processes, but equally used to perform tsunami case studies. The FUNWAVE-TVD code solves the Boussinesq equations of Chen (2006) with the adaptive vertical reference level of Kennedy et al. (2001), with either fully-nonlinear equations in a Cartesian framework (Shi et al., 2012) or a weakly-nonlinear spherical coordinate
10 formulation with Coriolis effects (Kirby et al., 2013). It uses a TVD shock-capturing algorithm with a hybrid finite-volume and finite-difference scheme to accurately simulate wave breaking and inundation by turning off dispersive terms (hence solving the Non-Linear Shallow Water (NSW) equations during breaking) once wave breaking is detected (detection based on the local wave height). The code is fully parallelized using the Message Passing Interface (MPI) protocol and efficient algorithms allowing a substantial acceleration of the computations with the number of cores. For operational uses, FUNWAVE-TVD has
15 received many convenient features, such as the use of nested grids to refine the simulations in the interest areas, or the use of heterogeneous Manning coefficients to characterize bottom friction. For the transatlantic simulations here, the Manning coefficient is a constant ($0.025 \text{ m}^{-1/3} \cdot \text{s}$).

In the framework of the U.S. NTHMP program, FUNWAVE-TVD has been validated for both tsunami propagation and coastal impact, through an important set of analytical, laboratory and field benchmarks (Tehranirad et al., 2011). Other recent
20 applications have allowed the validation of the model on real cases, such as the Tohoku-Oki tsunami (Grilli et al., 2013).

The simulation of the propagation of the tsunami to the coastlines was performed with nested grids (Figures 4 and 5) from 2.7-km resolution (Atlantic Ocean) to 930 m (Antilles), 450 m (north Atlantic area), 310 m (Guadeloupe Archipelago), 110 m (Aquitaine region) and 20 m (Gironde estuary).

2.3.2 Calypso

25 Calypso is a code developed by CEA and used for tsunami propagation (Poupardin et al., 2017; Gailler et al., 2015). The user can choose to solve either the non-dispersive (NSW) or dispersive (Boussinesq model following Pedersen and Løvholt (2008)) non-linear long wave equations, written in spherical coordinates. A Crank-Nicolson scheme for the temporal discretization and a finite-difference scheme for spatial derivatives are used to solve both NSW and Boussinesq equations. For the Crank-Nicolson scheme, an iterative procedure enables the solving of the implicit set of equations. The convergence criteria is applied to the
30 continuity equation. The spatial discretization uses centered differences for linear terms as well as for advection terms. For Boussinesq equations, the implicit momentum equations are solved by alternating implicit sweeps in the x and y components using an Alternating Direction Implicit (ADI) method. For a given direction, the dispersion terms in the other direction are

discretized explicitly. For each direction (x and y), a tridiagonal system of equations is then solved at each iteration, following Pedersen and Løvholt (2008). The numerical scheme of Calypso has been described in Poupardin et al. (2018).

Four levels of nested grids are used in this computation (Figures 4 and 5). The mother grid covers Canary Islands and a large part of the Atlantic Ocean to the French coasts. It is a 2-km resolution grid with a total of 1351×1298 cells. The second grid of 1294×1404 cells covers all the French Atlantic Ocean coastline and the north of Spain with a 500-m resolution. Four grids are used to simulate the propagation of water waves in coastal regions: the so-called “Brittany” grid covers a large region in the south of Brittany with a 125-m resolution; the “Gironde” grid covers the mouth of the Gironde estuary with a 125-m resolution; the “Saint-Jean-de-Luz” grids with a first grid of 125-m resolution and a smaller one of 32.5-m resolution which covers the bay of Saint-Jean-de-Luz in the southwest of France.

In the simulation performed, the offshore propagation was simulated by using the Boussinesq model to take into account the dispersive effects in the Atlantic Ocean, then NSW equations are solved in the daughter grids in order to reduce the computation time.

2.3.3 Locations of numerical output

A first synthetic gauge (Gauge 1), located west in the vicinity of the Canary archipelago, is used to analyze the wave at the beginning of the event.

In the Caribbean Sea, the tsunami waves features close to the Guadeloupe Archipelago will be detailed. The latter is located 61°W and 16°N in the Lesser Antilles at 4600 km from the Cumbre Vieja Volcano. It is made up of four main groups of islands (Figure 7) with a total surface of 1628 km^2 . Two synthetic gauges are used in this area: Gauges 8 and 9, respectively north and south of Guadeloupe Island.

In Europe, the following synthetic gauges are used (Figures 4 and 5): Gauge 2 south of Portugal and Spain to evaluate the impact in this region, Gauge 3 in the French abyssal plain, Gauge 4 in the continental shelf off the French Atlantic coast, and Gauges 5, 6 and 7 located on the French coastline (in front of the Gulf of Morbihan, near the Gironde estuary and at the entrance of the Saint-Jean-de-Luz bay). The locations, coordinates and depths of the nine gauges are provided in Figures 4, 5 and 7 and in Table 1.

2.4 Tsunami impact assessment

Independently of the wave signal quality, an accurate assessment of the impact of a given tsunami also requires refined computations on nested refined grids including local friction coefficients and an accurate knowledge of the bathymetry and the topography. In the present study, this extensive work was performed in La Guadeloupe. For this archipelago, the transoceanic propagation is performed using the code FUNWAVE-TVD while nearshore propagation and inundation is carried out with SCHISM.

Semi-implicit Cross-scale Hydroscience Integrated System Model (SCHISM) (Zhang et al., 2016), is a derivative product of the model (Zhang and Baptista, 2008a). Although the code is able to solve the 3D Reynolds Averaged Navier-Stokes equations in hydrostatic or non-hydrostatic mode, in this study only one sigma layer is used and equations are depth integrated leading to

2D NSW equations with additional source terms for Coriolis effect, bottom friction dissipation and horizontal eddy viscosity in the momentum equation.

A hotstart is made from the wave train of the FUNWAVE-TVD grid over the SCHISM unstructured grid at $t=18900$ s (*i.e.*, 5 h 30 min after the volcano collapse). At this time, the first wave is about 180 km Eastward from La Desirade. For these specific simulations, along the Guadeloupe coastline, and for the aerial part, where specific features may obstruct the water flow inland, resolution reaches 10 m. Inundation process relies on a specific inundation algorithm that is detailed and benchmarked in Zhang and Baptista (2008b). The Manning coefficient is adjusted as a function of the land use as shown in Figure 6. For the submerged area, 10 classes of Manning values were used while 50 classes have been used for the aerial domain based on Corine Land Cover dataset (Büttner et al., 2004). In order to avoid reflection along the domain limit, boundary conditions are set to Flather type (Flather, 1976). This extensive work could not be carried out for the entire French metropolitan coastlines and therefore, in this case, maximum flow depth is used as a proxy to estimate wave impact.

3 Results

3.1 Wave source computation

Figures 8 and 9 provide the complete sequence of the computed slide contours, thicknesses and related water surface elevations for the 80 km^3 scenario, obtained in Abadie et al. (2012) and in the present computation considering a viscous flow with a viscosity of 2×10^7 Pa.s. With a higher viscosity, the slide dynamics and the resulting wave generation changes significantly compared to the inviscid case for the 80 km^3 volume case. The slide is much slower, more compact and regular in shape during the energy transfer to water surface.

The bulge, which was very developed in the previous case (Figure 10), is scarcely noticeable, although it still exists (Figure 11). The slide tip is also slower ($\sim 30 \text{ m}\cdot\text{s}^{-1}$, Figure 11(b)) compared to the original simulation ($\sim 100 \text{ m}\cdot\text{s}^{-1}$, Figure 10). The rear part of the slide, where the velocity is maximum, is still very fast ($\sim 120 \text{ m}\cdot\text{s}^{-1}$) at the initial stage of the process (Figure 11(a)) but then the maximum velocity decreases to about $50 \text{ m}\cdot\text{s}^{-1}$ (Figures 11(b) and (c)).

As a consequence of lower velocity and slide cross section reduction, the wave train generated is significantly less energetic than in the inviscid case (Figures 8 and 9). Nevertheless, the sequence of wave formation shows similarities with the generation of a first free surface positive elevation reaching 400 m in the new case (compared to 800 m previously) at $t=90$ s, which then exhibits radial decrease and frequency dispersion. Additionally, the very large depression of the mean sea water level, observed at the end of the wave generation process in the previous inviscid case, is less visible in the new simulation.

For this volume, after almost 10 minutes of propagation, the leading wave, which was previously about 80 m high, only reaches ~ 30 m in the new viscous slide case (Figure 12(c)). Note that the wave energy focus has the same direction in both cases (*i.e.*, 20° south of West).

Figure 9 is not repeated for smaller slide volumes (*i.e.*, 20 and 40 km^3) as the slide evolution and wave train formation sequence show very similar pattern as compared to the 80 km^3 case.

Nevertheless, there is a significant variation of wave amplitude depending on the slide volume considered (Figure 13). At $t=5$ min, the leading wave is ~ 80 m high in the largest slide volume scenario (*i.e.*, 80 km^3) and is only 50 m and 20 m for smaller slide volumes (40 and 20 km^3 , respectively).

3.2 Filtered solution

5 Taking the THETIS solution (Figure 13) after the initial 5 minutes of propagation, and applying the filter described in Section 2.2, the subsequent wave propagation is simulated with the Boussinesq wave model FUNWAVE-TVD with a 500 m grid for an additional 15 minutes, which is sufficient to consider the interaction between the tsunami and the nearby islands.

The effect of the filtering can be seen clearly in Figure 14, where flow near La Palma is strongly damped, but the leading waves are unaffected. As shown by Abadie et al. (2012), this has been found to better represent the first several wave fronts
10 and the overall wave field, as compared to an unfiltered solution.

The potential dispersive character of the wave train can be assessed by investigating the frequencies present in the wave spectrum. To that purpose, the wave signal close to the source in the direction of the maximum wave energy and the associated Fourier transform is presented in Figure 15. At this location, the depth is 4432 m. Linear waves can be considered as shallow water waves if their respective wave length L verifies $L > 20h$. Still considering linear wave theory, this condition is only met
15 for wave periods less than 4 min in this particular depth. Hence, the wave energy included in the frequency band 1 min to 4 min, which is obviously not negligible in Figure 15, can be considered as a superposition of intermediate water waves whose celerity depends of the period, not only on depth. For this part of the spectrum, which represents approximately 25% of the overall wave train energy, dispersion is expected to occur during the next propagation phase. Note that the frequency band concerned with dispersion will evolve during the propagation with depth increase or decrease.

20 The resulting wave elevation and velocity fields (e.g., Figure 16) is used as initial condition in FUNWAVE-TVD and Calypso.

3.3 Propagation: FUNWAVE-TVD Results

Figure 17 shows the free surface signal in several selected points (Figures 4, 5 and 7) for the 80 km^3 scenario. The surface elevation reaches 0.75 m at Gauge 2 between the south of Portugal and the north of Morocco (followed by a though of the same amplitude) and around 0.15 m at Gauge 3 in the abyssal plain of the Bay of Biscay. These results are approximately consistent
25 with a r^{-1} propagation attenuation. Gauge 4 is located right after the beginning of the continental shelf. The increase of wave height is not very significant compared to Gauge 3 due to the large wavelength. Closer to the coast, the wave shoaling appears more significant with waves reaching about 0.40 m in south Brittany, 0.25 m in the Gironde estuary, and 0.40 m in Saint-Jean-de-Luz. Taking the first free surface increase as indicator, respective tsunami arrival times are 1 h 30 min, 2 h 50 min, 3 h 30 min, 4 h 15 min, 4 h 4 min and 3 h 50 min of propagation, respectively at Gauges 2 to 7.

30 Nearby Guadeloupe (Figure 17 (G) and (H)), the waves reaching the coasts are still significant with a first elevation of 0.75 m at Gauge 8 and 0.5 m at Gauge 9. Note that the second wave, which also features a large trough appears to be the largest in this area.

The frequency content of the wave signal for the 80 km³ scenario at the different gauges is also shown on Figure 17. As expected, due to dispersion, waves involving periods smaller than 4 min, whose respective celerity is smaller, are no longer visible in the spectrum whatever the gauge considered. In front of the French Atlantic coast and in South Brittany (*i.e.*, Gauge 4 and Gauge 5, respectively), the signal is made up of two main frequency bands respectively centered on 10 min and 40 min.

5 The propagation toward the southern parts of the Bay of Biscay also shows a gradual decrease of the energy fraction associated to the highest frequencies (*i.e.*, $T < 30$ min). Hence, in Saint-Jean-de-Luz or in the Gironde Estuary, the signal is dominated by waves between 30 min to 40 min periods with also some energy remaining in the lower frequencies (mainly 100 min). This is probably due to the fact that only the largest wavelengths are able to refract enough to reach these locations. We also note that the very low frequency wave signal component ($T > 200$ min) present in Gauges 2 and 3, is decreased in Gauges 4, 5 and

10 6 and not present in Gauge 7. For Guadeloupe (Gauges 8 and 9), compared to the wave signal close to the source (*i.e.*, Gauge 1), high frequencies involving periods less than 10 min are no longer observable and the signal is mainly composed of waves between 10 min and 100 min period. This is probably a manifestation of dispersion as during the transoceanic propagation, the wave train meets several time depths larger than 6000 m.

The wave train generated by the 20 km³ slide (Figure 18) shows very similar frequency spatio-temporal evolution with less energy and no low frequency motion (*i.e.*, $T > 100$ min). [Note that we observe a lag time of 5 to 10 minutes of the arrival times between the two slide scenarios.] The case of 40 km³ is not presented as its characteristics can be deduced from the two former ones.

3.4 Comparison between FUNWAVE-TVD and Calypso

Figure 19 shows a comparison of the free surface signal computed at Gauge 6 by the reference model FUNWAVE-TVD and

20 Calypso for different grids (*i.e.*, (A) coarse grid only (Figure 4), (B) nested computation: coarse + intermediate grid, (C) coarse + intermediate + fine grid (Figure 4 and Figure 5). We recall here that Calypso was run in Boussinesq mode on the coarsest grid and in shallow water mode (non-dispersive) in the finer grids. The solutions computed by the two models on the finest resolution appear very similar at least for the three first waves (Figure 19 (C)). The comparison of panel (A), (B) and (C) gives an idea of the model convergence in the context of nested computations. On that particular point, the solutions computed by

25 Calypso show less differences with grid resolution than FUNWAVE-TVD. For instance, the wave signal obtained with the intermediate grid is already close to the one obtained with the finest grid. This is not the case of FUNWAVE-TVD, which, with the coarsest grid, shows a wave signal with a clear cut in the high frequencies also visible in the spectra (Figure 19 A').

3.5 Impact assessment

Figures 20 and 21 show the maximal simulated sea surface elevation for the 80 km³ scenario computed by FUNWAVE-TVD at

30 an oceanic scale, from the source to the studied areas. A gradual decrease of the maximum wave height due to radial attenuation can be observed, modulated by energy focusing in narrow directions as already pointed out in Løvholm et al. (2008).

Territories close to the generation area are highly affected. The first locations impacted are the other surrounded Canary Islands, nearby archipelagos (Madeira Island, Cape Verde) and west Africa, especially western Sahara (Dakhla city - 100,000

inhabitants) and specific parts of Morocco by refraction on shallower part of the local bathymetry (Agadir, Essaouira, Safi - 800,000 inhabitants overall). In the latter areas, the waves are larger than 5 m.

The wave propagating toward Europe is obviously less energetic than in the western direction on which the main part of the energy is focused (Figure 20). Nevertheless, Portugal, the western coast of Spain and to a lesser extent, the southern coasts of Ireland and England are significantly affected. Lisbon, Porto, Vigo and Corunna appear to be the main cities at risk for the 80 km³ tsunami scenario with a surface elevation of about 2 m. When approaching the French Atlantic coastline (Figure 21), the wave experiences shoaling on the continental shelf and the wave height slightly increases. Even though France is less affected than the previous territories, as the coasts are protected by the Iberian Peninsula, waves reach up to 1 m at various points located north of the Gironde Estuary up to the northern part of the Brittany peninsula.

Figure 22 shows the distribution of the maximum surface elevation in the most refined domains of Calypso. A running average on 10 points has been applied to present more readable results. The flow depth at -5 m is in average 1 m in the Morbihan area with a one specific location (latitude 47.3 °N) submitted to a large 3 m flow depth. In the Gironde estuary and Saint-Jean-de-Luz areas, the flow depths are less than 1 m except in north part of the Gironde estuary and the south part of Saint-Jean-de-Luz where about 1 m flow depth is found.

For the Guadeloupe Archipelago, Figure 23 shows the spatial distribution of the maximum surface elevation for the town of Sainte-Anne (a) and the town of Saint-François (b). The extent of inundation illustrates the potential dramatic consequences and the need for evacuation of town centers. Incoming waves may reach several meters at the shore line, threatening the fisheries facilities of Sainte-Anne and the district of La Coulée in Saint-François. Urban areas are particularly exposed such as Saint-François, les Saintes, Sainte-Anne or Le Moule. As a consequence, the 80 km³ scenario should be considered as a major tsunami with catastrophic consequences.

Regarding the 20 km³ scenario (inundation maps not shown here), the overall flooded surface would reach about 9 km² and therefore this event should be already considered as an important tsunami event with an appropriate warning and evacuation of beaches, seafront, and close shore areas. In the 40 km³ scenario (inundation maps not shown here), the flooded surface may reach 22 km² including potentially dense urban areas such as Saint François or Terre-de-Haut in les Saintes.

4 Discussion

The main goal of the present study was to improve the state of the art for the potential La Palma tsunami source and to use this new proposed scenario to perform an impact assessment for Europe and particularly for French territories. Such high return period events with potentially catastrophic consequences are particularly important to study as accurately as possible since, due to the difficulty to assess their precise return period, they often serve as reference for hazard mitigation study (Tehrani et al., 2015).

The first result of the present work is the new tsunami source computed by Navier-Stokes simulation (for the initial 5 minutes), *ad hoc* filtering and Boussinesq wave propagation (for the following 15 minutes). As stressed previously, this source is more realistic than that considered in Abadie et al. (2012) due to the much larger viscosity used which is assumed to

better approximate a granular slide. To support this, a comparison with existing granular experiments was performed, and the results extrapolated at real scale using a Froude/Reynolds similitude. Based on this new computation, we observed a significant diminution of the initial wave compared to the first assessment proposed in Abadie et al. (2012) (*i.e.*, wave height approximately half that of previously computed after 10 minutes of propagation for the 80 km³ scenario). The new source
5 (after filtering and propagation in the Boussinesq model) as well as comprehensive data on the slide are made available through the SEA scieNtific Open data Edition (SEANOE) portal Abadie et al. (2019). This data allow potential users to either compute the slide on their own and do the whole sequence of computation, or start from the already filtered wave solution to carry out propagation and impact studies.

The second result is a presumably better impact assessment in Europe generally, and a new detailed impact assessment for
10 France and Guadeloupe. Considering a credible yet extreme 80 km³ scenario, it is shown that the impact on the French Atlantic coast would remain moderate, but could also be significant on the coast of Portugal and be very significant in the Guadeloupe Archipelago. A direct comparison with Tehranirad et al. (2015) is difficult as the areas of interest were not the same in the two papers. Nevertheless, for instance, Tehranirad et al. (2015) found waves up to 10 m in the vicinity of Western Sahara, and 5 m waves on the Portuguese coast while they respectively reach 5 m and about 2 m in the present work, so the decrease is clear
15 also far from the source.

Regarding the physics of the problem and the modeling strategy, the analysis of the wave signal obtained with FUNWAVE-TVD close to the source confirmed the presence of high frequency waves prone to dispersion in the depths encountered in this area of the Atlantic Ocean. Hence, physically, dispersion is expected and theoretically an appropriate Boussinesq modeling is required. The results obtained with FUNWAVE-TVD appear consistent with what is physically expected, high frequency
20 waves progressively disappearing from the spectra during the propagation. The comparison between FUNWAVE-TVD and Calypso, which showed a good agreement, allowed to mutually validate the models and secure the results obtained (even though some discrepancies remain in the low frequency band). The methodology of performing transoceanic simulation in Boussinesq mode and shifting to NSW mode in the nearshore area is also validated through the good match observed in Figure 19 (C). This figure also stresses the effect of resolution in tsunami propagation simulations. Indeed, such computations are
25 generally CPU expensive and the mesh is often adapted to this constraint, but Figure 19 shows that the results largely vary with resolution. Therefore, convergence of the results is also a critical aspect to verify and demonstrate in order to obtain accurate results. In the present study, both Boussinesq models are found to converge approximately toward the same solution which appears encouraging.

Of course there are some limitations in this study which may provide the basis for future improvements. First, this study
30 should not be considered as a hazard assessment *stricto-sensu* because the return period aspect is not considered and the sensitivity in the landslide parameters not covered extensively. For a review on Probabilistic Tsunami Hazard Analysis (PTHA) methods, the reader is referred to Grezio et al. (2017) for instance. Instead, the current study presents plausible particular scenarios based on state-of-the-art numeral models. Note that the Navier-Stokes model, which provides interesting information for this kind of processes, is still too heavy to be employed in PTHA computations.

Second, we used a glass beads based experiment (Viroulet et al., 2013) to calibrate the Navier-Stokes simulation of the La Palma slide. If this is an improvement compared to the very coarse inviscid initial estimation (Abadie et al., 2012), which should be more considered as a worst case, such a laboratory experiment still is a huge simplification of the complexity expected in a real volcano collapse. An accurate description of such a complex process at real scale is still beyond the capabilities of current models. Therefore, there is here a very important source of uncertainty which the reader has to be aware of and this uncertainty propagates and affects the impact results. Furthermore, this work is not an hazard study which could have been performed, for instance, by considering different values of slide viscosity but at much higher computational cost. The position of this paper is rather to give an illustration of what could be expected from such an event by presenting results at least consistent with the current state of the art in terms of laboratory experiments and therefore propose an improvement compared to the previous published results on that case.

The present work did not explicitly take into account the possibility of a retrogressive scenario. Whether the flank collapse occurs en masse or in successive stages is obviously crucial in terms of wave generation. In this study, we proposed several slide volume scenarios which can be used for a crude assessment of the wave reduction in case the collapse occurred as several separate events with no interactions between the successive slides (e.g., the 20 km³ scenario may give an idea of what would happen if a 80 km³ slide were occurring progressively or in sequence). The interactions could be left for future research even though field evidences tend to show that these collapses may have occurred as separate events (Wynn and Masson, 2003) rather than in an actual retrogressive way.

On the other hand, the extreme scenario of 450 km³ as studied in (Ward and Day, 2001; Løvholt et al., 2008; Abadie et al., 2012; Tehranirad et al., 2015) is not computed in the present. This extreme scenario however remains possible as evidenced by the volumes of the deep water deposits identified in Masson et al. (2002) around this archipelago. Nevertheless, we focused on the 80 km³ as it is consistent with the size of the deposits identified at the toe of the volcano, as possibly corresponding to its last massive flank collapse (about 300,000 years ago).

5 Conclusions

The wave generated by a potential Cumbre Vieja volcano flank collapse and its impact in Europe, and Guadeloupe was studied in this work. The source computation used an improved characterization of the slide rheology compared to previous works. Moreover, the subsequent propagation was performed using different models which allows for a model comparison on a real configuration. The main conclusions of the work performed are the following:

- The new wave source is reduced in half compared to previous estimations mainly due to the larger value of slide viscosity used in this work,
- The wave impact is still very significant on nearby areas, or on more remote coasts, such as Guadeloupe, located on the path of the maximum wave energy for the maximum slide volume considered here (*i.e.*, 80 km³). Smaller slide volumes (*i.e.*, 40 km³ and 20 km³) would have more moderate impacts on these remote areas.

- In Europe, the impact may be considered as moderate to significant in the most exposed areas such as some areas in Portugal and Spain, and weak to moderate along the French Atlantic coast.
- The tsunami source calculated in this paper after 15 minutes of propagation in FUNWAVE-TVD and proposed to the community in the SEANOE repository is dispersive and therefore we recommend to use appropriate models (e.g., Boussinesq models) to propagate further this source in future studies.
- The comparison of the Boussinesq models (*i.e.*, FUNWAVE-TVD and Calypso) mutually validates the models on this particular case and secure the results obtained. This comparison also stresses the importance of model resolution and the possibility to turn off the dispersive terms in the model after a certain distance of propagation.

Data availability. The new calibrated source (after filtering and propagation in the Boussinesq model) for the La Palma tsunami is made available through the SEANOE portal Abadie et al. (2019).

Author contributions. **S.M. Abadie:** Conceptualization, Software, Formal analysis, Investigation, Writing - Original Draft, Writing - Review Editing, Visualization, Supervision. **A. Paris:** Software, Formal analysis, Review Editing, Visualization. **R. Ata:** Software, Formal analysis. **S. Le Roy:** Software, Formal analysis. **G. Arnaud:** Software, Formal analysis, Visualization. **A. Poupardin:** Software, Formal analysis. **L. Clous:** Software, Formal analysis. **Ph. Heinrich:** Software, Formal analysis, Supervision. **J. Harris:** Software, Formal analysis, Data curation, Writing - Review Editing, Visualization. **R. Pedreros:** Software, Formal analysis, Visualization. **Y. Krien:** Software, Formal analysis. This work is based on simulations results obtained with different models : THETIS was run by UPPA, FUNWAVE-TVD was run by the LHSV for the transition from THETIS to the propagation models and by BRGM for the propagation study, Calypso was run by CEA and SCHISM by Université des Antilles. In the framework of the TANDEM project, simulations were also performed with TELEMAC2D by Electricité De France (EDF) on this case, but the results were not presented here to lighten the paper.

Acknowledgements. This work has been performed in the framework of the PIA RSNR French program TANDEM (Grant no: ANR-11-RSNR-00023-01) and as a part of the project C3AF, funded by the Electricité Réseau Distribution France (ERDF) and the Region Guadeloupe. Part of this work was supported by the Laboratoire de Recherche Conventionné (LRC) CEA-Ecole Normale Supérieure (ENS) Yves Rocard.

Acronyms

ADI Alternating Direction Implicit.

EDF Electricité De France.

ENS Ecole Normale Supérieure.

5 **ERDF** Electricité Réseau Distribution France.

GMRT Global Multi Resolution Topography.

LRC Laboratoire de Recherche Conventionné.

MPI Message Passing Interface.

NSW Non-Linear Shallow Water.

10 **NTHMP** National Tsunami Hazard Mitigation Program.

SCHISM Semi-implicit Cross-scale Hydroscience Integrated System Model.

SEANOE SEA scieNtific Open data Edition.

TANDEM Tsunamis in the Atlantic and the English ChaNnel Definition of the Effects through numerical Modeling.

TVD Total Variation Diminishing.

15 **VOF** Volume-Of-Fluid.

References

- Abadie, S., Morichon, D., Grilli, S., and Glockner, S.: Numerical simulation of waves generated by landslides using a multiple-fluid Navier-Stokes model, *Coastal Engineering*, 57, 779–794, 2010.
- Abadie, S., Harris, J. C., Grilli, S. T., and Fabre, R.: Numerical modeling of tsunami waves generated by the flank collapse of the
5 Cumbre Vieja Volcano (La Palma, Canary Islands): Tsunami source and near field effects, *Journal of Geophysical Research*, 117, <https://doi.org/10.1029/2011JC007646>, <http://www.agu.org/pubs/crossref/2012/2011JC007646.shtml>, 2012.
- Abadie, S., Paris, A., Ata, R., Roy, S. L., Arnaud, G., Poupardin, A., Clous, L., Heinrich, P., Harris, J., Pederos, R., and Krien, Y.: La Palma landslide tsunami: computation of the tsunami source with a calibrated multi-fluid Navier-Stokes model and wave impact assessment with propagation models of different types, SEANOE, 2019.
- 10 Athukorala, P.-c. and Resosudarmo, B. P.: The Indian Ocean tsunami: Economic impact, disaster management, and lessons, *Asian Economic Papers*, 4, 1–39, 2005.
- Büttner, G., Feranec, J., Jaffrain, G., Mari, L., Maucha, G., and Soukup, T.: The CORINE land cover 2000 project, *EARSeL eProceedings*, 3, 331–346, 2004.
- Chen, Q.: Fully nonlinear Boussinesq-type equations for waves and currents over porous beds, *Journal of Engineering Mechanics*, 132,
15 220–230, 2006.
- Clous, L. and Abadie, S.: Simulation of energy transfers in waves generated by granular slides, *Landslides*, <https://doi.org/10.1007/s10346-019-01180-0>, 2019.
- Elsworth, D. and Day, S. J.: Flank collapse triggered by intrusion: the Canarian and Cape Verde Archipelagoes, *Journal of Volcanology and Geothermal Research*, 94, 323–340, 1999.
- 20 Flather, R.: A tidal model of the northwest European continental shelf, *Mem. Soc. Roy. Sci. Liege*, 10, 141–164, 1976.
- Gailler, A., Calais, E., Hébert, H., Roy, C., and Okal, E.: Tsunami scenarios and hazard assessment along the northern coast of Haiti, *Geophysical Journal International*, 203, 2287–2302, 2015.
- Gisler, G., Weaver, R., and Gittings, M. L.: SAGE calculations of the tsunami threat from La Palma, *Sci. Tsunami Hazards*, 24, 288–312, 2006.
- 25 Grezio, A., Babeyko, A., Baptista, M. A., Behrens, J., Costa, A., Davies, G., Geist, E. L., Glimsdal, S., González, F. I., Griffin, J., et al.: Probabilistic tsunami hazard analysis: Multiple sources and global applications, *Reviews of Geophysics*, 55, 1158–1198, 2017.
- Grilli, S. T., Harris, J. C., Bakhsh, T. S. T., Masterlark, T. L., Kyriakopoulos, C., Kirby, J. T., and Shi, F.: Numerical simulation of the 2011 Tohoku tsunami based on a new transient FEM co-seismic source: Comparison to far-and near-field observations, *Pure and Applied Geophysics*, 170, 1333–1359, 2013.
- 30 Grilli, S. T., Grilli, A. R., David, E., and Coulet, C.: Tsunami hazard assessment along the north shore of Hispaniola from far-and near-field Atlantic sources, *Natural Hazards*, 82, 777–810, 2016.
- Grilli, S. T., Shelby, M., Kimmoun, O., Dupont, G., Nicolsky, D., Ma, G., Kirby, J. T., and Shi, F.: Modeling coastal tsunami hazard from submarine mass failures: effect of slide rheology, experimental validation, and case studies off the US East Coast, *Natural Hazards*, 86, 353–391, 2017.
- 35 Grilli, S. T., Tappin, D. R., Carey, S., Watt, S. F., Ward, S. N., Grilli, A. R., Engwell, S. L., Zhang, C., Kirby, J. T., Schambach, L., et al.: Modelling of the tsunami from the December 22, 2018 lateral collapse of Anak Krakatau volcano in the Sunda Straits, Indonesia, *Scientific reports*, 9, 1–13, 2019.

- Hebert, H.: the TANDEM project Team, 2014, Project TANDEM (Tsunamis in the Atlantic and the English Channel: Definition of the Effects through numerical Modeling)(2014-2018): a French initiative to draw lessons from the Tohoku-oki tsunami on French coastal nuclear facilities, EGU, 2014.
- Horrillo, J., Wood, A., Kim, G.-B., and Parambath, A.: A simplified 3-D Navier-Stokes numerical model for landslide-tsunami: Application to the Gulf of Mexico, *Journal of Geophysical Research: Oceans*, 118, 6934–6950, 2013.
- Jop, P., Forterre, Y., and Pouliquen, O.: A constitutive law for dense granular flows, *Nature*, 441, 727, 2006.
- Kennedy, A. B., Kirby, J. T., Chen, Q., and Dalrymple, R. A.: Boussinesq-type equations with improved nonlinear performance, *Wave Motion*, 33, 225–243, 2001.
- Kim, J., Løvholt, F., Issler, D., and Forsberg, C. F.: Landslide Material Control on Tsunami Genesis—The Storegga Slide and Tsunami (8,100 Years BP), *Journal of Geophysical Research: Oceans*, 2019.
- Kirby, J. T., Shi, F., Tehranirad, B., Harris, J. C., and Grilli, S. T.: Dispersive tsunami waves in the ocean: Model equations and sensitivity to dispersion and Coriolis effects, *Ocean Modelling*, 62, 39–55, 2013.
- Kirby, J. T., Shi, F., Nicolsky, D., and Misra, S.: The 27 April 1975 Kitimat, British Columbia, submarine landslide tsunami: a comparison of modeling approaches, *Landslides*, 13, 1421–1434, 2016.
- Lagrée, P.-Y., Staron, L., and Popinet, S.: The granular column collapse as a continuum: validity of a two-dimensional Navier–Stokes model with a $\mu(I)$ -rheology, *Journal of Fluid Mechanics*, 686, 378–408, 2011.
- Løvholt, F., Pedersen, G., and Gisler, G.: Oceanic propagation of a potential tsunami from the La Palma Island, *Journal of Geophysical Research: Oceans*, 113, 2008.
- Løvholt, F., Bondevik, S., Laberg, J. S., Kim, J., and Boylan, N.: Some giant submarine landslides do not produce large tsunamis, *Geophysical Research Letters*, 44, 8463–8472, 2017.
- Ma, G., Kirby, J. T., Hsu, T.-J., and Shi, F.: A two-layer granular landslide model for tsunami wave generation: Theory and computation, *Ocean Modelling*, 93, 40–55, 2015.
- Mader, C. L.: Modeling the La Palma landslide tsunami, *Science of Tsunami Hazards*, 19, 150–170, 2001.
- Masson, D., Watts, A., Gee, M., Urgeles, R., Mitchell, N., Le Bas, T., and Canals, M.: Slope failures on the flanks of the western Canary Islands, *Earth-Science Reviews*, 57, 1–35, 2002.
- Mikami, T., Shibayama, T., Esteban, M., and Matsumaru, R.: Field survey of the 2011 Tohoku earthquake and tsunami in Miyagi and Fukushima prefectures, *Coastal Engineering Journal*, 54, 1250 011–1, 2012.
- Pararas-Carayannis, G.: Evaluation of the threat of mega tsunami generation from postulated massive slope failures of island stratovolcanoes on La Palma, Canary Islands, and on the island of Hawaii, *Science of Tsunami Hazards*, 20, 251–277, 2002.
- Paris, A., Heinrich, P., Paris, R., and Abadie, S.: The December 22, 2018 Anak Krakatau, Indonesia, Landslide and Tsunami: Preliminary Modeling Results, *Pure and Applied Geophysics*, 177, 571–590, 2020.
- Paris, R., Ramalho, R. S., Madeira, J., Ávila, S., May, S. M., Rixhon, G., Engel, M., Brückner, H., Herzog, M., Schukraft, G., et al.: Mega-tsunami conglomerates and flank collapses of ocean island volcanoes, *Marine Geology*, 395, 168–187, 2018.
- Pedersen, G. and Løvholt, F.: Documentation of a global Boussinesq solver, Tech. rep., Department of Mathematics, University of Oslo, Norway, 2008.
- Poupardin, A., Heinrich, P., Frère, A., Imbert, D., Hébert, H., and Flouzat, M.: The 1979 submarine landslide-generated tsunami in Mururoa, French Polynesia, *Pure and Applied Geophysics*, 174, 3293–3311, 2017.

- Poupardin, A., Heinrich, P., Hébert, H., Schindelé, F., Jamelot, A., and Reymond, D.: Traveltime delay relative to the maximum energy of the wave train for dispersive tsunamis propagating across the Pacific Ocean: the case of 2010 and 2015 Chilean Tsunamis, *Geophysical Journal International*, 214, 1538–1555, 2018.
- Ryan, W. B. F., Carbotte, S. M., Coplan, J. O., O’Hara, S., Melkonian, A., Arko, R., Weissel, R. A., Ferrini, V., Goodwillie, A., Nitsche, F., Bonczkowski, J., and Zemsky, R.: Global Multi-Resolution Topography synthesis, *Geochemistry, Geophysics, Geosystems*, 10, <https://doi.org/10.1029/2008GC002332>, q03014, 2009.
- Shi, F., Kirby, J. T., Harris, J. C., Geiman, J. D., and Grilli, S. T.: A high-order adaptive time-stepping TVD solver for Boussinesq modeling of breaking waves and coastal inundation, *Ocean Modelling*, 43-44, 36–51, 2012.
- Si, P., Shi, H., and Yu, X.: Development of a mathematical model for submarine granular flows, *Physics of Fluids*, 30, 083 302, 2018a.
- 10 Si, P., Shi, H., and Yu, X.: A general numerical model for surface waves generated by granular material intruding into a water body, *Coastal Engineering*, 142, 42–51, 2018b.
- Tappin, D., Grilli, S., Ward, S., Day, S., Grilli, A., Carey, S., Watt, S., Engwell, S., and Muslim, M.: The devastating eruption tsunami of Anak Krakatau - 22nd December 2018, in: *EGU General Assembly Conference Abstracts*, vol. 21 of *EGU General Assembly Conference Abstracts*, p. 18326, 2019.
- 15 Tehranirad, B., Shi, F., Kirby, J., Harris, J., and Grilli, S.: Tsunami benchmark results for fully nonlinear Boussinesq wave model FUNWAVE-TVD, Tech. rep., Version 1.0. Technical report, No. CACR-11-02, Center for Applied Coastal Research, University of Delaware, 2011.
- Tehranirad, B., Harris, J. C., Grilli, A. R., Grilli, S. T., Abadie, S., Kirby, J. T., and Shi, F.: Far-Field Tsunami Impact in the North Atlantic Basin from Large Scale Flank Collapses of the Cumbre Vieja Volcano, La Palma, *Pure and Applied Geophysics*, 172, pp 3589–3616, <https://doi.org/10.1007/s00024-015-1135-5>, 2015.
- 20 Viroulet, S., Sauret, A., Kimmoun, O., and Kharif, C.: Granular collapse into water: toward tsunami landslides, *Journal of visualization*, 16, 189–191, 2013.
- Viroulet, S., Sauret, A., and Kimmoun, O.: Tsunami generated by a granular collapse down a rough inclined plane, *EPL (Europhysics Letters)*, 105, 34 004, 2014.
- Ward, S. N. and Day, S.: Cumbre Vieja volcano—potential collapse and tsunami at La Palma, Canary Islands, *Geophysical Research Letters*, 28, 3397–3400, 2001.
- 25 Wei, G., Kirby, J. T., Grilli, S. T., and Subramanya, R.: A fully nonlinear Boussinesq model for surface waves. Part 1. Highly nonlinear unsteady waves, *Journal of Fluid Mechanics*, 294, 71–92, 1995.
- Wynn, R. and Masson, D.: Canary Islands landslides and tsunami generation: Can we use turbidite deposits to interpret landslide processes?, in: *Submarine mass movements and their consequences*, pp. 325–332, Springer, 2003.
- 30 Zhang, Y. and Baptista, A. M.: SELFE: a semi-implicit Eulerian–Lagrangian finite-element model for cross-scale ocean circulation, *Ocean modelling*, 21, 71–96, 2008a.
- Zhang, Y. J. and Baptista, A. M.: An efficient and robust tsunami model on unstructured grids. Part I: Inundation benchmarks, *Pure and Applied Geophysics*, 165, 2229–2248, 2008b.
- Zhang, Y. J., Ye, F., Stanev, E. V., and Grashorn, S.: Seamless cross-scale modeling with SCHISM, *Ocean Modelling*, 102, 64–81, 2016.

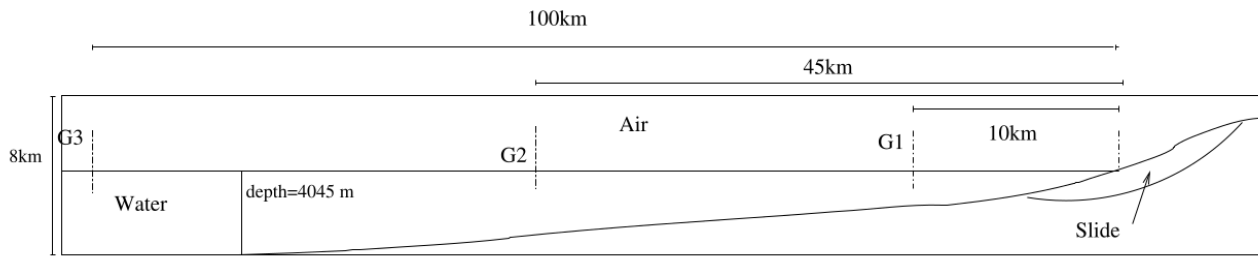


Figure 1. Cross section of the 80 km³ La Palma slide scenario considered in Abadie et al. (2012).

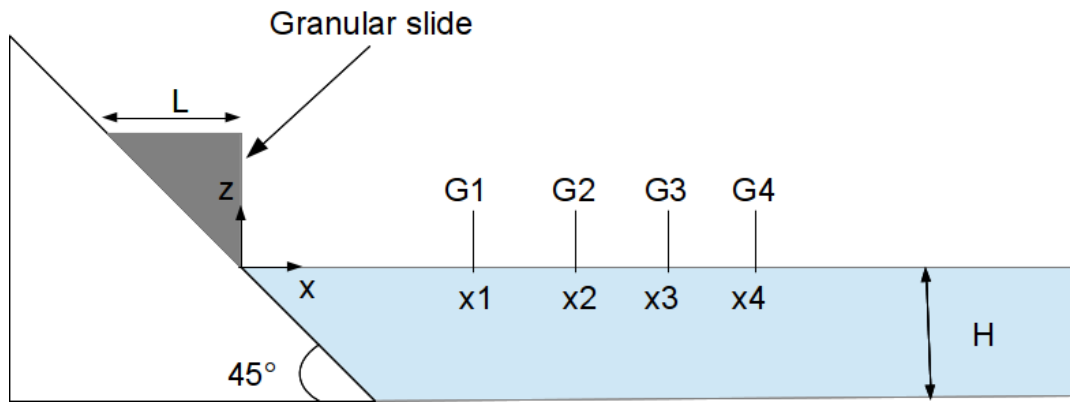


Figure 2. Sketch of the experiment performed in Viroulet et al. (2014).

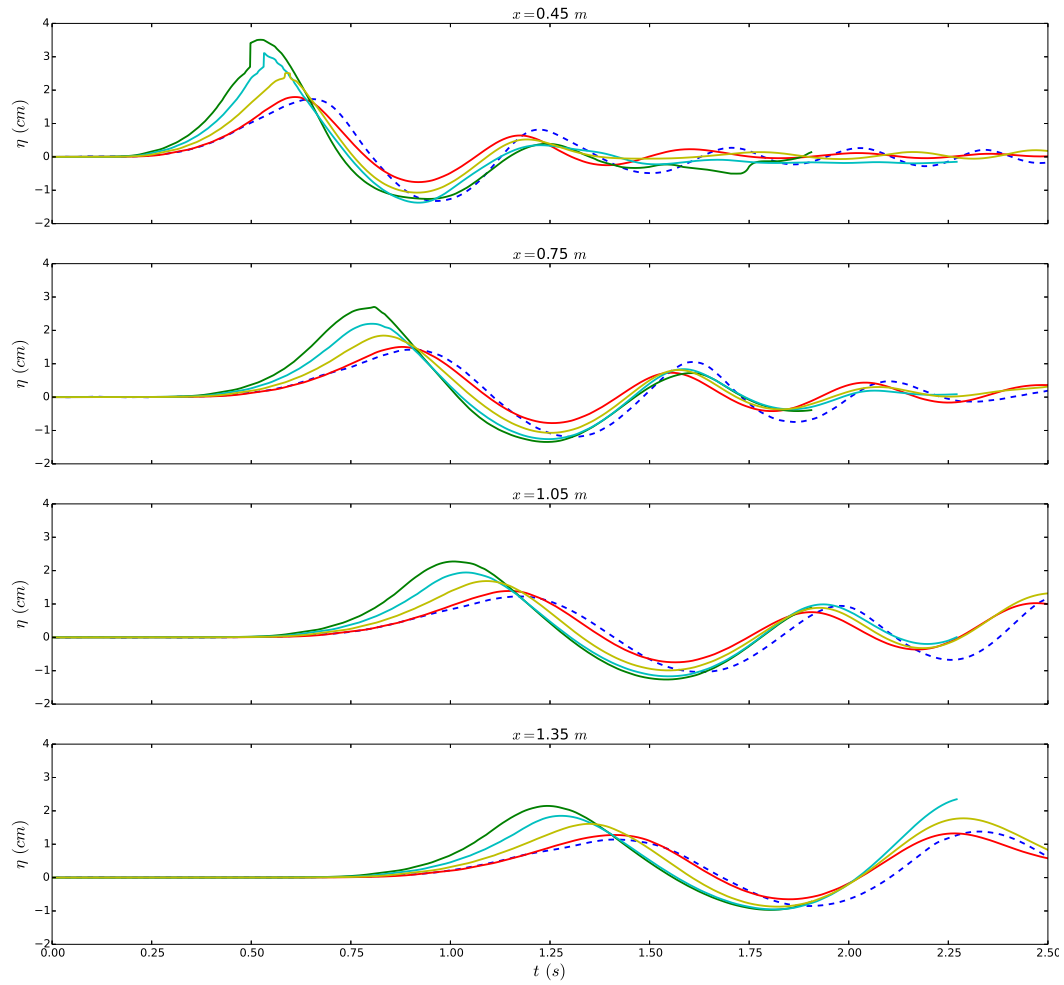


Figure 3. Free-surface elevation at the gauges for the experiment (blue dashed line) and the simulations for different values of viscosity, $\mu=1 \text{ Pa}\cdot\text{s}$: green line, $\mu=2 \text{ Pa}\cdot\text{s}$: cyan line, $\mu=5 \text{ Pa}\cdot\text{s}$: yellow line and $\mu=10 \text{ Pa}\cdot\text{s}$: red line.

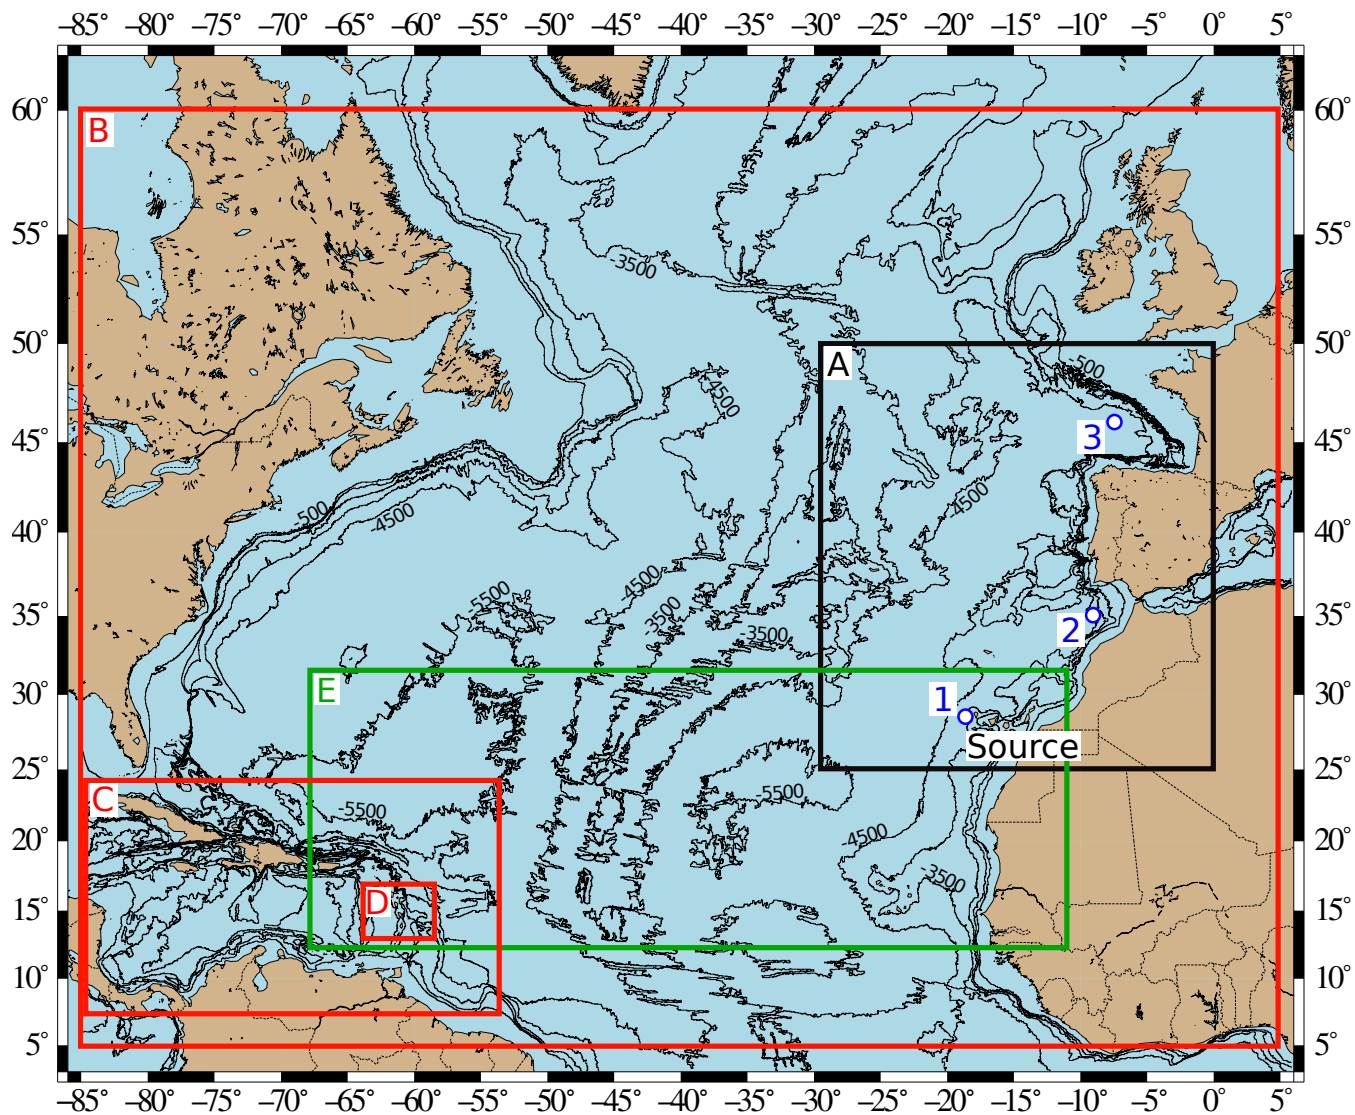


Figure 4. Computational domains for Calypso (2-km (A) resolution in black), FUNWAVE-TVD (2.7 km (B), 930 m (C) and 310 m (D) in red) and SCHISM (in green (E); variable resolution). Bathymetric contours range from -500 m to -7500 m, every 1000 m. Gauges 1, 2 and 3 are marked by white and blue points.

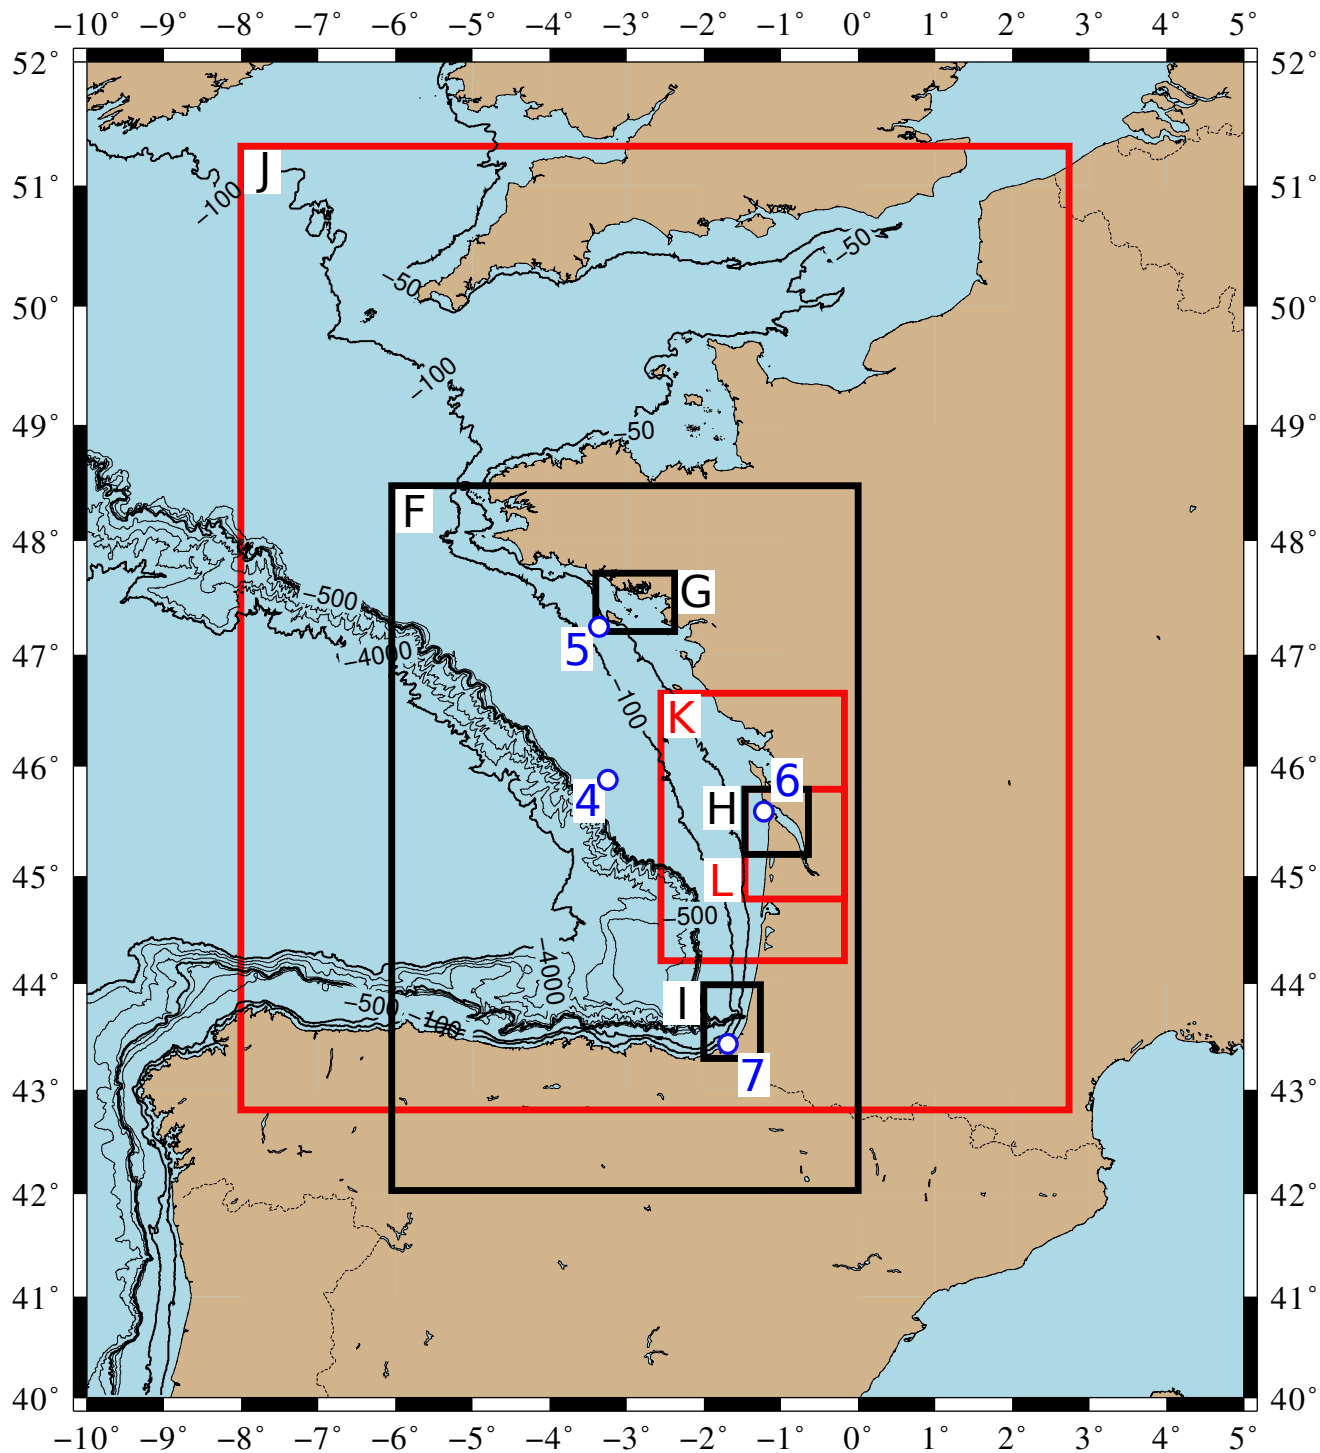


Figure 5. Computational domains for Calypso (500-m resolution (F), 125 m (G) or 32.5 m (H and I) in black) and FUNWAVE-TVD (450 m (J), 110 m (K) and 20 m (L) in red). After the -50 m contour, bathymetric contours range from -100 m to -500 m every 100 m, then from -1000 m to -4000 m every 1000 m. Gauges 4, 5, 6 and 7 are marked by the white and blue points.

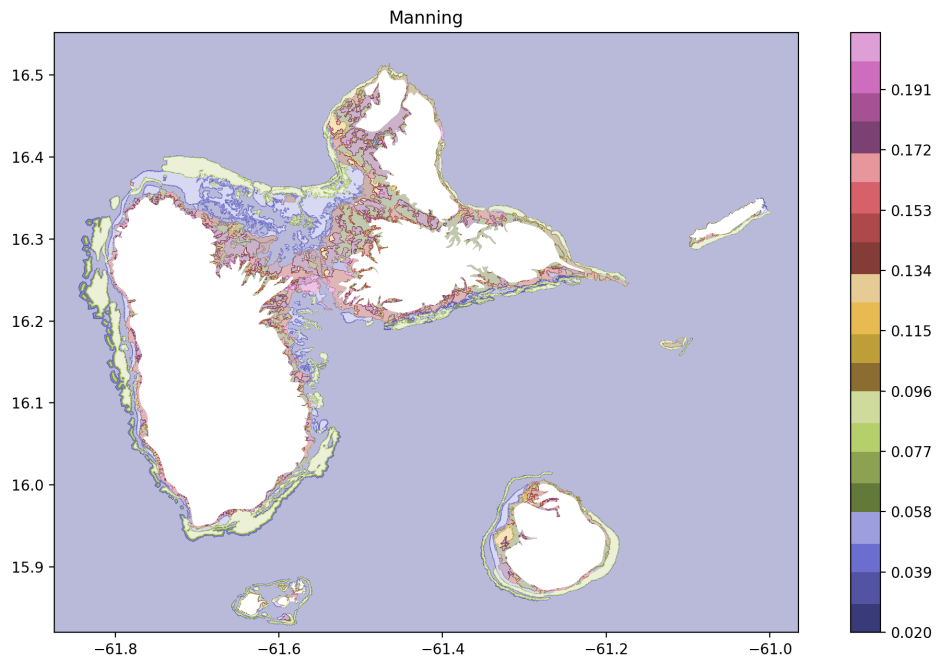


Figure 6. Values of Manning coefficient as function of land use in Guadeloupe.

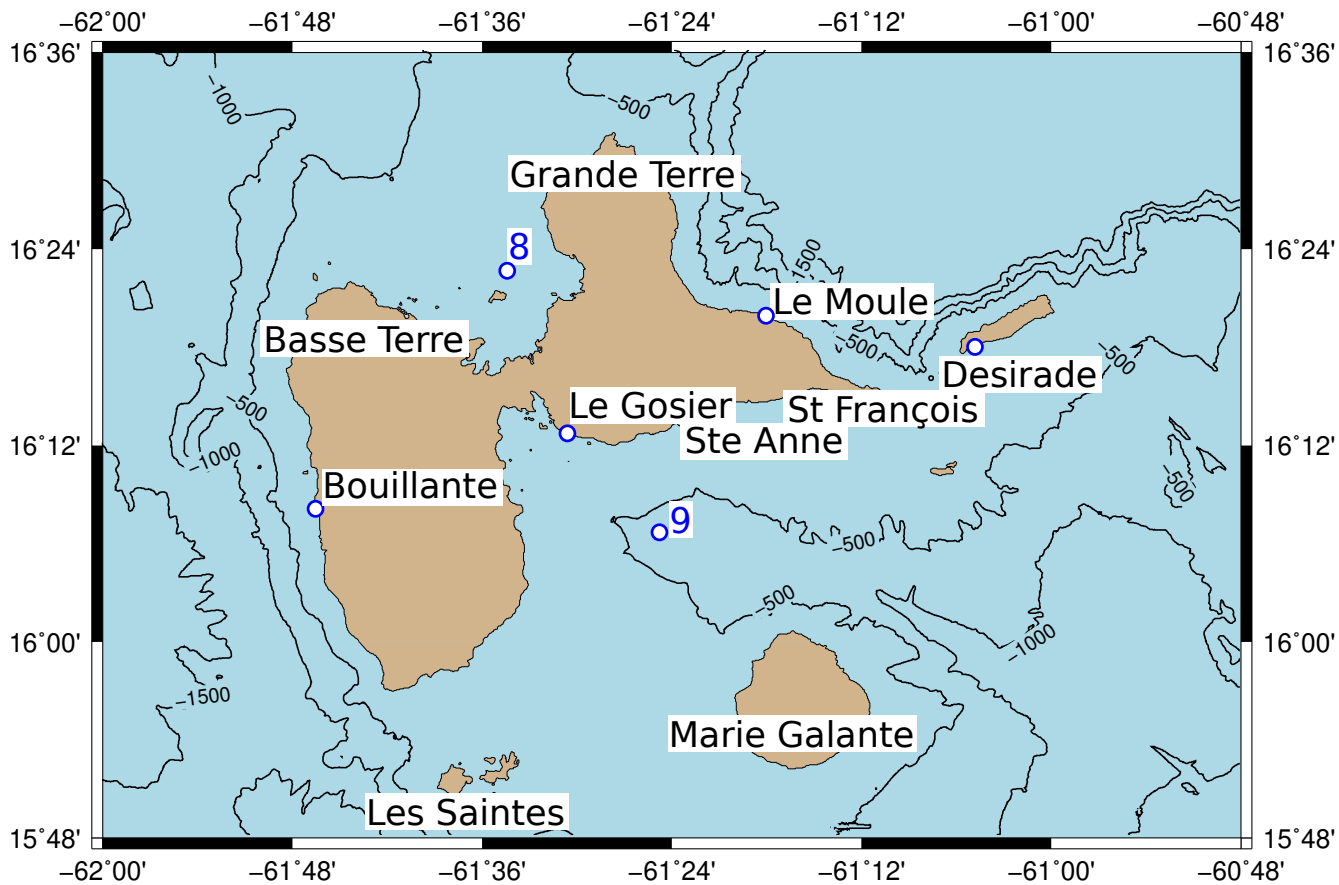


Figure 7. Guadeloupe Archipelago and locations of the Gauges 8 and 9 and of the cities of Bouillante, Le Gosier, Le Moule, and Desirade.

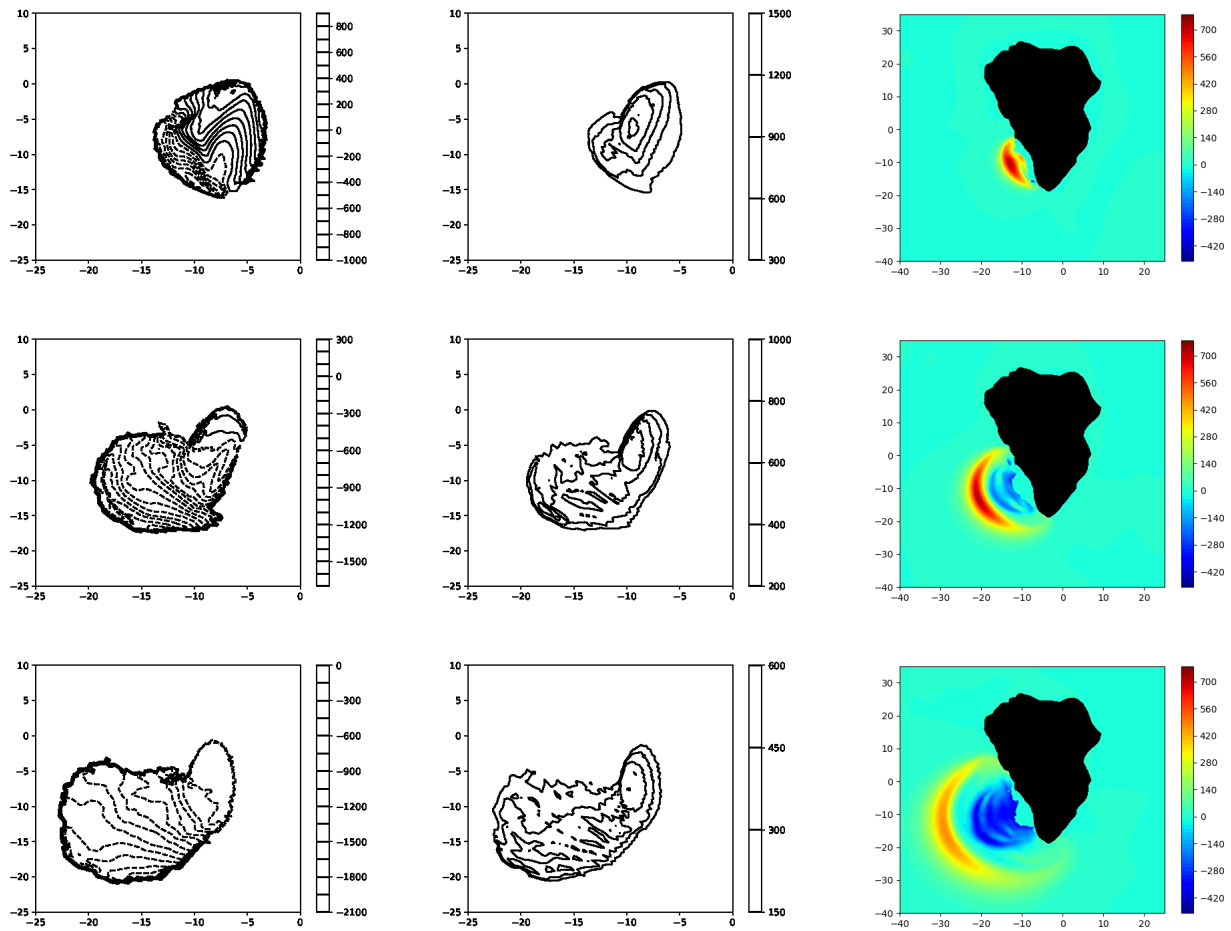


Figure 8. Snapshots of slide upper free surface, thickness and corresponding water free surface for the inviscid case (Abadie et al., 2012) (left, middle, right) respectively) for the 80 km^3 scenario at $t=60 \text{ s}$ (row 1), 120 s (row 2), 180 s (row 3).

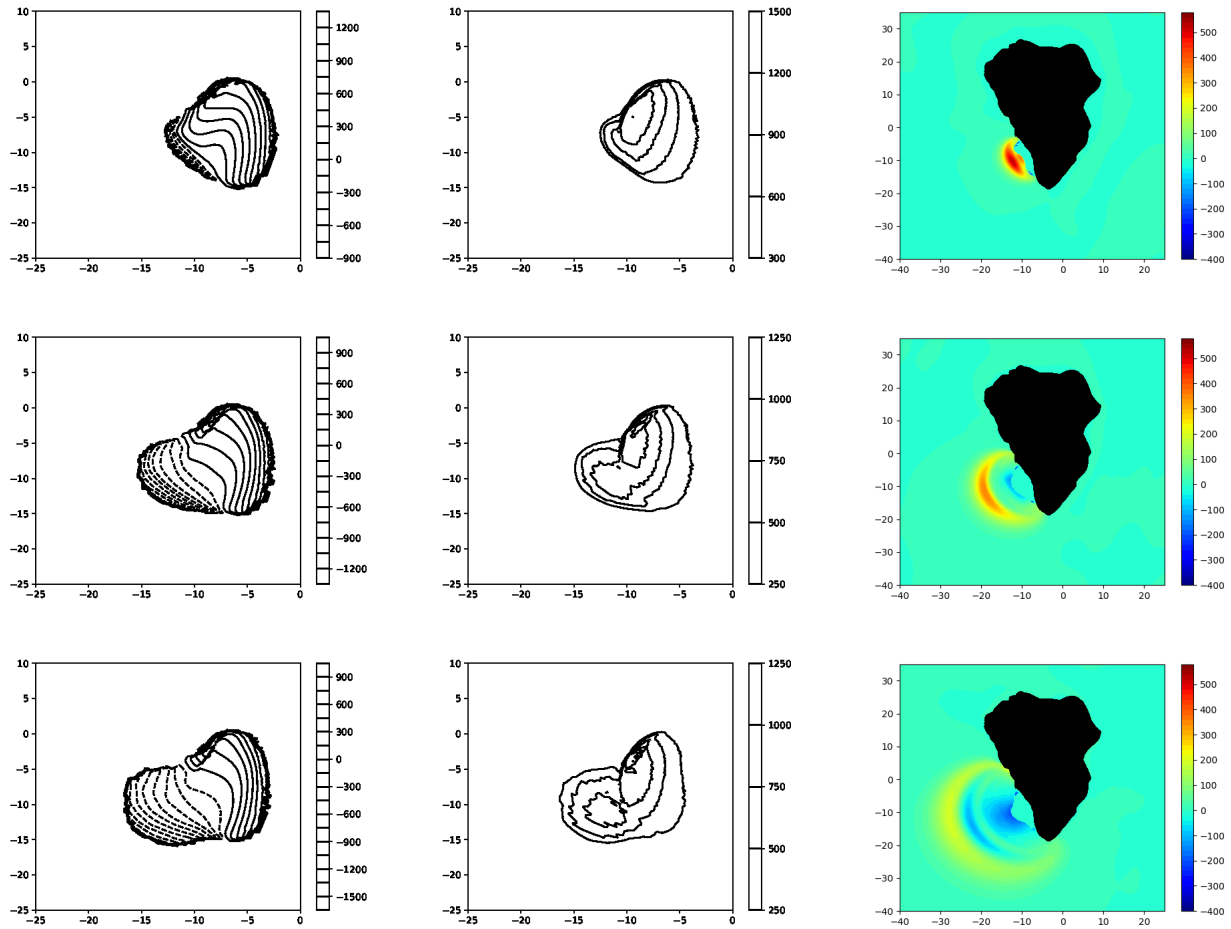


Figure 9. Snapshots of slide upper free surface, thickness and corresponding water free surface for the present study (*i.e.*, viscous slide with a viscosity of 2×10^7 Pa-s, (left, middle, right) respectively) for the 80 km^3 scenario at $t=60$ s (row 1), 120 s (row 2), 180 s (row 3).

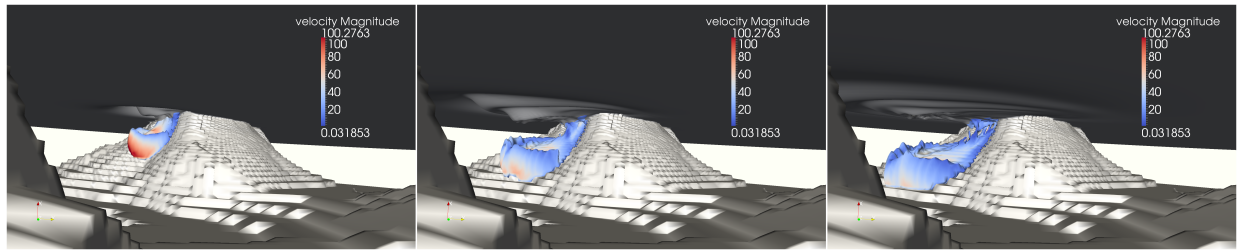


Figure 10. THETIS 3D computations for 80 km^3 slide volume. Snapshots of 0.1 slide volume fraction contour colored by velocity magnitude, at : t=100 s (left), 200 s (middle) and 300 s (right). Inviscid slide (Abadie et al., 2012).

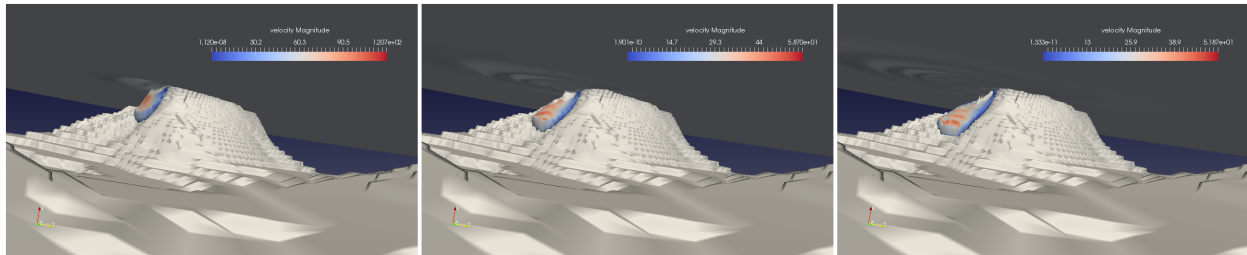


Figure 11. THETIS 3D computations for 80 km^3 slide volume. Snapshots of 0.1 slide volume fraction contour colored by velocity magnitude, at : $t=102 \text{ s}$ (left), 230 s (middle) and 342 s (right). Slide viscosity $2 \times 10^7 \text{ Pa}\cdot\text{s}$.

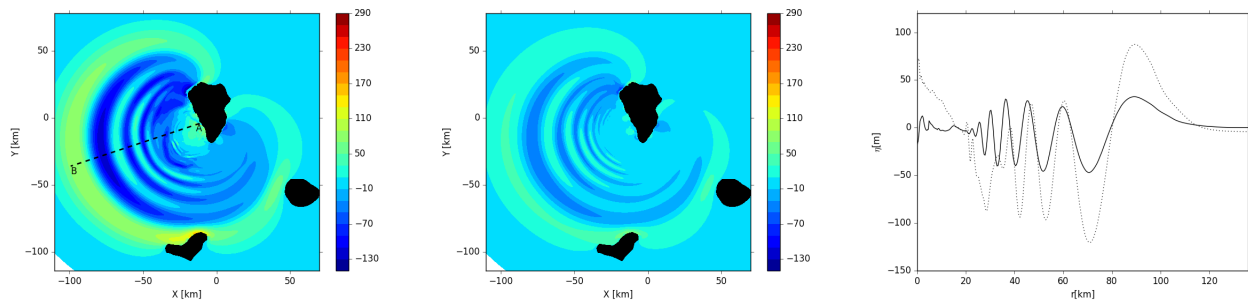


Figure 12. THETIS 3D computations for the 80 km^3 slide scenario, $t \approx 560 \text{ s}$. left panel: Inviscid slide. middle panel: Slide viscosity $2 \times 10^7 \text{ Pa}\cdot\text{s}$. right panel: Free surface elevations along the cross section A-B (left panel).

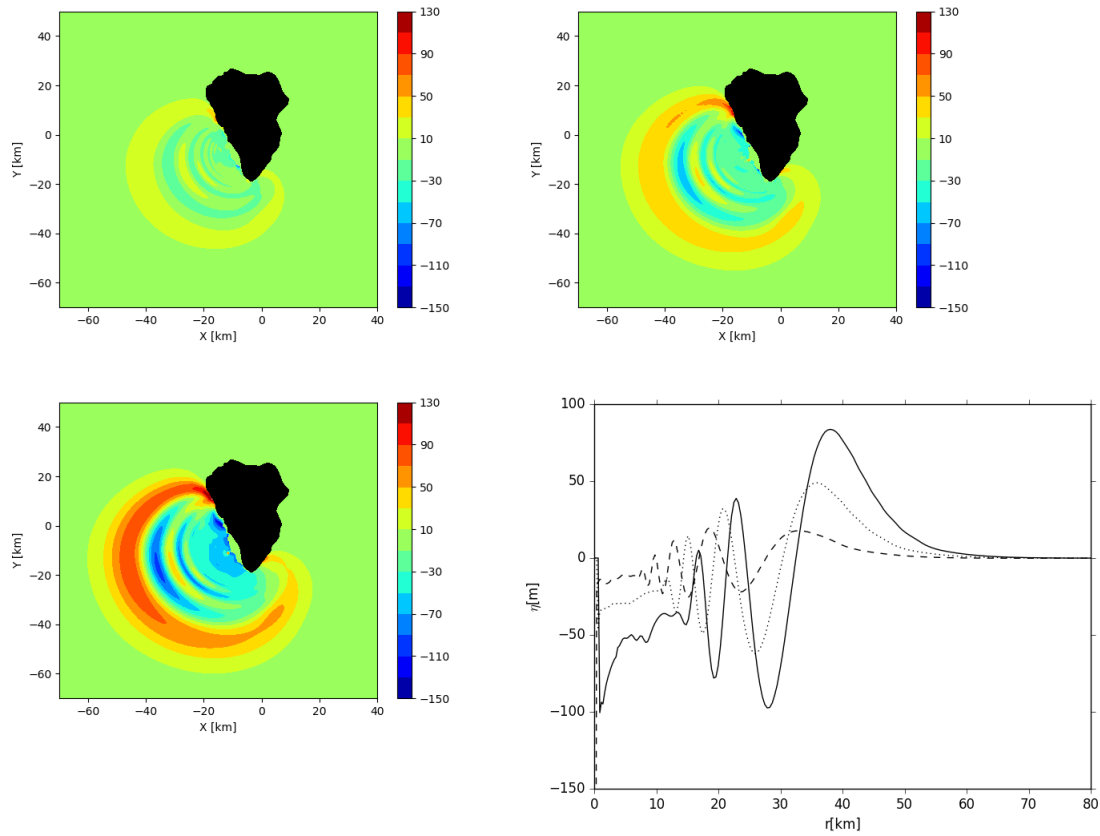


Figure 13. THETIS 3D computations for : 20 km^3 (top, left), 40 km^3 (top, right) and 80 km^3 (bottom, left) slide scenarios at $t=5 \text{ min}$. Bottom right panel: Free surface elevations along section A-B of left frame of Figure 12. Slide viscosity $2 \times 10^7 \text{ Pa}\cdot\text{s}$.

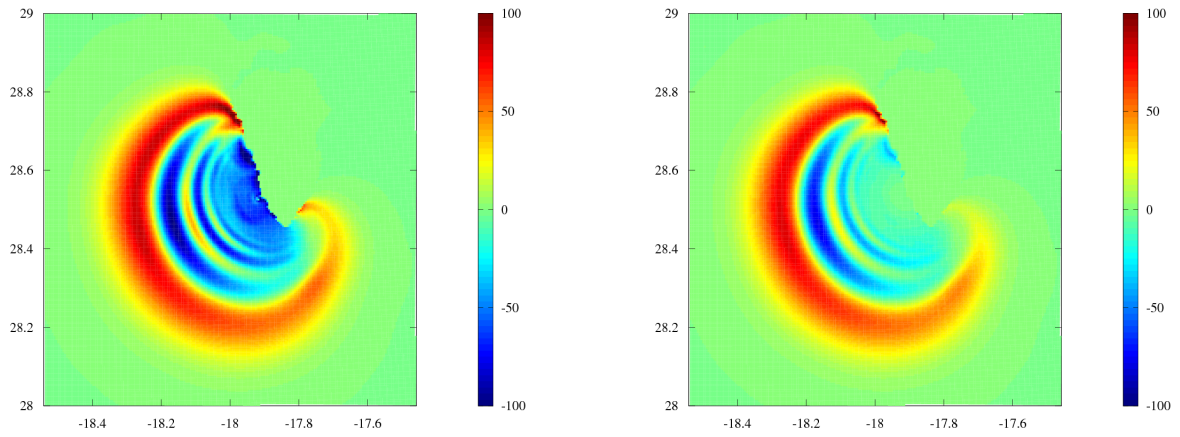


Figure 14. Region around Cumbre Vieja Volcano after 5 minutes of simulated time with THETIS for the 80 km^3 slide scenario. Left : Wave elevation for the initial solution from THETIS. Right : Filtered state which is used to initialize FUNWAVE-TVD.

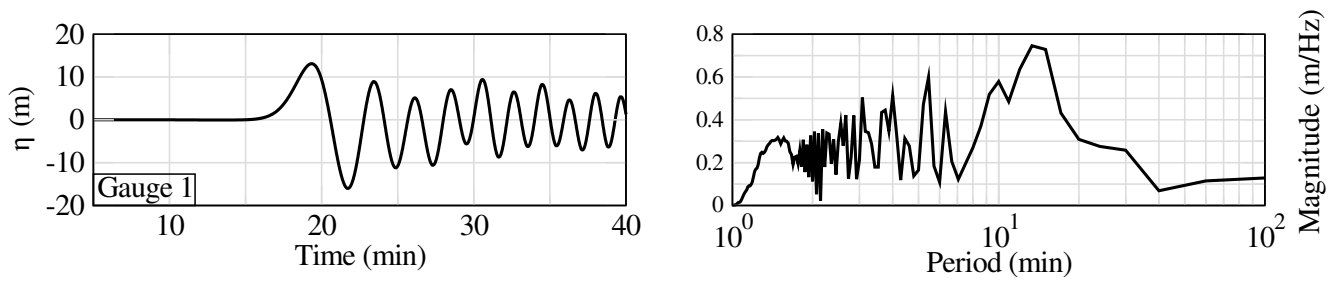


Figure 15. Surface elevation (m, left) and associated Fourier transform (right) for the 80 km^3 scenario at Gauge 1 close to the source. The time takes into account the 20 first minutes of the slide and tsunami generation.

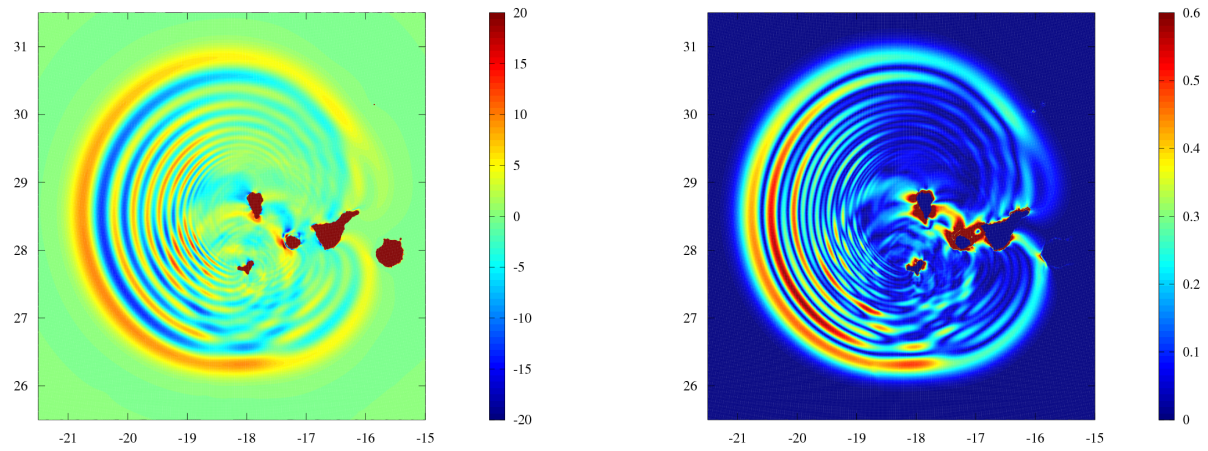


Figure 16. Region around the Canary Islands, 20 minutes after the beginning of the event (after 5 minutes of simulated time with THETIS, and 15 minutes of simulated time with FUNWAVE-TVD) during the 80 km^3 slide volume scenario. Left: Wave elevation. Right: Horizontal water velocity magnitude.

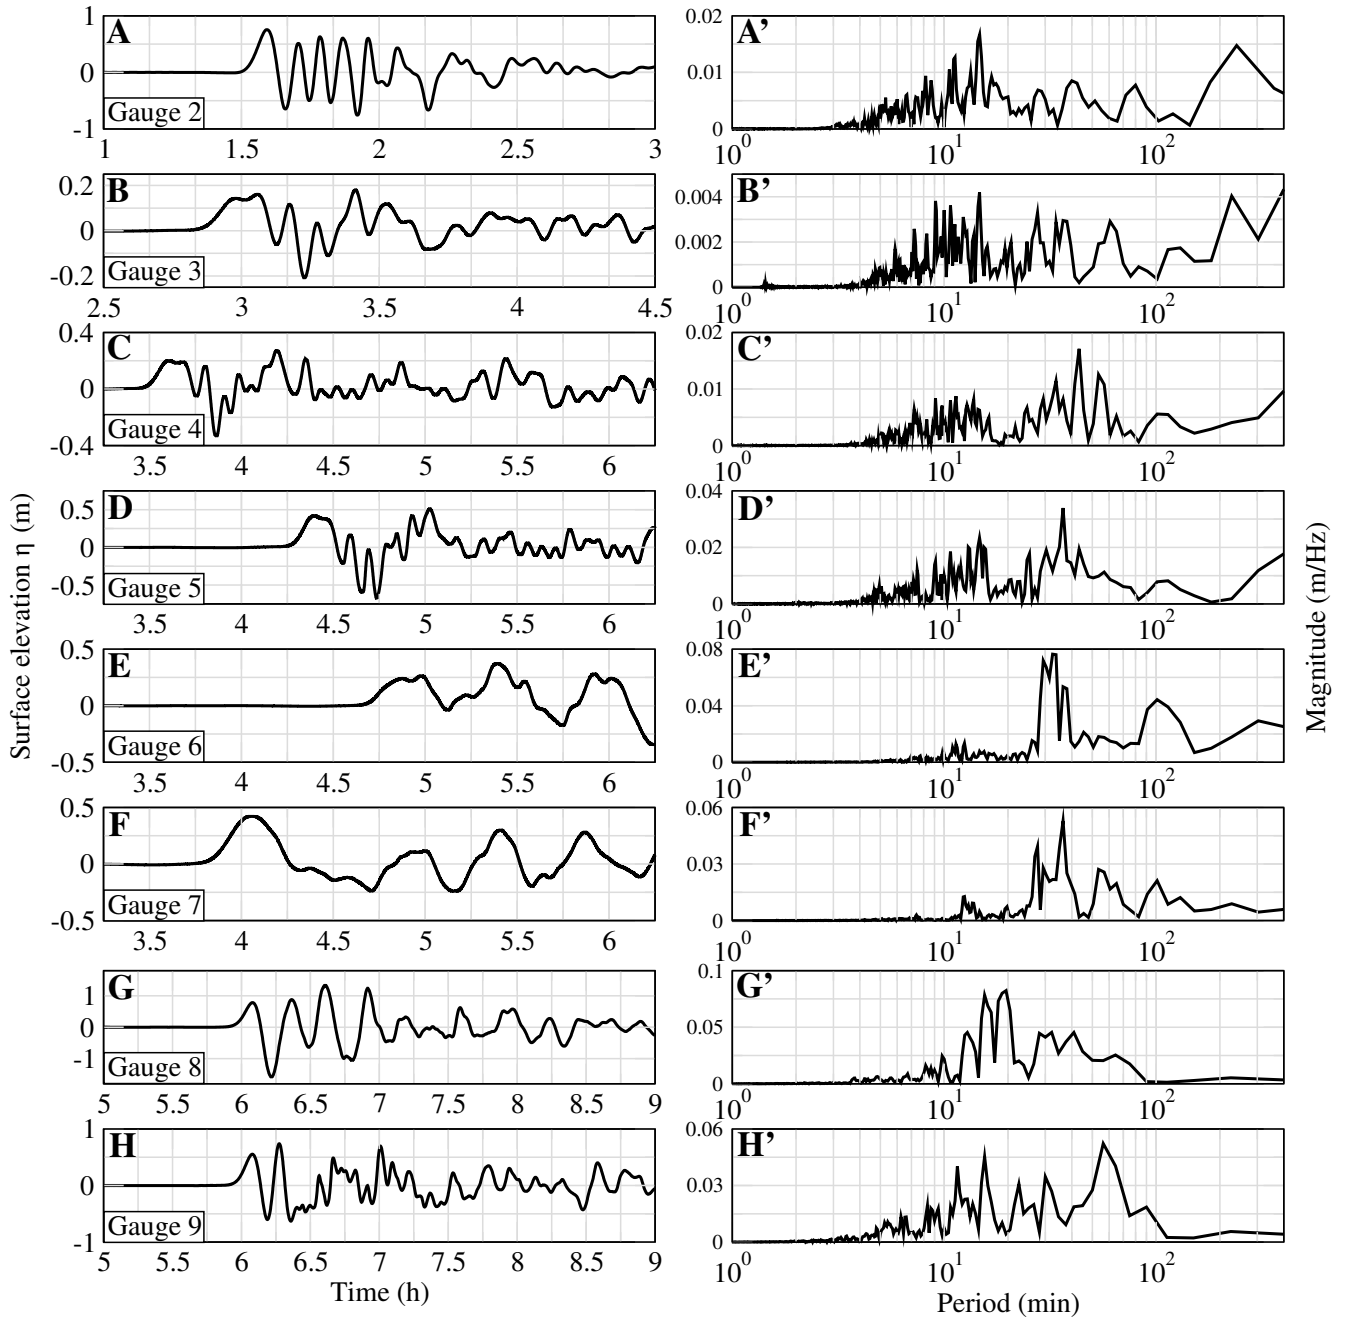


Figure 17. Surface elevations (m) (left column) and Fourier transforms (right column) for the 80 km^3 scenario at Gauge 2 in south Portugal (A and A'), Gauge 3 in the abyssal plain of the Bay of Biscay (B and B'), Gauge 4 in the continental shelf of the Bay of Biscay (C and C'), Gauge 5 in south Brittany (D and D'), Gauge 6 in the Gironde estuary (E and E'), Gauge 7 in Saint-Jean-de-Luz (F and F') and Gauges 8 and 9, respectively north (G and G') and south (H and H') of Guadeloupe, computed by FUNWAVE-TVD. The time takes into account the 20 first minutes of the slide and tsunami generation.

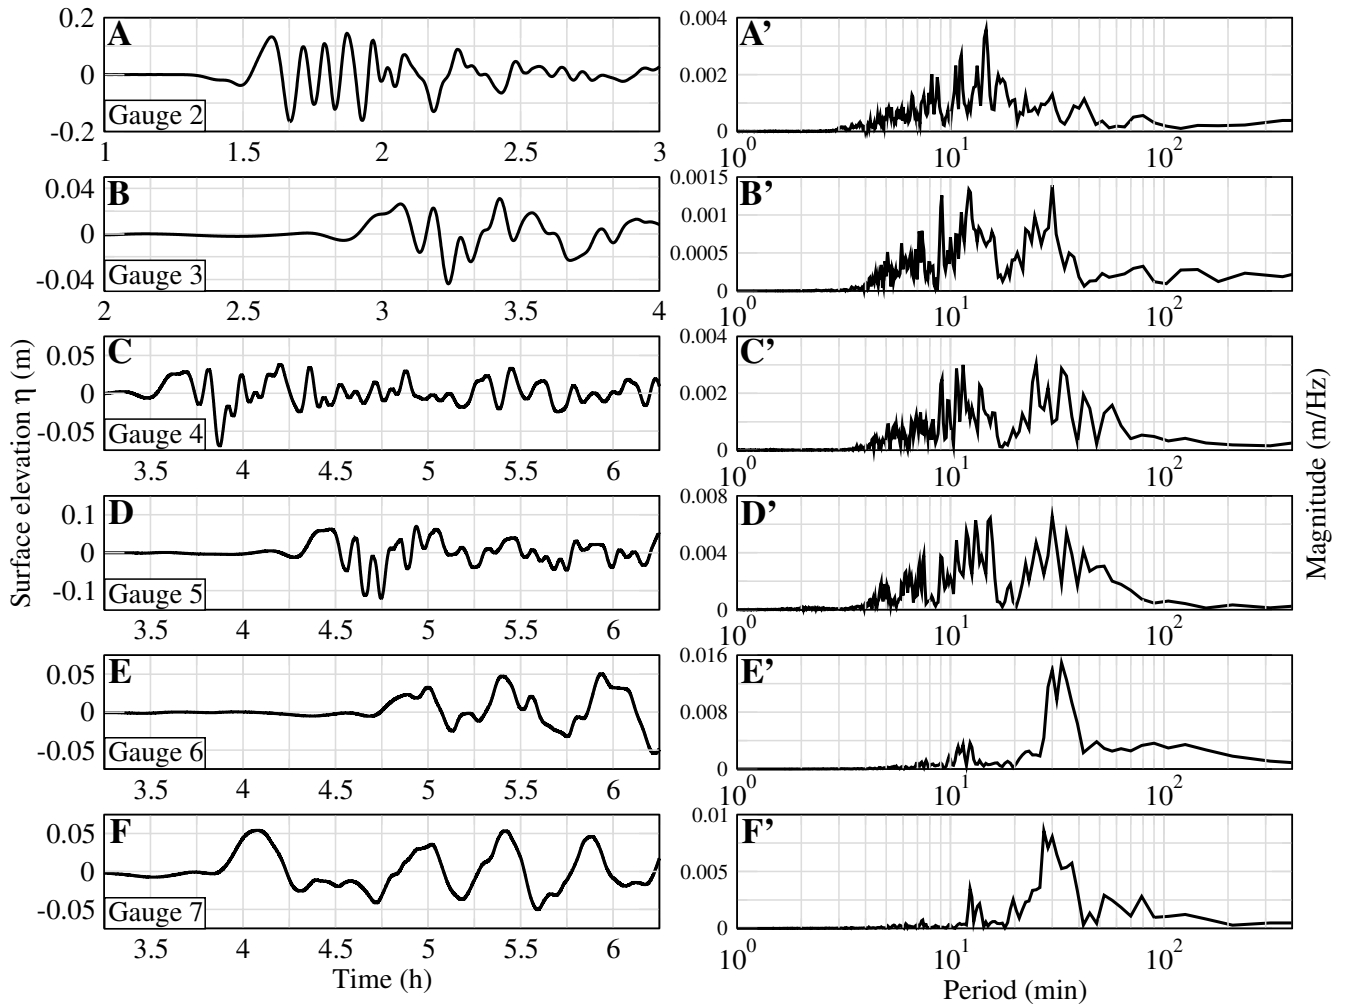


Figure 18. Surface elevations (m) (left column) and Fourier transforms (right column) for the 20 km^3 scenario at Gauge 2 in south Portugal (A and A'), Gauge 3 in the abyssal plain of the Bay of Biscay (B and B'), Gauge 4 in the continental shelf of the Bay of Biscay (C and C'), Gauge 5 in south Brittany (D and D'), Gauge 6 in the Gironde estuary (E and E') and Gauge 7 in Saint-Jean-de-Luz (F and F'), computed by FUNWAVE-TVD. The time takes into account the 20 first minutes of the slide and tsunami generation.

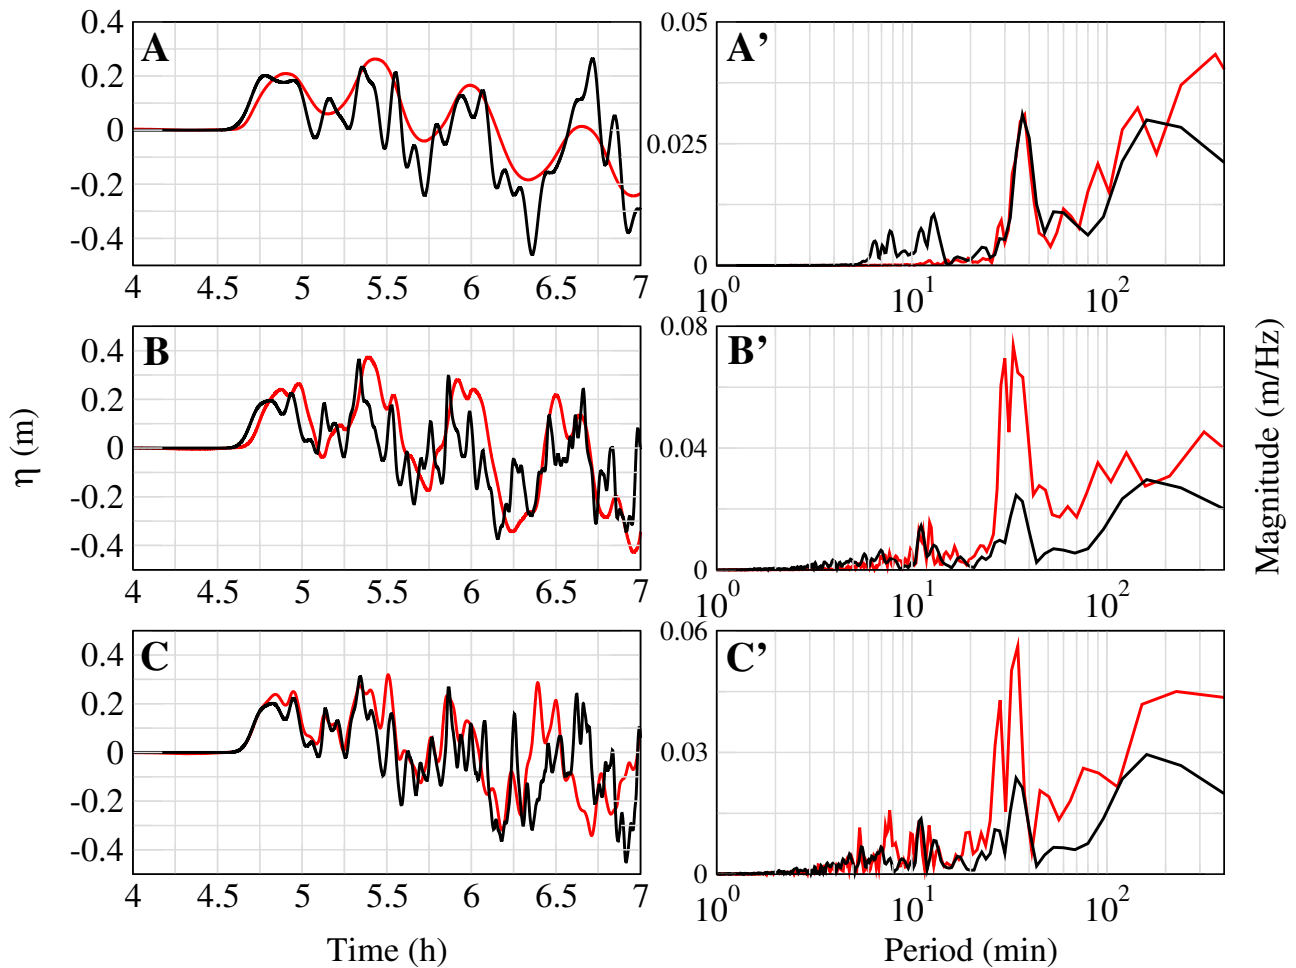


Figure 19. Comparison of the surface elevation (m) and the associated periods computed by a Fourier transformation (A', B' and C') at Gauge 6 between Calypso (in black) and FUNWAVE-TVD (in red) for the 80 km^3 scenario at the Gironde estuary, for three resolutions: 2.7 km (A), 450 m (B) and 110 m (C) for FUNWAVE-TVD and 2 km (A), 500 m (B) and 125 m (C) for Calypso. The time takes into account the 20 first minutes of the slide and tsunami generation.

At the North-Atlantic scale

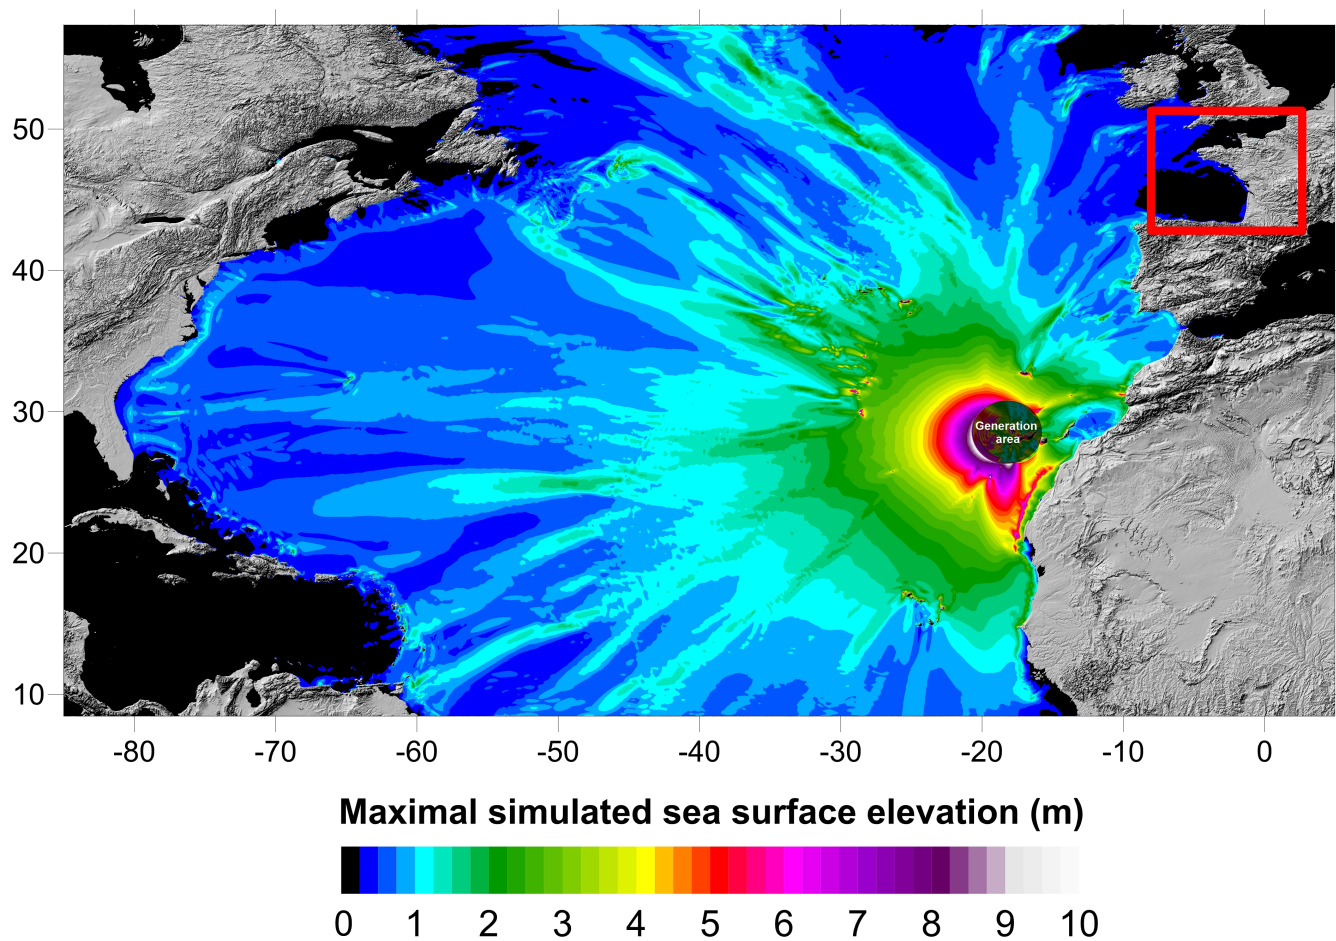


Figure 20. Maximum surface elevations (m) computed by FUNWAVE-TVD for the 80 km³ scenario, from the generation area to the French coasts and other remote territories, with a 2.7-km resolution. The red rectangle represents a daughter grid covering the western French coasts (see Figures 5 and 21).

Near metropolitan France

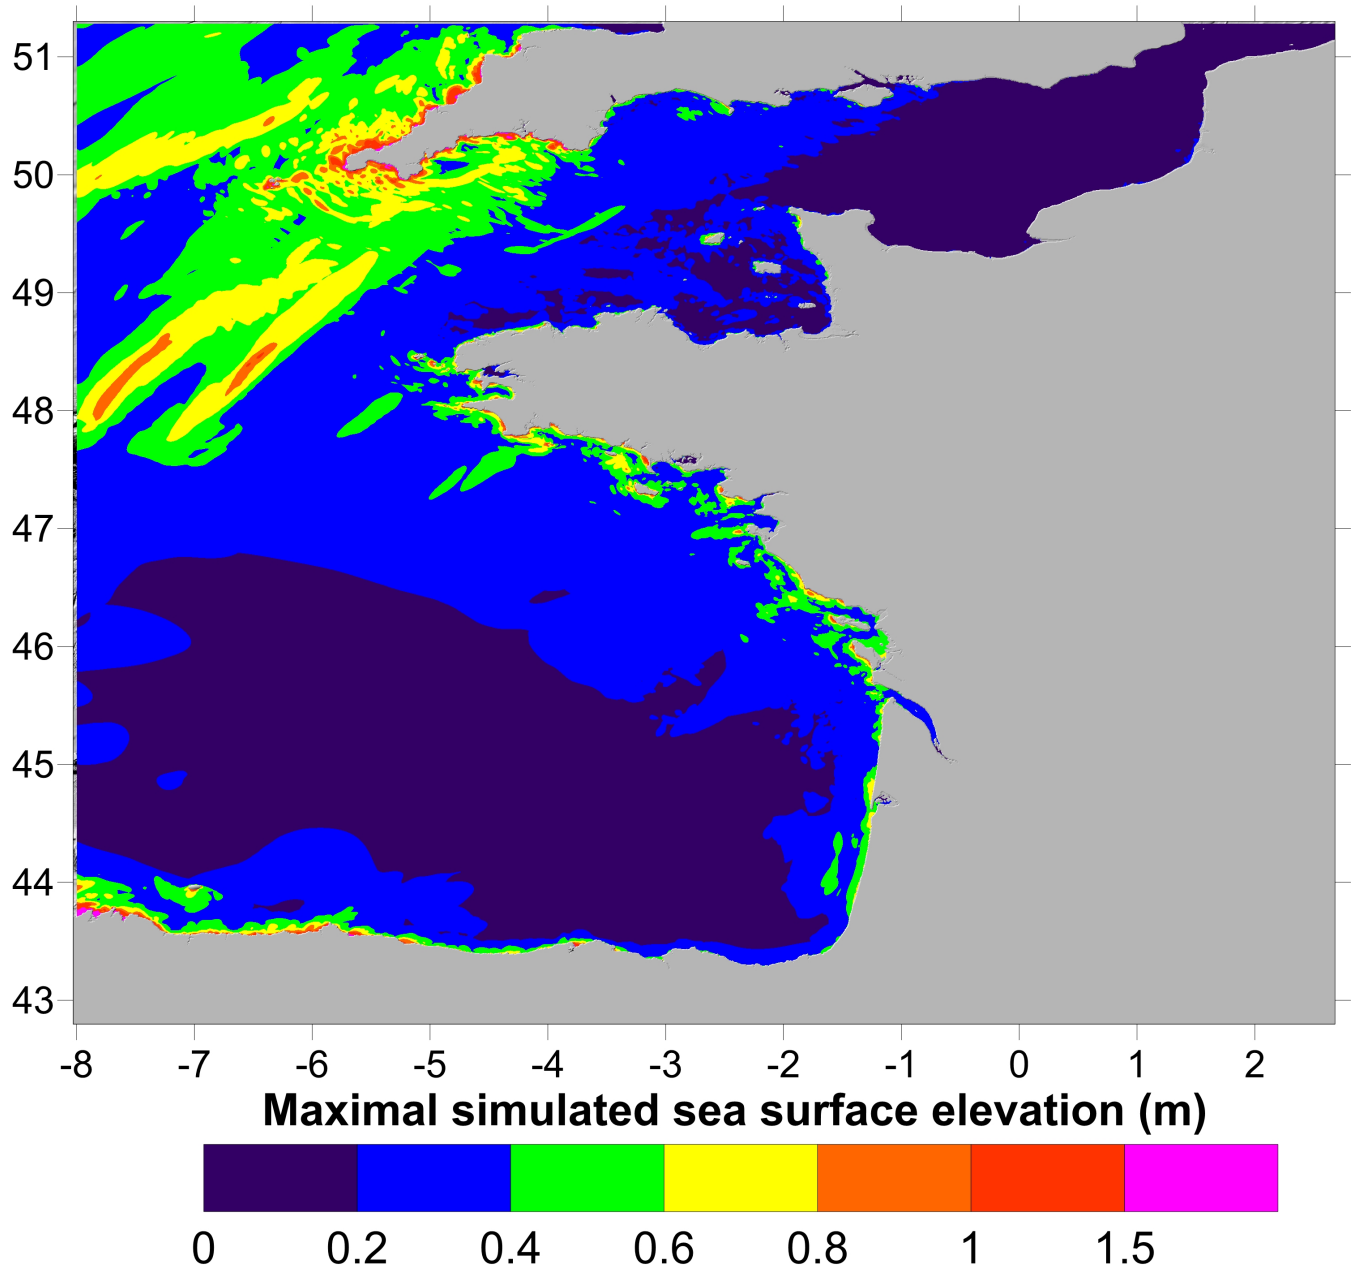


Figure 21. Maximum surface elevations (m) computed by FUNWAVE-TVD for the 80 km³ scenario on the western French coasts, with a 450-m resolution.

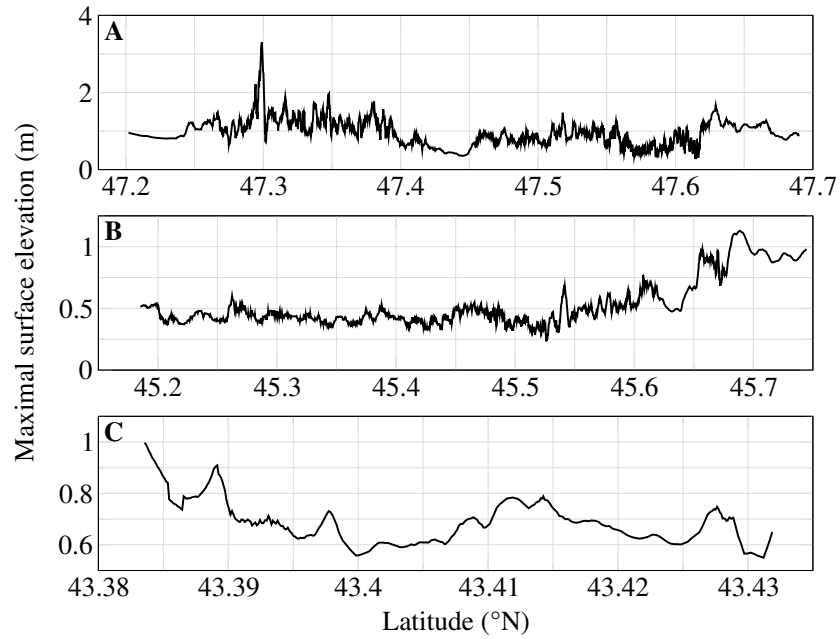


Figure 22. Maximum surface elevation computed with Calypso for the 80 km³ scenario using the finest grid resolution at isobath -5 m for different areas along the French Atlantic coastline. Panel A: Morbihan, panel B: Gironde estuary, panel C: Saint-Jean-de-Luz area

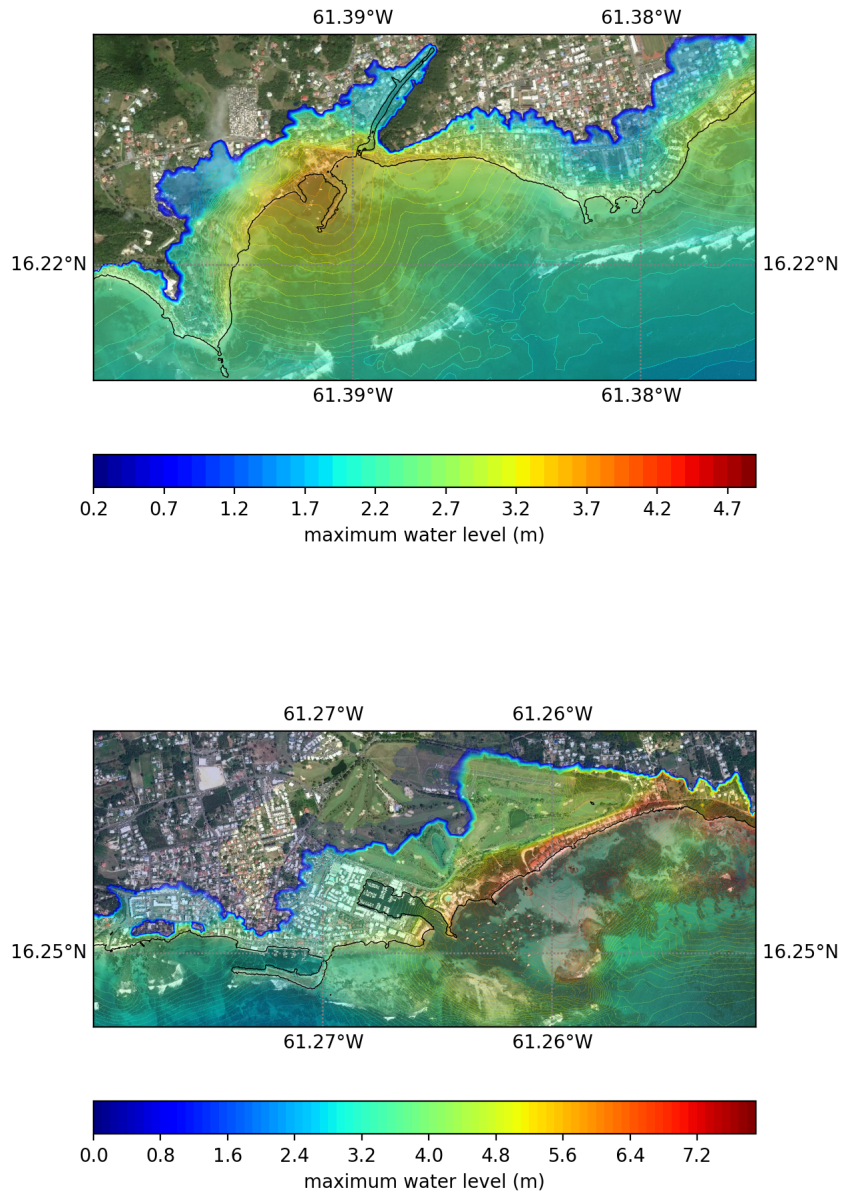


Figure 23. Flood map showing the maximum water level reached during the 80 km³ scenario for the region of Sainte-Anne (top) and Saint-François (bottom) (see locations in Figure 7), computed by SCHISM. Map created using ArcGIS® software by Esri. ArcGIS® and ArcMap™ are the intellectual property of Esri and are used herein under license. Copyright © Esri. All rights reserved.

Table 1. Summary of locations of numerical output (see Figure 4 for Gauges 1, 2, and 3, Figure 5 for Gauges 4, 5, 6, and 7, and Figure 7 for Gauges 8, and 9).

Gauge	Latitude	Longitude	Depth (m)
1	27.7	-19.8	4430
2	35.2247	-8.85923	3260
3	45.8663	-6.85191	4810
4	46.0016	-3.27661	130
5	47.2934	-3.26421	50
6	45.5854	-1.21069	10
7	43.3979	-1.67607	20
8	16.379519	-61.582708	110
9	16.1	-61.41	620

Table 2. Summary of grid characteristics (see Figure 4 for footprints of grids A, B, C, D and E, and Figure 5 for footprints of grids F, G, H, I, J, K and L)

Grid	Code	Resolution
A	Calypso	2 km
B	FUNWAVE-TVD	2.7 km
C	FUNWAVE-TVD	930 m
D	FUNWAVE-TVD	310 m
E	SCHISM	variable
F	Calypso	500 m
G	Calypso	125 m
H	Calypso	32.5 m
I	Calypso	32.5 m
J	FUNWAVE-TVD	450 m
K	FUNWAVE-TVD	110 m
L	FUNWAVE-TVD	20 m