

## RESPONSE TO THE EDITOR'S COMMENTS

The authors are very grateful to the Editors and Associate Editors for the kind consideration and possible publication of our article in the Natural Hazards and Earth System Sciences. The authors would like to thank all reviewers for suggesting improvements for the manuscript. Point-wise reply/answer to each comment is provided below (comments are shown in BOLD, answers are shown in REGULAR). All suggestions have been addressed, but still if reviewers have any other point/reservation, the authors are happy to incorporate. Furthermore, the authors appreciate the editors and reviewers for the timely handling of review process.

### REVIEWER 2

<b>Sr. No.</b>	<b>Questions with answers</b>	<b>Clarification made or Changes Incorporated</b>
1	<p><b>1. After, reading the revised version of the article, I consider that suggestions previously recommended are incorporated in revised article. There are some grammatical errors in article that needs to be corrected. Recently published studies about Pakistan: Updated earthquake catalog by Khan et al., 2018 and Probabilistic seismic hazard analysis using an areal source model may be cited in the article for the completeness.</b></p> <p>The reviewer is thanked for this suggestion, the revised manuscript now incorporated the requested information.</p>	YES

# 1 SEISMIC HAZARD MAPS OF PESHAWAR DISTRICT FOR 2 VARIOUS RETURN PERIODS

3

4 Khalid Mahmood<sup>1</sup>, Naveed Ahmad<sup>2\*</sup>, Usman Khan<sup>1</sup>, Qaiser Iqbal<sup>1</sup>

5 <sup>1</sup>Sarhad University of Science and Information Technology, Peshawar, KP Pakistan.

6 <sup>2</sup>Department of Civil Engineering, UET Peshawar, KP Pakistan.

7 \*Correspondence E-Mail: naveed.ahmad@uetpeshawar.edu.pk

8

## 9 **Abstract:**

10 Probabilistic seismic hazard analysis of Peshawar District has been performed for a grid size of 0.01°.

11 The seismic sources for the target location are defined as the area polygon with uniform seismicity. The  
12 earthquake catalogue was developed based on the earthquake data obtained from different worldwide  
13 seismological networks and historical records. The earthquake events obtained in different magnitude  
14 scale were converted into moment magnitude using indigenous catalogue-specific regression  
15 relationships. The homogenized catalogue was subdivided into shallow crustal and deep subduction zone  
16 earthquake events. The seismic source parameters were obtained using the bounded Gutenberg-Richter  
17 recurrence law. Seismic hazard maps were prepared for peak horizontal acceleration at bedrock using  
18 different ground motion attenuation relationships. The study revealed the selection of an appropriate  
19 ground motion prediction equation is crucial in defining the seismic hazard of Peshawar District. The  
20 inclusion of deep subduction earthquakes does not add significantly to the seismic hazard for design base  
21 ground motions. The seismic hazard map developed for shallow crustal earthquakes, including also the  
22 epistemic uncertainty, was in close agreement with the map given in the Building Code of Pakistan –  
23 Seismic Provision (2007) for a return period of 475 years on bedrock. The seismic hazard maps for other  
24 return periods i.e., 50, 100, 250 475, and 2500 years are also presented.

25 **Keywords:** Seismic hazard map, probabilistic seismic hazard analysis, BCP-SP 2007, Peshawar, CRISIS

26

## 27 **1. Introduction:**

28 Peshawar is the capital city of the Khyber Pakhtunkhwa province of Pakistan that has historical  
29 background in the history of indo-subcontinent. The city provides key access to the Central Asian States

Dr Naveed 3/4/20 19:38

Deleted: The p

Dr Naveed 3/4/20 19:38

Deleted: conducted

Dr Naveed 3/4/20 19:41

Deleted: The s

Dr Naveed 3/4/20 19:41

Deleted: in term of

Dr Naveed 3/4/20 19:42

Deleted: PGA

Dr Naveed 3/4/20 19:42

Deleted: ;

Dr Naveed 3/4/20 19:43

Deleted: an important factor

Dr Naveed 3/4/20 19:43

Deleted:

Dr Naveed 3/4/20 19:43

Deleted: calculated

Dr Naveed 3/4/20 19:43

Deleted:

Dr Naveed 3/4/20 19:44

Deleted: ;

Dr Naveed 3/4/20 19:44

Deleted: ,

Dr Naveed 3/4/20 19:44

Deleted: were

1 through Afghanistan along the Western borders of Pakistan. It is located at 710, 43.4' N latitude and 330,  
2 93.7' E Longitude in the western Himalayan region.

3 Peshawar is characterized by high seismicity rates due to its proximity to the active plate boundary  
4 between the Indian and Eurasian plates, which are converging at the rate, of 37-42 mm/year (Chen et al.,  
5 2000). The Main Boundary Thrust (MBT) system along which the devastating Kashmir earthquake  
6 occurred in 2005, is located in the northern parts of the country together with some other active regional  
7 fault systems, including Main Mantle Thrust (MMT) and Main Karakorum Thrust (MKT). These faults,  
8 if reactivated can act as a potential source of seismic hazard for the region including Peshawar (Waseem  
9 et al., 2013). This was confirmed also by the recent 2015 Afghanistan-Pakistan earthquake that caused  
10 widespread damages in the province of Khyber Pakhtunkhwa (Ahmad, 2015), including Peshawar,  
11 damaging a number of important structures in the historic city (**Fig. 1**).

12 The Building Code of Pakistan in 1986 has placed Peshawar in Zone 2 that corresponds to intensity V-VI  
13 on the Modified Mercalli Intensity scale. Mona Lisa et al. (2007), based on the probabilistic seismic  
14 hazard analysis for the NW Himalayan thrust, recommended a value of 0.15g for Peshawar. Hashash et  
15 al. (2012), using discrete faults model for Northern Pakistan, suggested peak ground acceleration (PGA),  
16 value in the range of 0.20-0.4g. Rafi et al. (2012), based on the probabilistic seismic hazard analysis and  
17 zonation for Pakistan and Azad Jammu and Kashmir, has evaluated a value of 0.175g for Peshawar.  
18 Several researchers either regionally or partially have studied the seismic hazard of Peshawar District  
19 (Table 1). The Geological Survey of Pakistan (2006) Seismic Zoning Map suggests a PGA value in the  
20 range of 0.03-0.1g, Zaman and Warnitchai (2010) suggests in the range of 0.33-0.40g while Zhang et al.  
21 (1999) suggested in the range of 0.166-0.244g. The Building Code of Pakistan – Seismic Provision  
22 (2007), which is a legal binding for the seismic design of structures in Pakistan, has placed Peshawar in  
23 Zone 2B. This zone has peak ground acceleration in the range of 0.16g to 0.24g for a return period of 475  
24 years. This has revealed that previous seismic hazard studies of Peshawar and Northern Pakistan report  
25 widely conflicting results (Ahmad et al., 2019; Ambraseys et al., 2005; Khaliq et al., 2019; Sesetyan et  
26 al., 2018; Waseem et al., 2018, 2020).

27 The present study aims to re-calculate the seismic hazard of Peshawar, based on the up-to-date  
28 earthquake catalogue and ground motion prediction equations, and compare the same with that  
29 recommended by BCP-SP (2007). The PGA value at bedrock was calculated using the classical  
30 probabilistic seismic hazard analysis procedure. The area sources, as suggested by BCP-SP (2007) were  
31 for which the earthquake catalogue was obtained from worldwide seismogram networks and historical  
32 records. The Modified Gutenberg-Richter empirical model was used to calculate the seismic zone  
33 parameters for both shallow crustal and deep subduction zone earthquakes. The seismic hazard in terms

Dr Naveed 3/4/20 19:45

Deleted: vicinity

Dr Naveed 3/4/20 19:46

Deleted: s

Dr Naveed 3/4/20 19:46

Deleted: , which

Dr Naveed 3/4/20 19:47

Deleted: e

Dr Naveed 3/4/20 19:50

Deleted:

Dr Naveed 3/4/20 19:48

Deleted: has

Dr Naveed 3/4/20 19:50

Deleted: polygon

Dr Naveed 3/4/20 19:51

Deleted: used as seismic sources

1 of PGA at bedrock was calculated and plotted in GIS tool. Different ground motion attenuation  
2 relationships compatible to the geology and seismicity of local environment were used to quantify model-  
3 to-variability in seismic hazard of Peshawar District. Furthermore, the logic tree approach was used to  
4 take into consideration the epistemic uncertainty. The GIS based seismic hazard map developed for a  
5 return period of 475 years was compared with that given in the BCP-SP (2007). Seismic hazard maps  
6 were prepared for various other return periods i.e. 50, 100, 250, 475 and 2500 years.

7



(a) Peshawar City, Qisa Khwani Bazar: Complete collapse of building roof.



(b) Peshawar City, Ganj: Sliding of overhead tank on the building roof.



(c) Peshawar City, Fort: Collapse of masonry retaining wall and backfill sliding of Fort "Qilla Bala Hisar".

8 **Figure. 1** Damages observed in Peshawar during 2015 Afghanistan-Pakistan earthquake.

9

10

Dr Naveed 3/4/20 19:51

~~Deleted:~~ environment

Dr Naveed 3/4/20 19:51

~~Deleted:~~ The d

Dr Naveed 3/4/20 19:53

~~Deleted:~~ the difference

Dr Naveed 3/4/20 19:52

~~Deleted:~~ results

Dr Naveed 3/4/20 19:53

~~Deleted:~~ were prepared

Dr Naveed 3/4/20 19:53

~~Deleted:~~ ;

Dr Naveed 3/4/20 19:53

~~Deleted:~~ ,

1 **Table 1.** Seismic hazard of Peshawar reported by various researchers

S. No.	Authors	PGA (g)
1	Bhatia et al. (1999)	0.10 – 0.15
2	Mona Lisa et al. (2007)	0.15
3	Zhang et al. (1999)	0.16 – 0.24
4	Rafi et al. (2012)	0.17
5	Hashash et al. (2012)	0.20 – 0.40
6	Şeşetyan et al. (2018)	0.30 – 0.40
7	Khaliq et al. (2019)	0.32 – 0.34
8	Zaman and Warnitchai (2012)	0.33 – 0.40
9	<a href="#">Waseem et al. (2020)</a>	0.33
10	Waseem et al. (2018)	0.38
11	Shah et al. (2019)	0.06
12	Ahmad et al. (2019)	0.16 to 0.24

Dr Naveed 3/4/20 18:18

Deleted: 9

Dr Naveed 3/4/20 18:18

Deleted: 0

Dr Naveed 3/4/20 18:18

Deleted: 1

2

3 **2. Probabilistic Seismic Hazard Analysis**

4 The uncertainties in the location, size and rate of recurrence of earthquake along with the variation in the  
 5 ground motion intensity and spatial variability can be well considered in the probabilistic seismic hazard  
 6 analysis procedures (Ornthammarath et al., 2011; Çağnan and Akkar, 2018; Rowshandel, 2018). The  
 7 probabilistic seismic hazard analysis (PSHA) provides a framework in which these uncertainties can be  
 8 identified, quantified, and combined in a rational manner to provide a [holistic view](#) of the seismic hazard.

Dr Naveed 3/4/20 19:55

Deleted: more complete picture

9 According to [the](#) modified Gutenberg-Richter Law the earthquake exceedance rate  $\lambda(M)$  for an  
 10 earthquake magnitude  $M$  can be defined using Equation (1);

11 
$$\lambda(M) = \lambda_0 \frac{e^{-\beta M} - e^{-\beta M_u}}{e^{-\beta M_0} - e^{-\beta M_u}}, M_0 \leq M \leq M_u \quad (1),$$

12  $\lambda_0$  is the exceedance rate in the range of lower  $M_0$  and upper limit  $M_u$  of magnitude,  $\beta$  is the earthquake  
 13 source parameter. [Considering earthquake as a](#) Poisson process, the probability density of the earthquake  
 14 magnitude [can be obtained using](#) Equation (2):

Dr Naveed 3/4/20 19:59

Deleted: For the

Dr Naveed 3/4/20 19:59

Deleted: is given

Dr Naveed 3/4/20 19:59

Deleted: by

12 
$$P(M) = \lambda_0 \beta \frac{e^{-\beta M}}{e^{-\beta M_0} - e^{-\beta M_u}} \quad (2)$$

1 | The strong **ground** motion parameters, i.e. acceleration, velocity and displacement, are characterized using  
 2 | attenuation relationships that shows the variation in strong motion amplitude with source-to-site distance  
 3 | and depends on a number of source, path and site parameters (Douglas, 2019; Kramer, 1996; McGuire,  
 4 | 2004; Rupakhety and Sigbjörnsson, 2009). For example, the attenuation relationship for the peak  
 5 | horizontal acceleration has been developed by Campbell (1981) within 50 kM of fault rupture in  
 6 | magnitude 5.0 to 7.7 earthquake. Campbell and Bozorgnia (1994) developed attenuation relationships  
 7 | using worldwide moment magnitude in the range of 4.7 to 8.1. This relationship is more specific and  
 8 | provides additional terms for source characterization. Toro et al., (1994) has developed attenuation  
 9 | relation in term of peak horizontal acceleration on rock side for the continental portion of Northern  
 10 | America. Among others Boore and Atkinson (2008) and Akkar and Bommer (2010) have developed site  
 11 | specific attenuation relationship that can calculate peak acceleration in term of earthquake magnitude,  
 12 | source to site distance, fault mechanism and site condition. Boore and Atkinson (2008) model was  
 13 | developed based on the empirical regression of PEER NGA strong-motion database while that of Akkar  
 14 | and Bommer (2010) model was developed for Europe, Mediterranean and **the Middle East** region.

Dr Naveed 3/4/20 20:00  
 Deleted: ;

15 | The mentioned attenuation relationships can be used for ground motion prediction of shallow crustal  
 16 | earthquakes. However, several researchers including Crouse et al. (1988), Crouse (1991), Molas and  
 17 | Yamazaki (1993), Youngs et al. (1995) have pointed out different conditions of attenuation relationships  
 18 | for shallow and subduction zones. Lin and Lee (2008) and Kanno et al. (2006) have developed  
 19 | attenuation relationships for earthquake records of Taiwan and Japan respectively. The study of Lin and  
 20 | Lee (2008) showed lower attenuation for subduction zones than that for crustal shallow earthquakes.  
 21 | Therefore, the use of shallow crustal earthquake attenuation relationships may lead to underestimation of  
 22 | the seismic hazard for subduction earthquakes in probabilistic analysis.

Dr Naveed 3/4/20 20:02  
 Deleted: e

23 | In probabilistic seismic hazard analysis, the peak acceleration at a location is a function of magnitude and  
 24 | distance that is lognormally distributed with standard deviation. In the hazard analysis, the study area is  
 25 | first divided into seismic sources based on tectonics and geotechnical characteristics. The different  
 26 | seismic sources are assumed to occur independently, and the seismic events **are** considered to **occur**  
 27 | **uniformly** over the source. The acceleration exceedance rates  $v_i(a)$  for the single seismic source  $i^{\text{th}}$  is  
 28 | calculated using Equation (3):

Dr Naveed 3/4/20 20:03  
 Deleted:  
 Dr Naveed 3/4/20 20:04  
 Deleted: occurrence of  
 Dr Naveed 3/4/20 20:03  
 Deleted: is  
 Dr Naveed 3/4/20 20:03  
 Deleted:  
 Dr Naveed 3/4/20 20:04  
 Deleted: be  
 Dr Naveed 3/4/20 20:04  
 Deleted: distributed

$$v_i(a) = \sum_i w_{ij} \int_{M_o}^{M_u} \left( -\frac{d\lambda_i(M)}{dM} \right) Pr(A > a|M, R_{ij}) dM \quad (3)$$

1 where  $M_0$  is the smallest and  $M_u$  is the largest magnitude of seismic source,  $\Pr(A>a|M,R_{ij})$  is the  
2 probability that acceleration  $A$  exceeds the value  $a$  at distance  $R_{ij}$  for an earthquake of magnitude  $M$ . The  
3 acceleration exceedance  $v(a)$  due to all sources- $N$  is calculated through combining all sources, as given  
4 in Equation (4):

$$v(a) = \sum_{i=1}^N v_i(a) \quad (4)$$

### 5 3. Seismicity of Peshawar

6 The collision of Eurasian and Indian plate has resulted in the formation of active Himalayan orogenic  
7 system that is further classified into Tethyan, Higher, Sub and Lesser Himalayas (Gansser, 1964). The  
8 divisions are based on the tectonic blocks formed and separated by major faults boundary.

9 The Microsoft Encarta Reference Library (2003) shows that the valley of Peshawar, consists of southern  
10 part of Eurasian plate and northern part of Indo-Australian plate. This part of the Himalayas is variably  
11 interpreted to be Lesser Himalayas (Tahirkheli et al., 1982) and Tethyan Himalayas (DiPietro and Pogue  
12 2004). The seismic hazard study of Waseem et al. (2006) has identified about twenty-one seismogenic  
13 faults around Peshawar. Most of these faults have reverse fault mechanism and have a Joyner-Boore  
14 distance  $R_{JB}$  in the range of 19-100 km. According to Ali and Khan (2004), most of the significant  
15 earthquakes felt at Peshawar have their origin in the Hindu Kush region of Afghanistan and few in  
16 northern areas of Pakistan.

### 18 4. Case Study PSHA of Peshawar

19 The seismic hazard software CRISIS-2007 was used to calculate the peak acceleration at bedrock for  
20 Peshawar District. **Fig. 2** shows the geographical location of Peshawar District within the geo-political  
21 boundaries of KP Province of Pakistan. The hazard analysis requires seismic source geometry, earthquake  
22 reoccurrence relationship and the selected ground motion attenuation relationship. In the present study the  
23 ground motion attenuation relationships of Boore and Atkinson (2008) and Akkar and Boomer (2010)  
24 were used for shallow crustal seismic earthquakes and that of Lin and Lee (2008) and Kanno et al. (2006)  
25 for deep subduction zone earthquakes. The earthquake events within 50 km depth were considered as  
26 shallow while earthquake events occurring at depth larger than 50 km were considered as deep

Dr Naveed 3/4/20 20:06

Deleted: and

Dr Naveed 3/4/20 20:09

Deleted: E

1 earthquakes. The seismic hazard maps were prepared in GIS environment based on a grid size of  $0.01^0$  for  
2 various return periods i.e. 50, 100, 250, 475 and 2500 years.

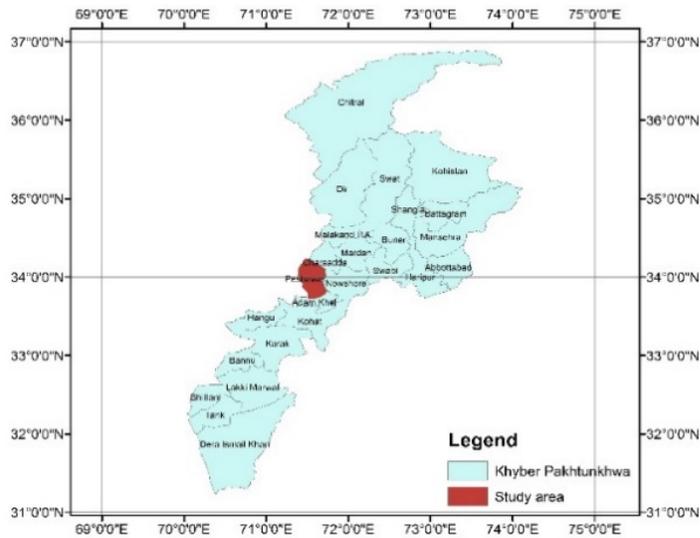


Figure. 2 Location of study area

### 3 4.1 Seismic Sources Identification and Characterization

4 The Building Code of Pakistan (BCP-SP, 2007) has defined the potential shallow seismic sources for  
5 Pakistan including northern areas. Those within 200 km of Peshawar were considered potential sources  
6 for earthquake activity impacting Peshawar (Fig. 3). The potential seismic sources (seven seismic sources  
7 in present study) for Peshawar region in a rectangular shape with latitude (31.888~ 36.006) and longitude  
8 (69.562~73.620) as shown in Fig. 4, were considered for the compilation of earthquake catalogue. The  
9 earthquake catalogues were obtained using worldwide seismogram network sources i.e., United States of  
10 Geological Survey, (USGS), National Geophysical Data Center (NGDC), Global Centroid Moment  
11 Tensor (GCMT) and International Seismological Center (ISC) using the time span of 1500 AD till 2015  
12 with focal depth up to 1000 m. The catalogue also included historical data from Ambrasey (2000) and  
13 Ambrasey and Douglas (2004). Khan et al. (2008) also reported updated earthquake catalogue for  
14 Pakistan, however, majority of their events relevant for Peshawar were already included in the catalogue  
15 of present study for seismic sources characterization. These different networks already discussed gives  
16 earthquake magnitude in different scales e.g. moment magnitude, surface magnitude and low magnitude,  
17 etc. According to Kanamori (1977) and Hanks and Kanamori (1979) the moment magnitude is the most


Dr Naveed 3/4/20 20:10  
Deleted: ;

Dr Naveed 3/4/20 20:11  
Deleted: ;


Dr Naveed 3/4/20 20:12  
Deleted: data collection

1 accurate scale that does not saturate in higher magnitude events. Therefore, all the magnitudes were  
 2 converted into moment magnitude (**M<sub>w</sub>**) using regression analysis. **Fig. 5** shows the empirical  
 3 relationships established in the present study based on the catalogue obtained for earthquake magnitude  
 4 conversion. These were used for the catalogue homogenization.

Dr Naveed 3/4/20 20:14  
 Deleted: , which  
 Dr Naveed 3/4/20 20:13  
 Deleted: employed

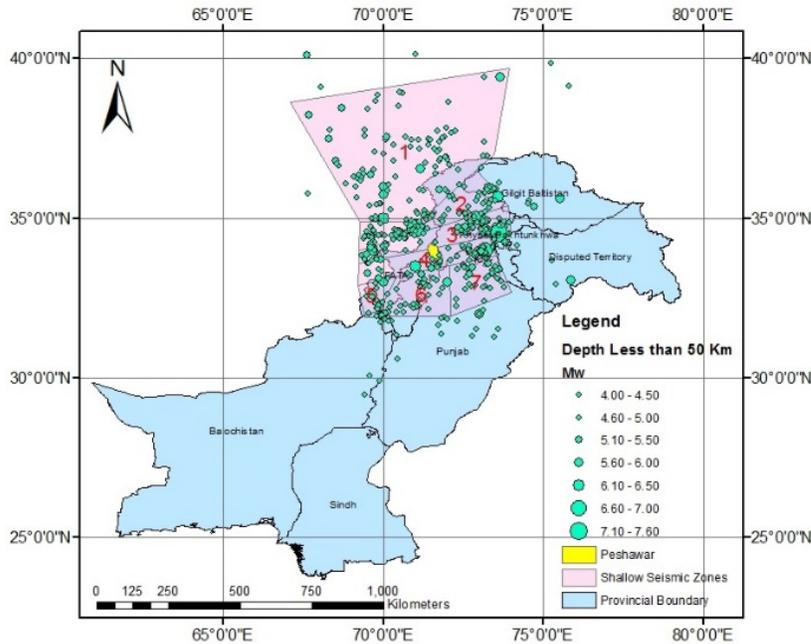

5  
 6 **Figure. 3** Shallow seismic sources for Peshawar (BCP-2007)  
 7

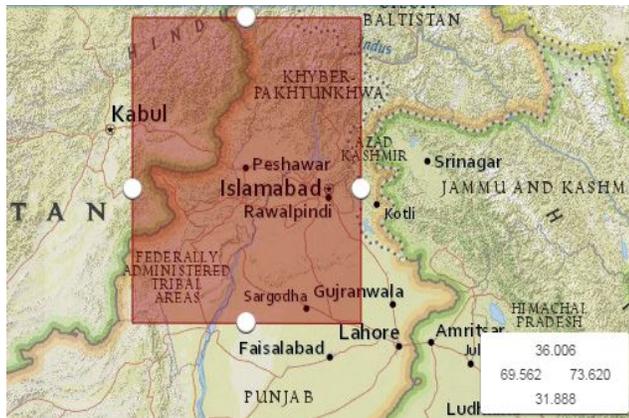

8  
 9 **Figure. 4** Seismic source identification with defined latitude and longitude. © Google Map.

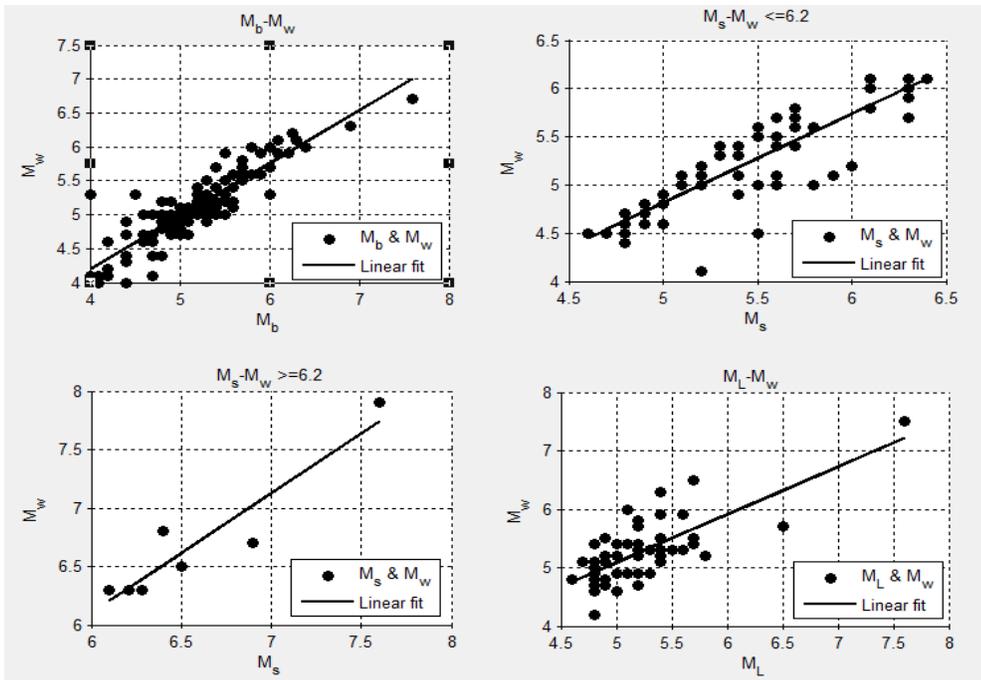


Figure. 5 Empirical relationships for moment magnitude

The homogenized catalogue was further subdivided into shallow (depth less than 50 km) and deep (depth more than 50 km) earthquake events. Fig. 6 shows the shallow and deep earthquake records along with seismic zones as defined in BCP-SP (2007). Furthermore, Table 2 reports the number of earthquakes in each seismic source along with maximum and minimum magnitude of each source. Deep earthquakes were found primarily in seismic source 1 and seismic source 2 that included the Hindu Kush seismic region. The deep sources were selected in consultation with the National Center of Excellence in Geology, Peshawar. Since, deep sources were not studied before for Peshawar.

Table. 2: No. of earthquakes, minimum and maximum magnitude in shallow and deep seismic source

Zones	1		2		3	4	5	6	7
Depth, (km)	<50	>50	<50	>50	<50	<50	<50	<50	<50
No. of Earthquakes	99	454	79	23	76	43	17	35	32
Minimum ( $M_w$ )	4.0	4.0	4.1	4.2	7.6	4.0	4.1	4.1	4.1
Maximum ( $M_w$ )	6.2	7.7	4.0	5.1	7.5	6.8	6.0	6.0	5.5


Dr Naveed 3/4/20 20:15

Deleted: moment magnitude

Dr Naveed 3/4/20 20:15

Deleted:

1

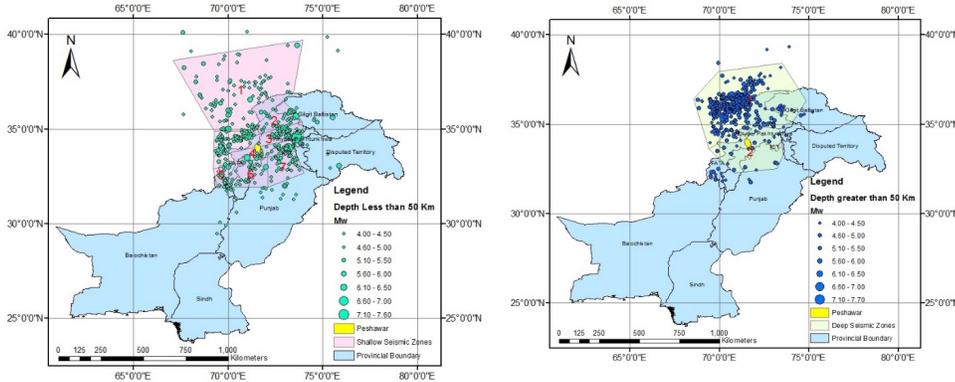

(a) Shallow crustal earthquake

(b) Deep subduction zone earthquake

Figure. 6 Earthquake records from homogenized catalogue and with defined seismic sources

## 2 4.2 Processing of Earthquake Catalogue

### 3 De-clustering

4 In seismic hazard analysis the probability of earthquake occurrence is considered to follow a Poisson's  
 5 process, which considers the independent events occurs randomly in time and space. Only mainly shocks  
 6 are considered for hazard analysis. This is to avoid over estimation of the seismic hazard. The dependent  
 7 events (foreshocks and aftershocks) are temporally and spatially dependent on the main shocks. For this  
 8 purpose Declustering was performed to remove the dependent events for the catalogue. The Gardner and  
 9 Kenopoff (1974) Declustering algorithm method was used for removing foreshocks and aftershocks  
 10 (Gardner and Knopoff, 1974). This performs windowing procedure in time and space on the event  
 11 magnitude to identify the dependent events. To perform these analysis Z-Map coding developed by ETH  
 12 in Zurich (freely available) was used. The homogenized catalogue was converted into Z-map specified  
 13 format to perform the routine analysis. A total of 926 independent events remained after Declustering.

14

### 15 Completeness Analysis:

16 The catalogue also report events from very past, which cannot be considered complete for all the  
 17 magnitudes and time span. The time window starts from the year 1500, however, since then the catalogue  
 18 is not reported on regular basis. The instrumental observation of seismic data started after 1960, which  
 19 now, observes and document complete details of the earthquake events on regular basis. Due to these

- Dr Naveed 3/4/20 20:20  
**Deleted:** s
- Dr Naveed 3/4/20 20:18  
**Deleted:** p
- Dr Naveed 3/4/20 20:18  
**Deleted:** distribution which
- Dr Naveed 3/4/20 20:21  
**Deleted:** only
- Dr Naveed 3/4/20 20:21  
**Deleted:** (main shocks)
- Dr Naveed 3/4/20 20:22  
**Deleted:** &
- Dr Naveed 3/4/20 20:22  
**Deleted:** .
- Dr Naveed 3/4/20 20:22  
**Deleted:** Z
- Dr Naveed 3/4/20 20:23  
**Deleted:** were
- Dr Naveed 3/4/20 20:33  
**Deleted:** is
- Dr Naveed 3/4/20 20:33  
**Deleted:** s
- Dr Naveed 3/4/20 20:34  
**Deleted:** and that time no serious efforts were made in obtaining the earthquake data
- Dr Naveed 3/4/20 20:35  
**Deleted:** was
- Dr Naveed 3/4/20 20:35  
**Deleted:** 1960 which
- Dr Naveed 3/4/20 20:35  
**Deleted:**

1 reasons the specified time window (1500-2015) cannot be considered in obtaining the activity rate, as this  
 2 will result in underestimation of the activity rate. For this purpose completeness analysis was performed  
 3 using visual cumulative method (CUVI) proposed by Mulargia and Tinti (1985). It is a simple procedure  
 4 based on the observation that earthquakes follow a stationery occurrence process. It is used to find the  
 5 completion point (CP) after which the catalogue is considered to be complete (Tinti and Mulargia, 1985).  
 6 The procedure is to divide the magnitudes form 4 to 8 into various bands having 0.5 step-size. The  
 7 selected bands are: 4.00 to 4.50, 4.51 to 5.00, 5.01 to 5.50, 5.51 to 6.00, 6.01 to 6.50, 6.51 to 7.00, 7.01 to  
 8 7.7. In each band cumulative the numbers of total earthquakes are plotted against the year of earthquakes,  
 9 the period of completeness (Tc) is considered to begin at the earliest time when the slope of the fitting  
 10 curve can be well approximated by a straight line (**Fig. 7**). **Table 3** reports the completeness points and  
 11 time periods for each magnitude band.

12 **Table 3:**Completeness intervals and completion period of each magnitude band

Magnitude Range	Average Magnitude	Completion Interval	Completion Period (Tc)
4.00 – 4.50	4.25	1995 – 2015	20
4.51 – 5.00	4.75	1985 – 2015	30
5.01 – 5.50	5.25	1972 – 2015	43
5.51 – 6.00	5.75	1954 – 2015	61
6.01 – 6.50	6.25	1928 – 2015	87
6.51 – 7.00	6.75	1878 – 2015	137
7.01 – 7.77	7.35	1842 – 2015	173

13 **4.3 Seismic Source Parameters**

14 The modified Gutenberg-Richter reoccurrence law, as mentioned earlier, was used in the present seismic  
 15 hazard analysis to characterize the G-R parameters. The seismic source parameters (i.e.,  $\eta_o$ ,  $\beta$ ) were  
 16 calculated from setting linear trend line to the graph between  $\log \lambda_m \sim M_w$  as shown in **Fig. 8** for both  
 17 shallow and deep earthquakes for all seismic zones. Table 4 reports the seismic sources' G-R parameters  
 18 for all seismic sources and both shallow and deep earthquakes.  
 19

**Table. 4** Seismic source parameters for shallow and deep sources


Seismic Source	1	2	3	4	5	6	7	1*	2*
$\lambda_o$	10.055	3.625	4.075	2.876	1.059	2.143	2.731	24.143	5.652
$\beta = 2.303b$	2.832	2.03	2.10	2.24	2.03	2.10	2.5	2.17	2.97
$M_u$	6.2	7.6	7.5	6.8	6.0	6.0	5.5	7.7	6.0

1,2,3,4,5,6 and 7 are shallow seismic sources and 1\*, 2\* are deep seismic sources


- Dr Naveed 3/4/20 20:36  
**Deleted:** which is no. of events per time window
- Dr Naveed 3/4/20 20:36  
**Deleted:** were
- Dr Naveed 3/4/20 20:36  
**Deleted:** formulated
- Dr Naveed 3/4/20 20:37  
**Deleted:** range
- Dr Naveed 3/4/20 20:38  
**Deleted:** number of
- Dr Naveed 3/4/20 20:38  
**Deleted:** earthquakes
- Dr Naveed 3/4/20 20:38  
**Deleted:** is

- Dr Naveed 3/4/20 20:42  
**Formatted:** Font:5 pt
- Dr Naveed 3/4/20 20:40  
**Deleted:** discussed


- Dr Naveed 3/4/20 20:42  
**Formatted:** Line spacing: multiple 1.15 li

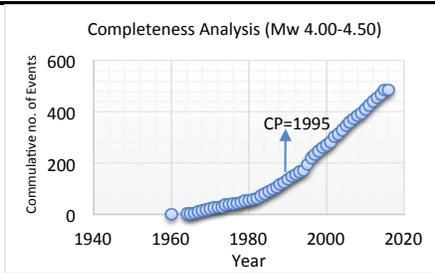


(Completeness period 20years:1995-2015)

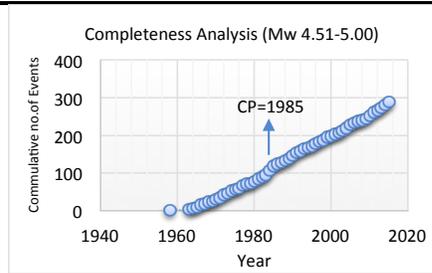


(Completeness period 30years:1985-2015)

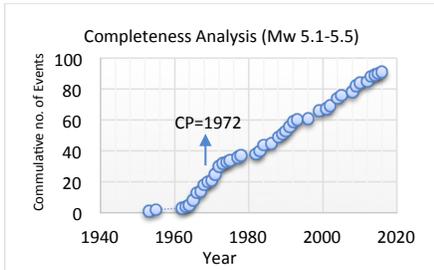


(Completeness period 43 years: 1972-2015)

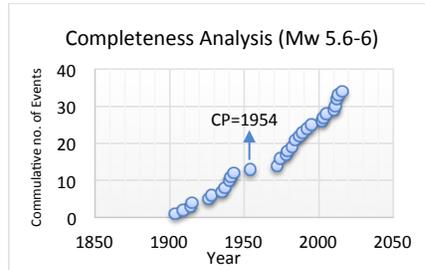


(Completeness period 61 years: 1954-2015)

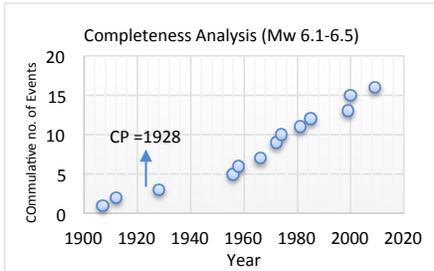

(Completeness period 87 years: 1928-2015)

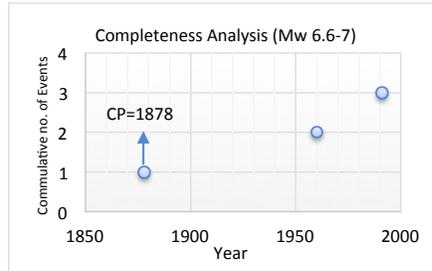


(Completeness period 137 years: 1878-2015)

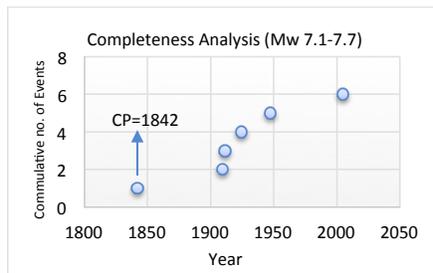

(Completeness period 173 years: 1842-2015)

**Figure 7.** Completeness Period for earthquake catalogue for specified band

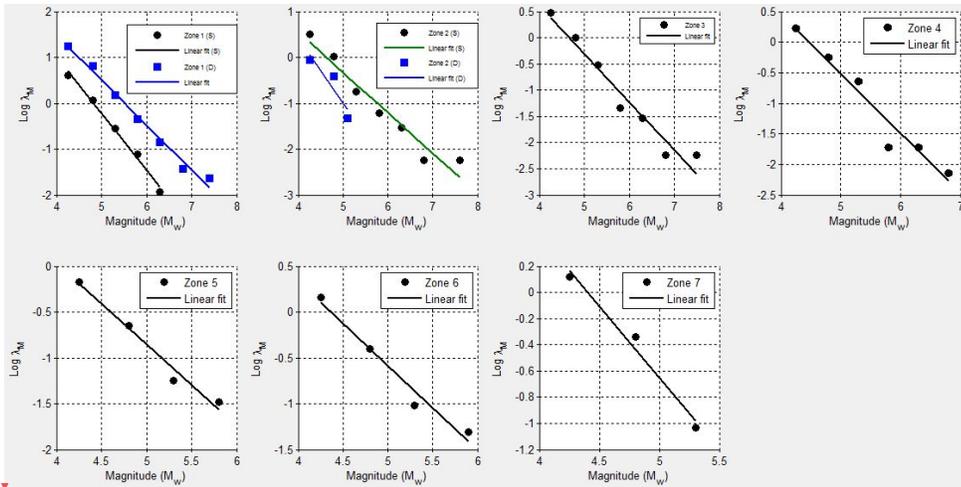

1  
2

3 **Figure. 8** The graph  $\log \lambda_m \sim M_w$  for seismic source parameters of seven zones

4 **4.4 Attenuation Relationships and Peak Ground Acceleration**

5 The attenuation relationships for a site are developed using substantial dataset information (Cotton et al.,  
 6 2006), however, these are not available for Pakistan because of the scarcity of available strong motion  
 7 data. The alternative to this is to use the already available attenuation relationships of other regions  
 8 having similar tectonic and geological conditions to Pakistan. In case of shallow earthquakes, the  
 9 candidate attenuation relationships for north Pakistan should be the one developed for the active tectonic  
 10 crustal earthquake region. Thus, the ground motion attenuation relationship of Akkar and Boomer (2010)  
 11 and Bore and Atkinson (2008) were used to calculate the **PGA** for shallow seismic sources. However, the  
 12 ground motion attenuation relationships of Lin and Lee (2008) and Kanno et al. (2006) developed for  
 13 subduction zones were used for deep seismic sources. The seismic hazard in term of PGA was then  
 14 calculated at bedrock site for different return periods, such as 50, 100, 250, 475 and 2500 years, as the  
 15 cumulative seismic hazard due to both shallow and deep seismic sources. The various GMPEs were  
 16 combined through logic tree approach and assigning equal weightages to each GMPE. The ground  
 17 motions calculated were plotted in **GIS** environment to obtain the seismic hazard maps for these different  
 18 ground motion attenuation relationships.

19  
20

Dr Naveed 3/4/20 20:42  
Deleted: .

Dr Naveed 3/4/20 20:43  
Deleted: .

Dr Naveed 3/4/20 20:43  
Deleted: Peak Ground Acceleration

Dr Naveed 3/4/20 20:44  
Deleted: Geographical Information System (

Dr Naveed 3/4/20 20:44  
Deleted: )

1 **4.5 Seismic Hazard Maps**

2 The seismic hazard levels (**Table 5**), based on peak acceleration, defined in the BCP-SP (2007) were  
 3 considered as basis for zoning of the seismic hazard at bedrock:

4

**Table. 5** Seismic hazard levels used for seismic zoning, obtained from BCP-SP (2007)

Seismic Hazard Level	Peak acceleration, (g)
Very low	< 0.08 g
Low	0.08 - 0.16 g
Medium	0.16 - 0.24
High	0.24 - 0.32
Very high	> 0.32 g

5

6 The seismic hazard maps for a return period of 475 years in case of shallow crustal earthquakes and deep  
 7 earthquakes for Peshawar District are reported in **Fig. 9** and **10** respectively. **Figure. 9** shows that for a  
 8 return period of 475 years, the predictive relationship of Akkar and Boomer, (2010) overestimate the  
 9 PGA value in comparison to that of Boore and Atkinson (2008), especially in the Northern parts of the  
 10 District. According to Arango et al. (2012), the distance scaling factor of the later appears to be more  
 11 adequate then the previous. Furthermore, **Table. 6** shows a slight comparison of both ground motion  
 12 prediction equations that suggests that in terms of  $N_R$ =Number of records,  $T_{max}$ = longest response period,  
 13  $M_w$ = moment magnitude and  $[R]$  = distance range, the prediction equation of Boore and Atkinson (2008)  
 14 is more appropriate and reliable than that of Akkar and Boomer (2010) for hazard assessment.


15

**Table. 4** Comparison of predictive equations used for shallow crustal earthquake (after, Arango, et al., 2012)


Predictive equation	Tectonic Regime	Region	$N_R$	$T_{max}$	$M_w$	$[R]$
Boore and Atkinson (2008)	Shallow crustal	Worldwide	1574	10	5-8	0-200
Akkar and Boomer (2010)	Shallow crustal	Europe/Middle east	532	3	5-7.6	0-100

16

17

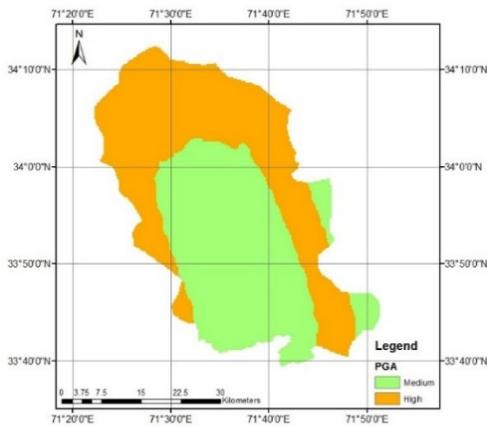


(a) Akkar and Boomer (2010)

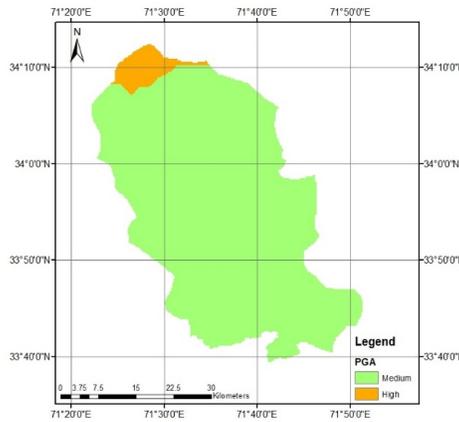


(b) Boore and Atkinson, NGA (2008)

**Figure. 9** Seismic hazard maps for shallow crustal earthquake using different attenuation equations

1

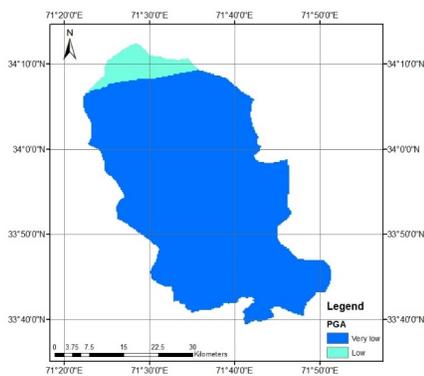

(a) Lin and Lee (2008)

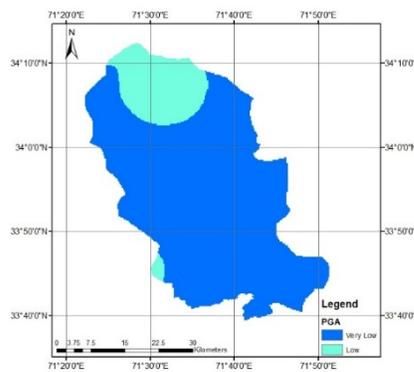

(b) Kanno et al. (2006)

**Figure. 10** Seismic hazard maps for deep subduction earthquake using different attenuation equations and for a return period of 475 years


2

3 **Figure. 10** shows, the seismic hazard maps for deep subduction earthquakes using the Lin and Lee (2008)  
 4 and Kanno et al. (2006) for a return period of 475 years. According to this **Fig. 10** both the attenuation  
 5 equations resulted in roughly similar seismic hazard for Peshawar District. Furthermore, it is also  
 6 evidenced from **Fig. 10** that, the inclusion of deep subduction zones in the seismic hazard does not  
 7 contribute significantly i.e., it remains low (0.08-0.16g) to very low (<0.08g). The cumulative seismic  
 8 hazard may slightly increase ground motion level, especially in the **northern** parts.

Dr Naveed 3/4/20 20:46  
 Deleted:

Dr Naveed 3/4/20 20:46  
 Deleted: southern

1 In probabilistic seismic hazard analysis (PSHA), one of the major sources of uncertainty is the epistemic  
 2 uncertainty arising from the selection of predictive relationship. Thus, the different ground motion  
 3 attenuation relationships already discussed were further used to find out the epistemic uncertainty in the  
 4 seismic hazard analysis. This was accomplished through the logic tree approach, assigning equal  
 5 weighing factor to each GMPE (Fig. 11), the seismic hazard was combined from all the GMPEs.  
 6

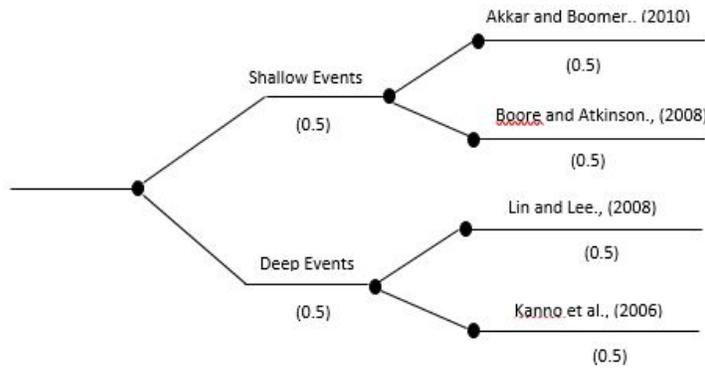


7  
 8 **Figure. 11** Logic Tree for incorporating epistemic uncertainty  
 9

10 **Figure. 12** shows the seismic hazard maps for shallow and deep events after incorporating the epistemic  
 11 uncertainty. As can be seen in **Fig. 12a**, the seismic hazard of Peshawar District becomes balanced when  
 12 the average of the seismic hazard calculated using the Akkar and Boomer (2010) and Boore and Atkinson  
 13 (2008) were taken. The reason is that of providing equal weightage to both the predictive relationship in  
 14 hazard analysis. The seismic hazard in case of deep subduction zone earthquake remains roughly the same  
 15 after incorporating epistemic uncertainty (**Fig. 12b**). It can also be further concluded that the earthquake  
 16 produced by deep subduction zone are not significant in term of seismic hazard and may be reasonably  
 17 ignored. Thus, the shallow seismic sources are sufficient for seismic hazard assessment of Peshawar. The  
 18 calculated seismic hazard map after incorporating epistemic uncertainty is compared with the hazard map  
 19 from the BCP-2007. For the return period of 475 years, a close agreement between the two seismic hazard  
 20 maps can be noticed (**Fig. 13**). After this check the seismic hazard maps for other return periods i.e. 50,  
 21 100, 250, 475 and 2500 years were prepared (**Fig. 14**), which may be used for seismic risk assessment.  
 22 Hazard maps for various cases are reported in Appendix Fig. A1 through Fig. A8.


Dr Naveed 3/4/20 20:47  
 Deleted: ..

Dr Naveed 3/4/20 20:47  
 Deleted: taken

Dr Naveed 3/4/20 20:48  
 Deleted: models

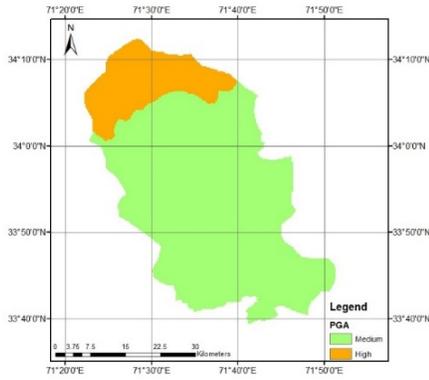


(a) Shallow crustal earthquake

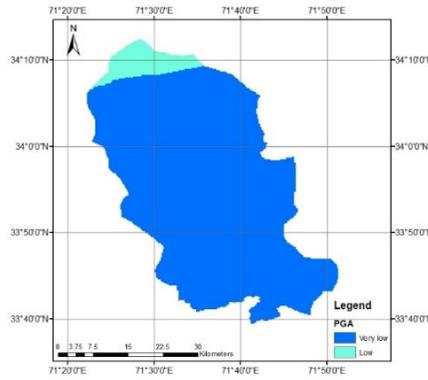


(b) Deep subduction zone earthquake

**Figure. 12** Seismic hazard maps after incorporating epistemic uncertainty for 475 years return period

1

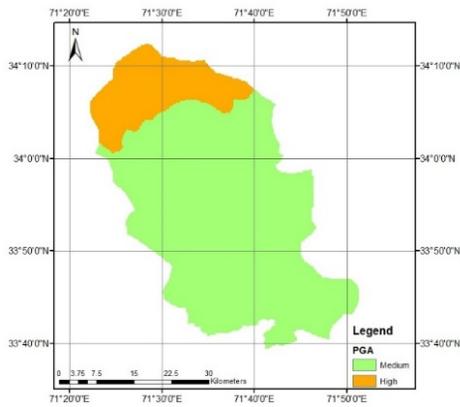

(a) Calculated with epistemic uncertainty

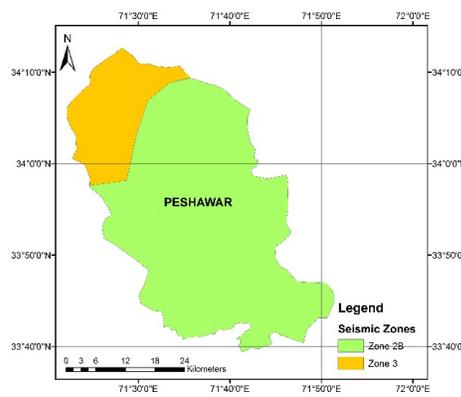


(b) BCP (2007)

**Figure. 13** Comparison of seismic hazard maps for a return period of 475 years

2

3

4

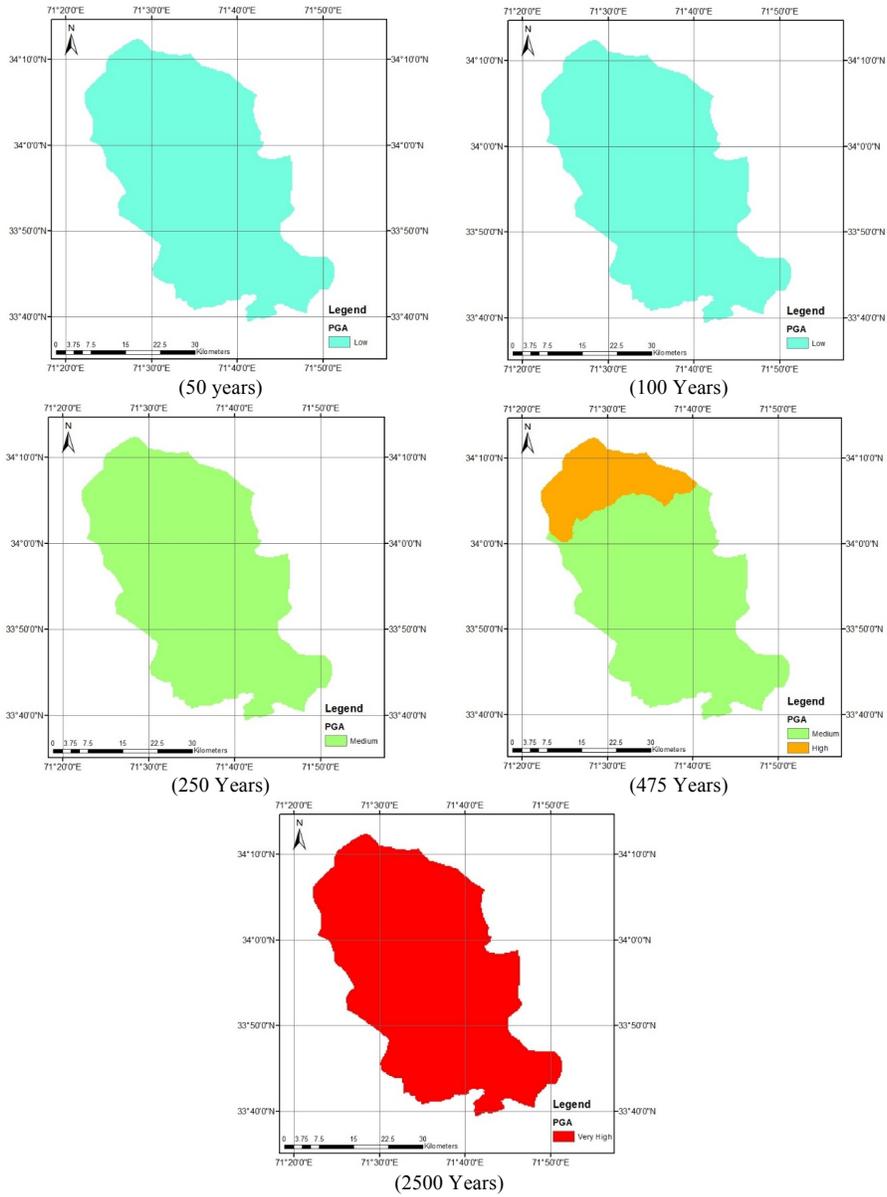

1 **Figure. 14** Mean seismic hazard maps for various return periods i.e. 50, 250, 475, 2500 years, considering all  
 2 GMPEs and both shallow and deep earthquake sources.

3

## 1 5. Conclusions and Recommendations

2 The following were concluded on the basis of literature ~~review~~ of past seismic hazard studies of  
3 Peshawar and classical PSHA conducted for Peshawar in the present study:

Dr Naveed 3/4/20 20:50

Deleted: review

4 • The selection of appropriate ground motion prediction equation is ~~crucial~~ in defining the seismic  
5 hazard of Peshawar District. In case of shallow crustal earthquake, the predictive relationship of  
6 Akkar and Boomer (2010) provide higher estimate of the PGA value in comparison to that of  
7 Boore and Atkinson (2008). The distance-scaling factor of the later appears to be the reason for  
8 this disparity ~~between~~ the two models.

Dr Naveed 3/4/20 20:50

Deleted: an important factor

9 • The inclusion of deep subduction earthquakes does not add significantly to hazard and may be  
10 neglected in term of seismic hazard. Therefore, these are only the shallow crustal ~~earthquakes~~  
11 ~~that contribute~~ to the seismic hazard of Peshawar District. However, recent earthquakes in  
12 Peshawar from deep sources earthquakes has caused widespread destruction in various parts of  
13 the district. This raises concern for the existing GMPEs and the classical PSHA procedure to  
14 simulate such effects.

Dr Naveed 3/4/20 20:50

Deleted: among

Dr Naveed 3/4/20 20:50

Deleted: earthquakes that contributes

15 • The epistemic uncertainty was used by providing equal weightage to the attenuation equation of  
16 Akkar and Boomer (2010) and Boore and Atkinson (2008). The mean seismic hazard map ~~thus~~  
17 produced was balanced and was found in a close agreement with the design base seismic hazard  
18 given in the BCP-SP (2007) for bedrock hazard. However, the BCP places Peshawar in Zone 2B,  
19 which is reasonable for most of the locations but it underestimates ground motions especially in  
20 northern parts of the District.

Dr Naveed 3/4/20 20:51

Deleted: s

Dr Naveed 3/4/20 20:51

Deleted: .

21 • The mean seismic hazard calculated for Peshawar was also compared with the previous studies  
22 (Table 6). It can be observed that the seismic hazard performed by independent researchers  
23 suggests an average PGA equal to about 0.24g, which is in agreement with the PGA = 0.24g  
24 given in the BCP-SP (2007) for seismic Zone 2b (0.16g to 0.24g) for bedrock. The present PSHA  
25 study performed using the most up-to-date earthquake catalogue, recent GMPEs and considering  
26 both the shallow and deep seismic sources confirmed the validity of seismic hazard given in the  
27 BCP-SP (2007). It is worth mentioning that the calculated mean hazard may be approximated as  
28 the 50<sup>th</sup> percentile seismic hazard. **Table 6** reports that recent hazard studies considering the fault  
29 sources have resulted in larger estimate of seismic hazard that places Peshawar in seismic Zone 3  
30 and Zone 4, however, the idealization of seismic sources as discrete faults for Peshawar are not  
31 reliable due to the scarcity of detailed information regarding the fault sources in Northern  
32 Pakistan. This higher seismic hazard is not justified by the earthquake history of Peshawar.

1 **Table 6.** Placement of Peshawar based on the present study: classical PSHA with areal sources,  
 2 considering both shallow and deep earthquakes. Listed in ascending order.

S. No.	Authors	PGA (g)
1	Shah et al. (2019)	0.06
2	Bhatia et al. (1999)	0.10 – 0.15
3	Mona Lisa et al. (2007)	0.15
4	Zhang et al. (1999)	0.16 – 0.24
5	Rafi et al. (2012)	0.17
6	Ahmad et al. (2019)	0.16 to 0.24
<b>7</b>	<b>Present Study</b>	<b>0.16 – 0.32</b>
8	Hashash et al. (2012)	0.20 – 0.40
9	Şeşetyan et al. (2018)	0.30 – 0.40
10	Khaliq et al. (2019)	0.32 – 0.34
11	Zaman and Warnitchai (2012)	0.33 – 0.40
<u>12</u>	<u>Waseem et al. (2020)</u>	<u>0.33</u>
<u>13</u>	<u>Waseem et al. (2018)</u>	<u>0.38</u>

3

4 It is worth mentioning that the focus of the present study was to provide the base maps for seismic hazard  
 5 in Peshawar. Site-specific soil properties were not known, therefore, it was not addressed in the present  
 6 study. Alternatively, the code suggests amplification factors for various soils from Type C to Type E as  
 7 per NEHRP soil classification. This may be considered to amplify/de\_amplify the seismic hazard  
 8 provided in the present study. ▾

9 **Acknowledgement**

10 This paper has been produced from MSc research work of Seismic Microzonation of Peshawar, Pakistan.  
 11 The authors are grateful to the reviewer for their constructive remarks that improved quality of the  
 12 manuscript.

13 **Data Availability Statement**

14 All data, models, or code generated or used during the study are available from the corresponding author  
 15 by request (Naveed Ahmad, [naveed.ahmad@uetpeshawar.edu.pk](mailto:naveed.ahmad@uetpeshawar.edu.pk)). Items, which may be requested:  
 16 earthquake catalogue (raw and processed data), excel sheets used for G-R parameters derivation, CRISIS  
 17 input files, etc.

18

Dr Naveed 3/4/20 18:19  
 Deleted: 2

Dr Naveed 3/4/20 20:53  
 Deleted: -

1 **Author Contribution**

2 Naveed Ahmad has contributed as the advisor/supervisor of the research, in the analysis of earthquake  
3 catalogue for derivation of seismic parameters, selection of GMPEs, preparation of input files for CRISIS  
4 program and paper drafting. Usman Khan has contributed in the compilation of earthquake catalogue and  
5 processing of data, analysis of hazard through CRISIS program and developing hazard maps. Khalid  
6 Mahmood has contributed in the data organization, literature review and integration of work tasks and  
7 preparation of initial paper draft. Qaiser Iqbal has contributed in selecting/designing seismic sources for  
8 both shallow and deep earthquakes, assignment of source parameters in CRISIS program, output data  
9 compilation and result plotting.

10 **Competing Interest**

11 The authors do not report any potential conflict of interest.

12 **References**

- 13 Ahmad, N. (2015) "A note on the strong ground motions and behavior of buildings during 26<sup>th</sup> Oct. 2015  
14 Afghanistan- Pakistan earthquake", Earthquake Engineering Research Institute (EERI), Oakland,  
15 CA, USA.
- 16 Ahmad, N., Ullah, S. and Waseem, M. (2019) "Discussion of "Assessment of the seismicity of Peshawar  
17 region in line with the historical data and modern building codes (ASCE-07 & IBC3-2006)" by  
18 Shah et al", Journal of Earthquake Engineering. <https://doi.org/10.1080/13632469.2019.1692743>.
- 19 Ali, Q., Khan, A.N.: A critical review of the seismic hazard zoning of Peshawar and Adjoining areas.  
20 Journal of Earthquake Engineering, 9, 587-607.
- 21 Akkar, S., Bommer, J.J.: Empirical Equations for the Prediction of PGA, PGV, and Spectral  
22 Accelerations in Europe, the Mediterranean Region, and the Middle East. Seismological Research  
23 Letters, 81, 2010.
- 24 Ambraseys, N.N., Douglas, J., Sarma, S. K. and Smit, P. M.: Equations for the estimation of strong  
25 ground motions from shallow crustal earthquakes using data from Europe and the Middle East:  
26 horizontal peak ground acceleration and spectral acceleration. Bulletin of Earthquake  
27 Engineering, Vol. 3, pp. 1-53, 2005.
- 28 Arango, M.C., Free, M.W., Lubkowsky, Z.A., Pappin, J.W., Musson, R.M.W., Jones, G., Hodge, E.:  
29 Comparing predicted and observed ground motions from UK earthquakes. Proceeding of the 15<sup>th</sup>  
30 World Conference on Earthquake Engineering, Lisbon, Portugal, 2012.
- 31 Bhatia, S. C., Kumar, M. R. and Gupta, H. K.: A probabilistic seismic hazard map of India and adjoining  
32 regions", *Annali di Geofisica*, Vol. 42, pp. 1153-1164, 1999.
- 33 BCP: BCP-SP - Building Code of Pakistan Seismic Provision. Ministry of Housing and Works,  
34 Islamabad, 2007.

- 1 Boore, D.M., Atkinson, G.M.: Ground-motion prediction equations for the average horizontal component  
2 of PGA, PGV, and 5%-damped PSA at spectral periods between 0.01 s and 10.0 s. *Earthquake*  
3 *Spectra*, 24, 99-138, 2008.
- 4 Çağnan, Z. and Akkar, S.: Assessment of Aleatory and Epistemic Uncertainty for Ground-Motion  
5 Intensity Measure Prediction in Turkey. *Bulletin of the Seismological Society of America*,  
6 109(1), pp. 263-283.
- 7 Campbell, K.W., Bozorgnia, Y.: Empirical analysis of strong ground motion from the 1992 Landers,  
8 California, earthquake. *Bulletin of the Seismological Society of America*, 84, 573-588, 1994.
- 9 Chen, Z., Burchfiel, B.C., Liu, Y., King, R.W., Royden, L.H., Tang, W., Wang, E., Zhao, J., Zhang, W.:  
10 GPS measurement from eastern Tibet and their implications for India/Eurasia intercontinental  
11 deformation. *Journal of Geophysical Research*, 105, 16-215, 2000.
- 12 Cotton, F., Scherbaum, F., Bommer, J.J., Bungum, H.: Criteria for selecting and adjusting ground-  
13 motion models for specific target regions: application to central Europe and rock sites. *Journal*  
14 *of Seismology*, 10, 137-156, 2006.
- 15 CRISIS: User Manual Crisis 2007 Version 7.2. In: Ordaz, M., Aguilar, A., Arbulida, J. (Eds.). A  
16 computer program for seismic hazard assessment. Institute of Ingeniería, UNAM, 2007.
- 17 Campbell, K.W.: Near source attenuation of peak horizontal acceleration. *Bulletin of the Seismological*  
18 *Society of America*, 71, 2039-2070, 1981.
- 19 Crouse, C.B.: Ground-motion attenuation equations for earthquakes on the Cascadia subduction zone.  
20 *Earthquake Spectra*, 7, 210-236, 1991.
- 21 Crouse, C.B., Vyas, Y.K., Schell, B.A.: Ground motions from subduction-zone earthquakes. *Bulletin of*  
22 *the Seismological Society of America*, 78, 1- 25, 1988.
- 23 DiPietro, J.A., Pogue, K.R.: Tectonostratigraphic subdivisions of the Himalaya: A view from the west.  
24 *Tectonics*, 23, 1-20, 2004.
- 25 Douglas, J.: Ground motion prediction equations 1964-2019. Technical Report, Department of Civil and  
26 Environmental Engineering, University of Strathclyde, Glasgow, UK.
- 27 Gansser, A.: *Geology of the Himalayas*. Inter-Science Publication. Jon Wiley and Sons, London, 1964.
- 28 Hanks, T. C., Kanamori, H.: A moment magnitude scale. *Journal of Geophysical Research*, 84, 2348 -  
29 2350, 9B0059, doi:10.1029/JB084iB05p02348, 1979.
- 30 Hashash, Y.M, Kim, B., Olson, S.M., and Ahmad, I.: Seismic hazard analysis using discrete faults in  
31 Northwestern Pakistan: Part I-methodology and evaluation. *Journal of Earthquake Engineering*,  
32 16, 963-964, 2012.
- 33 Kanamori, H.: The energy release in great earthquakes. *Journal of Geophysical Research*, 82, 298 I-2987,  
34 1977.
- 35 Kanno, T., Narita, A., Morikawa, N., Fujiwara, H., Fukushima, Y.: A new attenuation relation for strong  
36 ground motion in Japan based on recorded data. *Bulletin of the Seismological Society of*  
37 *America*, 96, 879-897, 2006.
- 38 Khaliq, A.H., Waseem, M., Khan, S., Ahmed, W. and Khan, M.A.: Probabilistic seismic hazard  
39 assessment of Peshawar District, Pakistan. *Journal of Earth System Sciences*, Vol. 128(6), 2019.

- 1 | [Khan, S., Waseem, M., Khan, M.A., Ahmed, W. \(2018\) "Updated earthquake catalogue for seismic](https://doi.org/10.1007/s10950-018-9736-y)  
2 | [hazard analysis in Pakistan", Journal of Seismology, Vol. 22, pp. 841-861. DOI:](https://doi.org/10.1007/s10950-018-9736-y)  
3 | [https://doi.org/10.1007/s10950-018-9736-y.](https://doi.org/10.1007/s10950-018-9736-y)
- 4 | Lin, P-S., Lee, C.T.: Ground-Motion Attenuation Relationships for Subduction Zone Earthquakes in  
5 | Northeastern Taiwan. Bulletin of the Seismological Society, 98, 220-240, 2008.
- 6 | McGuire, R.K.: Seismic hazard and risk analysis. Earthquake Engineering Research Institute (EERI), CA,  
7 | USA, 2004.
- 8 | Molas, G.L., Yamazaki, E.: Attenuation of earthquake ground motions in Japan including deep focus  
9 | events. Bulletin of the Seismological Society of America, 85, 1343-1358, 1995.
- 10 | MonaLisa, Khawaja, A.A., Jan, M. Q.: Seismic hazard assessment of NW Himalayan thrust belt using  
11 | probabilistic approach. Journal of Earthquake Engineering, 11, 257-301, 2007.
- 12 | Ornthammarath, T., Douglas, J., Sigbjörnsson, R. and Lai, C.: Assessment of ground motion variability  
13 | and its effects on seismic hazard analysis: A case study for Iceland. Bulletin of Earthquake  
14 | Engineering, Springer Verlag, 2011, 9 (4), pp.931-953.
- 15 | Rafi, Z., Lindholm, C., Bungum, H., and Ahmed, N.: Probabilistic seismic hazard analysis and zonation  
16 | of Pakistan, Azad Jammu and Kashmir. Natural Hazards, 61, 1317-1354, 2012.
- 17 | Rowshandel, B.: Capturing and PSHA implementation of spatial variability of Near-source ground  
18 | motion hazard, Proceedings of the Geotechnical Earthquake Engineering and Soil Dynamics V,  
19 | June 10-13, Austin, Texas, 2018.
- 20 | Rupakhety, R. and Sigbjörnsson, R.: Ground-motion prediction equations (GMPEs) for inelastic  
21 | displacement and ductility demands of constant-strength SDOF systems. Bulletin of Earthquake  
22 | Engineering, 7(3), pp. 661-679.
- 23 | Şeşetyan, K. et al.: The 2014 seismic hazard model of the Middle East: overview and results. Bulletin of  
24 | Earthquake Engineering, Vol. 16(8), pp. 3535-3566, 2018.
- 25 | Zaman, S., and Warnitchai, P.: Probabilistic seismic hazard maps for Pakistan. In Proceedings of the 15<sup>th</sup>  
26 | World Conference on Earthquake Engineering, Bangkok, Thailand, 2010.
- 27 | Tahirkheli, R.A.: Geology of the Himalayas, Karakorum, and Hindu Kush in Pakistan. University of  
28 | Peshawar Geological Bulletin, 15, 1-49, 1982.
- 29 | Toro, G.R., Abrahamson, N.A. and Schneider, J.F.: Model of strong ground motions from earthquakes  
30 | in Central and Eastern North America: best estimates and uncertainties. Seismological  
31 | Research Letters, 68, 41-57, 1997.
- 32 | Toro, G.R., Abrahamson, N.A., and Schneider, J.F., 1995. Engineering model of strong ground motions  
33 | from earthquake in the central and eastern United States, Earthquake Spectra, in press.
- 34 | Waseem, M., Khan, M.A., Javed, M. W., Ali, S.M.: Deterministic seismic hazard analysis for  
35 | Peshawar, Pakistan. Journal of Himalayan Earth Sciences, 46, 67-72, 2013.
- 36 | Waseem, M., Spacone, E. and Lai, C. G.: Seismic hazard assessment of northern Pakistan. Natural  
37 | Hazards, Vol. 90(2), pp. 563-590. 2018.

Dr Naveed 3/4/20 18:08

**Deleted:** Khan, S., Waseem, M., Khan, M.A., Ahmed, W. (2018) "Updated earthquake catalogue for seismic hazard analysis in Pakistan", Journal of Seismology, Vol. 22, pp. 841-861. DOI: [https://doi.org/10.1007/s10950-018-9736-y.](https://doi.org/10.1007/s10950-018-9736-y)

1 | [Waseem, M., Khan, S. & Asif Khan, M. Probabilistic Seismic Hazard Assessment of Pakistan Territory](https://doi.org/10.1007/s00024-020-02455-7)  
2 | [Using an Areal Source Model. Pure Appl. Geophys. \(2020\). https://doi.org/10.1007/s00024-020-](https://doi.org/10.1007/s00024-020-02455-7)  
3 | [02455-7](https://doi.org/10.1007/s00024-020-02455-7)

4 | Youngs, R.R., Abrahamson, N.A., Makdisi, E., Sadlgh, K.: Magnitude dependent dispersion in peak  
5 | ground acceleration. Bulletin of the Seismological Society of America, 85, 1161-1176, 1995.

6 | Youngs, T.L.R., Chiou, S.J., Silva, W.L., Humphrey, J.R.: Strong ground motion attenuation relationships  
7 | for subduction zone earthquakes based on empirical data and numerical modeling (abs.),  
8 | Seismological Research Letters, 64, 58-73, 1993.

9 | Zhang, P. Z., Yang, Z-X, Gupta, H.K., Bhatia, S.C., Shedlock, K.M.: Global seismic hazard assessment  
10 | program (GSHAP) in continent Asia; Annali di geofisica, 42, 1167-1190, 1999.

11

12

13

14

15

16

17

18

19

20

21

22

23

24

25

26

27

28

29

30


31

32

33

1 | APPENDIX:

Dr Naveed 3/4/20 18:20  
Deleted: ... [1]

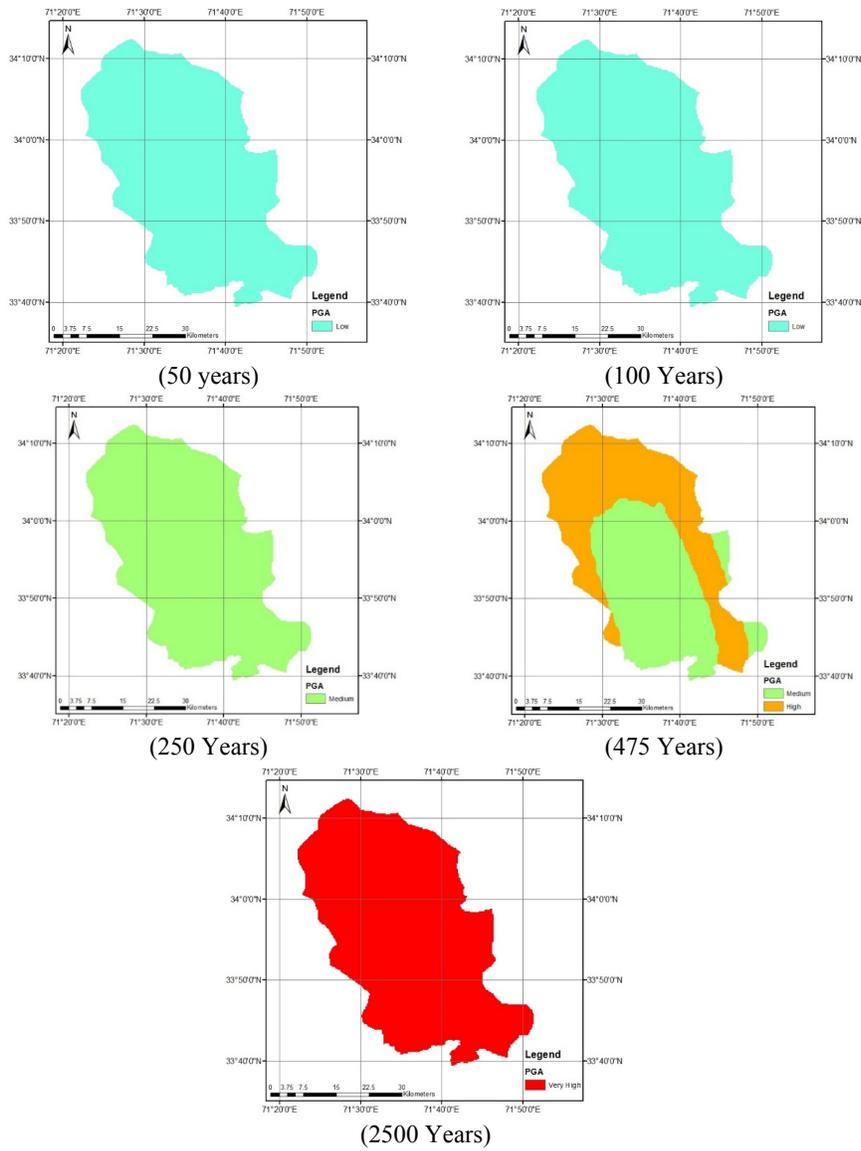


2


3 Fig A1. Calculated seismic hazard maps using Akkar and Boomer, 2010 GMPE for shallow earthquakes

4

5

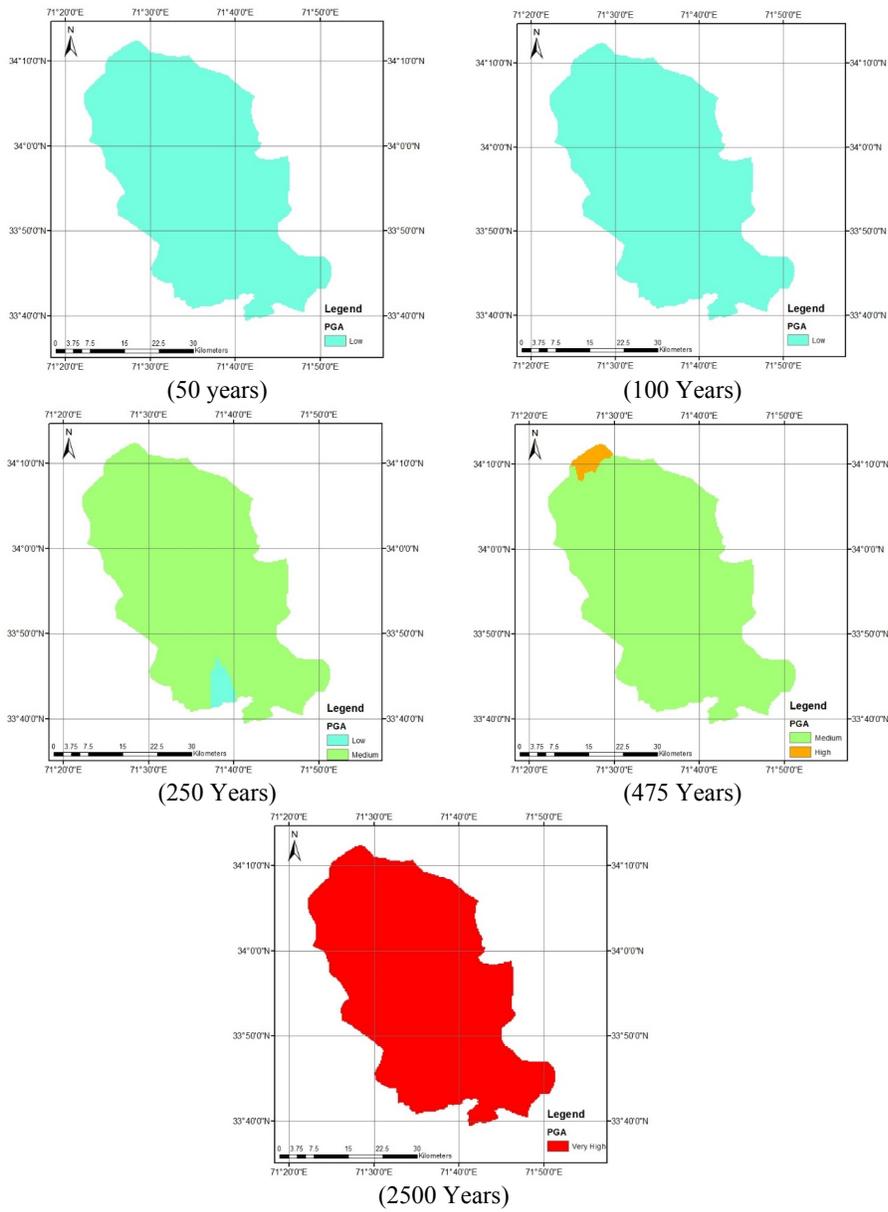

1 Fig A2. Calculated seismic hazard map using Bore and Atkinson, NGA 2008 GMPE for shallow earthquakes  
 2

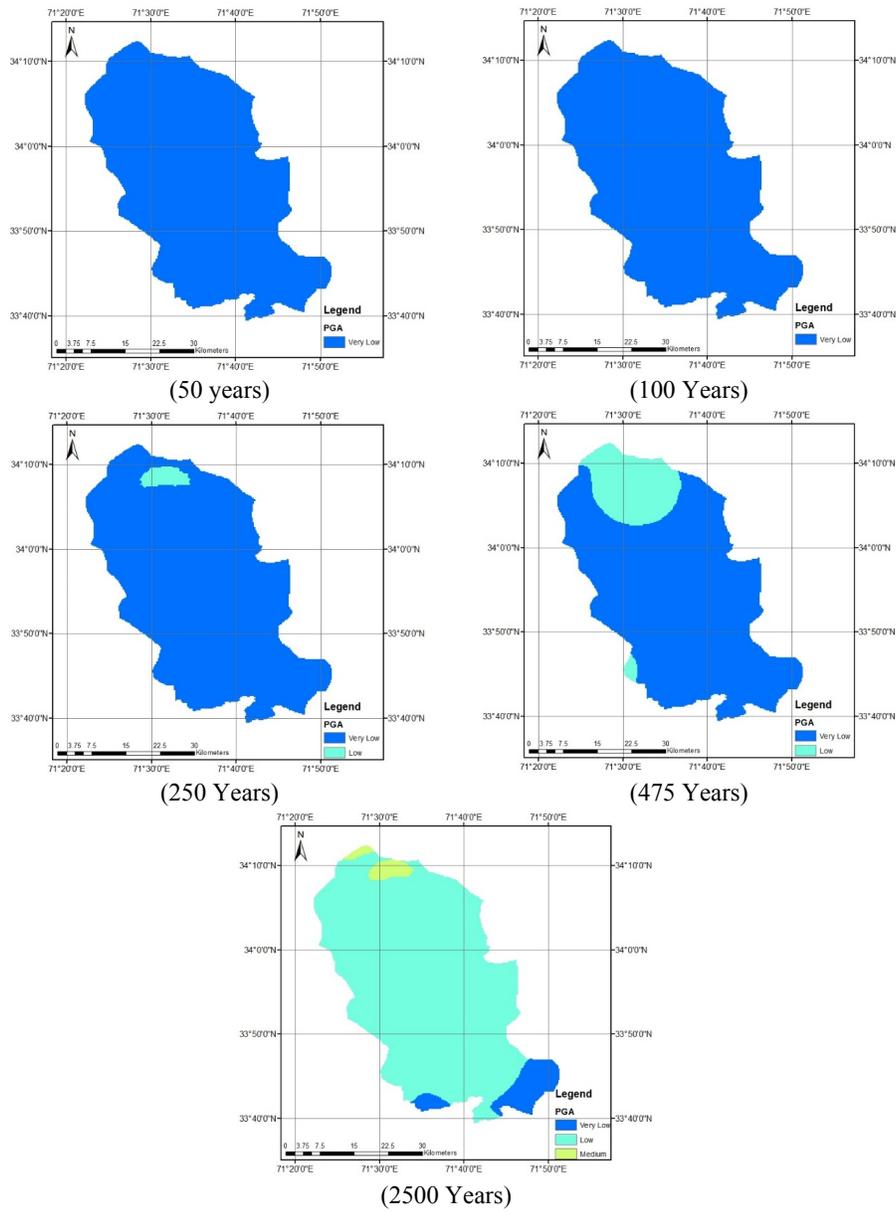


1


2

3


Fig A3. Calculated seismic hazard map using Kanno et al, 2006 GMPE for Deep earthquakes

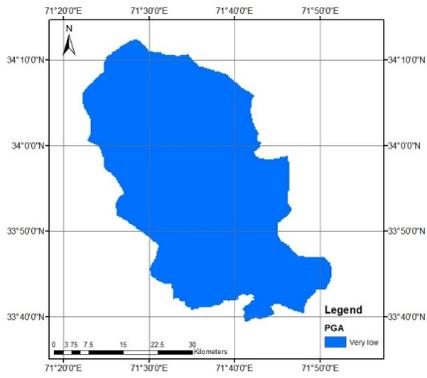


(50 years)

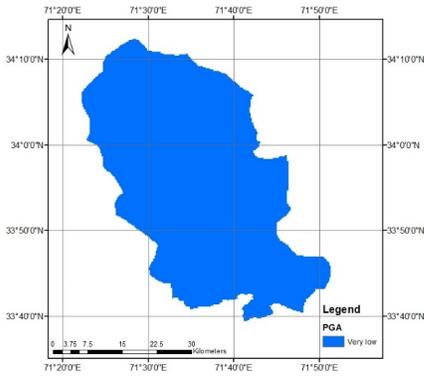


(100 Years)

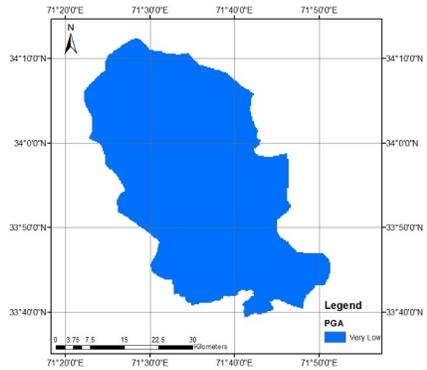

(250 Years)

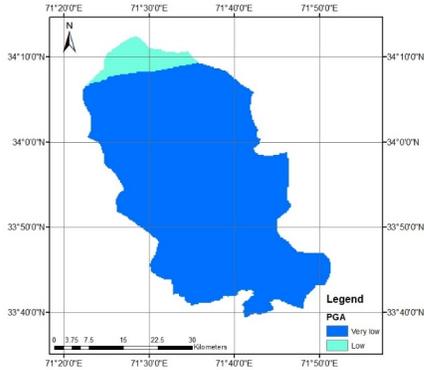

(475 Years)

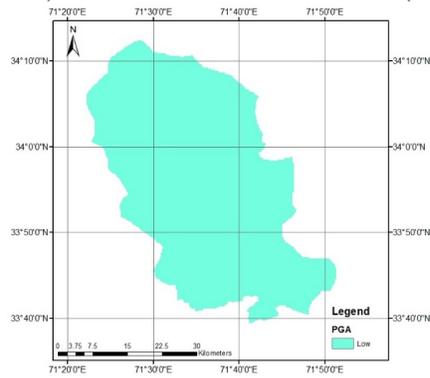


(2500 Years)

1


2

3

Fig A4 Calculated seismic hazard map Lin and Lee, 2008 GMPE for Deep earthquakes

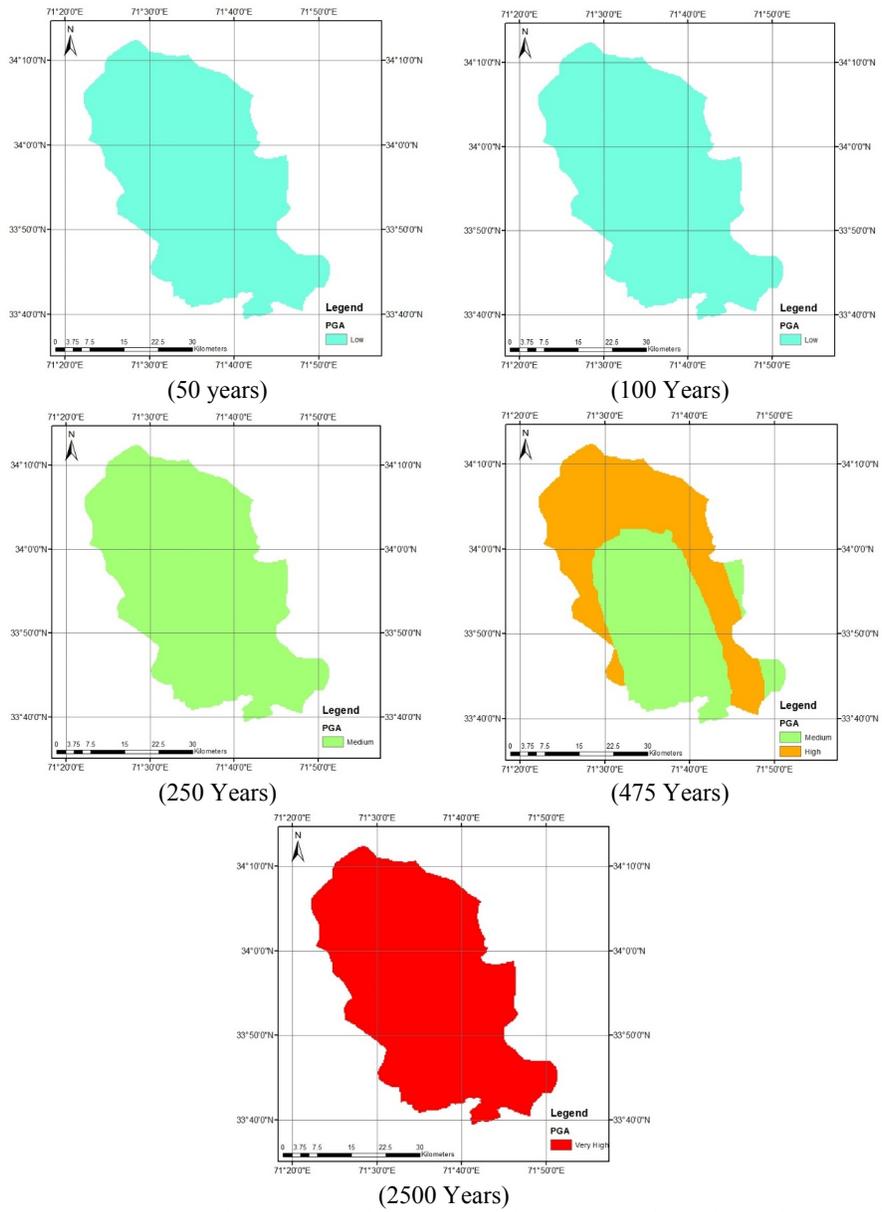


1 Fig A5. Calculated seismic hazard map considering Akkar and Boomer, 2010 for shallow earthquakes and Kanno et  
 2 al, 2006 for Deep earthquakes

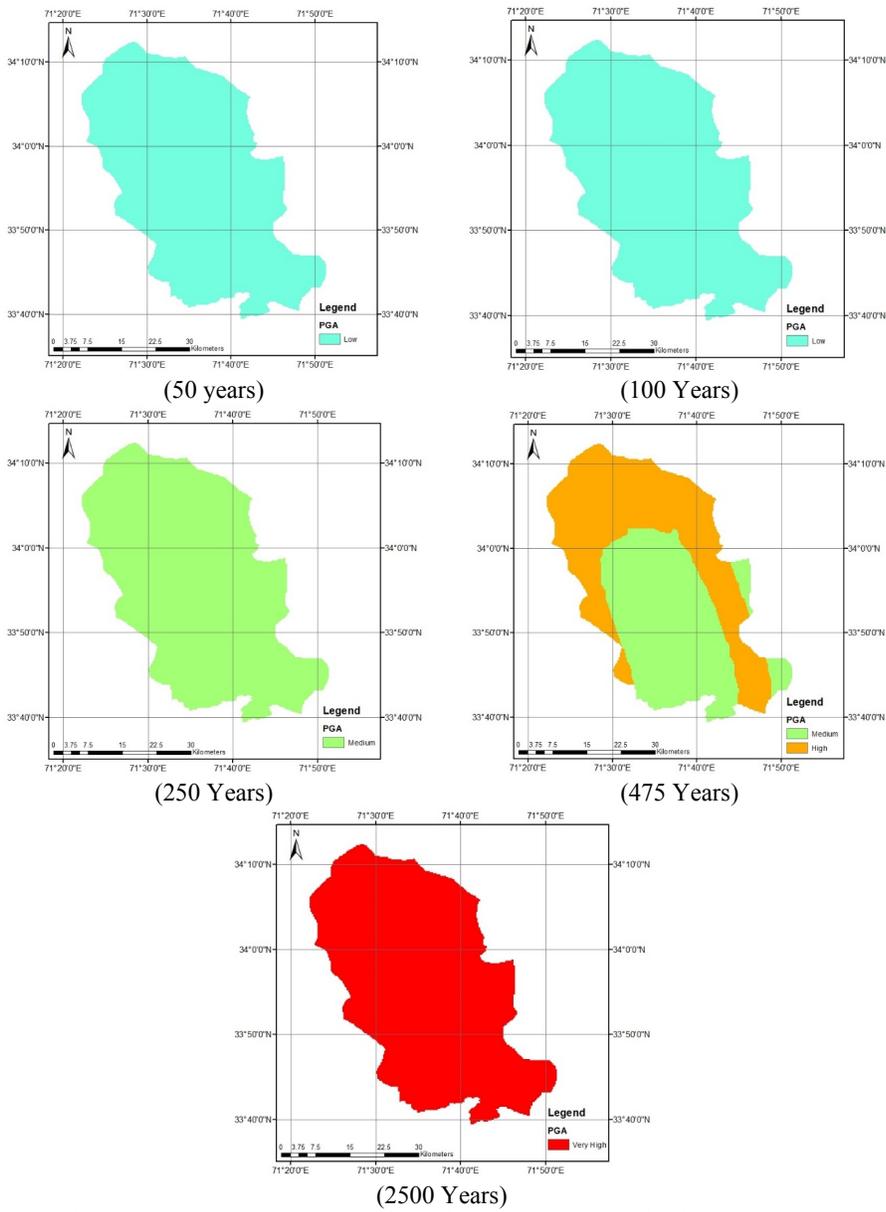

1 Fig A6. Calculated seismic hazard map considering Akkar and Boomer, 2010 for shallow earthquakes and Lin and  
 2 Lee, 2008 for Deep earthquakes


3

4

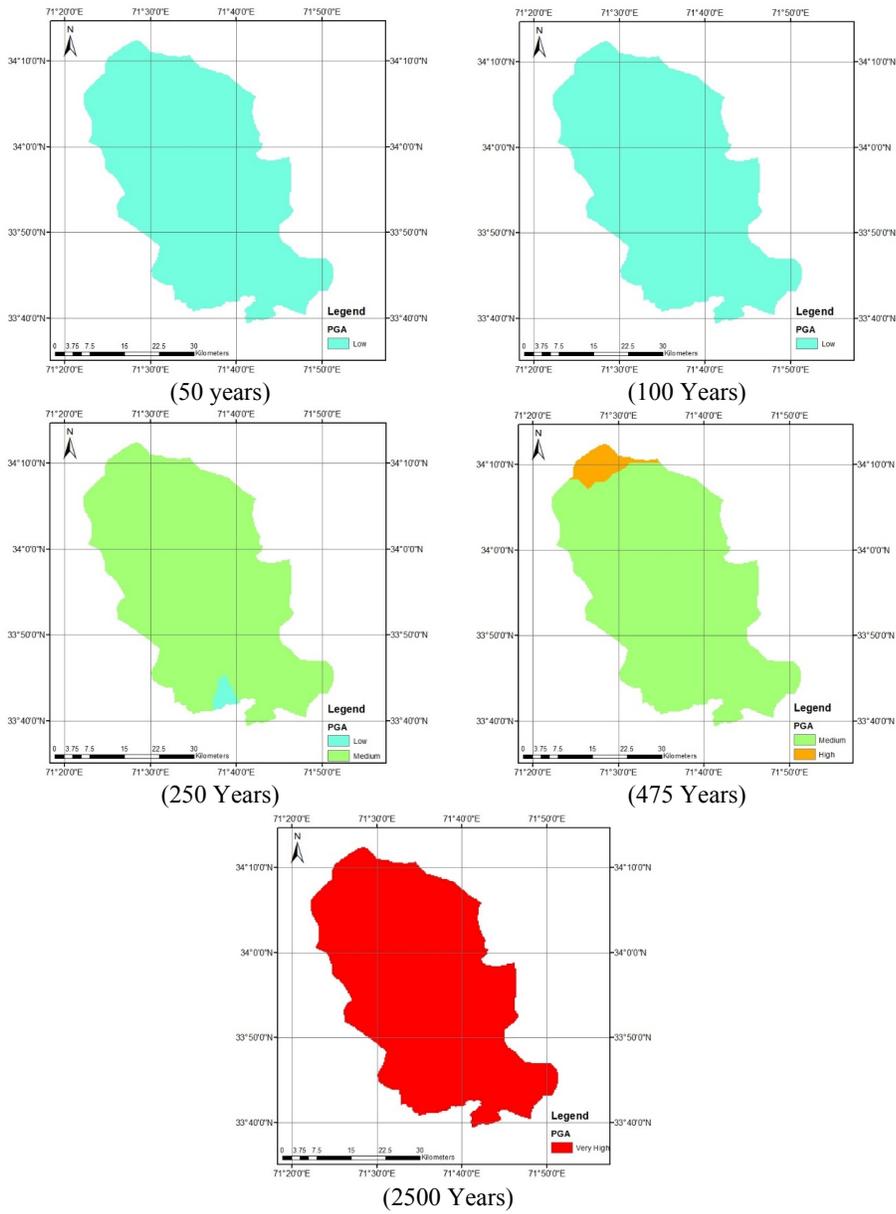

1 Fig A7. Calculated seismic hazard map considering Bore and Atkinson, NGA 2008 for shallow earthquakes and  
 2 Kanno et al, 2006 for Deep earthquakes

3

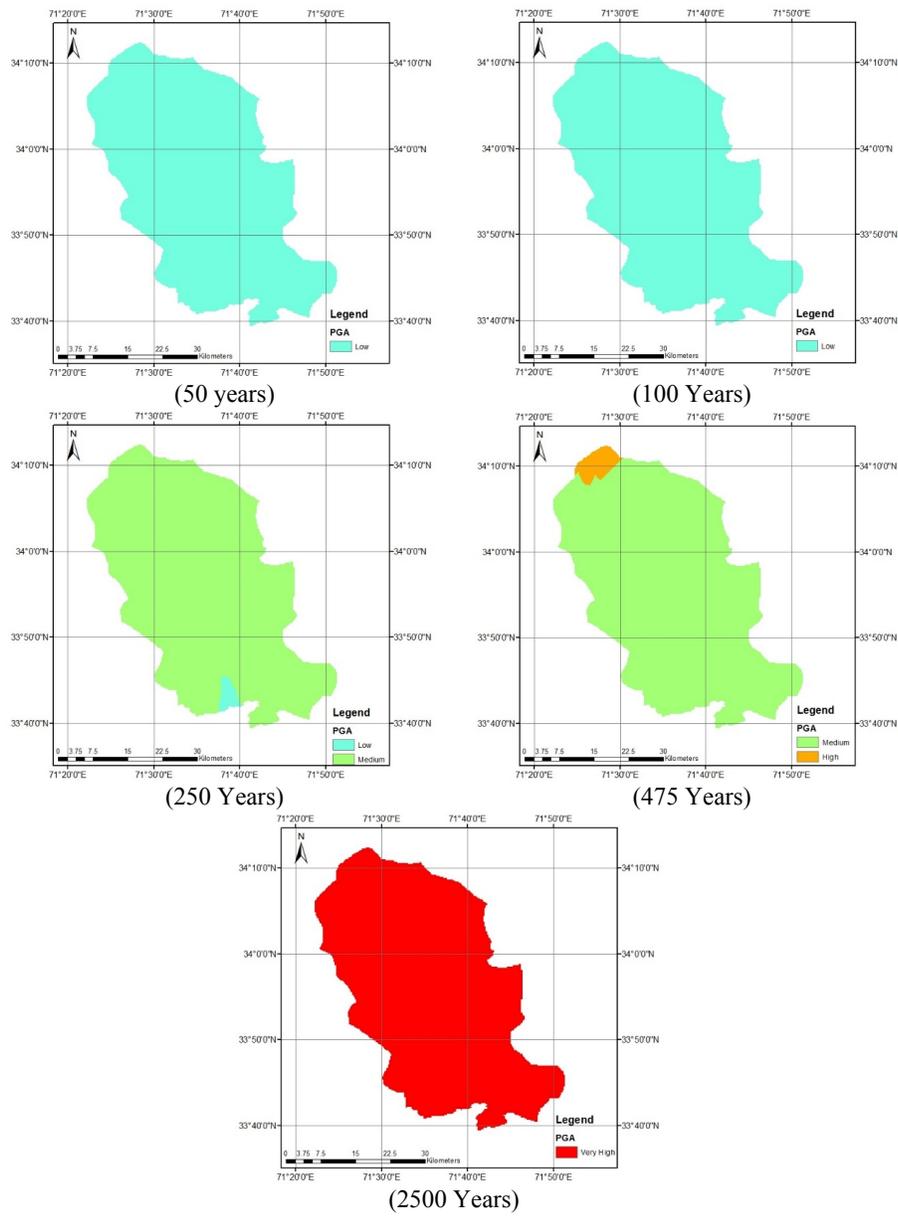

1 Fig A8. Calculated seismic hazard map considering Bore and Atkinson, NGA 2008 for shallow earthquakes and Lin  
 2 and Lee, 2008 for Deep earthquakes