

Authors' response

Editor:

Thank you very much again for your responses and revisions of your manuscript. The referee reports for these major revisions are now available. Both of them agree that your manuscript has improved and that you have addressed most of the comments. However, some additional revisions are requested. Some of them refer to comments from the previous round of major revisions. I kindly ask you to take the specific comments of both reviewers into thorough consideration and rework the manuscript accordingly. Sharpening the focus of your paper is an important recommendation. Therefore, I decide on minor revisions. Please provide a revised marked up (track changes) version of your manuscript to make clear how you include the changes in response to the referee report. I look forward to receiving the revised version of your manuscript.

We would like to thank the Editor for his advice on how to improve our manuscript. Given Reviewer 1 comments, we believe that he/she had missed our response that was uploaded to the system as a separate document. Below we provide our specific response to the comments listed by both Reviewers and, using a smaller font size, a repetition of our previous response to comments, which we believe we already addressed.

Reviewer 1

There have been some improvements of the manuscript related to validation and the citation of state of the art methods. However, some of my comments of the first round of review have not been considered.

We wrote a nine-page Response to Reviewer 1 document, by extensively considering and addressing all the comments provided in the first round of reviews. We believe that Reviewer 1 missed our Response to his/her comments that was uploaded to the system as a separate document. In any case, below we provide our specific response to the comments listed in his/her second review.

Specific comments

- In my view the focus of this contribution is still not clear. The method for detecting flooding based on SAR data is already published by the authors. Therefore, the focus of this publication should be on the huge flood event on the Bahamas. However, only Sentinel-1 data on two dates in early September has been analysed. By integrating other Earth Observation data sets acquired during this event (e.g. in the frame of the International Charter Space and Major Disasters) and also additional Sentinel-1 data acquired in September 2019 (e.g. on September 14) the evolution of this flood event could be better described (the RAPID approach could be of course a component to complete the description of this event) (see also my comment of my first review).

We would like to iterate herein our response that was submitted to address this exact same comment during the first round of reviews.

Thank you for this comment. We agree with the reviewer about the clarity of the focus of our paper. In particular, we are not presenting the methodology for an automated system, but we are presenting the application of that system. For this reason we modified the following sentence of the abstract by adding the words "an application of":

40 “we present an application of the automated near-real-time (NRT) system called RAdar-Produced Inundation Diary (RAPID) to European Space Agency Sentinel-1 SAR images to produce flooding maps for Hurricane Dorian in the northern Bahamas.”

The reviewer’s question related to other Earth Observation data may arise by our lack of specificity on the resolution. In the previous version of the manuscript we generically wrote about “high-resolution”. However, the resolution of this product is much higher than other high-resolution products: it is 10 meters (we included this information in the current version). Most of the other products are either at a lower resolution, or optical. Optical sensors do not work in adverse weather conditions are not reliable for an immediate response to hurricanes. To make this difference clear, we added the following sentence in the paper:

45 “Differently than optical sensors, SAR images are not influenced (more recent edit: nearly not affected) by adverse weather conditions.”

Moreover, in the revised version we now include a comparison with the EMS product (which is based on the same SAR observation) in Figure 2, in the new Table 1, and in text:

50 “The agreement (overall, user, producer) scores between RAPID and EMS flooding maps for the Abaco Islands on September 2 and September 4, derived from the confusion matrix shown in Table 1, were (77%, 90%, 41%) and (89%, 61%, 86%), respectively. The high overall and user agreement scores for the September 2 flooding are also depicted in the flood maps of Figure 2 indicating a very good overlap of the two products over the coast of Great Abaco, while the relatively low producer agreement comes from the lack of flood detection by the EMS algorithm over the multiple near-sea-surface-elevation islands, located in the front of the western coast of Great Abaco. The relatively low user agreement score between the two products on September 4 is due to the fact that RAPID classifies some non-flooded areas within the EMS flooded boundary, which are expected to occur as a consequence of the flood recession.”

55 We also mentioned visible products available on the International Charter Space and Major Disasters website, which confirm the results we found for Andros Island:

“RAPID flooding estimates of area and inland extent on the Andros Island are in agreement with the coarser resolution product composited from VIIRS (375m) and ABI (1km) passive radiometers, displayed on the International Charter “Space and Major Disasters” website at https://disasterscharter.org/image/journal/article.jpg?img_id=3519568&t=1568272371731.”

60 Finally, we would like to mention that the September 14 image, being acquired more than 10 days after the passage of the hurricane, shows just a very limited amount of flooded area. We believe it is not necessary to include this image in the brief communication.

- Line 49: Replace (EMS) by (CMES)

Thank you for this comment, we replaced “EMS” with “Copernicus EMS”, which is the abbreviation used on the Copernicus Emergency Management System website.

65 - Line 74: Please replace Alos-2 by ALOS-2/PALSAR-2 (see also my comment in the first review)

Thank you for this comment. We apologize for having incorrectly written in the previous response that it has been replaced, when it actually has not been. Now we replaced Alos-2 with ALOS-2/PALSAR-2.

- Line 83: I think 10 meters is the pixel spacing and not the spatial resolution. I would suggest to use the abbreviation “m” instead of “meters”

70 Thank you, it is correct. 10 m is the pixel spacing, not the spatial resolution.

We replaced “meters” with “m” at line 46, and “10 meter resolution” with “10 m pixel spacing” at line 128.

- Line 85: X-band data can be affected by adverse weather conditions. I would suggest writing “SAR images are nearly not affected...”

75 Thank you. At line 48 of the new version of our manuscript we replaced the sentence, “SAR images are not influenced by adverse weather conditions” with the sentence “SAR images are nearly not affected by adverse weather conditions”.

- Line 110: I do not understand the meaning of “dry overpasses”. You mean acquired during dry conditions? Perhaps it is better to use the term “non-flood conditions”? What is the meaning of noise-free? Is this derived by combining the data of 5 overpasses? If yes, it would be perhaps better to replace this term by “noise-reduced”.

80 Yes, we intend that we combine the data from 5 overpasses to reduce the noise. All 5 overpasses have been acquired during dry conditions.

We replaced “dry overpasses” with “overpasses acquired during non-flood conditions”.

We also replaced “noise-free” with “noise-reduced”.

- Line 113: Please specify “DFO” and “DSWE”

85 Thank you. We replaced “DFO” with “Dartmouth Flood Observatory (DFO)” and “DSWE” with “Dynamic Surface Water Extent (DSWE)”

- Line 143: The comparison with Charter-based products is only conducted on a visual basis, correct?

That’s correct. There is a difference of two to three orders of magnitude in the pixel spacing.

90 - Line 147-154: In order to perform a validation, the validation data should be correct. If there are errors in the CMES products I would suggest not to use the data as basis for validation or just to perform a comparison between the results (and not a validation).

Thank you very much for this comment. We received the same comment from Reviewer 2 in this round of revisions. We replaced the words “validated...against” with “compared...with”.

95 - Line 175: Without any information about the performance of RAPID I would strongly suggest to remove the sentence: “We believe RAPID system’s ability to map such a large area of inundation as soon as SAR observations were available makes it the fastest fully automated method for assessing flood extension and providing situational awareness”. It would be better to prove this statement. This was also my comment in the first round of review.

100 We already considered your comment in the first round of review, and we replied that:

“Since in the revised version we are now providing the accuracy information of RAPID for different events, showing consistently high performance, we can safely make the conclusion. Other approaches have been extensively discussed in Shen et al., 2019a and, for brevity, cannot be discussed here.”

105 We hope that this argument would satisfy the reviewer as we truly believe that this statement should remain in the paper, because RAPID indeed is the fastest fully/automated method currently available to map flood inundation from SAR.

110 - Figure 2 and 3: it would be important to describe which data source was used to separate between normal water conditions and flooding. It would be helpful to visualize layers of normal water extent in the figures. This was also my comment in the first round of review.

We already considered your comment in the first round of review, and we replied that:

115 RAPID uses dry references for change detection. We vote (some studies name it the temporal filtering technique) each pixel using multiple dry references (no less than 5 overpasses) to create a noise-free persistent water extent (normal water extent).

We added the following sentence in the Methodology section: *“In step 2, the noise-free ((more recent edit: noise-reduced) persistent water extent (know water body) is computed using at least 5 dry overpasses (more recent edit: overpasses acquired during non-flood conditions) for each pixel.”*

120 In this particular case showing an extra layer of the normal water extent is not very helpful, because that is the ocean.

Reviewer 2:

125 The authors have made efforts to address my previous concerns adequately, specifically, they added existing literature, references that describe the method used and most importantly they compared the results with other data sets. The only comment I have relates to the use of the term validation. Given that the datasets the authors use to "validate" their results have not been independently validated and thus no level of accuracy has been associated, I'd suggest the authors replace the word "validation"/"validate" with "comparison"/"compare".

Response:

130 We would like to thank Reviewer 2 for his comment.

We received the same comment from Reviewer 1 in this round of revisions. We replaced the words “validated...against” with “compared...with”.

135

140

145

Brief communication:

Hurricane Dorian: automated near-real-time mapping of the “unprecedented” flooding on the Bahamas using SAR

Diego Cerrai¹, Qing Yang², Xinyi Shen¹, Marika Koukoulou¹, Emmanouil N. Anagnostou¹

¹Department of Civil and Environmental Engineering, University of Connecticut, Storrs (CT), 06279, USA

²College of Civil Engineering and Architecture, Guangxi University, Nanning, Guangxi, 530004, China

Correspondence to: Diego Cerrai (diego.cerrai@uconn.edu)

155 **Abstract.** In this communication, we present application of the automated near-real-time (NRT) system called RADar-
Produced Inundation Diary (RAPID) to European Space Agency Sentinel-1 SAR images to produce flooding maps for
Hurricane Dorian in the northern Bahamas. RAPID maps, released two days after the event, show that coastal flooding in the
Bahamas reached areas located more than 10 km inland, covering more than 3,000 km² of continental area. RAPID flood
estimates from subsequent SAR images show the recession of the flood across the islands, and present high agreement scores
160 when compared to Copernicus Emergency Management Service ([Copernicus EMS](#)) estimates.

1 Introduction

Hurricane Dorian was the strongest Atlantic hurricane at landfall in terms of maximum sustained winds (185 mph, 83 ms⁻¹),
tied with the 1935 Labor Day Hurricane (Landsea et al., 2014). Dorian’s first record-breaking landfall occurred at 16:40
UTC and its second at 18:00 UTC on September 1, 2019, in the Abaco Islands in the northern Bahamas (NHC 2019). A third
165 landfall occurred at 03:00 UTC on September 2 at the eastern end of Grand Bahama and was characterized by maximum
sustained winds of 180 mph. Tropical storm conditions battered the northern Bahamas for 72 hours, and locations in
northeastern Grand Bahama suffered hurricane conditions for more than 40 hours. Between 08:00 UTC on September 2 and
14:00 UTC on September 3, the National Hurricane Center issued 30 consecutive hourly public advisories (NHC 2019)
indicating Hurricane Dorian was either moving at 1 mph or was stationary, resulting in prolonged extreme conditions over
170 the same areas. The prolonged damaging and record-breaking winds were just one aspect of this storm - one that was
measured directly and in near real time (NRT) by aircraft missions (HRD 2019). In addition, the combined effect of storm
surge and heavy precipitation brought about the extensive flooding that was the major cause of “unprecedented and
extensive devastation,” as described by Bahamian Prime Minister Hubert Minnis, and of deaths whose number has yet to be
determined. Neither precipitation nor coastal surge could be directly measured because of the lack of a ground-based
175 observational network.

In this and other remote areas around the world where ground-based measurements are not available, precipitation can be
assessed using near-real-time (NRT) satellite estimates available through the National Aeronautics and Space Administration
(NASA) Global Precipitation Measurement (GPM) Integrated Multi-satellitE Retrievals for GPM (IMERG), version 06
(Huffman et al. 2019). Without these automated estimates, gaining prompt situational awareness becomes difficult, which
180 can cause delays in rescue operations.

Several space missions acquire synthetic aperture radar (SAR) data derived from low Earth observation (LEO) satellites that
can be used for NRT systems: Sentinel-1, from the European Space Agency (ESA; Torres et al. 2012), TerraSAR-X, from
the German Aerospace Center (DLR; Werninghaus and Buckreuss 2009), CosmoSkyMed, from the Italian Space Agency
(ASI; Covello et al. 2010), RADARSAT-2, from the Canadian Space Agency (CSA; Morena et al. 2004), and ~~ALOS~~
185 ~~2~~/[PALSAR-2](#), from the Japan Aerospace Exploration Agency (JAXA; Kankaku et al. 2013). Among these, only Sentinel-1
provides public access to SAR data that can be used to estimate flooding.

The nature of LEO satellites makes SAR data sparse, however, and, unlike with precipitation products, gaps cannot be filled using geosynchronous satellites. In fact, the spatial resolution needed for accurate flooding maps is three orders of magnitude higher than that required for a global precipitation product. Even when observations are present, no detailed processing methods exist for real-time retrieval of flooding data because underdetection or overdetection issues necessitate manual labor (Shen et al. 2019a).

Recently, we published the RADar-Produced Inundation Diary (RAPID) NRT fully automated system (Shen et al. 2019a), which involves the processing of high-resolution (10 meters) SAR images to allow the creation of rapid and efficient flood inundation maps by addressing both underdetection and overdetection. Differently than optical sensors, SAR images are ~~nearly not affected influenced~~ by adverse weather conditions. As discussed in the methodology section below, the system is triggered (Yang et al. 2019) by IMERG precipitation estimates (Huffman et al. 2019), and it processes Sentinel-1 SAR data.

In this brief communication, we present the early results we delivered with the RAPID NRT automated system two days after Hurricane Dorian hit the Bahamas, just a few hours after SAR data for the event became publicly available. We provide a short description of the methodology, and we detail the extent of flood inundation by analyzing RAPID maps.

200 2 Methodology

Only a few SAR-based flood delineation methods (e.g. Horritt et al. 2003, Martinis et al. 2009, Matgen et al., 2011, Giustarini et al. 2012, Lu et al. 2014, Chini et al. 2017, Cian et al. 2018) have the potential to be fully automated (Shen et al. 2019b). The RAPID algorithm (Shen et al. 2019a) is an automated system capable of producing NRT inundation maps by processing SAR observations. Because of the considerable computation, storage, and data transfer time that would be needed to run the RAPID algorithm blindly for every SAR image worldwide, we implemented a zoom-in triggering mechanism (Yang et al. 2019) that allows selection of areas of the world where flooding is possible. Areas are defined by the availability of SAR images associated with land that has received at least 60 mm of accumulated precipitation during the previous day or potentially fluvial flood areas indicated by hydrological station observations. Within the continental United States (CONUS) area, we use the National Oceanic and Atmospheric Administration (NOAA) NEXt-Generation RADar (NEXRAD) precipitation product (NOAA 1991) and the U.S. Geological Survey (USGS) WaterWatch(<https://waterwatch.usgs.gov/>). We use NASA's IMERG, version 06 (Huffman et al. 2019), for the rest of the world (Yang et al. 2019).

After being triggered, the RAPID core algorithm (Shen et al. 2019a) handles both polarizations of SAR images in GRD mode through four steps: (1) identification of water and land pixels through a binary classification; (2) selection of water pixels connected to known water bodies and water areas not connected to known water bodies; (3) generation of a buffer region around the identified water bodies to reduce false negatives using less restrictive thresholds derived from the radar noise model; and (4) correction of the classification through a machine-learning algorithm that uses high-resolution topography (Farr et al. 2007), hydrography (Yamazaki et al. 2019), water occurrence (Pekel et al. 2016), and river bathymetry (Allen and Pavelsky 2018, Chen et al. 2019, Yamazaki et al. 2014). In step (2), the noise-~~reduced~~~~free~~ persistent water extent (know water body) is computed using at least 5 ~~dry~~-overpasses acquired during non-flood conditions for each pixel.

The RAPID system has been quantitatively ~~validated~~~~compared~~ in past studies ~~with~~~~against~~ manually derived flood maps using (overall, user, producer) agreement scores, representing (accuracy, true positive rate, precision) parameters of the confusion matrix. Specifically, for Hurricane Harvey, RAPID was ~~validated against~~ compared with the Dartmouth Flood Observatory (DFO) comprehensive flood map of August 30, 2017 (Shen et al., 2019) and against the USGS Dynamic Surface Water Extent (DSWE) Northwestern flood map of June 25, 2019 (Yang et al. 2019). RAPID yielded consistently high agreement scores for Harvey (93%, 75%, 77%) and the Northwestern flood (96%, 84%, 76%). For Hurricane Dorian, we are presenting a comparison between RAPID and the Copernicus Emergency Management Service (Copernicus EMS) first estimate maps (available at <https://emergency.copernicus.eu/mapping/list-of-components/EMSR385/FEP/ALL>), both derived from the Sentinel-1 SAR observations. Copernicus EMS flooding maps are not available for the entire SAR images, but only for the Abaco Islands on September 2, 2019, and for Grand Bahama on September 4, 2019.

3 Results

Because of the extremely high amounts of precipitation related to Hurricane Dorian (up to more than 1,400 mm over three days; see figure 1), the RAPID system was automatically triggered for the northern Bahamas. Sentinel-1 SAR data were available at 23:44 UTC on September 2 and at 11:09 UTC on September 4, 2019.

- 235 At the time of the first overpass on September 2, Dorian was located 20 km to the north of Grand Bahama (figure 1). Sentinel-1 data covered the northeastern sector of Grand Bahama and all of Great Abaco, both located in the southeastern sector of the hurricane and therefore affected by southwesterly winds. Lower-elevation areas on the west coast of Great Abaco were suffering onshore tropical storm force winds, and flooding in these territories was extensive, covering 518 km² of land, or 26% of the island (figure 2a).
- 240 On September 2, offshore hurricane-force winds affected lower-elevation areas along the northern coast of Grand Bahama, which had been affected by onshore hurricane-force winds during the previous day. Despite the blowing of the winds away from the coast, proximity to the center of the hurricane did not allow the storm surge to retreat significantly. For this reason, these locations were also still experiencing extensive flooding: 138 km² of the 308 km² covered by the SAR images were flooded, amounting to 45% of eastern Grand Bahama (figure 2a). Since the first overpass occurred several hours after the
- 245 passage of the hurricane, the flooded area shown in figure 2a represents a conservative estimate.

The second Sentinel-1 overpass entirely captured Great Abaco, Grand Bahama, Andros, New Providence, and other smaller islands of the archipelago on September 4, when Dorian was located 300 km to the north of Grand Bahama. Despite the absence of storm surge at the time of the overpass, 17% of Great Abaco was still flooded, while flooding on Grand Bahama had mostly receded (14% of the island was still flooded).

- 250 On September 3, high amounts of precipitation also fell on Andros Island, located approximately 200 km to the south of Dorian's path. The flooding map resulting from the automated trigger of the RAPID algorithm also showed extensive flooding on the low-lying terrain of this island, which received onshore winds during the entire duration of the event (figure 2b). On September 4, the inundated area was 2,193 km² (37% of the island), and flooding reached more than 10 km inland. RAPID flooding estimates of area and inland extent on the Andros Island are in agreement with the coarser resolution
- 255 product composited from VIIRS (375m) and ABI (1km) passive radiometers, displayed on the International Charter "Space and Major Disasters" website at https://disasterscharter.org/image/journal/article.jpg?img_id=3519568&t=1568272371731.

- The agreement (overall, user, producer) scores between RAPID and [Copernicus](#) EMS flooding maps for the Abaco Islands on September 2 and September 4, derived from the confusion matrix shown in Table 1, were (77%, 90%, 41%) and (89%, 61%, 86%), respectively. The high overall and user agreement scores for the September 2 flooding are also depicted in the
- 260 flood maps of Figure 2b indicating a very good overlap of the two products over the coast of Great Abaco, while the relatively low producer agreement comes from the lack of flood detection by the [Copernicus](#) EMS algorithm over the multiple near-sea-surface-elevation islands, located in the front of the western coast of Great Abaco. The relatively low user agreement score between the two products on September 4 is due to the fact that RAPID classifies some non-flooded areas within the [Copernicus](#) EMS flooded boundary, which are expected to occur as a consequence of the flood recession.

- 265 According to the conservative flooding estimates shown in these maps, the total area covered by flooding in the Bahamas exceeded 3,000 km², spread over areas hundreds of kilometers away from each other. To assess the inundation extent over such vast and dispersed areas, recognition flights take days, and they cannot operate during such extreme weather conditions as were presented by the long-lasting hurricane-force winds in the Bahamas. In contrast, a system such as RAPID can provide flooding estimates for any area of the world within hours of the data's becoming available. RAPID has the potential
- 270 to be a fundamental tool for a fast and efficient emergency response.

4 Closing Remarks

Hurricane Dorian heavily damaged the northern Bahamas with extreme winds and precipitation and extensive flooding, causing deaths whose number is yet unknown. When extensive weather-related devastation occurs in areas of the world that

do not have in situ observation networks, an assessment of the situation based on hydrometeorological parameters is often difficult.

In this brief communication, we analyzed the flooding related to Hurricane Dorian in the Bahamas at 10 ~~meter resolution~~ ~~pixel spacing~~ through RAPID, which is an automated system producing near-real-time flood maps across the globe based on SAR images. Specifically, RAPID identifies possibly flooded areas using near-real-time high-resolution precipitation products and then processes SAR images to compute inundation maps.

For Hurricane Dorian, RAPID inundation maps showed that, several hours after the passage of the storm, 26% of Great Abaco, 45% of eastern Grand Bahama, and 37% of Andros were flooded, for a total area exceeding 3,000 km². We compared RAPID inundation maps with ~~Copernicus~~ EMS maps finding high agreement scores and we discussed the differences between the two products for the case in exam. We believe RAPID system's ability to map such a large area of inundation as soon as SAR observations were available makes it the fastest fully automated method for assessing flood extension and providing situational awareness.

The main limitation of the system is the occasional unavailability of timely satellite overpasses in conjunction with heavy precipitation events. For Hurricane Dorian, Sentinel-1 images were not available at the peak of the event in the most affected area. This limitation can be overcome through international collaborations, such as the International Charter "Space and Major Disasters", Sentinel Asia, NASA-ISRO SAR Mission, and Copernicus Emergency Management Service – Mapping, that would increase the availability of data from other satellite missions.

Future extensions of this work will allow us to combine the rapidly derived inundated areas with high-resolution terrain elevation to identify flood levels and inversely estimate the surges that caused the flooding. Using this information, we would be able to extend the flood inundation estimates outside the SAR coverage, e.g. derive the September 2 flooding over northwestern part of Grand Bahama, where Sentinel-1 observations are not available. Furthermore, an estimate of the surge level can be valuable information for comparing ~~with~~~~against~~ model forecasts for this event.

Author contribution: DC: conceptualization, supervision, writing – original draft. QY and MK: software, formal analysis, data curation. XS and EA: conceptualization, project administration, writing – review and editing.

Competing interests: The authors declare that they have no conflict of interest.

Acknowledgements: The authors of this publication had research support from Eversource Energy.

References

Allen, G.H. and Pavelsky, T.M.: Global extent of rivers and streams. *Science*, 361(6402), pp.585-588, 2018.

Cian, F., Marconcini, M. and Ceccato, P.: Normalized Difference Flood Index for rapid flood mapping: Taking advantage of EO big data. *Remote sensing of environment*, 209, pp.712-730, 2018.

Chen, X., Shen, X., Li, H., Cui, Y., Liu, B., Fang, W., Yang, Q. and Hong, Y.: Construct Channel Network Topology From Remote Sensing Images by Morphology and Graph Analysis. *IEEE Geoscience and Remote Sensing Letters*, 2019.

Chini, M., Hostache, R., Giustarini, L. and Matgen, P.: A hierarchical split-based approach for parametric thresholding of SAR images: Flood inundation as a test case. *IEEE Transactions on Geoscience and Remote Sensing*, 55(12), pp.6975-6988, 2017.

- Covello, F., Battazza, F., Coletta, A., Lopinto, E., Fiorentino, C., Pietranera, L., Valentini, G. and Zoffoli, S.: COSMO-SkyMed an existing opportunity for observing the Earth. *Journal of Geodynamics*, 49(3-4), 171-180, 2010.
- Esri. "Ocean" [basemap]. "World Ocean Base". <https://www.arcgis.com/home/item.html?id=1e126e7520f9466c9ca28b8f28b5e500>. (last access: September 2019), 2014
- Farr, T.G., Rosen, P.A., Caro, E., Crippen, R., Duren, R., Hensley, S., Kobrick, M., Paller, M., Rodriguez, E., Roth, L. and Seal, D.: The shuttle radar topography mission. *Reviews of geophysics*, 45(2), 2007.
- 315 Giustarini, L., Hostache, R., Matgen, P., Schumann, G.J.P., Bates, P.D. and Mason, D.C.: A change detection approach to flood mapping in urban areas using TerraSAR-X. *IEEE transactions on Geoscience and Remote Sensing*, 51(4), pp.2417-2430, 2012.
- Hijmans, R. and University of California, Berkeley, Museum of Vertebrate Zoology. Boundary, Bahamas. UC Berkeley, Museum of Vertebrate Zoology. <http://purl.stanford.edu/gr421mg4744>, (last access: September 2019), 2015.
- 320 Horritt, M.S., Mason, D.C., Cobby, D.M., Davenport, I.J. and Bates, P.D.: Waterline mapping in flooded vegetation from airborne SAR imagery. *Remote Sensing of Environment*, 85(3), pp.271-281, 2003.
- HRD: Dorian 2019 missions. https://www.aoml.noaa.gov/hrd/Storm_pages/dorian2019/mission.html, (last access: September 2019), 2019.
- Huffman, G.J., Stocker E.F., Bolvin D.T., Nelkin E.J., and Tan J.: GPM IMERG Late Precipitation L3 1 day 0.1 degree x 0.1 degree V06, Edited by Andrey Savtchenko, Greenbelt, MD, Goddard Earth Sciences Data and Information Services Center (GES DISC), 10.5067/GPM/IMERGDL/DAY/06, (last access: September 2019), 2019
- 325 Kankaku, Y., Suzuki, S. and Osawa, Y.: ALOS-2 mission and development status. In *2013 IEEE International Geoscience and Remote Sensing Symposium-IGARSS* (pp. 2396-2399). IEEE, 2013.
- Landsea, C.W., Hagen A., Bredemeyer W., Carrasco C., Glenn D.A., Santiago A., Strahan-Sakoskie D., and Dickinson M.: A Reanalysis of the 1931–43 Atlantic Hurricane Database. *J. Climate*, 27, 6093-6118, 2014.
- 330 Lin, Y. and Mitchell, K.E.: The NCEP stage II/IV hourly precipitation analyses: Development and applications. In: 19th Conf. Hydrology, American Meteorological Society, San Diego, CA, USA, 2005.
- Lu, J., Giustarini, L., Xiong, B., Zhao, L., Jiang, Y. and Kuang, G.: Automated flood detection with improved robustness and efficiency using multi-temporal SAR data. *Remote sensing letters*, 5(3), pp.240-248, 2014.
- 335 Martinis, S., Twele, A. and Voigt, S.: Towards operational near real-time flood detection using a split-based automatic thresholding procedure on high resolution TerraSAR-X data. *Natural Hazards and Earth System Sciences*, 9(2), pp.303-314, 2009.
- Matgen, P., Hostache, R., Schumann, G., Pfister, L., Hoffmann, L. and Savenije, H.H.G.: Towards an automated SAR-based flood monitoring system: Lessons learned from two case studies. *Physics and Chemistry of the Earth, Parts A/B/C*, 36(7-8), pp.241-252, 2011.
- 340 Morena, L.C., James, K.V. and Beck, J.: An introduction to the RADARSAT-2 mission. *Canadian Journal of Remote Sensing*, 30(3), 221-234, 2004.
- NHC: Hurricane Dorian Advisory Archive. <https://www.nhc.noaa.gov/archive/2019/DORIAN.shtml?>, (last access: September 2019), 2019.
- 345 NOAA National Weather Service (NWS) Radar Operations Center: NOAA Next Generation Radar (NEXRAD) Level 2 Base Data. NOAA National Centers for Environmental Information. doi:10.7289/V5W9574V, (last access: September 2019), 1991.

- Pekel, J.F., Cottam, A., Gorelick, N. and Belward, A.S.: High-resolution mapping of global surface water and its long-term changes. *Nature*, 540(7633), pp.418-422, 2016.
- 350 Shen, X., Anagnostou E.N., Allen G.H., Brakenridge G.R., and Kettner A. J.: Near-real-time non-obstructed flood inundation mapping using synthetic aperture radar. *Remote Sensing of Environment*, 221, 302-315, 2019a.
- Shen, X., Dacheng W., Kebiao M., Anagnostou, E.N. and Hong Y.: Inundation Extent Mapping by Synthetic Aperture Radar: A Review, *Remote Sensing*, 11, 879, 2019b.
- 355 Werninghaus, R. and Buckreuss, S.: The TerraSAR-X mission and system design. *IEEE Transactions on Geoscience and Remote Sensing*, 48(2), 606-614, 2009.
- Torres, R., Snoeij, P., Geudtner, D., Bibby, D., Davidson, M., Attema, E., Potin, P., Rommen, B., Floury, N., Brown, M. and Traver, I.N: GMES Sentinel-1 mission. *Remote Sensing of Environment*, 120, 9-24, 2012.
- 360 Yamazaki, D., Ikeshima, D., Sosa, J., Bates, P.D., Allen, G. and Pavelsky, T.: MERIT Hydro: A high-resolution global hydrography map based on latest topography datasets. *Water Resources Research*, 2019.
- Yamazaki, D., O'Loughlin, F., Trigg, M.A., Miller, Z.F., Pavelsky, T.M. and Bates, P.D.: Development of the global width database for large rivers. *Water Resources Research*, 50(4), pp.3467-3480, 2014.
- 365 Yang, Q., Shen, X.*, Anagnostou, E.N., Eggleston, J.R., and Kettner, A.J.: An unprecedented High-Resolution Inundation Dataset delineated from SAR over the CONUS-from 2016 to Present, proposal submitted to *Bulletin of the American Meteorological Society*, 2019.

Total Accumulated Precipitation between 00 UTC 01/09/2019 and 00 UTC 04/09/2019

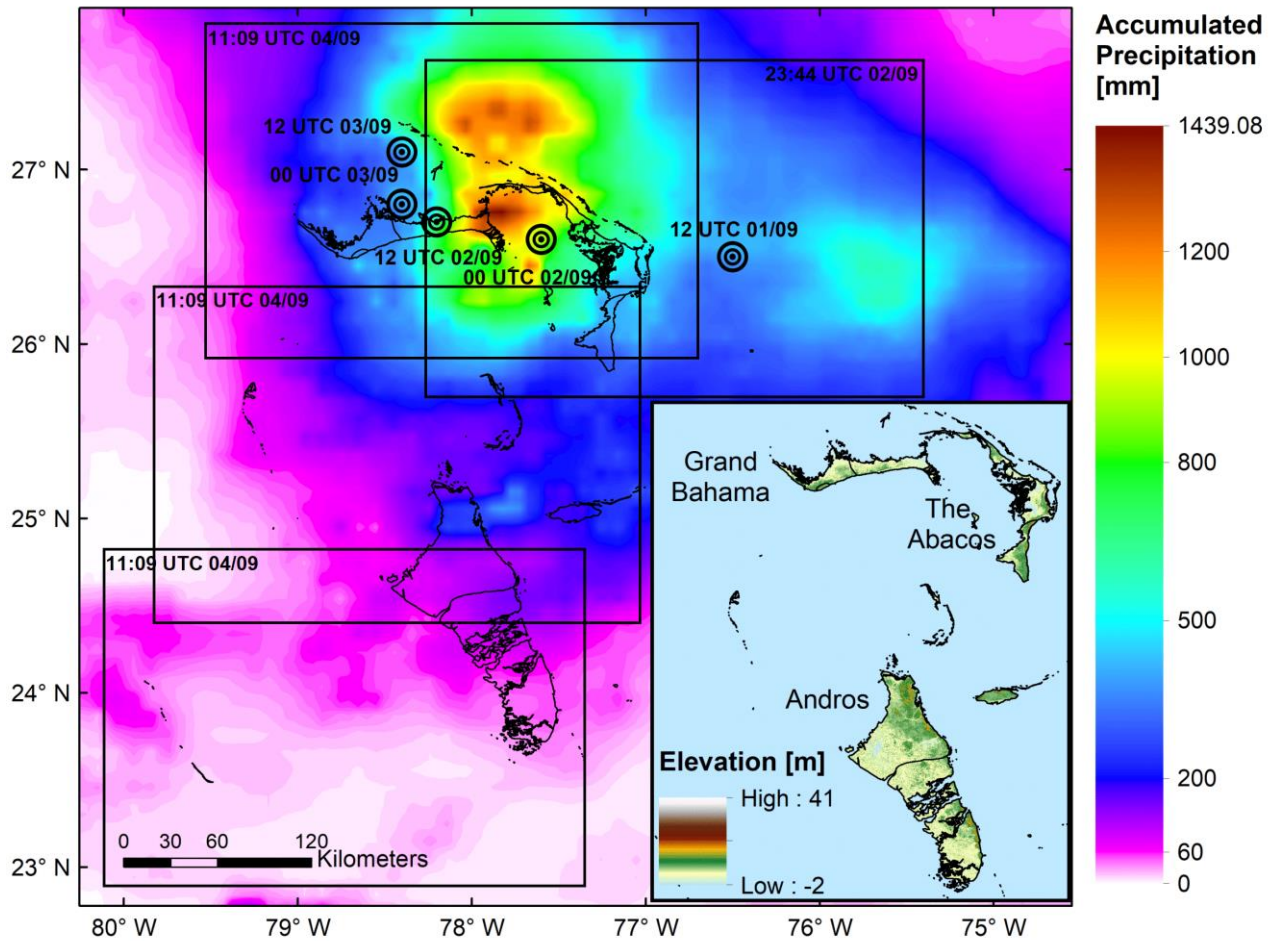


Figure 1: Background map: IMERG total accumulated precipitation between 00 UTC September 1 and 00 UTC September 4, 2019 (shaded), boundaries of Sentinel-1 SAR images (rectangles), and location (targets) of Hurricane Dorian from National Hurricane Center public advisories (NHC, 2019). Bottom right front map: elevation (Farr et al. 2007) of the study area. In both maps, Bahamas boundaries are delineated using the Global Administrative Areas dataset (Hijmans et al. 2015).

370

Flooding retreat and comparison between RAPID and Copernicus EMS

Flooding extent on September 4th

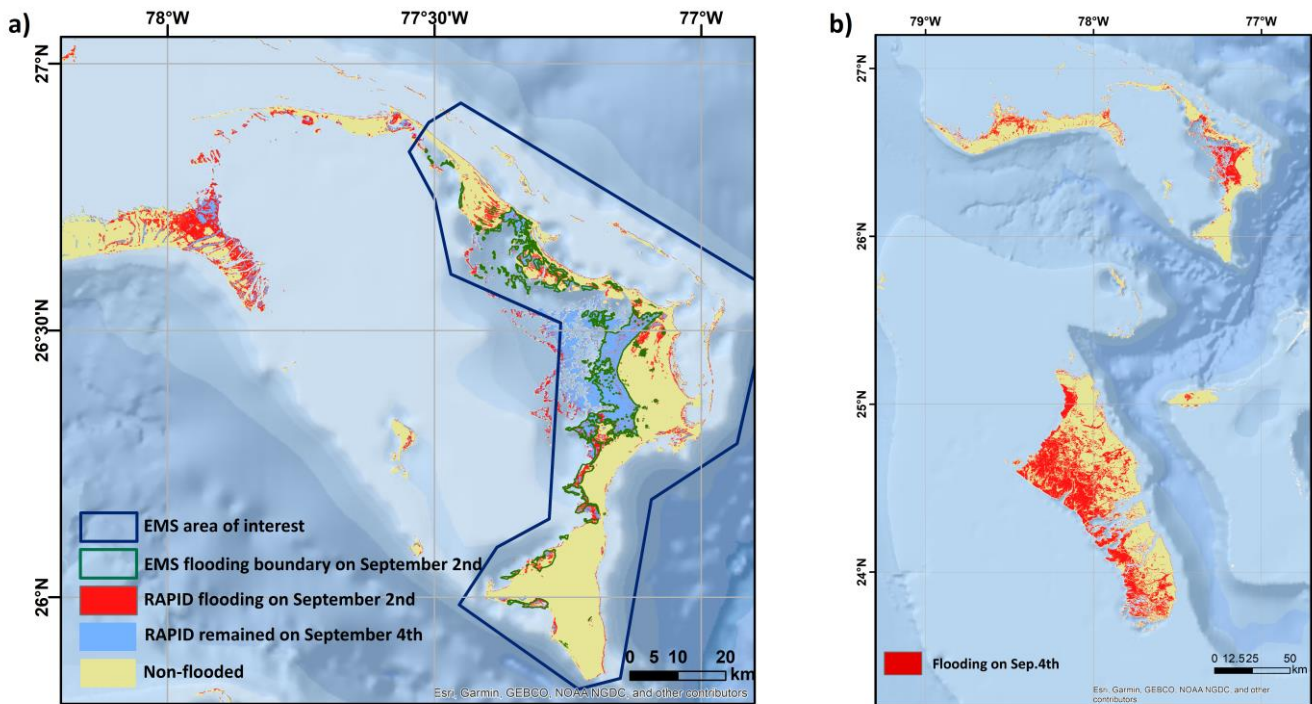


Figure 2: a) Flooded and non-flooded areas on September 2 and September 4, 2019 derived from the RAPID algorithm that processed SAR data from the Sentinel-1 overpasses, and flooded boundary on September 2 from Copernicus EMS. b) RAPID flooding map for the entire Northern and Central Bahamas, for the September 4, 2019 Sentinel-1 overpass. For both images, ocean background from World Ocean Base map (ESRI et al. 2014; list of contributors available at: http://downloads.esri.com/esri_content_doc/da/WorldOcean_ContributorsDA64.pdf).

375

Confusion Matrix		September 2 – Great Abaco		September 4 – Grand Bahama	
		Copernicus EMS		Copernicus EMS	
		Flooded	Non-flooded	Flooded	Non-flooded
RAPID	Flooded	2,274,927 (14.5%)	3,318,143 (21.1%)	1,880,609 (13.2%)	32,989 (2.3%)
	Non-flooded	260,335 (1.7%)	9,847,017 (62.7%)	1,219,786 (8.6%)	10,710,519 (75.9%)

Table 1: Confusion matrix between RAPID and Copernicus EMS flooding products for September 2, 2019 overpass over Great Abaco (left) and for September 4, 2019 overpass over Grand Bahama (right). For each matrix, number and percentage of pixels is reported.

380