

Dear Eric Martin,

We addressed your comments, please see the revised manuscript and our comments below.

Line 495 : suppress a “,”

Done

Lines 501- 508 : Please reword and simplify these sentences (it is quite wordy at this stage)

We reworded this section.

Lines 536-537 : I don't understand the sentence beginning by “However...” . There are assimilation techniques (most of them) that can use data that are not continuous. On the other way, of course, if the series are too discontinuous, with too much missing data the assimilation won't be efficient, but that is trivial. Please check this sentence.

Indeed, we agree that sentence was quite trivial. We removed this sentence.

Line 868 : add the period considered in the legend

We added “between 2013 and 2016”

Line 871 : modify the legend : “Seasonal correlation between the different soil moisture data, in situ measurements and the SMA model (significant correlations are represented in bold)”

Changed

Legend of Fig. 4 and Fig. 5 : please homogenise the two legend (Add "A" in Fig 4 or delete in Fig 5.). Add into bracket “Sat” and “S/A” in the caption. E.g. Relationship between the different product of soil moisture (Sat) and SMA outputs (S/A)....

We homogenized the captions:

Figure 4: Relationship between the different products of soil moisture and SMA outputs between 08/04/2013 and 31/12/2016 over the Rheraya basin.

Figure 5: Relationship between the different products of soil moisture and SMA outputs between 18/10/2010 and 20/08/2015 in the Issyl basin

Figure 6 : Precise the caption : Validation results of flood events simulated for the Rheraya using different soil moisture products with a daily time step : the observed hydrographs (*Q_{obs}*) are compared to the simulated hydrographs using ASCAT (*Q_{ascat}*), SMOS-IC (*Q_{SMOS-IC}*) For the selected flood events described in Table 2

Figure 7 : see comment on Figure 6

Figure 8 : homogenise the caption with Fig. 5 and 6.

We modified as follow:

Figure 6: Validation results of flood events simulated for the Rheraya using different soil moisture products with a daily time step: the observed hydrographs (*Q_{obs}*) are compared to the simulated hydrographs using ASCAT (*Q_{ascat}*), SMOS-IC (*Q_{SMOS-IC}*), ERA5 (*Q_{ERA5}*) or observed soil moisture (*Q_{sm-obs}*)

to estimate the antecedent soil moisture conditions. The selected flood events are described in Table 2

Figure 7: Validation results of flood events simulated for the Rheraya using different soil moisture products with an hourly time step: the observed hydrographs (Q_{obs}) are compared to the simulated hydrographs using ERA5 (Q_{ERA5}) or observed soil moisture (Q_{sm-obs}) to estimate the antecedent soil moisture conditions. The selected flood events are described in Table 2

Figure 8: Validation results of flood events simulated for the Issyl using ERA5 soil moisture at the hourly time step: the observed hydrographs (Q_{obs}) are compared to the simulated hydrographs using ERA5 (Q_{ERA5}) to estimate the antecedent soil moisture conditions. The selected flood events are described in Table 2

Challenges in flood modeling over data scarce regions: how to exploit globally available soil moisture products to estimate antecedent soil wetness conditions in Morocco

El Mahdi El Khalki¹, Yves Tramblay^{2,*}, Christian Massari³, Luca Brocca³, Vincent Simmoneaux⁴, Simon Gascoin⁴, Mohamed El Mehdi Saidi¹

¹ Georesources, Geoenvironment and Civil Engineering Laboratory, Cadi Ayyad University, Marrakesh, 40000, Morocco

² HydroSciences Montpellier (Univ. Montpellier, CNRS, IRD), Montpellier, 34000, France

³ Research Institute for Geo-Hydrological Protection, National Research Council, Perugia, 06100, Italy

⁴ Centre d'Etudes Spatiales de la Biosphère (UPS/CNRS/IRD/CNES), Toulouse, France

* Correspondence to: Yves Tramblay (yves.tramblay@ird.fr)

Abstract: The Mediterranean region is characterized by intense rainfall events giving rise to devastating floods. In Maghreb countries such as Morocco, there is a strong need for forecasting systems to reduce the impacts of floods. The development of such a system in the case of ungauged catchments is complicated but remote sensing products could overcome the lack of in-situ measurements. The soil moisture content can strongly modulate the magnitude of flood events and consequently is a crucial parameter to take into account for flood modeling. In this study, different soil moisture products (ESA-CCI, SMOS, SMOS-IC, ASCAT satellite products and ERA5 reanalysis) are compared to in-situ measurements and one continuous soil moisture accounting (SMA) model for basins located in the High-Atlas Mountains, upstream of the city of Marrakech. The results show that the SMOS-IC satellite product and the ERA5 reanalysis are best correlated with observed soil moisture and with the SMA model outputs. The different soil moisture datasets were also compared to estimate the initial soil moisture condition for an event-based hydrological model based on the Soil Conservation Service Curve Number (SCS-CN). The ASCAT, SMOS-IC and ERA5 products performed equally well in validation to simulate floods, outperforming daily in situ soil moisture measurements that may not be representative of the whole catchment soil moisture conditions. The results also indicated that the daily time step may not fully represent the saturation state before a flood event, due to the rapid decay of soil moisture after rainfall in these semi-arid environments. Indeed, at the hourly time step, ERA5 and in-situ measurements were found to better represent the initial soil moisture conditions of the SCS-CN model by comparison with the daily time step. The results of this work could be used to implement efficient flood modelling and forecasting systems in semi-arid regions where soil moisture measurements are lacking.

Keywords: Soil moisture, floods, Morocco, ERA5, Rheraya, Issyl, High Atlas

1 Introduction

The Mediterranean region is characterized by intense rainfall events generating floods with a very short response time (Gaume et al., 2004; Merheb et al., 2016; Trambly et al., 2011). The socio-economic consequences of these floods are very important in terms of fatalities or damages to the infrastructures in particular for Southern countries (Vinet et al., 2016). This highlights the need for forecasting systems to reduce the impacts of floods. Unfortunately, the development of such systems is very complicated in the case of ungauged catchments (Creutin and Borga, 2003) such as in North Africa and requires remote sensing products to overcome the lack of in situ measurements. Furthermore, while several studies have been focused on northern Mediterranean catchments for flood modelling, only a few studies are available on southern basins, yet those probably the most vulnerable to floods.

The Moroccan catchments are exposed to intense flash floods, such as the event of August 17, 1995 in the Ourika river where the max discharge reached in 45 minutes a peak discharge of 1030 m³/s causing extensive damages and more than 200 casualties (Saidi et al., 2003). Few studies have been carried out in Morocco to minimize the impact of floods by improving the forecasting systems, either by event-based modeling of floods (El Alaoui El Fels et al., 2017; Boumenni et al., 2017; El Khalki et al., 2018) or by hydro-geomorphological approaches (Bennani et al., 2019) to identify the areas at risk of flooding. The severity of floods in these semi-arid regions is controlled by several factors including precipitation intensity, soil permeability, steep slopes and soil moisture content at the beginning of event (El Khalki et al., 2018; Trambly et al., 2012). In Mediterranean regions, the soil moisture content varies between events and is known to strongly modulate the magnitude of floods (Brocca et al., 2017; Tuttle and Salvucci, 2014) and particularly to be useful for flood modeling and forecasting systems (Brocca et al., 2011; El Khalki et al., 2018; Koster et al., 2009; Marchandise and Viel, 2010; Trambly et al., 2012). However, studies in North African basins are lacking to document the rainfall-runoff relationship with soil moisture during floods (Merheb et al., 2016).

In most Mediterranean regions and particularly in North Africa, only a few measurements of soil moisture are available. To represent spatial variability, several measurement at different locations are needed due to the potentially large spatial variability of soil moisture for a wide range of scales (Massari et al., 2014; Schulte et al., 2005; Western and Blöschl, 1999). However, even the in-situ data may not represent the spatial variability over a very wide area in the case of large basins. On the contrary, satellite soil moisture products provide coverage of the earth's surface by microwave sensors. There are two types of microwave sensors, active and passive, noting: 1) The Advanced Scatterometer (ASCAT) soil moisture product is on board MetOp with good radiometric accuracy and stability. This product provides

a spatial resolution of 25 km with a temporal resolution of 1 day since January 2007 (Wagner et al., 2013). 2) The Soil Moisture and Ocean Salinity Mission (SMOS) product, which begins in January 2010 with a spatial resolution of 50km (Kerr et al., 2012). The improvement of the robustness of satellite soil moisture products can be achieved by merging passive and active microwave sensors as initiated and distributed by ESA-CCI (European Space Agency Climate Change Initiative) (Liu et al., 2011) providing data from 1978 to 2018. However, remote sensing products might suffer from several problems in complex topography or very dense vegetation and snow cover (Brocca et al., 2017). For this reason and before any use the data, it is necessary to validate them (Al-Yaari et al., 2014; Van doninck et al., 2012; Ochsner et al., 2013), either by in-situ measurements, if they exist, or by using Soil Moisture Accounting models (Javelle et al., 2010; Trambly et al., 2012) to simulate soil moisture in the ungauged basins.

In this context, with an increasing number of satellite products becoming available to estimate soil moisture, clear guidelines and recommendations about the most suitable products to estimate the initial soil moisture content prior to floods are lacking for the semi-arid basins of North Africa. There is a knowledge gap on the evaluation of soil moisture products in North Africa (Jiang and Wang, 2019) that the present study aimed to fill. The purpose of this study is to compare different satellite soil moisture products with in-situ soil moisture measurements and the recently developed ERA5 reanalysis to estimate the initial soil moisture before flood events. The goal is to identify the best products to be used for flood modeling that could improve forecasting systems. This comparison is performed for two basins representative of medium-size catchments of North Africa that are the most sensitive to flash flood events. The validation of the different soil moisture products is made with a Soil Moisture Accounting (SMA) model, to test the capabilities of the different soil moisture products for the sake of estimating the initial conditions for an event-based hydrological model for floods. The paper is organized as follow: In section 2, an overview of the study area and all used data (hydro-meteorological and soil moisture products). Section 3 explains the methods adopted in this paper. Section 4 presents the results. The conclusion and perspectives are given in the last section.

2 Study area and data

2.1 Rheraya and Issyl catchments

The Rheraya research catchment (Jarlan et al., 2015) is located in the Moroccan High Atlas Mountains (Figure 1) with an altitude ranging from 1027 to 4167m and an area of 225km². The climate in the basin is semi-arid, strongly influenced by altitude, with a mean annual precipitation of 732mm, including 30% as snow in altitudes above 2000m (Boudhar et al., 2009). The geology is characterized by volcanic formations that are considered impermeable in the highest elevation areas, while the lowest elevation

areas are made of granites with clays and marls. In the highest elevation areas very steep slopes are found with an average of 19% (Chaponnière et al., 2008). The vegetation cover is only located in the lowest areas with a concentration of cultivated areas found along the river channel. These natural conditions favor runoff generation. There is very low human disturbance for runoff, with only some local water uptake in the lower part of the river.

The Issyl basin (Figure 1) is located in the foothills of the Moroccan High Atlas Mountains with an altitude ranging from 632 to 2300m, an area of 160 km², and a mean annual precipitation of 666mm. It is an ephemeral river with discharge occurring only after rainfall events. The climate is semi-arid to arid and the downstream part of the basin reaches the city of Marrakech. The geological formations in this downstream are alluvial conglomerates that are relatively permeable. The upstream of the basin consists of clays and calcareous marl. The basin area includes agricultural activities that are irrigated in the downstream part of the basin. The irrigation comes from *seguías*, earthen-made channels that traditionally draw their water supply from the river itself, by building small diverting dams on the side of the river (Pérennès, 1994). The *seguías* channels are usually filled up during floods, and water is distributed to the neighboring agricultural parcels. The map on the *seguías* in the Issyl basin can be seen in Figure 1, covering the northern part of the basin. The system is unmonitored and in a context of high evaporation rates the portion of runoff diverted from the stream is not quantified. Due to the temporary nature of *seguías*, they can be partially destroyed during large floods and consequently their hydraulic properties and the amount of water collected can be modified over time. In the Ourika catchment located upstream of the Issyl, Bouimouass et al. (2020) estimated that irrigation by streamflow diversion due to *seguías* could represent up to 65% of the total surface runoff.

2.2 Hydro-meteorological data

In the Rheraya basin, we used 8 rainfall stations (Table 1), 5 of them from the data network of the Joint International Laboratory Télédétection et Ressources en Eau en Méditerranée semi- Aride "LMI TREMA" (Jarlan et al., 2015; Khabba et al., 2013) and the remaining ones from the Tensift Hydraulic Basin Agency. The data is covering from 2008 to 2016. For the Issyl basin, only 2 rainfall gauges are available from the Tensift Hydraulic Basin Agency, covering the years from 2010 to 2015. In this type of basin, the spatial variability of rainfall is very important (Chaponnière et al., 2008). The hydrometric data was provided by radar sensor installed in each basin's outlet. The data is covering only the year 2014 for Rheraya, since the sensor was installed at the end of 2013, and the years 2010 to 2015 for Issyl. The discharge data is provided with a time step of 10min converted into hourly time step as for rainfall.

The precipitation data is missing for some events, especially at high altitude gauges during snowfall events. The percentage of missing value ranges from 2.4% at PR5 to 10.85% at PR7. The highest

percentage of missing data is 19.7% at PR1 where the gauge underwent technical problems. Overall, the total percentage of missing value (7.8%) is low, hence and no gap filling method is used. The discharge data is missing in some events that are not selected. For this reason we considered only the events with complete discharge data. Some of the flood events considered in this study (Table 2) occurred in winter season, where rainfall can be in the form of snow above 2000m elevation. According to El Khalki et al.(2018), the snow does not contribute to runoff during winter season in the Rheraya basin because it does not melt during the coldest months (Hajhouji et al., 2018), where only 17% of basin area is occupied by snow. The runoff coefficient is calculated by relating the amount of direct runoff to the amount of precipitation for each selected events. It is larger when the basin has low infiltration and lower for permeable basins. In our case, runoff coefficient ranges from 13.1 to 34.1% for Rheraya and from 1.2 to 7.2% for Issyl. This indicates the important role of initial conditions in both basins, with a much higher infiltration capacity in the Issyl basin in addition to potential water loss due to irrigation. We used 5 temperature stations located in the Rheraya basin and one temperature station located in the Issyl basin with an hourly time step to calculate the average temperature over each basin, ranging from 2008 to 2016. This data enabled us to calculate potential evapotranspiration (PET) with Oudin formula (Oudin et al., 2005) requiring temperature only. This formula was previously applied in Morocco ((Marchane et al., 2017; Trambly et al., 2013) and in Tunisia (Dakhlaoui et al., 2020).

2.3 Soil moisture data

We used 7 different types of soil moisture data over the Rheraya basin and 6 types in the Issyl basin due to the absence of measurements in this basin. Covering the same period of rainfall data mentioned in the 2.3 section, we used:

1. In-situ measurement with three Thetaprobess at 5cm and 30cm depth in the Rheraya basin, located at the SMPR7 station (Figure 1).
2. Simulated soil moisture from a Soil Moisture Accounting model (SMA)
3. ASCAT satellite soil moisture
4. SMOS satellite soil moisture
5. SMOS-IC satellite soil moisture
6. ESA-CCI satellite soil moisture
7. ERA5 reanalysis soil moisture

2.3.1 In-situ measurements

Soil moisture measurements are available at one location with three Thetaprobess at two different depths (5cm and 30cm). In this study we used Thetaprobess with 5cm depth, which is comparable with the depths of satellite products (Massari et al., 2014). The site is located in Rheraya basin, with an altitude

of 2030m and a slope of 30% (Figure 1). The data is covering the time period from 2013 to 2016, with 30min time step converted to daily time step.

2.3.2 Soil moisture accounting model

The SMA is a continuous Soil Moisture Accounting model that can be used in the absence of soil moisture data to represent the degree of saturation for flood modeling (Anctil et al., 2004; Trambly et al., 2012). In this study, a simplified version of the SMA model is used, adopting the same approach used by Trambly et al. (2012) and Javelle et al. (2010). The SMA calculates the level of the soil reservoir (S/A), ranging between 0 and 1, by calibrating its single parameter, A , which represents the maximum reservoir capacity of the soil. An interpolated daily rainfall dataset created by the Inverse Distance method and evapotranspiration data computed from daily temperature with the Oudin equation (Oudin et al., 2005) are used as inputs to the SMA model.

2.3.3 Soil moisture products

In this study we used three different types of satellite products and a Reanalysis product (Table 3):

1. The Advanced SCATterometer (ASCAT) is a Soil Moisture product, onboard Metop-A and Metop-B and a Metop-C satellite is a C-band (5.255 GHz) scatterometer onboard the Metop satellite series. It has a spatial sampling of 12.5 km and 1 to 2 observations per day (Wagner et al., 2013). The SM product was provided within the EUMETSAT project (<http://hsaf.meteoam.it/>) denoted as H115.
2. The Soil Moisture and Ocean Salinity (SMOS) mission is a radiometer operating at L band (1.4 GHz), providing Soil Moisture data with ~50km as spatial sampling and 1 observation per 2/3 days (Kerr et al., 2001). Centre Aval de Traitement des Données SMOS (CATDS, <https://www.catds.fr/>) provided the version RE04 (level3) for this study. This version is gridded on the 25km EASEv2 grid.
3. The Soil Moisture and Ocean Salinity INRA-CESBIO (SMOS-IC) is an algorithm designed by Institut National de la Recherche Agronomique (INRA) and Centre d'Etudes Spatiales de la Biosphère (CESBIO) for a global retrieval of Soil Moisture and L-VOD. Two parameters of inversion of the L-MED model are used in the SMOS-IC (Wigneron et al., 2007) with a consideration of the pixel as homogeneous. This version is 105 and has a spatial sampling of 25km with EASEv2 grid (Fernandez-Moran et al., 2017).
4. The ESA-CCI soil moisture product (<http://www.esa-soilmoisture-cci.org/>) regroups active and passive microwave sensors to measure soil moisture, giving three type of products: Active, Passive and Combined (Active + Passive). In this paper, the ESA-CCI V4.5 –

Combined product is used (Dorigo et al., 2017; Gruber et al., 2017, 2019). The product has been validated to be useful by 600 ground-based measurement points around the globe (Dorigo et al., 2015), as well as it was compared with ERA-Interim products (Albergel et al., 2013). In the field of hydrological modeling, several global studies have used the ESA-CCI product to initiate the hydrological model (Dorigo et al., 2012, 2015; Massari et al., 2014) at the scale of Morocco (El Khalki et al., 2018). We extracted for each basin the pixel that corresponds to it.

5. ERA5 (Copernicus Climate Change Service (C3S), 2017) developed by European Centre for Medium-Range Weather Forecasts (ECMWF), it is the latest version of atmospheric reanalysis available for public since February 2019. The ERA5 replaced ERA-Interim with improvement at different scales, particularly, a higher spatial and temporal resolution, and a better global balance of precipitation and evaporation. The spatial resolution is 31km instead of 79km, hourly resolution is used instead of 6 hours, and the covered period will be extended to 1950 in future. The ERA5 product was applied in some recent studies in hydro-climatic field (Albergel et al., 2018; Hwang et al., 2019; Mahto and Mishra, 2019; Olauson, 2018). We selected the volumetric soil water of the first soil layer. This new product is tested in our study for the first time in Morocco. An alternative dataset, ERA5-Land using an improved land-surface scheme with a spatial resolution of 10km, was also tested, providing the same results as ERA5 since there is a strong correlation between soil moisture simulated by the two products.

It should be noted that the soil moisture products have a different percentage of missing data over each basin (Table 4). The ESA-CCI product show an important percentage of missing values over the Rheraya basin compared to ASCAT that is included in the ESA-CCI product. This is due to the filter used in the ESA-CCI product to ensure the data quality. The difference in the percentage of missing values between Rheraya and Issyl is related to the complex topography and also to the frozen zones in the Rheraya basin, more description about the applied filters can be found in (Dorigo et al., 2017). However, the percentage of missing values for the SMOS product are quite similar between the two basins, which is related to the low temporal resolution (1 observation per 2/3 days).

3 Methods

3.1 Evaluation of different soil moisture datasets

In-situ data preparation consists of averaging the 5cm depth probes in order to get a single value to work with and take into account the plot-scale variability of the measurements. This data is considered as a reference for soil moisture data in the Rheraya basin, so that all the other soil moisture products are

compared to it. The different soil moisture products are compared to the observed soil moisture over the entire period and also on a seasonal basis.

The SMA model is used to represent the soil moisture aggregated at the catchment scale. The rationale behind the use of such model here is that continuous rainfall and temperature series are often available in monitored catchments, unlike soil moisture, and a calibrated SMA model can sometimes palliate the lack of soil moisture measurements (Tramblay et al., 2012). For the SMA model, the A parameter, representing the soil water holding capacity, is calibrated to obtain the best correlation between observed and simulated soil moisture (S/A). The calibration with observed data can only be performed in the Rheraya basin where soil moisture is measured. In addition to this calibration, other values of A, ranging from 1 to 1000mm, are tested in the SMA model to maximize the correlations with the different soil moisture products. The choice of this approach is to check if there are any possible uncertainties that can be related to the in-situ soil moisture measurements, located on a steep slope plot that may not fully represent the average soil moisture conditions over the whole basin. In the case of the Issyl basin, since there is no observed soil moisture data, the model is run for a range of different values of the A parameter. The best value of the A parameter is selected as the one yielding the best correlations with the different satellite products.

The values from ASCAT and SMA are given in percentage (values are ranging between 0 and 1) while SMOS, SMOS-IC, ERA5, ESA-CCI and observations are in $\text{m}^3 \text{m}^{-3}$. To allow a comparison for all soil moisture datasets a rescaling procedure is needed. Before applying the rescaling procedure, according to Albergel et al. (2010), a 95% confidence interval is chosen to define the higher and lower values to exclude any abnormal outliers using equation 1 and 2. The resulted data is then rescaled to their own maximum and minimum values considering the whole period using the equation 3. The issue in the validation of satellite soil moisture products and reanalysis product with in-situ measurements is the spatial resolution (Jackson et al., 2010). Several studies mentioned that, in the case of the temporal stability introduced by Vachaud et al. (1985), one in-situ measurement point can represent the soil moisture condition of a larger area (Brocca et al., 2009b, 2010; Loew and Mauser, 2008; Loew and Schlenz, 2011; Martínez-Fernández and Ceballos, 2005; Miralles et al., 2010; Wagner et al., 2008). According to (Massari et al., 2015), the coarse satellite observations can be beneficial for small basins, in the case if the in-situ observation falls in the satellite product pixel. This means that the in-situ measurements can represent a good benchmark (Liu et al., 2011). In this study we considered the in-situ measurement as a benchmark to validate different soil moisture products.

$$Up_{SM} = \mu_{SM} + 1.96\sigma_{SM}, \quad (1)$$

$$Low_{SM} = \mu_{SM} - 1.96\sigma_{SM}, \quad (2)$$

Where Up_{SM} and Low_{SM} are the limits of the confidence interval (the upper and the lower 95%)

$$SM = \frac{SM - Low_{SM}}{Low_{SM} - Up_{SM}}, \quad (3)$$

The correlation coefficient of Pearson equation (4) and the Root Mean Square Deviation (RMSD) equation (5) are used to compare in-situ measurements and humidity modeled by SMA model and the different soil moisture products.

$$r = \frac{N \sum SM_{sat} SM_{in-situ} - (\sum SM_{sat})(\sum SM_{in-situ})}{\sqrt{[N \sum SM_{sat}^2 - (\sum SM_{sat})^2][N \sum SM_{in-situ}^2 - (\sum SM_{in-situ})^2]}}, \quad (4)$$

$$RMSD = \sqrt{\frac{\sum (SM_{in-situ} - SM_{sat})^2}{N}}, \quad (5)$$

With $SM_{in-situ}$ is the in-situ measurements of soil moisture or SMA model which are considered as reference, SM_{sat} is the soil moisture from satellite or reanalysis and N is the number of values.

3.2 Event-based hydrological model for floods

In this study, we used the Soil Conservation Service Curve Number (SCS-CN) model for each basin, implemented in the hydrologic Engineering System - Hydrologic Modeling System ‘‘HEC-HMS’’ software (US Army Corps of Engineers, 2015). This model is known by its widespread popularity and to the simplicity of the application method (Miliiani et al., 2011). SCS-CN is often used in the semi-arid context (Brocca et al., 2009a; El Khalki et al., 2018; Trambly et al., 2010; Zema et al., 2017). Our methodology is based on the use of SCS-CN model as a production function to compute net rainfall, by automatically and manually calibrating the Curve Number parameter (CN) in order to obtain a realistic hydrograph shape. The value of CN is non-dimensional ranging from 0 (dry) to 100 (wet). The potential maximum retention, S, is related to CN as follows:

$$S = \frac{25400}{CN} - 254, \quad (6)$$

The transformation of precipitation excess into runoff is provided by Clark Unit hydrograph model (transfer function). The calibration procedure is based on calibrating the Clark Unit hydrograph model parameters; Storage Coefficient (Sc) and Time of Concentration (Tc). The two functions (production and transfer) are calibrated separately to avoid the parameter dependence and the calibration is based on Nash-Sutcliffe criterion.

325
 326 The validation procedure is based on two steps; first, testing the relationship between soil moisture data
 327 (In-situ, SMA, ERA5, ASCAT, SMOS, SMOS-IC and ESA-CCI), at two different timescales (daily and
 328 hourly) and the S parameter of the event-based model of all the flood events. The hourly time step
 329 concerns only the in-situ data and ERA5 by choosing the soil moisture state 1 hour before the starting
 330 time of rainfall for each event. Only the ERA5 product can be used in the Issyl basin at the hourly time
 331 step due to the absence of observed data. Then, the soil moisture products that are well correlated with
 332 S parameter are used to validate the model by calculating the S parameter from the linear equation
 333 obtained between soil moisture and S, using the leave-one-out resampling procedure; each event is
 334 successively removed and a new relationship between the remaining event is re-computed. The
 335 relationship is good when the correlation is near to $r = -1$. The negative correlation is related to the fact
 336 that, the storage capacity (S) is larger when the soil is dry (soil moisture is near to 0). The estimated S
 337 parameter for a given event is then used in the SCS-CN model in validation. For the Clark Unit
 338 Hydrograph model, the average of the Sc and the Tc parameters are used in validation in the leave-one-
 339 out resampling method; the parameters are re-calibrated with the remaining events and the mean of
 340 calibrated values are used in validation.

341
 342 For the evaluation of the flows simulated by the flood event model, we compared the simulated
 343 discharge with those observed using the efficiency coefficient of Nash-Sutcliffe (Ns) (Nash and
 344 Sutcliffe, 1970) equation (7) as well as through the bias on peak flow and on volume equation(8).

$$Ns = 1 - \frac{\sum((Q_{obs}) - Q_{sim})^2}{\sum((Q_{obs}) - \overline{(Q_{obs})})^2}, \quad (7)$$

$$BIAS_Q = \frac{\sum(Q_{sim} - Q_{obs})}{\sum Q_{obs}}, \quad (8)$$

346
 347 Where Q_{sim} is the simulated discharge, Q_{obs} is the observed discharge and n is the number of events
 348 The Ns ranges between $-\infty$ and 1, the 1 value of Ns indicates that the simulated discharge perfectly
 349 match the observed hydrograph

350

351 **4 Results and discussions**

352

353 **4.1 Relationship between satellite soil moisture data and in-situ measurements**

354

355 The comparison between measured soil moisture at 5cm depth and the different products of soil moisture
 356 show that the SMOS-IC and ERA5 provide the best correlations, with $r=0.77$ and $r=0.67$ respectively,
 357 but it should be noted that all the correlations with the different products are also significant. Figure 2
 358 shows that SMOS-IC and ERA5 reproduce dry periods well, whereas ERA5 reproduces well wet

periods. This result is in accordance with the results of Massari et al. (2014) who found that ERA-Land is well correlated with In-situ data. ASCAT product shows a correlation of $r=0.45$ which is less than the correlation given in Albergel et al. (2010) who found r values ranging from 0.59 to 0.64, the lower correlation may be caused by the orography and the coarse resolution. In fact, this results shows that the use of a combined product as ESA-CCI give an obvious advances in term of r values than one single satellite soil moisture product (Ma et al., 2019; Zeng et al., 2015).

4.2 Relationship between the SMA model outputs and soil moisture products

The best correlation between observed soil moisture and the soil moisture level (S/A) modeled by the SMA model is obtained for $A=8\text{mm}$ with $r=0.86$. But it shows higher RMSD than observations (RMSD $=0.23$) which is due to the overestimation of the wet periods (Figure 3). This can be related to the averaging of rainfall data in the SMA model over the basin which could be higher than rainfall in the soil moisture measurement site. It should be noted that the value of the A parameter is very small by comparing to previous studies (Javelle et al., 2010; Trambly et al., 2012), indicating a much lower soil storage capacity.

We correlated the SMA model output (for $A=8\text{mm}$) with the Satellite Products of Soil Moisture, and the best correlations are found for SMOS-IC and ERA-5, with $r=0.74$ and $r=0.63$ respectively (Figure 4). Other values of A that maximize the correlations with the different soil moisture products have also been tested. Optimal values of A are ranging from 1 mm with ASCAT (with $r=0.4$), 8 mm for SMOS ($r=0.56$), SMOS-IC ($r=0.74$) and ESA-CCI ($r=0.59$) up to 16mm for ERA5 ($r=0.68$). Comparing the Figure 2 and Figure 4 we notice that the soil moisture products better reproduce in-situ measurements than modeled soil moisture with the SMA model, expect for ESA-CCI and SMOS. This improvement is directly related to the SMA model performance, which overestimates soil moisture, and should be compared to Figure 2 where ESA-CCI and SMOS products also overestimate in-situ measurements.

For the Issyl basin,ss mentioned above, no observed soil moisture data is available to calibrate the A parameter of the SMA model. Therefore, different values of A are tested to correlate the SMA outputs with the different soil moisture datasets. Over all datasets, the value of A best correlated to the majority of soil moisture products is 30mm. The best correlation is given by $A=30\text{mm}$ with $r=0.78$, 0.82 and 0.79 for ASCAT, SMOS-IC and ESA-CCI respectively. As for SMOS and ERA5, the best correlation is given for $A=40\text{mm}$ with $r=0.7$ and $A=60\text{mm}$ with $r=0.8$, respectively. In order to choose a single value of A that represents the basin, we have considered $A=30\text{mm}$, the optimal value yielding the best correlations with the different soil moisture products. Figure 5 shows that the best correlation between satellite products and S/A is obtained with SMOS-IC ($r=0.82$) and ESA-CCI ($r=0.79$). As observed over the Rheraya basin, the SMOS-IC and ERA5 products showed a good reproduction for dry periods with

Code de champ modifié

Mis en forme : Anglais (États-Unis)

Mis en forme : Anglais (États-Unis)

a better reproduction of wet periods with ERA5, these results are similar to those of Ma et al. (2019) who found that SMOS-IC performs well in arid zones with a median r value of 0.6. Overall, the higher value for the A parameter found for this basin is coherent with the fact that this basin is located in a plain area with a much higher soil moisture storage capacity than in the mountainous Rheraya basin.

4.3. Comparison of soil moisture datasets by seasons

Seasonal evaluation of satellite soil moisture and reanalysis data shows for the Rheraya basin that during the summer season there are low correlations (average $r=0.34$) for all the products which is possibly due to very low precipitation amounts mostly as localized convective precipitation (Albergel et al., 2010). On the contrary, better performance are obtained with the SMA model ($r=0.59$) that considers catchment-scale precipitations. Better correlations are obtained in fall with an average of $r=0.61$ and 0.58 for the in-situ data and SMA respectively (Table 5). In the winter we found a poor correlation using SMOS and ESA-CCI that can be related to the important percentage of missing values. For the Issyl watershed, the satellite products show good correlations with the SMA model outputs (on average $r=0.76$) except for the SMOS product especially in winter. The highest mean correlations (i.e. averaged for all the different products) are found during fall in the Rheraya basin, with $r=0.61$ with in situ data and $r=0.58$ with SMA soil moisture. It should be noted that correlations with SMA outputs in summer are similar with $r=0.59$. For the Issyl basin, the correlations are also higher in the fall with a mean $r=0.87$ for the SMA model. The ERA5 product shows good correlations for most seasons. Complementary to this comparison of the different soil moisture products, an Extended Collocation Analysis has also been performed, comforting the results obtained (see supplementary materials).

4.4 Calibration of the event-based hydrological model

Calibration results (Table 6) on the individual flood events of Table 2 show that the difference between the values of the potential maximum soil moisture retention (S) of each basin is very important with larger values for the Issyl basin where the soil depth is prominent. We noticed that the temporal variability of soil moisture can be important between two successive events like the events of 02/04/2012 and 05/04/2012 for the Issyl basin. The SCS-CN model reproduces well the floods of the Rheraya basin with average N_s of 0.67 and bias on runoff peak ($BIAS_Q$) of 4% (Table 6). The SCS-CN model in calibration is able to reproduce the shape of the different flood events even for the most complex ones (21/04/2014 and 22/11/2014). Similarly, for the Issyl basin the SCS-CN model gives good results with average N_s of 0.66 and an average bias on runoff peak of 6.93%. The simulated hydrographs are in good agreement with the observations. The lower N_s coefficients obtained for the 23/01/2014 event in the Rheraya and for the 03/04/2011 and 28/09/2012 events in the Issyl basin are caused by a slight shift in the hydrograph probably due to a time lag in instantaneous precipitation measurements. For the Clark

Unit Hydrograph model, the averages of calibrated Tc and Sc parameters are considered for validation (Sc = 1.42 and 2.54 hours and Tc = 2.85 and 3.64 hours for Rheraya and Issyl respectively).

The S parameters of the hydrological models, for the two basins, are then compared to the soil moisture products. For the Rheraya basin, there are significant correlations of the S parameter with in-situ soil moisture data, ERA5 and SMOS-IC (Table 7). The correlations using observed soil moisture, ESA-CCI and SMOS data can be computed with only 8 and 6 events respectively, due to the presence of missing values. The time step of the soil moisture data in the Rheraya basin seems to play a key role in the representation of soil moisture conditions. Indeed, the daily time step shows a weakness to effectively represent the antecedent soil moisture conditions in the SCS model, which indicates the rapid change of soil moisture content in such a semi-arid mountainous basin. For the Issyl basin, ESA-CCI is the only satellite product that is significantly correlated to the S parameter at the daily time step. The ERA5 product is also significantly correlated with the S parameter but at the hourly time step. The daily output of the SMA model is also able to estimate the initial condition of the model for the Issyl basin, with a correlation of -0.69 with S. Interestingly, the SMA model does not provide a good performance in the Rheraya basin. It can be due to the fact that in such a mountainous basin, there is a strong spatial variability of rainfall and it is difficult to obtain reliable precipitation estimates for continuous simulations (Chapponiere et al., 2005).

4.5 Validation of the event-based hydrological model

The validation of the event-based hydrological model is performed on the events of Rheraya and Issyl using only the soil moisture datasets that show relatively good correlations with the initial condition (S) of the model from Table 8. These products include SMOS-IC, ERA5 and observed soil moisture for the Rheraya, and ESA-CCI, ERA5, SMOS and SMA for Issyl. The validation of the event-based model is performed with S calculated from the linear equation obtained from the correlation analysis between the different soil moisture products and the calibrated parameter S. The validation results show that for the Rheraya basin the events are well validated using both daily (Figure 6) and hourly (Figure 7) time step of soil moisture products. The best validation result at the daily time step is obtained with SMOS-IC with an average Ns of 0.58 for all events (median Ns = 0.63). This result should be compared with the results found in the previous sections where SMOS-IC showed the best correlations with observed soil moisture. ASCAT and ERA5 show similar results in term of average Ns (~0.45). On the contrary, the daily observed soil moisture shows a lower performance with an average Ns of 0.25 (median Ns = 0.49). The hourly time step enhanced the performance of the model, with an average Ns using the ERA5 product of 0.64 (median Ns = 0.73) and also a better performance with the hourly in-situ data with mean Ns = 0.54 (median Ns = 0.61). These results show that the hourly time step better represents the saturation content before the flood events in this basin. For the Issyl, the validation results are quite

different (Figure 8). For only 5 events (the 03/04/2011, 02/05/2011, 19/05/2011, 05/04/2012 and 25/03/2015) the event-based model can be validated using the ERA5 hourly data with an average N_s coefficient of 0.46. For the events of the 16/05/2011 and 06/06/2011, an important spatial variability of precipitation is observed, with no precipitation in the PQI station. In addition to these events, the flood of the 28/09/2012 showed an overestimation of the validated value of S compared to the calibrated value. This overestimation is related to the ERA5 estimation that considers the soil more saturated than it is. For all other events and with different soil moisture products the N_s coefficients are negative and the hydrographs not adequately reproduced. These validation results should be put in perspective with the fact that the Issyl basin has a land use characterized by agricultural activities with possible large water uptake in the diver channel during floods for irrigation. Some simple methods to compensate for the water losses due to irrigation, such as the application of a varying percentage of runoff added to the observed discharge to compensate the part of water lost for irrigation, have been tested but with no improvement of the results. This is probably because the quantity taken for irrigation is not constant from one event to another depending on the farmer needs, as shown by field surveys, and this amount may also depend on discharge thresholds.

5 Conclusions

This study performed an evaluation of different soil moisture products (ASCAT, ESA-CCI, SMOS, SMOS-IC and ERA5) using in-situ measurements and a Soil Moisture Accounting model (SMA) over two basins located in the Moroccan High Atlas in order to estimate the initial soil moisture conditions before flood events. The results indicated that the SMOS-IC product is well correlated with both the in-situ soil moisture measurements and simulated soil moisture from the SMA model over the two basins. Beside satellite products, the new ERA5 reanalysis reproduced also well the in-situ measurements over the mountainous basin, which indicates the robustness of this product to estimate soil moisture in these semi-arid environments. The seasonal analysis showed for both basins that the highest correlations are found in autumn, which encourages the use of these remote sensing products for flood forecasting because the majority of events occur in autumn and early winter in these regions (El Khalki et al., 2018). One of the main finding of the present study is that different products, in particular SMOS-IC, ASCAT and ERA5, are efficient to estimate the initial soil moisture conditions in an event-based hydrological model, that could improve the forecasting capability in data-scare environments.

This study also showed that the hourly temporal resolution for soil moisture provides a better estimate of antecedent wetness conditions before flood events. Indeed, the use of hourly soil moisture measurements or ERA5 provided better performance than daily soil moisture to estimate the initial condition of the hydrological model. These results indicate that the temporal variability of soil moisture in these semi-arid basins under high evapotranspiration rates can be very important, causing a quick

~~decay of soil moisture after a rainfall event. For this type of basin, the use of soil moisture products with an hourly temporal resolution could be required to estimate with accuracy the soil moisture content prior to flood events. This study also showed that the hourly temporal resolution for soil moisture may provide a better estimate of the initial soil moisture conditions for both basins. Indeed, the use of hourly in situ soil moisture measurements and ERA5 provided better performance to estimate the initial condition of the hydrological model. These results indicate that the temporal variability of soil moisture in these semi-arid basins under high evapotranspiration rates can be very important causing a quick decay of soil moisture following a rainfall event. For this type of basin or others under even more arid conditions, the use of soil moisture products with an hourly temporal resolution could be required to estimate with accuracy the soil moisture content prior to flood events.~~ This constitute a research challenge to monitor soil moisture at the sub-daily timescale without ground measurements, since most remote sensing products at present are not available at the hourly time step. As shown by this study, atmospheric reanalysis coupled with a land surface model, such as ERA5, could provide a valuable alternative, in particular since the resolution of these products is constantly improving along with a more realistic representation of water balance.

For the catchment that is the most influenced by agricultural activities, the Issyl basin located nearby Marrakech, the water uptake for irrigation made difficult the validation of the hydrological model. The model overestimates runoff for some flood events, since the water uptake during floods from the river channel by small artisanal structures is not monitored and thus cannot be represented in the hydrological model. This example shows the difficulty in the implementation of a flood forecasting system in such basin without a good knowledge on the human influences on river discharge. This situation is not a particular case but deemed common in semi-arid areas where rivers with a high risk of flooding are also a substantial water resource for agriculture. Therefore, as shown by our results, a hydrological model that is not accounting for water use and irrigation may not be efficient at reproducing flood events in an operational context. The resolution of this issue would require the development of an irrigation monitoring system, that would need intensive field surveys and mapping but also the agreement of the local farmers that benefit from this system.

This study is a first step towards the development of operational flood forecasting systems in semi-arid North Africa basins highly impacted by floods. Indeed, the evaluation of the most suitable satellite or reanalysis products to estimate soil moisture for the monitoring of the basin saturation conditions before floods is a necessary first step prior to implement flood warning systems based on rainfall and soil moisture thresholds or coupled hydro-meteorological modeling (Javelle et al., 2016; Norbiato et al., 2008). Three important aspects that should be addressed in further research aiming at developing a flood forecasting system are: (1) the application of assimilation methods to correct the initial soil moisture condition of the basin and to increase the latency of soil moisture by using the observed discharge before

the flood event (Coustau et al., 2013). ~~However, the application of assimilation methods is limited in the basins where the hydrometric data is not continuous.~~ (2) the Joint assimilation of soil moisture and snow cover in order to better predict floods in the mountainous basins (Baba et al., 2018; Koster et al., 2010)-and (3) ~~t~~The selection of soil moisture data based on the latency of soil moisture products. For instance, the ERA5 reanalysis is available within 5-days latency when ASCAT or SMOS satellite products could be available with 3-hours latency. With the issue of the latency to obtain some products, it should be noted also that the mismatch of spatial resolution between large scale remote sensing products and very local small-scale applications could be an additional issue. Prior to these developments, this type of evaluation should be generalized in Morocco and other sites in North Africa where soil moisture measurements are available, for the development of reliable flood forecasting systems using the outputs of meteorological models.

Author Contributions: E.E. performed the analysis and wrote the paper, Y.T. designed the analysis and wrote the paper, C.M. and L.B. designed the analysis and contributed to the paper, C.M. performed the TC analysis, and M.S., V.S., S.G. contributed to the paper

Acknowledgments: This research has been conducted in TREMA International Joint Laboratory (<https://www.lmi-trema.ma/>) funded by the University Cadi Ayyad of Marrakech and the French IRD. This work is a contribution to the HYdrological cycle in The Mediterranean EXperiment (HyMeX) program, through INSU-MISTRALS support. The financial support provided by the ERASMUS+ mobility and the Centre National de la Recherche Scientifique et Technique (CNRS) are gratefully acknowledged. Thanks are due to the hydrological basin agency Tensift (ABHT) and to the LMI TREMA for providing the data. The Authors would like to thank Professor Khalid Chaouch for his English revision and the associated Editor Eric Martin and two anonymous reviewers that helped to improve the manuscript.

Conflicts of Interest: The authors declare no conflict of interest.

References

- Al-Yaari, A., Wigneron, J.-P., Ducharne, A., Kerr, Y. H., Wagner, W., De Lannoy, G., Reichle, R., Al Bitar, A., Dorigo, W., Richaume, P. and Mialon, A.: Global-scale comparison of passive (SMOS) and active (ASCAT) satellite based microwave soil moisture retrievals with soil moisture simulations (MERRA-Land), *Remote Sens. Environ.*, 152, 614–626, doi:10.1016/J.RSE.2014.07.013, 2014.
- El Alaoui El Fels, A., Bachnou, A. and Alaa, N.: Combination of GIS and mathematical modeling to predict floods in semiarid areas: case of Rheraya watershed (Western High Atlas, Morocco), *Arab. J. Geosci.*, 10(24), 554, doi:10.1007/s12517-017-3345-x, 2017.
- Albergel, C., Calvet, J.-C., De Rosnay, P., Balsamo, G., Wagner, W., Hasenauer, S., Naeimi, V., Martin,

581 E., Bazile, E., Bouyssel, F. and Mahfouf, J.-F.: Hydrology and Earth System Sciences Cross-evaluation
 582 of modelled and remotely sensed surface soil moisture with in situ data in southwestern France, *Hydrol.*
 583 *Earth Syst. Sci.*, 14, 2177–2191, doi:10.5194/hess-14-2177-2010, 2010.
 584 Albergel, C., Dorigo, W., Balsamo, G., Muñoz-Sabater, J., de Rosnay, P., Isaksen, L., Brocca, L., de
 585 Jeu, R. and Wagner, W.: Monitoring multi-decadal satellite earth observation of soil moisture products
 586 through land surface reanalyses, *Remote Sens. Environ.*, 138, 77–89, doi:10.1016/J.RSE.2013.07.009,
 587 2013.
 588 Albergel, C., Dutra, E., Munier, S., Calvet, J.-C., Munoz-Sabater, J., de Rosnay, P. and Balsamo, G.:
 589 ERA-5 and ERA-Interim driven ISBA land surface model simulations: which one performs better?,
 590 *Hydrol. Earth Syst. Sci.*, 22(6), 3515–3532, doi:10.5194/hess-22-3515-2018, 2018.
 591 Anctil, F., Michel, C., Perrin, C. and Andréassian, V.: A soil moisture index as an auxiliary ANN input
 592 for stream flow forecasting, *J. Hydrol.*, 286(1–4), 155–167, doi:10.1016/J.JHYDROL.2003.09.006,
 593 2004.
 594 Baba, M. W., Gascoin, S. and Hanich, L.: Assimilation of Sentinel-2 data into a snowpack model in the
 595 High Atlas of Morocco, *Remote Sens.*, 10(12), 1–23, doi:10.3390/rs10121982, 2018.
 596 Bennani, O., Druon, E., Leone, F., Trambly, Y. and Saidi, M. E. M.: A spatial and integrated flood risk
 597 diagnosis, *Disaster Prev. Manag. An Int. J.*, DPM-12-2018-0379, doi:10.1108/DPM-12-2018-0379,
 598 2019.
 599 Boudhar, A., Hanich, L., Boulet, G., Duchemin, B., Berjamy, B. and Chehbouni, A.: Evaluation of the
 600 Snowmelt Runoff Model in the Moroccan High Atlas Mountains using two snow-cover estimates,
 601 *Hydrol. Sci. J.*, 54(6), 1094–1113, doi:10.1623/hysj.54.6.1094, 2009.
 602 Bouimouass, H., Fakir, Y., Tweed, S., and Leblanc, M.: Groundwater recharge sources in semiarid
 603 irrigated mountain fronts, *Hydrological Processes*, 34(7), 1598–1615.
 604 <https://doi.org/10.1002/hyp.13685>, 2020
 605 Boumenni, H., Bachnou, A. and Alaa, N. E.: The rainfall-runoff model GR4J optimization of parameter
 606 by genetic algorithms and Gauss-Newton method: application for the watershed Ourika (High Atlas,
 607 Morocco), *Arab. J. Geosci.*, 10(15), 343, doi:10.1007/s12517-017-3086-x, 2017.
 608 Brocca, L., Melone, F., Moramarco, T. and Morbidelli, R.: Antecedent wetness conditions based on
 609 ERS scatterometer data, *J. Hydrol.*, doi:10.1016/j.jhydrol.2008.10.007, 2009a.
 610 Brocca, L., Melone, F., Moramarco, T. and Morbidelli, R.: Soil moisture temporal stability over
 611 experimental areas in Central Italy, *Geoderma*, doi:10.1016/j.geoderma.2008.11.004, 2009b.
 612 Brocca, L., Melone, F., Moramarco, T. and Morbidelli, R.: Spatial-temporal variability of soil moisture
 613 and its estimation across scales, *Water Resour. Res.*, doi:10.1029/2009WR008016, 2010.
 614 Brocca, L., Hasenauer, S., Lacava, T., Melone, F., Moramarco, T., Wagner, W., Dorigo, W., Matgen,
 615 P., Martínez-Fernández, J., Llorens, P., Latron, J., Martin, C. and Bittelli, M.: Soil moisture estimation
 616 through ASCAT and AMSR-E sensors: An intercomparison and validation study across Europe, *Remote*
 617 *Sens. Environ.*, doi:10.1016/j.rse.2011.08.003, 2011.

618 Brocca, L., Crow, W. T., Ciabatta, L., Massari, C., De Rosnay, P., Enenkel, M., Hahn, S., Amarnath,
619 G., Camici, S., Tarpanelli, A. and Wagner, W.: A Review of the Applications of ASCAT Soil Moisture
620 Products, *IEEE J. Sel. Top. Appl. Earth Obs. Remote Sens.*, 10(5), 2285–2306,
621 doi:10.1109/JSTARS.2017.2651140, 2017.

622 Chaponnière, A., Boulet, G., Chehbouni, A. and Aresmouk, M.: Understanding hydrological processes
623 with scarce data in a mountain environment, *Hydrol. Process.*, 22(12), 1908–1921,
624 doi:10.1002/hyp.6775, 2008.

625 Coustau, M., Ricci, S., Borrell-Estupina, V., Bouvier, C. and Thual, O.: Benefits and limitations of data
626 assimilation for discharge forecasting using an event-based rainfall–runoff model, *Nat. Hazards Earth*
627 *Syst. Sci.*, 13(3), 583–596, doi:10.5194/nhess-13-583-2013, 2013.

628 Creutin, J.-D. and Borga, M.: Radar hydrology modifies the monitoring of flash-flood hazard, *Hydrol.*
629 *Process.*, 17(7), 1453–1456, doi:10.1002/hyp.5122, 2003.

630 Dakhlaoui, H., Seibert, J. and Hakala, K.: Sensitivity of discharge projections to potential
631 evapotranspiration estimation in Northern Tunisia, *Reg. Environ. Chang.*, 20(2), 1–12,
632 doi:10.1007/s10113-020-01615-8, 2020.

633 Van doninck, J., Peters, J., Lievens, H., De Baets, B. and Verhoest, N. E. C.: Accounting for seasonality
634 in a soil moisture change detection algorithm for ASAR Wide Swath time series, *Hydrol. Earth Syst.*
635 *Sci.*, 16(3), 773–786, doi:10.5194/hess-16-773-2012, 2012.

636 Dorigo, W., de Jeu, R., Chung, D., Parinussa, R., Liu, Y., Wagner, W. and Fernández-Prieto, D.:
637 Evaluating global trends (1988–2010) in harmonized multi-satellite surface soil moisture, *Geophys. Res.*
638 *Lett.*, 39(18), doi:10.1029/2012GL052988, 2012.

639 Dorigo, W., Wagner, W., Albergel, C., Albrecht, F., Balsamo, G., Brocca, L., Chung, D., Ertl, M.,
640 Forkel, M., Gruber, A., Haas, E., Hamer, P. D., Hirschi, M., Ikonen, J., de Jeu, R., Kidd, R., Lahoz, W.,
641 Liu, Y. Y., Miralles, D., Mistelbauer, T., Nicolai-Shaw, N., Parinussa, R., Pratola, C., Reimer, C., van
642 der Schalie, R., Seneviratne, S. I., Smolander, T. and Lecomte, P.: ESA CCI Soil Moisture for improved
643 Earth system understanding: State-of-the art and future directions, *Remote Sens. Environ.*, 203, 185–
644 215, doi:10.1016/j.rse.2017.07.001, 2017.

645 Dorigo, W. A., Gruber, A., De Jeu, R. A. M., Wagner, W., Stacke, T., Loew, A., Albergel, C., Brocca,
646 L., Chung, D., Parinussa, R. M. and Kidd, R.: Evaluation of the ESA CCI soil moisture product using
647 ground-based observations, , doi:10.1016/j.rse.2014.07.023, 2015.

648 Fernandez-Moran, R., Wigneron, J.-P., De Lannoy, G., Lopez-Baeza, E., Parrens, M., Mialon, A.,
649 Mahmoodi, A., Al-Yaari, A., Bircher, S., Al Bitar, A., Richaume, P. and Kerr, Y.: A new calibration of
650 the effective scattering albedo and soil roughness parameters in the SMOS SM retrieval algorithm, *Int.*
651 *J. Appl. Earth Obs. Geoinf.*, 62, 27–38, doi:10.1016/J.JAG.2017.05.013, 2017.

652 Gaume, E., Livet, M., Desbordes, M. and Villeneuve, J.-P.: Hydrological analysis of the river Aude,
653 France, flash flood on 12 and 13 November 1999, *J. Hydrol.*, 286(1–4), 135–154,
654 doi:10.1016/J.JHYDROL.2003.09.015, 2004.

655 Gruber, A., Dorigo, W. A., Crow, W. and Wagner, W.: Triple Collocation-Based Merging of Satellite
656 Soil Moisture Retrievals, *IEEE Trans. Geosci. Remote Sens.*, 55(12), 6780–6792,
657 doi:10.1109/TGRS.2017.2734070, 2017.

658 Gruber, A., Scanlon, T., Van Der Schalie, R., Wagner, W. and Dorigo, W.: Evolution of the ESA CCI
659 Soil Moisture climate data records and their underlying merging methodology, *Earth Syst. Sci. Data*,
660 11, 717–739, doi:10.5194/essd-11-717-2019, 2019.

661 Hajhouji, Y., Simonneaux, V., Gascoin, S., Fakir, Y., Richard, B., Chehbouni, A. and Boudhar, A.:
662 Modélisation pluie-débit et analyse du régime d'un bassin versant semi-aride sous influence nivale. Cas
663 du bassin versant du Rheraya (Haut Atlas, Maroc), *La Houille Blanche*, (3), 49–62,
664 doi:10.1051/lhb/2018032, 2018.

665 Hwang, S. O., Park, J. and Kim, H. M.: Effect of hydrometeor species on very-short-range simulations
666 of precipitation using ERA5, *Atmos. Res.*, 218(December 2018), 245–256,
667 doi:10.1016/j.atmosres.2018.12.008, 2019.

668 Jackson, T. J., Cosh, M. H., Bindlish, R., Starks, P. J., Bosch, D. D., Seyfried, M., Goodrich, D. C.,
669 Moran, M. S. and Du, J.: Validation of advanced microwave scanning radiometer soil moisture products,
670 *IEEE Trans. Geosci. Remote Sens.*, 48(12), 4256–4272, doi:10.1109/TGRS.2010.2051035, 2010.

671 Jarlan, L., Khabba, S., Er-Raki, S., Le Page, M., Hanich, L., Fakir, Y., Merlin, O., Mangiarotti, S.,
672 Gascoin, S., Ezzahar, J., Kharrou, M. H., Berjamy, B., Saaïdi, A., Boudhar, A., Benkaddour, A.,
673 Laftouhi, N., Abaoui, J., Tavernier, A., Boulet, G., Simonneaux, V., Driouech, F., El Adnani, M., El
674 Fazziki, A., Amenouz, N., Raïbi, F., El Mandour, A., Ibouh, H., Le Dantec, V., Habets, F., Trambly,
675 Y., Mougenot, B., Leblanc, M., El Faïz, M., Drapeau, L., Coudert, B., Hagolle, O., Filali, N., Belaqqiz,
676 S., Marchane, A., Szczypta, C., Toumi, J., Diarra, A., Aouade, G., Hajhouji, Y., Nassah, H., Bigeard,
677 G., Chirouze, J., Boukhari, K., Abourida, A., Richard, B., Fanise, P., Kasbani, M., Chakir, A., Zribi, M.,
678 Marah, H., Naimi, A., Mokssit, A., Kerr, Y. and Escadafal, R.: Remote Sensing of Water Resources in
679 Semi-Arid Mediterranean Areas: the joint international laboratory TREMA, *Int. J. Remote Sens.*, 36(19–
680 20), 4879–4917, doi:10.1080/01431161.2015.1093198, 2015.

681 Javelle, P., Fouchier, C., Arnaud, P. and Lavabre, J.: Flash flood warning at ungauged locations using
682 radar rainfall and antecedent soil moisture estimations, *J. Hydrol.*, doi:10.1016/j.jhydrol.2010.03.032,
683 2010.

684 Javelle, P., Organde, D., Demargne, J., Saint-Martin, C., Saint-Aubin, C. de, Garandeau, L. and Janet,
685 B.: Setting up a French national flash flood warning system for ungauged catchments based on the AIGA
686 method, *E3S Web Conf.*, 7, 18010, doi:10.1051/E3SCONF/20160718010, 2016.

687 Jiang, D. and Wang, K.: The role of satellite-based remote sensing in improving simulated streamflow:
688 A review, *Water (Switzerland)*, 11(8), doi:10.3390/w11081615, 2019.

689 Kerr, Y. H., Waldteufel, P., Wigneron, J.-P., Martinuzzi, J.-M., Font, J. and Berger, M.: Soil Moisture
690 Retrieval from Space: The Soil Moisture and Ocean Salinity (SMOS) Mission. [online] Available from:
691 <https://pdfs.semanticscholar.org/089c/4c73617a96fd33ef7be538d2c3899b2075c2.pdf> (Accessed 20

August 2019), 2001.
 Kerr, Y. H., Waldteufel, P., Richaume, P., Wigneron, J. P., Ferrazzoli, P., Mahmoodi, A., Al Bitar, A., Cabot, F., Gruhier, C., Juglea, S. E., Leroux, D., Mialon, A. and Delwart, S.: The SMOS Soil Moisture Retrieval Algorithm, *IEEE Trans. Geosci. Remote Sens.*, 50(5), 1384–1403, doi:10.1109/TGRS.2012.2184548, 2012.
 Khabba, S., Jarlan, L., Er-Raki, S., Le Page, M., Ezzahar, J., Boulet, G., Simonneaux, V., Kharrou, M. H., Hanich, L. and Chehbouni, G.: The SudMed Program and the Joint International Laboratory TREMA: A Decade of Water Transfer Study in the Soil-plant-atmosphere System over Irrigated Crops in Semi-arid Area, *Procedia Environ. Sci.*, 19, 524–533, doi:10.1016/J.PROENV.2013.06.059, 2013.
 El Khalki, E. M., Trambly, Y., El Mehdi Saidi, M., Bouvier, C., Hanich, L., Benrhanem, M. and Alaouri, M.: Comparison of modeling approaches for flood forecasting in the High Atlas Mountains of Morocco, *Arab. J. Geosci.*, 11(15), doi:10.1007/s12517-018-3752-7, 2018.
 Koster, R. D., Guo, Z., Yang, R., Dirmeyer, P. A., Mitchell, K., Puma, M. J., Koster, R. D., Guo, Z., Yang, R., Dirmeyer, P. A., Mitchell, K. and Puma, M. J.: On the Nature of Soil Moisture in Land Surface Models, *J. Clim.*, 22(16), 4322–4335, doi:10.1175/2009JCLI2832.1, 2009.
 Koster, R. D., Mahanama, S. P. P., Livneh, B., Lettenmaier, D. P. and Reichle, R. H.: Skill in streamflow forecasts derived from large-scale estimates of soil moisture and snow, *Nat. Geosci.*, 3(9), 613–616, doi:10.1038/ngeo944, 2010.
 Liu, Y. Y., Parinussa, R. M., Dorigo, W. A., De Jeu, R. A. M., Wagner, W., M. Van Dijk, A. I. J., McCabe, M. F. and Evans, J. P.: Developing an improved soil moisture dataset by blending passive and active microwave satellite-based retrievals, *Hydrol. Earth Syst. Sci.*, doi:10.5194/hess-15-425-2011, 2011a.
 Liu, Y. Y., Parinussa, R. M., Dorigo, W. A., De Jeu, R. A. M., Wagner, W., van Dijk, A. I. J. M., McCabe, M. F. and Evans, J. P.: Developing an improved soil moisture dataset by blending passive and active microwave satellite-based retrievals, *Hydrol. Earth Syst. Sci.*, 15(2), 425–436, doi:10.5194/hess-15-425-2011, 2011b.
 Loew, A. and Mauser, W.: On the disaggregation of passive microwave soil moisture data using A Priori knowledge of temporally persistent soil moisture fields, *IEEE Trans. Geosci. Remote Sens.*, 46(3), 819–834, doi:10.1109/TGRS.2007.914800, 2008.
 Loew, A. and Schlenz, F.: A dynamic approach for evaluating coarse scale satellite soil moisture products, *Hydrol. Earth Syst. Sci.*, 15(1), 75–90, doi:10.5194/hess-15-75-2011, 2011.
 Ma, H., Zeng, J., Chen, N., Zhang, X., Cosh, M. H. and Wang, W.: Satellite surface soil moisture from SMAP, SMOS, AMSR2 and ESA CCI: A comprehensive assessment using global ground-based observations, *Remote Sens. Environ.*, 231, doi:10.1016/j.rse.2019.111215, 2019.
 Mahto, S. S. and Mishra, V.: Does ERA-5 Outperform Other Reanalysis Products for Hydrologic Applications in India?, *J. Geophys. Res. Atmos.*, 124(16), 9423–9441, doi:10.1029/2019JD031155, 2019.

729 Marchandise, A. and Viel, C.: Utilisation des indices d'humidité de la chaîne Safran-Isba-Modcou de
730 Météo-France pour la vigilance et la prévision opérationnelle des crues, La Houille Blanche,
731 doi:10.1051/lhb/2009075, 2010.

732 Marchane, A., Tramblay, Y., Hanich, L., Ruelland, D. and Jarlan, L.: Climate change impacts on surface
733 water resources in the Rheraya catchment (High Atlas, Morocco), *Hydrol. Sci. J.*, 62(6), 979–995,
734 doi:10.1080/02626667.2017.1283042, 2017.

735 Martínez-Fernández, J. and Ceballos, A.: Mean soil moisture estimation using temporal stability
736 analysis, *J. Hydrol.*, 312(1–4), 28–38, doi:10.1016/j.jhydrol.2005.02.007, 2005.

737 Massari, C., Brocca, L., Moramarco, T., Tramblay, Y. and Didon Lescot, J.-F.: Potential of soil moisture
738 observations in flood modelling: estimating initial conditions and correcting rainfall, *Adv. Water*
739 *Resour.*, 74, 44–53, doi:10.1016/j.advwatres.2014.08.004, 2014.

740 Massari, C., Brocca, L., Ciabatta, L., Moramarco, T., Gabellani, S., Albergel, C., De Rosnay, P., Puca,
741 S. and Wagner, W.: The Use of H-SAF Soil Moisture Products for Operational Hydrology: Flood
742 Modelling over Italy, *Hydrology*, 2(1), 2–22, doi:10.3390/hydrology2010002, 2015.

743 Merheb, M., Moussa, R., Abdallah, C., Colin, F., Perrin, C. and Baghdadi, N.: Hydrological response
744 characteristics of Mediterranean catchments at different time scales: a meta-analysis, ,
745 doi:10.1080/02626667.2016.1140174, 2016.

746 Miliani, F., Ravazzani, G. and Mancini, M.: Adaptation of Precipitation Index for the Estimation of
747 Antecedent Moisture Condition in Large Mountainous Basins, *J. Hydrol. Eng.*, 16(3), 218–227,
748 doi:10.1061/(ASCE)HE.1943-5584.0000307, 2011.

749 Miralles, D. G., Crow, W. T. and Cosh, M. H.: Estimating Spatial Sampling Errors in Coarse-Scale Soil
750 Moisture Estimates Derived from Point-Scale Observations, *J. Hydrometeorol.*, 11(6), 1423–1429,
751 doi:10.1175/2010JHM1285.1, 2010.

752 Nash, J. E. and Sutcliffe, J. V.: River flow forecasting through conceptual models part I — A discussion
753 of principles, *J. Hydrol.*, 10(3), 282–290, doi:10.1016/0022-1694(70)90255-6, 1970.

754 Norbiato, D., Borga, M., Degli Esposti, S., Anquetin, S. and Gaume, E.: Flash flood warning based on
755 rainfall thresholds and soil moisture conditions: An assessment for gauged and ungauged basins, *J.*
756 *Hydrol.*, doi:10.1016/j.jhydrol.2008.08.023, 2008.

757 Ochsner, T. E., Cosh, M. H., Cuenca, R. H., Dorigo, W. A., Draper, C. S., Hagimoto, Y., Kerr, Y. H.,
758 Njoku, E. G., Small, E. E., Zreda, M. and Larson, K. M.: State of the Art in Large-Scale Soil Moisture
759 Monitoring, *Soil Sci. Soc. Am. J.*, 77(6), 1888, doi:10.2136/sssaj2013.03.0093, 2013.

760 Olauson, J.: ERA5: The new champion of wind power modelling?, *Renew. Energy*, 126, 322–331,
761 doi:10.1016/j.renene.2018.03.056, 2018.

762 Oudin, L., Michel, C. and Anctil, F.: Which potential evapotranspiration input for a lumped rainfall-
763 runoff model?: Part 1—Can rainfall-runoff models effectively handle detailed potential
764 evapotranspiration inputs?, *J. Hydrol.*, 303(1–4), 275–289, doi:10.1016/J.JHYDROL.2004.08.025,
765 2005.

766 Pérénnès, J. J.: L'eau et les hommes au Maghreb. Contribution à une politique de l'eau en Méditerranée,
 767 Rev. Tiers Monde, 35(137), 231–232 [online] Available from: [https://www.persee.fr/doc/tiers_0040-](https://www.persee.fr/doc/tiers_0040-7356_1994_num_35_137_4870_t1_0231_0000_5)
 768 7356_1994_num_35_137_4870_t1_0231_0000_5 (Accessed 7 October 2019), 1994.
 769 Saidi, M. E. M., Daoudi, L., Aresmouk, M. E. H. and Blali, A.: Rôle du milieu physique dans
 770 l'amplification des crues en milieu montagnard: exemple de la crue du 17 août 1995 dans la vallée de
 771 l'Ourika (Haut-Atlas, Maroc), Sécheresse, v. 14(2) p(April 2003) [online] Available from:
 772 <http://agris.fao.org/agris-search/search/display.do?f=2003/FR/FR03035.xml;FR2003003547>, 2003.
 773 Schulte, R. P. O., Diamond, J., Finkele, K., Holden, N. M. and Brereton, A. J.: Predicting the Soil
 774 Moisture Conditions of Irish Grasslands, Irish J. Agric. Food Res., 44, 95–110, doi:10.2307/25562535,
 775 2005.
 776 Tramblay, Y., Bouvier, C., Crespy, A. and Marchandise, A.: Improvement of flash flood modelling
 777 using spatial patterns of rainfall : a case study in southern France, , 2(October), 172–178, 2010.
 778 Tramblay, Y., Bouvier, C., Ayral, P. A. and Marchandise, A.: Impact of rainfall spatial distribution on
 779 rainfall-runoff modelling efficiency and initial soil moisture conditions estimation, Nat. Hazards Earth
 780 Syst. Sci., doi:10.5194/nhess-11-157-2011, 2011.
 781 Tramblay, Y., Bouaicha, R., Brocca, L., Dorigo, W., Bouvier, C., Camici, S. and Servat, E.: Estimation
 782 of antecedent wetness conditions for flood modelling in northern Morocco, Hydrol. Earth Syst. Sci.,
 783 16(11), 4375–4386, doi:10.5194/hess-16-4375-2012, 2012.
 784 Tramblay, Y., Ruelland, D., Somot, S., Bouaicha, R. and Servat, E.: High-resolution Med-CORDEX
 785 regional climate model simulations for hydrological impact studies: A first evaluation of the ALADIN-
 786 Climate model in Morocco, Hydrol. Earth Syst. Sci., 17(10), 3721–3739, doi:10.5194/hess-17-3721-
 787 2013, 2013.
 788 Tuttle, S. E. and Salvucci, G. D.: A new approach for validating satellite estimates of soil moisture using
 789 large-scale precipitation: Comparing AMSR-E products, Remote Sens. Environ., 142, 207–222,
 790 doi:10.1016/j.rse.2013.12.002, 2014.
 791 US Army Corps of Engineers: Hydrologic Modelling System HEC-HMS., 2015.
 792 Vinet, F., El Mehdi Saidi, M., Douvinet, J., Fehri, N., Nasrallah, W., Menad, W. and Mellas, S.: Sub-
 793 chapter 3.4.1. Urbanization and land use as a driver of flood risk, in The Mediterranean region under
 794 climate change, pp. 563–575, IRD Éditions., 2016.
 795 Wagner, W., Pathe, C., Doubkova, M., Sabel, D., Bartsch, A., Hasenauer, S., Blöschl, G., Scipal, K.,
 796 Martínez-Fernández, J. and Löw, A.: Temporal Stability of Soil Moisture and Radar Backscatter
 797 Observed by the Advanced Synthetic Aperture Radar (ASAR), Sensors, 8(2), 1174–1197,
 798 doi:10.3390/s80201174, 2008.
 799 Wagner, W., Hahn, S., Kidd, R., Melzer, T., Bartalis, Z., Hasenauer, S., Figa-Saldaña, J., de Rosnay, P.,
 800 Jann, A., Schneider, S., Komma, J., Kubu, G., Brugger, K., Aubrecht, C., Züger, J., Gangkofner, U.,
 801 Kienberger, S., Brocca, L., Wang, Y., Blöschl, G., Eitzinger, J. and Steinnocher, K.: The ASCAT Soil
 802 Moisture Product: A Review of its Specifications, Validation Results, and Emerging Applications,

803 Meteorol. Zeitschrift, 22(1), 5–33, doi:10.1127/0941-2948/2013/0399, 2013.

804 Western, A. W. and Blöschl, G.: On the spatial scaling of soil moisture., 1999.

805 Wigneron, J.-P., Kerr, Y., Waldteufel, P., Saleh, K., Escorihuela, M.-J., Richaume, P., Ferrazzoli, P., de

806 Rosnay, P., Gurney, R., Calvet, J.-C., Grant, J. P., Guglielmetti, M., Hornbuckle, B., Mätzler, C.,

807 Pellarin, T. and Schwank, M.: L-band Microwave Emission of the Biosphere (L-MEB) Model:

808 Description and calibration against experimental data sets over crop fields, Remote Sens. Environ.,

809 107(4), 639–655, doi:10.1016/J.RSE.2006.10.014, 2007.

810 Zema, Demetrio 1. Zema, D.A.; Labate, A.; Martino, D.; Zimbone, S.M. Comparing Different

811 Infiltration Methods of the HEC-HMS Model: The Case Study of the Mésima Torrent (Southern Italy).

812 L. Degrad. Dev. 2017, 28, 294–308. Antonio, Labate, A., Martino, D. and Zimbone, S. M.: Comparing

813 Different Infiltration Methods of the HEC-HMS Model: The Case Study of the Mésima Torrent

814 (Southern Italy), L. Degrad. Dev., 28(1), 294–308, doi:10.1002/ldr.2591, 2017.

815 Zeng, J., Li, Z., Chen, Q., Bi, H., Qiu, J. and Zou, P.: Evaluation of remotely sensed and reanalysis soil

816 moisture products over the Tibetan Plateau using in-situ observations, Remote Sens. Environ., 163, 91–

817 110, doi:10.1016/j.rse.2015.03.008, 2015.

818

819

820

821

822

823

824

825

826

827

828

829

830

831

832

833

834

835

836

837

838

839

TABLES

Table 1: Stations with observed precipitation and river discharge

Catchment	Gauges	Code	Altitude [m]	Source	Type	Time step	Period
Rheraya	Asni	PR1	1170	LMI TREMA	P	30min	2008-2016
	Imskerbour	PR2	1416	LMI TREMA			
	Matate	PR3	1753	ABHT			
	Oukaïmeden	PR4	3239	LMI TREMA			
	Tachedert	PR5	2336	LMI TREMA			
	Tamatarte	PR6	1906	ABHT			
	Armed	SMPR7	2030	ABHT			
	Neltner	PR8	3177	LMI TREMA			
	Tahnaout	QR	990	ABHT	Discharge	10min	2014
Issyl	Ait Bouzguia	PQI1	623		Precipitation and discharge	10 minutes	2010-2015
	Ouaguejdit	PI2	1039		Precipitation		

864
865
866
867
868
869
870
871
872

Table 2: Characteristics of the selected flood events.

Rheraya				
	Max Discharge [m ³ /s]	Volume [10 ³ m ³]	Precipitation Volume [10³ m³]	Runoff Coefficient [%]
23/01/2014	17.1	459.2	2749.5	16.7
29/01/2014	39.7	602.8	2632.5	22.9
10/02/2014	19.2	543.2	2904.7	18.7
11/03/2014	19	557	1633.5	34.1
21/04/2014	38.2	1070	5431.5	19.7
21/09/2014	24.4	440.6	3363.8	13.1
05/11/2014	46.5	1027	5737.5	17.9
09/11/2014	42.2	869.3	4575.2	19
22/11/2014	99.5	3868.9	17586	22
28/11/2014	76.4	3797.2	11940.8	31.8
Issyl				
25/03/2011	63.8	385.28	27520	1.4
03/04/2011	16.6	550.656	30592	1.8
29/04/2011	19.7	246.4	11200	2.2
02/05/2011	17.1	303.36	10112	3.0
16/05/2011	45.8	361.12	9760	3.7
19/05/2011	27.6	315.392	7168	4.4
06/06/2011	18.3	212.352	5056	4.2
02/04/2012	16.8	216.576	18048	1.2
05/04/2012	20	543.744	7552	7.2
28/09/2012	22.7	126.72	7040	1.8
05/04/2013	15.4	365.376	16608	2.2
28/11/2014	37.2	489.6	28800	1.7
25/03/2015	16.2	767.424	18272	4.2

873

874 **Table 3: Summary of the soil moisture products considered**

Product	Type	Temporal resolution	Spatial resolution	Source
ASCAT	Active	1 to 2 observations per day	12.5 km (H115)	EUMETSAT project (http://hsaf.meteoam.it/)
SMOS	Passive	1 observation per 2/3 days	25 km (EASEv2)	CATDS, (https://www.catds.fr/)
SMOS-IC	Passive	Daily	25 km (EASEv2)	Wigneron et al., 2007
ESA-CCI	Combined	Daily	25km	http://www.esa-soilmoisture-cci.org/
ERA5	Reanalysis	Hourly	31 km	Copernicus Climate Change Service (C3S), 2017

Table 4: Percentage of missing values for the different soil moisture products between 2013 and 2016

	Percentage of missing values					
	In-Situ	ASCAT	SMOS	SMOS-IC	ESA-CCI	ERA5
Rheraya	12%	0%	18.70%	6.82%	46%	0%
Issyl	-	0%	17.19%	9.10%	2.20%	0%

Table 5: Seasonal correlation between the different soil moisture data, in situ measurements and the SMA model Results of the correlation analysis between the different soil moisture data, in-situ measurements and SMA model outputs (significant correlations are represented in bold)

		Winter	Spring	Summer	Fall
Rheraya					
In-situ	SMA A=8mm	0.82	0.83	0.67	0.75
ASCAT	In-situ	0.47	-0.03	0.18	0.70
	SMA A=8mm	0.32	0.09	0.54	0.65
SMOS	In-situ	0.01	0.68	0.61	0.16
	SMA A=8mm	-0.09	0.75	0.58	0.54
SMOS-IC	In-situ	0.80	0.68	0.45	0.85
	SMA A=8mm	0.80	0.72	0.62	0.57
ESACCI	In-situ	0.12	0.28	0.41	0.60
	SMA A=8mm	0.15	0.30	0.67	0.51
ERA5	In-situ	0.74	0.73	0.04	0.73
	SMA A=8mm	0.86	0.76	0.54	0.65
Mean	In-situ	0.43	0.47	0.34	0.61
	SMA A=8mm	0.41	0.52	0.59	0.58
Issyl					
ASCAT		0.77	0.86	0.70	0.90
SMOS		0.39	0.76	0.47	0.74
SMOS-IC	SMA A=30mm	0.85	0.81	0.56	0.93
ESACCI		0.70	0.89	0.77	0.89

ERA5		0.88	0.82	0.70	0.88
Mean	SMA A=30mm	0.72	0.83	0.64	0.87

Table 6: Calibration results of SCS-CN model, S is the potential maximum soil moisture retention, BIAS_Q is the difference between the observed and calibrated peak discharge of the event, BIAS_V is the difference between the observed and calibrated volume of the event.

Rheraya					Issyl				
Events	S[mm]	Ns	BIAS _Q [%]	BIAS _V [%]	Events	S[mm]	Ns	BIAS _Q [%]	BIAS _V [%]
23/01/2014	19.1	-0.58	1.18	-5.76	25/03/2011	679.8	0,83	29,94	-13,5
29/01/2014	24.5	0.87	6.43	29.14	03/04/2011	730.5	0,02	-12,05	27,93
10/02/2014	34.6	0.71	-4.00	2.85	29/04/2011	218.1	0,83	0	10,36
11/03/2014	9.5	0.61	-17.39	2.57	02/05/2011	113	0,91	-0,58	44,39
21/04/2014	55.8	0.73	6.41	2.30	16/05/2011	176.5	0,61	17,69	-26,31
21/09/2014	34.6	0.77	27.08	-6.87	19/05/2011	136.7	0,87	1,09	9,64
05/11/2014	39.6	0.97	15.38	0.88	06/06/2011	108.8	0,75	0	-5,38
09/11/2014	40.7	0.83	6.30	-0.32	02/04/2012	440.3	0,56	0	15,26
22/11/2014	43.1	0.78	-5.06	2.38	05/04/2012	125.1	0,56	13,5	-1,91
28/11/2014	71.6	0.97	3.66	-6.22	28/09/2012	159.7	0,11	32,16	23,41
					05/04/2013	388.2	0,90	6,49	-4,16
					28/11/2014	254	0,74	1,88	0,71
					25/03/2015	356.6	0,89	0	12,32
Mean		0.67	4.00	2.09	Mean		0,66	6,93	7,14
Median		0.77	4.98	1.59	Median		0,75	1,09	9,64

Table 7: Correlation between the different soil moisture products and the S parameter of the SCS-CN hydrological model

	Rheraya		Issyl	
	S	Number of events	S	Number of events
In-situ [Daily]	-0.71	8	-	-

In-situ [Hourly]	-0.83	8	-	-
SMA A=8mm	-0.32	10	-	-
SMA A=30mm	0.02	10	-0.69	13
ASCAT	-0.55	10	-0.29	13
ESA-CCI	-0.29	8	-0.66	11
SMOS	0.12	6	-0.59	6
SMOS-IC	-0.81	10	-0.34	13
ERA5 [Daily]	-0.46	10	-0.37	13
ERA5 [Hourly]	-0.80	10	-0.63	13

Table 8: Performance of the SCS-CN model in term of Nash Coefficients for the Rheraya and Issyl events, using the daily or hourly time steps for the different soil moisture products.

	Daily						Hourly		
	ASCAT	ESA-CCI	SMOS	SMOS-IC	ERA5	In-situ	SMA 30mm	ERA5	In-situ
	RHERAYA								
Min	-0.15	-	-	-0.04	-0.73	-1.88	-	-0.01	0.15
Mean	0.48	-	-	0.58	0.45	0.25	-	0.64	0.54
Median	0.57	-	-	0.63	0.66	0.49	-	0.73	0.61
Max	0.85	-	-	0.84	0.82	0.83	-	0.81	0.71
	ISSYL								
	Min	-	-56041	-1938	-	-	-	-96.08	-
	Mean	-	-14138	-324	-	-	-	-24.77	114.60
	Median	-	-254	-1.80	-	-	-	-2.46	-16.74
	Max	-	-2.10	-0.52	-	-	-	-0.78	-0.85

913
914
915
916
917
918
919
920
921
922
923

FIGURES

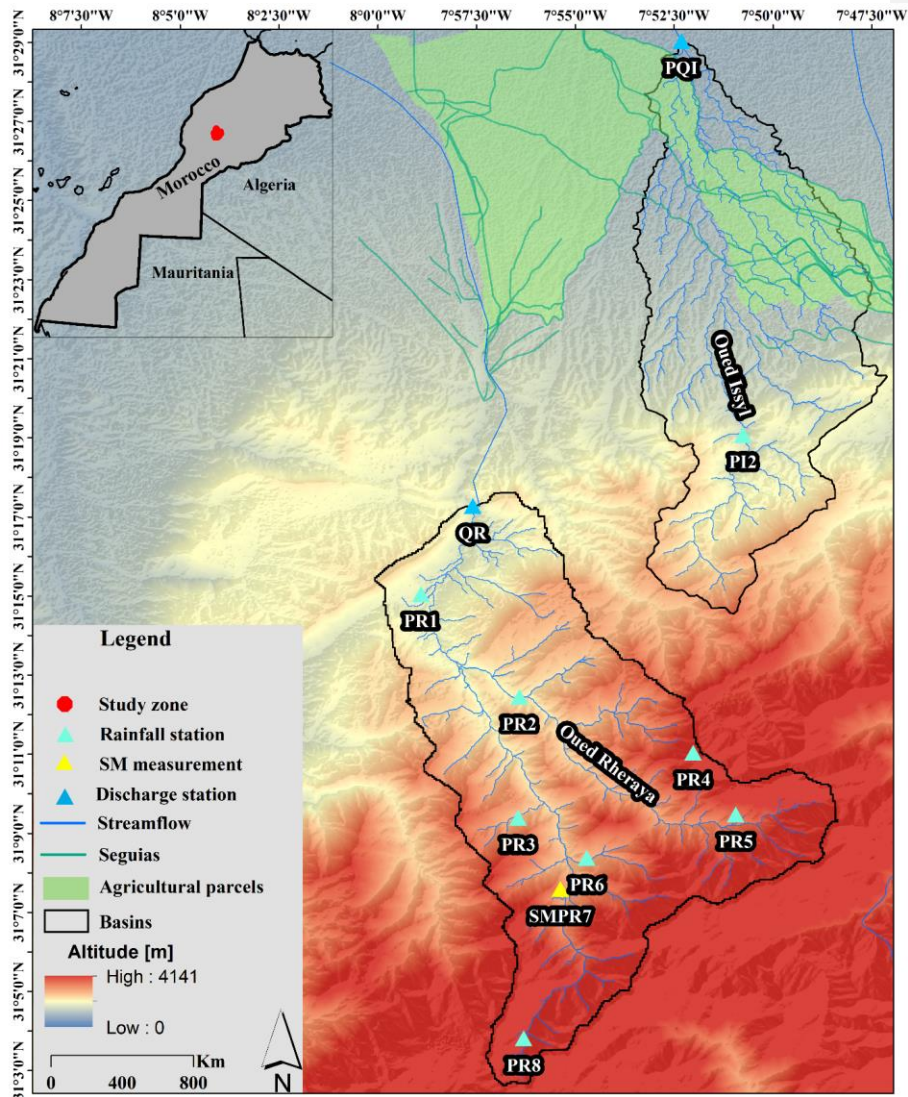


Figure 1: Location of Rheraya and Issyl basins, the seguias network, the agricultural parcels and the hydro-meteorological network – PR: Rainfall station in Rheraya, SMPR: Soil moisture measurement+ Rainfall station in Rheraya, PQI: Rainfall and discharge station in Issyl, QR: Discharge station in Rheraya.

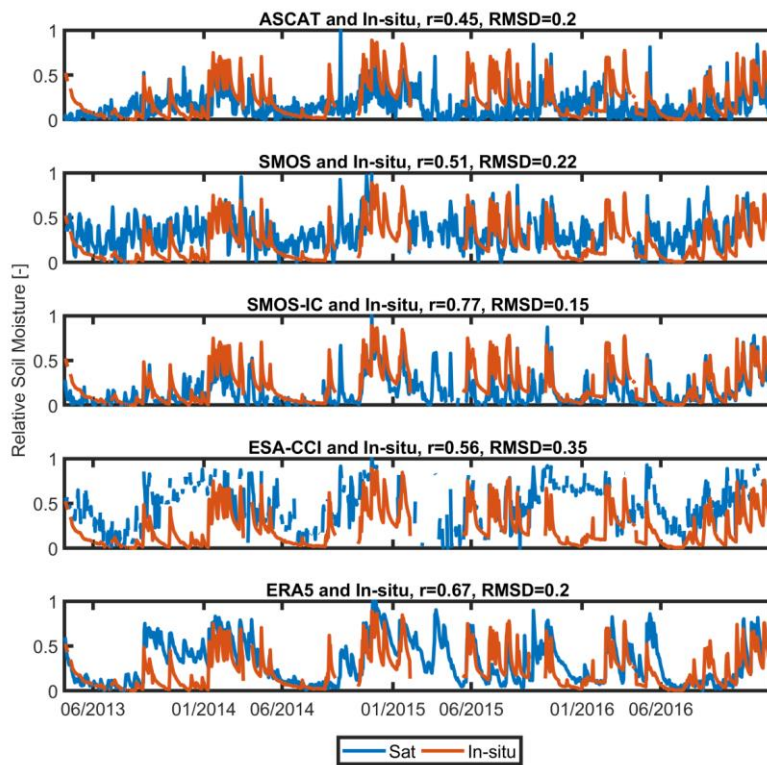


Figure 2: Comparison between measurements of soil moisture (5cm depth) and different products of soil moisture (Rheraya basin).

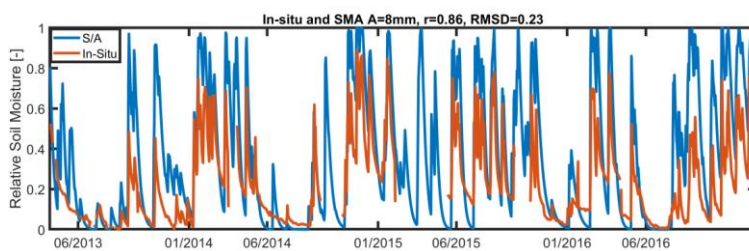


Figure 3: Relationship between S/A and observed soil moisture data between 08/04/2013 and 31/12/2016 for different values of A (Rheraya basin).

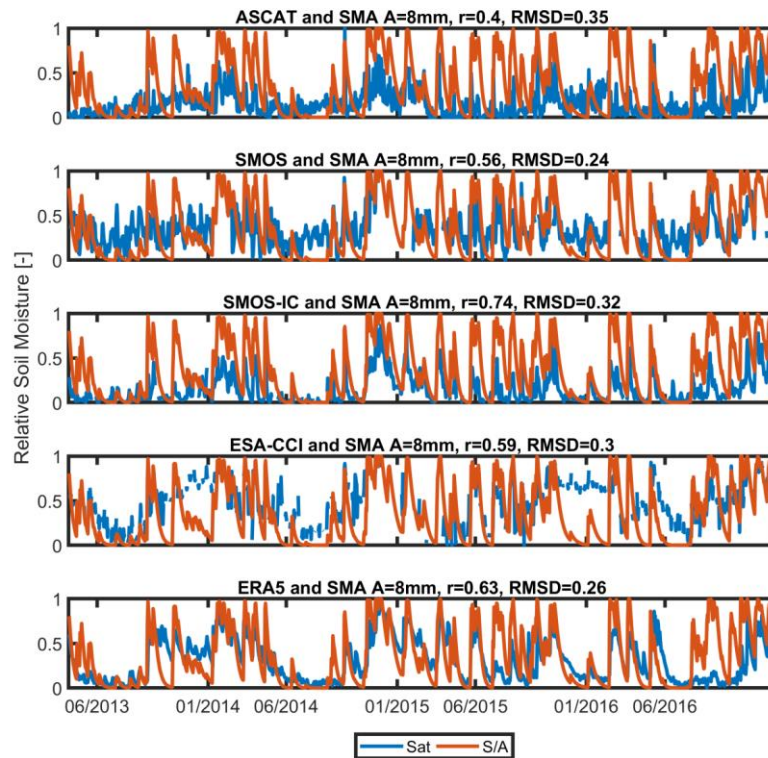


Figure 4: Relationship between the different products of soil moisture and SMA outputs between 08/04/2013 and 31/12/2016 over the Rheraya basin.

Figure 4: Relationship between different products of soil moisture with SMA outputs between 08/04/2013 and 31/12/2016 over the Rheraya basin.

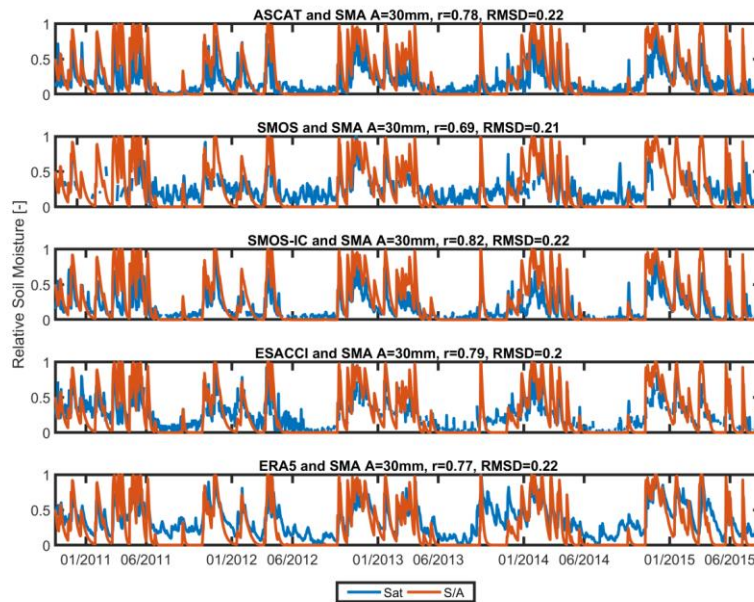


Figure 5: Relationship between the different products of soil moisture and SMA outputs between 18/10/2010 and 20/08/2015 in the Issyl basin

Figure 5: Relationship between the different products of soil moisture and SMA outputs for A=30mm between 18/10/2010 and 20/08/2015 in the Issyl basin

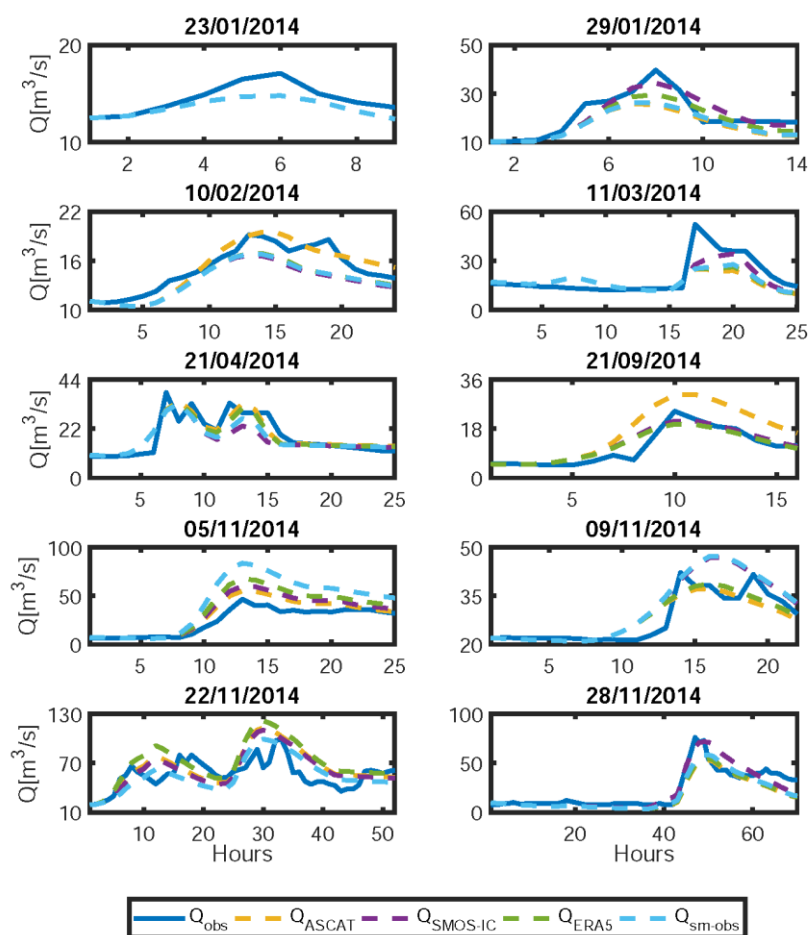


Figure 6:

Validation results of flood events simulated for the Rheraya using different soil moisture products with a daily time step: the observed hydrographs (Q_{obs}) are compared to the simulated hydrographs using ASCAT (Q_{ascat}), SMOS-IC ($Q_{SMOS-IC}$), ERA5 (Q_{ERA5}) or observed soil moisture (Q_{sm-obs}) to estimate the antecedent soil moisture conditions. The selected flood events are described in Table 2

Validation results of flood events simulated for the Rheraya using different soil moisture products with a daily time step. The observed hydrographs (Q_{obs}) are compared to the simulated hydrographs using ASCAT, SMOS-IC, ERA5 and in situ data.

Mis en forme : Anglais (États-Unis)

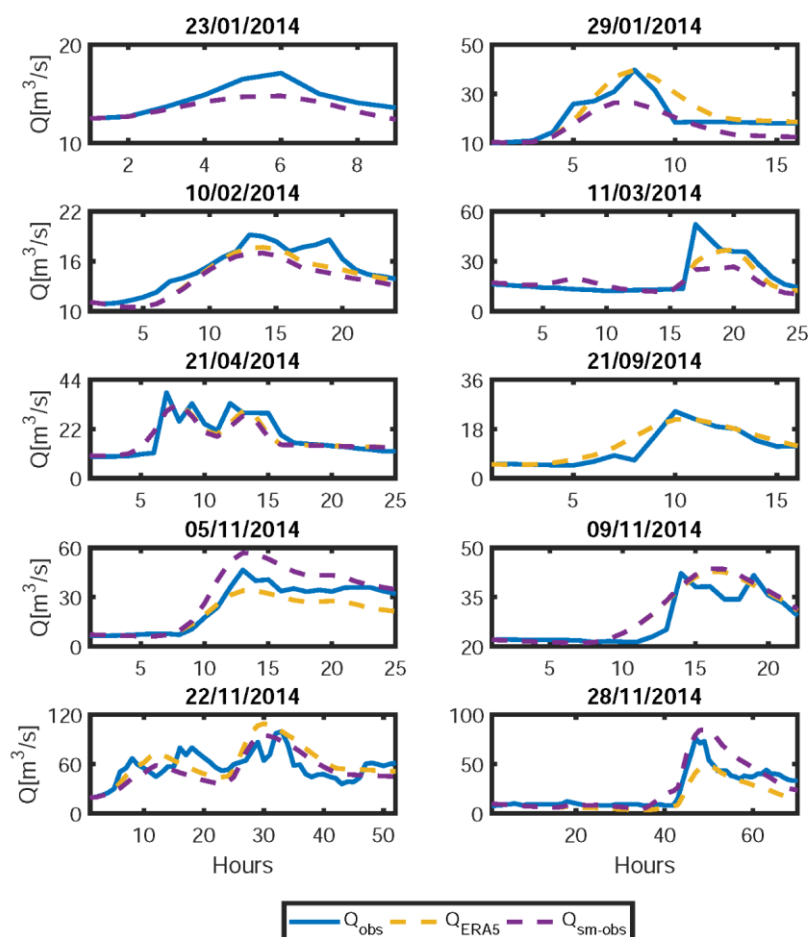


Figure 7:

Validation results of flood events simulated for the Rheraya using different soil moisture products with an hourly time step: the observed hydrographs (Q_{obs}) are compared to the simulated hydrographs using ERA5 (Q_{ERA5}) or observed soil moisture (Q_{sm-obs}) to estimate the antecedent soil moisture conditions. The selected flood events are described in Table 2

Validation of the flood events simulated for the Rheraya using ERA5 and in situ soil moisture at the hourly time step.

Mis en forme : Anglais (États-Unis)

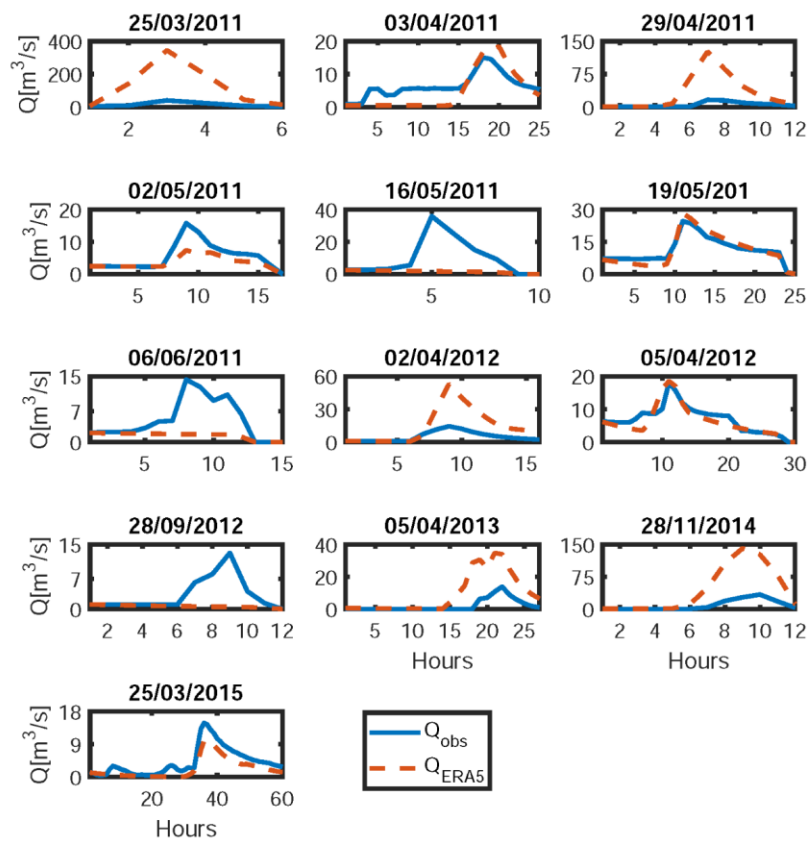


Figure 8: Validation results of flood events simulated for the Issyl using ERA5 soil moisture at the hourly time step: the observed hydrographs (Q_{obs}) are compared to the simulated hydrographs using ERA5 (Q_{ERA5}) to estimate the antecedent soil moisture conditions. The selected flood events are described in Table 2