

LABS: an agent-based run-out program for shallow landslides

Richard Guthrie¹ and Andrew Befus²

¹Director Geohazards and Geomorphology, Stantec, 200-325 25 St SE, Calgary, T2A 7H8, Alberta, Canada.

Tel.: 4034415133

²Software Developer, Environmental Services, Stantec, 200-325 25 St SE, Calgary, T2A 7H8, Alberta, Canada.

Tel.: 4037814116

Correspondence to: Richard Guthrie (richard.guthrie@stantec.com)

Abstract. Credible models of landslide runout are a critical component of hazard and risk analysis in the mountainous regions worldwide. Hazard analysis benefits enormously from the number of available landslide runout models that can recreate events and provide key insights into the nature of landsliding phenomena. Regional models that are easily employed, however, remain a rarity. For debris flows and debris avalanches, where the impacts may occur some distance from the source, there remains a need for a practical, predictive model that can be applied at the regional scale. We present, herein, an agent-based simulation for debris flows and debris avalanches called LABS. A fully predictive model, LABS employs autonomous sub-routines, or agents, that act on an underlying DEM using a set of probabilistic rules for scour, deposition, path selection, and spreading behavior. Relying on observations of aggregate debris flow behavior, LABS predicts landslide runout, area, volume, and depth along the landslide path. The results can be analyzed within the program, or exported in a variety of useful formats for further analysis. A key feature of LABS is that it requires minimal input data, relying primarily on a 5 m DEM and user defined initiation zones, and yet appears to produce realistic results. We demonstrate the applicability of LABS using two very different case studies from distinct geologic, geomorphic, and climatic settings. The first case study considers sediment production from the steep slopes of Papua, the island province of Indonesia; the second considers landslide runout as it affects a community on Vancouver Island off the west coast of Canada. We show how LABS works, how it performs compared to real world examples, what kinds of problems it can solve, and how the outputs compare to historical studies. Finally, we discuss its limitations and its intended use as a predictive regional landslide runout tool. LABS is freely available ~~to not for profit groups including universities, NGOs and government organizations~~non-commercial use.

1 Introduction

Mountains occupy 30.5% of the global land surface (Sayre et al., 2018), provide much of the global water supply, critical economic resources, and directly support hundreds of millions of people around the world. Steep rugged mountain slopes, however, are also responsible for some of the world’s deadliest hazards, threatening infrastructure and causing the loss of thousands of lives annually (on average) (Froude and Petley, 2018).

E-mail: Andrew Befus (andrew.befus@stantec.com)

Style Definition: Heading 1: Indent: Left: 0.34"

Field Code Changed

Debris flows and debris avalanches are potentially destructive, rapid to extremely rapid landslides that tend to travel considerable distance from their source. Interaction between debris flows and objects, resources, or people at distal points along their travel path results in a potentially unexpected and dangerous mountain hazard. One of the critical challenges to overcome with respect to debris flow hazards is, therefore, the credible prediction of size, runout, and depth.

5 Debris flow runout behavior is controlled by topography, geology (surficial and bedrock), rheology, land use, land cover, water content, and landslide volume. Modeling approaches for predicting debris flow runout have included empirical methods such as total travel distance (Corominas, 1996; VanDine, 1996) or limiting criteria (Iverson, 1997; Benda and Cundy, 1990; Berti and Simoni, 2014), volume balance methods (Fannin and Wise, 2001; Guthrie et al., 2010), analytic solutions and continuum-based dynamic models (Hungr, 1995; O'Brien et al., 1993; McDougall and Hungr, 2003; Rickenmann, 1990; Gre-

10 roretti et al., 2016; Hussin, 2011), and cellular automata (Guthrie et al., 2008; Tiranti et al., 2018; Deangeli, 1995; D'Agostino et al., 2003).

A limited number of models have been applied regionally (Chiang et al., 2012; Guthrie et al., 2008; Horton et al., 2013; Mergili et al., 2015), in part due to the complexity of data inputs. Analytical models in particular, while producing excellent results, are frequently complex and can require back analyses to determine model parameters. Hussin (2011), for example, suc-

15 cessfully recreated a channelized debris flow in the Southern French Alps, but also found that the model results were sensitive to small changes in the entrainment coefficient, turbulent coefficient, friction coefficient, and the DEM itself. Adjustments to model parameters can require considerable expertise and complicate the predictive value of the models if applied regionally.

There remains a need for a widely accessible debris flow model that produces credible results with limited inputs.

Guthrie et al. (2008) created a regional landslide model intended to provide evidence that the occurrence of the rollover

20 effect in landslide magnitude frequency distributions was primarily a result of landscape dynamics rather than data censoring (or other causes). That model used cellular automata methods wherein individual cells (agents) followed simple rules for scour, deposition, path selection, and landslide spread. The model assumed aggregate behavior of rapid or extremely rapid flow-type landslides based on about 1,700 data points from Coastal British Columbia (Guthrie et al., 2008, 2010; Wise, 1997). Landslide behavior relied on empirical observations that events exhibit similar scour, deposition, depths, and runout independent of geol-

25 ogy, rheology, triggering mechanisms, or antecedent conditions. Simply put, once triggered, debris flows and debris avalanches had behavior that tended to be broadly self-similar. The model itself did a credible job of reproducing landslides across a broad region using limited inputs.

The current authors identified a use case and designed, from scratch using C++ and XAML, the landslide runout model presented herein. LABS (Landslides: Agent Based Simulation) is a standalone agent-based model that requires limited inputs and

30 provides the user with both visualization and analytic capabilities. LABS is freely available ~~to~~for non-profit commercial use (university research groups (universities, NGOs, government)-LABSfor example) and may be downloaded here [ADDRESS TO BE PROVIDED IN FINAL SUBMISSION].

This paper explains the basis for LABS and provides two very different case studies to demonstrate how it might be applied.

Commented [GR1]: Added reference

Formatted: Not Expanded by / Condensed by

2 Description of the Program

LABS estimates sediment volume (erosion and deposition) along a landslide path by deploying ‘agents’, or *autonomous sub-routines* over a 5 m spatial resolution digital elevation model (DEM). The DEM surface provides basic information to each agent, in each time-step, that triggers the rule set that comprises the subroutine. In this manner, agents interact with the surface and with other agents. Each agent occupies a single pixel in each time step.

2.1 Agent Generation

The user defines a starting location by injecting a single agent (5 m x 5 m), a group of nine agents (15 m x 15 m initiation zone), or by painting a user defined initiation zone (unlimited size) as indicated by field morphology. Multiple agents may be generated at the same time using any of these methods, or any combination of these methods. LABS can automatically create 15 15 m x 15 m initiation zones (nine agents) for each point in an imported point file.

The starting location of a single agent, or a group of connected agents, represents the initiation of a landslide. Each landslide knows which agents that belong to it, whatever the method of initiation.

2.2 Agent Mass

Agents follow probabilistic rules for scour (erosion) and deposition at each time step based on the underlying slope. Rules for scour and deposition are independent probability distributions for 12 slope classes (bins), modified from Guthrie et al. (2008) to account for a wider range of slopes than the original study (Table 1). They are based on data gathered for coastal BC by Wise (1997) and by Guthrie et al. (2008, 2010), and the results are inferred to be representative of aggregate debris flow behavior elsewhere. Continuous functions are derived for each slope bin within the model, and the user can choose either the step function, drawing directly from Table 1 or the continuous function (recommended).

Agent mass can be refined within the program to allow for regions with thicker or thinner available sediment by using the Deposition Multiplier, Erosion Multiplier, or Min Initiation Depth sliders. Deposition Multiplier and Erosion Multiplier sliders act on the scour and deposition results at each time step and are independent of one another. Min Initiation Depth affects the initial mass when generating agents.

Additional rules for deposition are implemented when agents change cardinal direction. This is a user defined parameter provided as a substitute for frictional deposition. In this study, deposition was limited to 5% of agent volume for each 45° turn, but users can experiment with increased amounts.

In each time step an agent scours, deposits, then checks its mass balance. Mass balance is recorded by the agent in each time step, and agents are terminated when their mass equals zero.

2.3 Agent Path Selection

Agents with mass move down slope in successive time steps by calculating the elevations of the Moore neighbors (the surrounding eight squares in a grid), determining the lowest three pixels and moving to the lowest unoccupied pixel of the three (Figure 1). Should the lowest three pixels be occupied, or should some of the pixels be equal elevation, the agent will merge-5 with one of the cells based on similar internal decision-making rules.

2.4 Agent Spread

L/ABS software has functions that control the spreading behavior of landslides. Spreading behavior causes landslides to re-1 distribute mass by generating new agents and transferring mass to them from existing agents. Spreading, and therefore the spawning of new agents, is based on the probability density function using a Gaussian normal distribution over the surface (a 5 3D bell curve) where the shape of the Gaussian surface is controlled by the user (Figure 2).

User controls include Landslide Shape and Spread (spawning) are described by a probability density function where the mean is centered around the facing direction of an individual agent (accounting for the local slope by way of the Moore neighbors) and the standard 10 deviation, σ , is defined by:

$$\sigma = \left(\left(\frac{m_{MAX} - m}{m_{MAX}} \right)^n * ((\sigma_L - \sigma_S) + \sigma_S) \right)$$

Where: m_{MAX} = Fan Maximum Slope, m = DEM slope, n = Skew coefficient, σ_L = Low Slope coefficient, σ_S = Steep Slope Coefficient.

These are controlled, in turn, by sliders within the program itself that cover a fanning slope limit, above which agents will 15 not spawn, and shape controls that determine how steep and narrow the curve, or alternatively how low and broad the curve, for both steeper and flatter slopes: 20

- Fan Maximum Slope
- σ Steep Slopes
- σ Low Slopes
- Skew Fanning to Low Slopes

Spread is calibrated experimentally based on empirical or observed behaviors of actual landslides. In the absence of observ- 40 able observable landslides, the authors recommend using 27°. Spread behavior produces realistic results related to underlying topography such that mass is redistributed at sudden changes in slope (e.g. Figure 3); 2) or through gradual slope change where landslides tend to widen and deposit.

25 Spawning agents immediately perform the same rules as other agents in each time step (including the time step in which they

Formatted

Formatted

Formatted: Font: 9 pt

Formatted: Indent: Left: 0", First line: 0", Space Before: 0 pt, Line spacing: single

Formatted

Formatted: Indent: Left: 0.34", Right: 0.07", Space Before: 4.85 pt, Line spacing: Multiple 1.39 li

Formatted

Formatted: Space Before: 0.8 pt

Formatted: Indent: Left: 0.07", Space Before: 4.85 pt, Tab stops: 3.22", Left

Formatted: Font: 9 pt

Formatted: Indent: Left: 0.34", First line: 0.14", Space Before: 4.85 pt, Line spacing: Multiple 1.46 li

Formatted

were spawned).

~~15 were spawned).~~

2.42.5 Agent Tracking

Each agent leaves behind a track that identifies the changes to the pixel, and colors the track according to those changes. This track also provides the visual cue that shows the landslide path.

2.6 Model Calibration

5 Model calibration is completed iteratively using the controls within the program. The landslide professional runs the model and compares the results to mapped or historical landslides and ground-based evidence for travel distance, scour and deposition. In addition to field evidence, several other calibration methods may be employed including a visual comparison (Figure 3), magnitude-frequency comparison of mapped versus modeled landslides (Figure 4), and comparison of volume area relationships against known relationships (Figure 5, Table 2).

10 Typically, adjustments are made to the control sliders until better results are realized. This might require several runs. An “Inspect” button allows the user to examine the results pixel by pixel and a “One By One” button advances individual agents through single time steps allowing for a much more detailed analysis of results.

By and large, when done by a landslide professional, calibration (qualitative or quantitative) is a relatively straight forward process. The professional must decide whether modeled landslides travel along realistic paths, whether the paths are similar to those of historical events as mapped or as observable in the air photographs, whether the range of deposition and erosion approximates similar events in the same region, and finally, analytically, whether or not the magnitude frequency and area-volume characteristics are sufficiently similar to mapped characteristics, or justifiably different.

15 Because LABS is both predictive and probabilistic, it may not precisely recreate an existing or historic landslide, but instead tries to credibly produce predictions of landslides that may occur on the existing surface. However, the predictive and probabilistic aspect of the program is, in the opinion of the authors, a strength, particularly given that LABS includes the ability to model many landslides and compare the range of responses between runs.

2.5 25 2.7 Outputs

20 LABS produces results from: a single run, single landslide; single run, multiple landslides; multiple runs, single landslide; or multiple runs, multiple landslides. Following a run or set of runs, each pixel can be queried to provide information about the debris depth (net deposition) at that location, the landslide number, the pixel facing direction, and basic topographic information.

Formatted: Space Before: 4.15 pt, Numbered + Level 2 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0.34" + Indent at: 0.65"

Formatted: Normal, Indent: Left: 0.07", Space Before: 0 pt, No bullets or numbering, Tab stops: Not at 0.65"
Formatted: Font: 10 pt, Bold

Formatted: Condensed by 0.7 pt
Formatted: Condensed by 0.75 pt

such as elevation and location. Multiple runs also provide some basic statistics including the number of times a pixel was occupied by an agent, and the minimum and maximum debris depth over all runs.

Each pixel is colored to represent scour or deposition. Red through yellow represent net scour (red being deeper than yellow), and green through blue represent net deposition (blue being deeper than green). Grey colors represent no change, or in the case

of multiple runs, they represent no average change in depth (transition zones).

Figure 4-6 demonstrates the difference in scour and deposition along a landslide path. The reader can see that road(s) tend to accumulate sediment, consistent with observations on Vancouver Island (Guthrie et al., 2010). (Guthrie et al., 2010).

Similarly, scour on the fill slope side of the road, where it is locally steeper, is also easily observed.

side of the road, where it is locally steeper, is also easily observed.

- Formatted: Not Expanded by / Condensed by
- Formatted: Left, Indent: First line: 0", Right: 0", Space Before: 4.15 pt
- Formatted: Not Expanded by / Condensed by
- Formatted: Condensed by 0.65 pt
- Formatted: Condensed by 0.6 pt
- Formatted: Condensed by 0.65 pt
- Formatted: Condensed by 0.6 pt
- Formatted: Condensed by 0.65 pt
- Formatted: Condensed by 0.6 pt
- Formatted: Condensed by 0.6 pt
- Formatted: Condensed by 0.65 pt
- Formatted: Condensed by 0.6 pt
- Formatted: Condensed by 0.6 pt
- Formatted: Condensed by 0.65 pt
- Formatted: Condensed by 0.6 pt
- Formatted: Condensed by 0.65 pt
- Formatted: Condensed by 0.6 pt
- Formatted: Condensed by 0.65 pt
- Formatted: Condensed by 0.6 pt
- Formatted: Condensed by 0.65 pt
- Formatted: Condensed by 0.6 pt
- Formatted: Left, Indent: Left: 0.14", First line: 0", Right: 0", Line spacing: Exactly 11.4 pt
- Formatted: Font: Arial, 8.5 pt, Not Expanded by / Condensed by
- Formatted: Not Expanded by / Condensed by
- Formatted: Justified, Right: 0.07", Space Before: 5.1

Figure 5 shows an example of LABS output within the program, in this case, for multiple landslides. Once again, colors relate to erosion and deposition.

Landslide predictions are probabilistic and thus vary between runs. Individual landslides can be shorter than those observed in the field in any given run, but the runout over multiple runs (e.g. 50) tends to be longer than those mapped since it includes more iterations of landslides. Longer landslides should not be confused with debris floods; LABS is based on observations of erosion and deposition in debris flows or debris avalanches, and the aggregate behavior of debris floods are based on substantially different mechanics not captured in the model.

10 2.67.1 Export to Excel

Landslide specific information (landslide number, area, volume) can be exported as an Excel file. The output allows the user to analyze magnitude frequency characteristics of the modeled landslides, including area and volume from the entire footprint, the erosion, and deposition zones, and confirm credible results.

2.5.22.7.2 Export to Shapefile

15 Data is easily exported to a shapefile through either an export points function, or an export to layer function. The first converts each pixel and associated metadata for each landslide to a point file for analysis in GIS software, while the second exports the metadata to an existing shapefile allowing, for example, the user to estimate cumulative sediment contribution to previously mapped polygons.

2.5.32.7.3 Export to GeotiffGeoTIFF

20 LABS exports the modeled landslides as [geotiffsGeoTIFFs](#) to enable viewing in other software and visual comparison with existing ground conditions.

3 Model Performance

LABS predicts landslide paths well, it spreads and converges in a realistic manner, and it credibly predicts runout, erosion, and deposition. When compared to actual landslides, LABS tends to produce meaningful results (Figure 6).

25

Due to the probabilistic nature of the model, individual landslide runs produce varying results and actual landslides may occupy a different footprint and have longer or shorter runout than an equivalent modeled landslide. For the same reason, the

Formatted: Space Before: 0.4 pt

Formatted: Font: 9 pt

Formatted: Space Before: 0 pt

Formatted: Numbered + Level: 3 + Numbering Style 2, 3, ... + Start at: 2 + Alignment: Left + Aligned at: 0.34" + Indent at: 0.75"

Formatted: Numbered + Level: 3 + Numbering Style 2, 3, ... + Start at: 2 + Alignment: Left + Aligned at: 0.34" + Indent at: 0.75"

Formatted: Font: 16.5 pt

Formatted: Space Before: 0.35 pt

cumulative footprint of multiple runs (e.g., 50) will tend to show longer runout or occupy more ground than individual mapped landslides.

Distal margins of landslides in multiple runs tend to be inundated less frequently than the main landslide body. Interpretation of the cumulative footprint should consider both the range of deposition or erosion, and the number of times that the pixel was occupied.

Landslide area-volume relationships compared favorably to historical studies (Figure 7 and Table 2) corroborating that, once again, the model produces reasonable results.

Running LABS with multiple landslides in any given run tends to result in increased scour or deposition wherever those landslides converge and interact, as compared to an individual event.

3.1-3 Case Studies

To better understand how LABS performs and how it might be applied, additional results are described in each of two unique case studies below.

3.2-25 case studies below.

Formatted: Not Expanded by / Condensed by

Formatted: Space Before: 0 pt

Formatted: Not Expanded by / Condensed by

Formatted: Line spacing: single

Formatted: Not Expanded by / Condensed by

3.1 Case Study I: Debris Flows in Papua, Indonesia

3.2.1.1 Background

Tembagapura is a high alpine town, 2000 m above sea level, in the Jayawijaya Mountains in the Mimika Regency of the Province of Papua, Indonesia (Figure 8)-7). Formed from uplifted and accreted terrains driven by the oblique convergence of the Pacific and Indo-Australian plates (Davies, 2012) Tembagapura is entirely surrounded by steep mountain slopes that regularly

205 Pacific and Indo-Australian plates (Davies, 2012) Tembagapura is surrounded by steep mountain slopes that regularly produce landslides including debris flows and debris floods. The area above the town is 21.4 km² and constitutes 2,646 m of relief.

In 2017, debris floods¹ swept through the town causing considerable damage, and town authorities sought to better understand under-

10 stand the expected magnitude and frequency of debris floods to better mitigate and prepare for future events. A landslide inventory was conducted using remotely acquired vertical color imagery from 2012, 2016, and 2017. The inventory resulted in 375 mapped landslides (Figure 9)-8) in the Tembagapura watershed and revealed that landslide evidence had a short persistence time in the dense and verdant vegetation (see Guthrie and Evans-Guthrie and Evans (2007) for a discussion of geomorphic persistence).

15 Rapid weathering and soil formation was inferred to provide a near infinite sediment supply that moves through the watershed in a “conveyor-belt” type process, whereby weathered rock was transported to the river system and subsequently transported downstream in successively larger floods.

30 downstream in successively larger floods.

- Formatted: Condensed by 0.45 pt
- Formatted: Space Before: 4.15 pt, Numbered + Level: 2 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0.34" + Indent at: 0.65" Tab stops: 0.65", Left
- Formatted: Font: 13 pt
- Formatted: Space Before: 0.25 pt
- Formatted: Space Before: 0 pt, Numbered + Level: 3 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0.34" + Indent at: 0.75"
- Formatted: Font: 8.5 pt
- Formatted: Space Before: 0.55 pt
- Formatted: Centered, Indent: Left: 0.32", Right: 0.05"
- Formatted: Not Expanded by / Condensed by
- Formatted: Font: Times New Roman, 10 pt
- Formatted: Font: 12.5 pt
- Formatted: Space Before: 0.05 pt
- Formatted
- Formatted
- Formatted: Not Expanded by / Condensed by
- Formatted: Indent: Left: 0.07", First line: 0", Space Before: 5.25 pt, Line spacing: single
- Formatted: Indent: First line: 0.14"
- Formatted: Font: Times New Roman, 10 pt
- Field Code Changed
- Formatted: Justified, Indent: Hanging: 0.27", Right: 0.07"
- Formatted

With multiple landslides occurring annually, a relationship describing landslide triggering rainfall was built from ~~terrain-~~
~~mapping, the landslide land-~~
20 slide inventory, weather data, and the town records of landslide causing precipitation events (Figure 40)-9). In order to supply a
debris flood model, the amount of sediment generated by landslides, and thus contributing to the conveyor ~~belt of available~~
~~sediment, was modeled in LABS.~~
5 belt of available sediment, was modeled in LABS.

Calibrating

3.2.23.1.2 Running the Model

In order to calibrate LABS, landslide head scarps 25 Within the program, landslides were ~~calibrated~~ visually by first
painting head scarps onto a 5 m DEM using the *Paint Agents* tool in LABS and by looking at the ~~an~~ imported existingshapefile
of the historical inventory shapefile. LABS has several methods of creating landslide initiation zones including
40 *Inject Agents*, a tool that inserts agents one 5 m pixel at a time, *Paint Agents*, a tool that allows the user to paint the imagined
initiation zone as large as they want, but no less than 15 m x 15 m (nine agents), and a *Create Agents From Points* tool that
automatically creates a 15 m x 15 m (nine agent) grid at user defined, or imported, points. In this case, landslide initiation zones
were estimated visually on the LiDAR image and a 5 m DEM acquired in 2018 (Figure 44).

45 10). The landslide simulation was activated (toggle the *Go* button) and the results compared visually to mapped landslides (Figure
11) and on-the-ground results (Figure 5, Figure 6, Figure 12).

~~The probabilistic nature of the model meant that every run was slightly different, but~~
¹As defined by Church and Jakob (2020), debris flood is a very rapid flow of water (flood) wherein the entire bed is mobile for at least a few minutes.
Debris floods are frequently distinguished as sustaining sediment concentrations of 20%-40% by volume and moving clasts greater than the D_{84} . Debris floods
are not modeled by LABS.

- Formatted: Font: 13 pt
- Formatted: Space Before: 0.2 pt
- Formatted: Indent: Hanging: 0.27", Space Before: 5 pt
- Formatted: Space Before: 9.35 pt, Numbered + Level 3 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0.34" + Indent at: 0.75
- Formatted: Font: 13 pt
- Formatted: Space Before: 0.25 pt
- Formatted: Condensed by 0.55 pt
- Formatted: Condensed by 0.55 pt
- Formatted: Condensed by 0.55 pt
- Formatted: Condensed by 0.55 pt
- Formatted: Not Expanded by / Condensed by
- Formatted: Condensed by 0.25 pt
- Formatted: Condensed by 0.25 pt
- Formatted: Condensed by 0.2 pt
- Formatted: Condensed by 0.25 pt
- Formatted: Condensed by 0.25 pt
- Formatted: Condensed by 0.2 pt
- Formatted: Condensed by 0.25 pt
- Formatted: Condensed by 0.25 pt
- Formatted: Condensed by 0.25 pt
- Formatted: Condensed by 0.2 pt
- Formatted: Condensed by 0.25 pt
- Formatted: Space Before: 0 pt, After: 0.55 pt
- Formatted: Condensed by 0.7 pt

LABS produced morphologically meaningful results when comparing flow paths, scour and deposition regions, divergence, convergence and runoff. In addition, area-volume relationships and the magnitude frequency statistics between mapped and

20 the magnitude frequency statistics between mapped and modeled landslides plotted similarly (Figure 13) and volumes, when compared with previous experience Table 2 were deemed credible.12).

3.2.33.1.3 Calculating Sediment Production

Six significant debris flood producing storms since 1991, were identified based on town records (1998, 2010, 2013, 2014, 2016,

25 and 2017). In order to simulate sediment made available to the conveyor belt system of sediment production during major storms, landslides were generated from random points in the slopes above Tembagaupura (Figure 14 and Figure 15), stratified by susceptibility (part of the terrain mapping exercise) and based on the storm return period and the relationship from Figure 10.

The results (scour and deposition) were accumulated into existing terrain polygons for the periods between each significant debris flood.

Sediment accumulated between 10 major storms was predicated on an assumed average landslide frequency (Figure 10) for return periods of one to three years. Collectively, this produced an estimate of the slope-based sediment contribution to historical

5 landslide events. Landslide, landslides were randomly generated sediment from the LABS model was exported to shapefiles and reported for each of 11 susceptible slopes (e.g. Figure 13) between debris flood years using the relationship from Figure 9. The sediments mobilized were accumulated into 12 sub-basins that formed the watersheds above Tembapapura for the periods between each significant debris flood (Table 3; sub-basins are visible in Figure 14 and Figure 15 as pink lines)-3). A debris flood model (FLO-2D) was then run through the system using the accumulated sediment as a bulking factor and compared to actual events.

40 Once the modeled debris floods were calibrated against historical events were calibrated, design floods were determined by bulking the debris flood model (FLO-2D) with sediment estimated in LABS for specific storm return periods (Table 4)-4). In this case sediment was accumulated in the model under the assumption that no debris flood greater than the 5-year event had occurred in the preceding 5 years. The results allowed the user to estimate hydrograph bulking for the 10, 20, 25, 50, and 100 year events.

45 3.2.4.20

3.1.4 Case Study I Summary

LABS successfully simulated debris flows in the steep mountains surrounding Tembapapura. Scour zones were painted using the supplied tool, and for predictive analysis were created automatically from randomly generated points using an imported shapefile.

25 The results were used to estimate landslide generated sediment to the stream network subsequently flushed by periodic debris
20 floods. The model produced morphologically meaningful results and similar magnitude frequency characteristics to mapped landslides- (Figure 12). The sediment contribution from slopes was easily exported to shapefiles for analysis and summation and ultimately to provide volume estimates for hydrograph bulking in the debris flood model at user specified design floods.

Formatted: Indent: Hanging: 0.27"

Formatted

Formatted

Formatted: Font: 7 pt

Formatted: Space Before: 0.25 pt

Formatted: Indent: First line: 0", Space Before: 4.85

Formatted

Formatted

Formatted: Space Before: 5.25 pt, Numbered + Level 3 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0.34" + Indent at: 0.75" Tab stops: 0.76", Left

Formatted: Condensed by 0.2 pt

Formatted: Font: 8.5 pt

Formatted: Space Before: 0.55 pt

Formatted: Space Before: 4.9 pt

Formatted

Formatted: Font: Times New Roman, 10 pt

Formatted: Space Before: 0 pt

Formatted

3.3 3.2 Case Study II: Understanding of Risk from Debris Flows on Vancouver Island

3.3.1 3.2.1 Background

Vancouver Island comprises approximately 31,788 km² of rugged terrain between sea level and 2,200 m elevation off the Canadian west coast. Oriented NW-SE, the steep Vancouver Island Ranges form the volcanic backbone of the island. Basalt and andesite are intermixed with marine sedimentary rocks, intruded in turn by granitic batholiths (Yorath and Nasmith, 1995). Pleistocene glaciation carved deep fjords and inlets, and created over-steepened U-shaped valleys that characterize the topography today. Precipitation varies between 700 mm⁻⁴ and over 6,000 mm⁻⁴ per year, and landslides are common with rates between

Formatted: Not Expanded by / Condensed by

Formatted: Space Before: 4.15 pt, No bullets or numbering, Tab stops: Not at 0.65"

Formatted: Normal, Indent: Left: 0.34", No bullets or numbering, Tab stops: Not at 0.76"

Formatted: Font: 8.5 pt

Formatted: Space Before: 0.55 pt

Formatted

Formatted

Formatted: Indent: Hanging: 0.2", Line spacing: Multiple 1.46 li

Formatted

0.007 km⁻²yr⁻¹ and 0.096 km⁻²yr⁻¹ depending on the regional zone (wet, moderate, dry, and alpine) as identified by Guthrie (2005b). Guthrie (2005b) further observed that more than two-thirds of all landslides below the alpine zone are debris flows. Cowichan Lake (Figure 1614) is an elongated bedrock-controlled lake on Southern Vancouver Island. The lake fills the glacially scoured contact between relatively competent Karmutsen and Bonanza volcanic rock on the south shore, and more erodible vol-

Formatted

Formatted: Space Before: 5.1 pt, Line spacing: single

Formatted

Formatted

canic and volcanoclastic rocks of the Sicker group on the north shore (Guthrie, 2005b). The steep northern slopes of Cowichan Lake lie within the dry zone and subsequently the lower range of landslide occurrence (0.004 km⁻²yr⁻¹), modified by the underlying bedrock to as much as 0.008 km⁻²yr⁻¹ (one landslide 125 km⁻²yr⁻¹) (Guthrie, 2005b).

Formatted: Indent: Hanging: 0.27", Space Before: 5.1 pt, Line spacing: Multiple 1.42 li

Formatted

Formatted

Field Code Changed

Formatted

(Ebbwater and Palmer, 2019). A landslide runoff model was needed to differentiate modern debris flow runoff zones from paraglacial fans and the floor of the U-shaped valley, and better discretize risk.

Formatted: Space Before: 0.6 pt

Formatted

Formatted: Font: 12 pt

Formatted: Space Before: 0 pt

Formatted: Indent: Left: 0.07", Space Before: 0 pt, No bullets or numbering, Tab stops: Not at 0.76"

Formatted: Not Expanded by / Condensed by

Formatted: Font: 8.5 pt

Formatted: Space Before: 0.55 pt

Formatted: Left, Indent: First line: 0", Right: 0", Space Before: 4.85 pt

Field Code Changed

Calibrating
3.3.2 3.2.2 Running the Model

Modeled landslides were initiated using LABS in each of four preassigned zones related to likelihood representing a hazard, respectively, of encountering landslides anywhere along their path. Those zones represented an encounter probability of 1:100, 1:300, 1:1,000, 0.004, 0.001, 0.0005, and 1:3,000 based on air photograph and terrain interpretation 0.00007 landslides per hectare per year (Palmer, 2018).

Landslide initiation locations were created by importing, within the zones described above, randomly distributed points, a uniform distribution of points, and manually chosen points using the GIS tool and LiDAR within LABS by looking at the LiDAR image and choosing initiation zones based on experience in

similar areas (Figure 15). The results of each run were compared in a calibration exercise. The model was calibrated by simulating landslides within the study area, comparing the results to mapped and expected landslide behavior, and checking the modeled landslide magnitude-frequency characteristics against mapped landslide magnitude-frequency characteristics for other areas in coastal British Columbia.

Formatted: Left, Indent: Left: 0.07", First line: 0", Right: 0", Line spacing: Exactly 11.4 pt

Formatted: Font: Arial, 8.5 pt

The results showed comparable landslide behavior to mapped landslides (Figure 17) and magnitude-frequency curves that are similar to other coastal BC data sets (Figure 18) with a similar rollover and distributions. The modeled results are somewhat smaller, on average, than those mapped elsewhere in coast, however, that may simply be a result of the limited initiation zone for each modeled landslide (15 m x 15 m), and imposed model restrictions on landslide spreading above 27° slopes. That said, the average modeled landslide size was similar to the average mapped landslide size for this area.

Modeled runoff tended to be a little longer than mapped landslide runoff, however, that could be a result of more landslides initiated at one time, the cumulative footprint of multiple runs, or the improved ability to follow a modeled landslide in a channel compared to a similar sized mapped event.

There was no significant difference in outcomes between landslides generated using a random, uniform, or manually chosen initiation points other than manually selected initiation zones were more likely to run successfully. Using the random or uniform distribution of initiation points meant that some agents were generated on local slopes too flat to initiate a landslide response.
30 Manual selection simply reduced the probability that this would occur.

Magnitude frequency analyses revealed some differences between mapped and modeled landslides (Figure 16). The tangent of the slope at a given probability of occurrence was approximately equal for both modeled and mapped landslides, and we interpret that the model does a good job representing variability in landslide size distribution. However, mapped landslides generally occupied about twice the area of modeled landslides.

5 We explain this by observing that mapping is, in and of itself, a model that includes restrictions related to level of detail and a practical mapping scale. The mapper must make a choice between outlining landslides that are inferred to exist on steep slopes and precisely following the limited path visible among trees. In this case, the model appears to have better limited the landslide width to the actual path (Figure 17). Mapped landslides include areas of steep gullies and slopes that are heavily forested after the identified event. We therefore interpret that the magnitudes of the mapped landslides are conservatively inflated and that is 10 reflected in the curve in (Figure 16).

Despite differences in magnitude and frequency, modeled landslides traveled consistently further than mapped landslides. Fanning behavior modeled did approximate vegetation changes on the fan, but exceeded what had been observed in the last several decades of air photograph interpretation.

3.3.33.2.3 Calculating Landslide Runout

Once tested, 1,364 new landslide initiation points were selected across the 1:100, 1:300, 1:1,000, and 1:3,000 encounter probability zones (Figure 19). A user-based initiation-point selection method was used for the final model runs as this method generally resulted in landslide generation somewhat more frequently than randomly or uniformly generated points that would 5 sometimes occur on a flatter portion each of the slope four hazard zones. LABS then automatically created initiation zones (as a selected option) of nine agents in 15 m by 15 m grids (where grid cells are 5 m a side - see Figure 2018).

20

Fifty landslide runs were modeled from each landslide initiation zone (both random and manually selected). Though view- 40 able viewable in LABS, the results were exported as Geotiffs GeoTIFFs to enable visualization in Google Earth and ArcGIS software (Figure 2119). Over 70,000 debris flows were modeled and a distinct runout limit was derived.

25 The result of the landslide runs was, with few exceptions, that the cumulative footprint of modeled landslides did not reach residential homes on the paraglacial fans. Instead, landslides tended to terminate on upper- and mid-fan slopes that were between 10 and 20 degrees (Figure 22). Modeled landslides, as observed in the testing phase, travelled consistently further than mapped landslides.

15

The likelihood of any individual landslide reaching the runout limit ean bewas explored in LABS by obtaining information about

30 the number of times any pixel was inundated out of the total number of runs. In this instance, however, the total runout limit was more practical (Figure 2320).

Formatted: Space Before: 5.2 pt, Numbered + Level + Numbering Style: 1, 2, 3, ... + Start at: 3 + Alignment Left + Aligned at: 0.34" + Indent at: 0.75"

Formatted: Font: 9 pt

Formatted: Space Before: 0 pt

Formatted

Formatted: Justified, Indent: First line: 0", Right: 0.07", Space Before: 4.85 pt

Formatted

Formatted: Space Before: 6.55 pt

Formatted: Font: 10 pt

Formatted: Space Before: 0.45 pt

Formatted

Formatted: Justified, Indent: First line: 0.14", Right: 0.07", Space Before: 0 pt

Formatted

Formatted

Formatted: Indent: Hanging: 0.27"

Formatted

Formatted: Indent: Hanging: 0.27", Space Before: 5 pt

Formatted

10

3.3.5.2.5 Case II Summary

5 LABS was used to model debris flow runout from steep slopes above a community on the north shore of Cowichan Lake.

15 With few exceptions, the cumulative footprint of modeled landslides did not reach residential homes on the paraglacial fans.

Exceptions were easily identified on two types of maps, a runout limit map and a potential damage map that relates to building vulnerability.

With over 70,000 landslide runs, the probability that a modeled debris flow will exceed the distal limit indicated on the maps was less than 0.000015.

40 was less than 0.000015.

20 Properties above (north) of the distal limit of modeled runout can use the potential damage curves to inform subsequent investigation.

4 Discussion and Limitations of Use

"All models are wrong, but some are useful." — George E.P. Box

45 Both case studies demonstrate the potential usefulness of an easily employed, regional runout model. LABS is predictive

25 and, at least for shallow, rapid to extremely rapid, flow-type landslides, appears to provide viable runout results, as well as information about landslide depth, area (footprint) and volume.

However, LABS is still limited to the rules for erosion and deposition employed, and experiments in other regions of the world will benefit users.

20 Some of the potential pitfalls of the program are articulated below.

Formatted: Space Before: 3.35 pt, Numbered + Level 3 + Numbering Style: 1, 2, 3, ... + Start at: 3 + Alignment: Left + Aligned at: 0.34" + Indent at: 0.75"

Formatted: Condensed by 0.35 pt

Formatted: Indent: Hanging: 0.41", Right: 0", Space Before: 5.25 pt, Line spacing: single, Tab stops: 0.48" Left

Formatted: Condensed by 0.35 pt

Formatted: Condensed by 0.3 pt

Formatted: Condensed by 0.3 pt

Formatted: Condensed by 0.35 pt

Formatted: Condensed by 0.35 pt

Formatted: Condensed by 0.3 pt

Formatted: Condensed by 0.3 pt

Formatted: Space Before: 5.25 pt

Formatted: Indent: Left: 0.34", First line: 0.14", Line spacing: Multiple 1.46 li

Formatted: Condensed by 0.45 pt

Formatted: Condensed by 0.4 pt

Formatted: Condensed by 0.45 pt

Formatted: Condensed by 0.2 pt

Formatted: Indent: Hanging: 0.27", Right: 0.08", Space Before: 0 pt, Tab stops: 0.48", Left

Formatted: Font: 16 pt

Formatted: Space Before: 0.45 pt

Formatted: Space Before: 0 pt

Formatted: Left, Right: 0", Space Before: 5.25 pt

Formatted: Font: Arial, 8.5 pt

Formatted: Not Expanded by / Condensed by

Formatted: Not Expanded by / Condensed by

Formatted: Not Expanded by / Condensed by

Formatted: Indent: Left: 0.48", Tab stops: Not at 0.48"

Formatted: Not Expanded by / Condensed by

4.1 Depth variability

As an artifact of the rules, individual runs may exhibit sudden deposition or scour along their path in excess of what would actually be expected. This occurs when a single agent at a pixel picks a low probability depth for either scour or deposition. Multiple model runs are therefore recommended and should provide better depth results because individual highs and lows are averaged out. Depths should be field verified wherever possible.

4.2 Parameter sensitivity

There are considerable opportunities to tweak landslide behavior within the program. The authors recommend the settings shown in Figure 12 and Figure 20 as default values. The Fan Maximum Slope slider is intuitive, as is the Mass Loss slider. Runout depends on initial volume as well as the difference in available entrainment along the landslide path. The professional landslide specialist needs to consider these criteria and measure results against actual conditions when calibrating the model.

- Formatted: Space Before: 4.15 pt, Numbered + Level: 2 + Numbering Style: 1, 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0.34" + Indent at: 0.65"
- Formatted: Font: 8.5 pt
- Formatted: Space Before: 0.55 pt
- Formatted: Condensed by 0.3 pt
- Formatted: Condensed by 0.25 pt
- Formatted: Condensed by 0.3 pt
- Formatted: Condensed by 0.25 pt
- Formatted: Condensed by 0.3 pt
- Formatted: Condensed by 0.25 pt
- Formatted: Condensed by 0.3 pt
- Formatted: Indent: Left: 0.14"
- Formatted: Font: 8.5 pt
- Formatted: Space Before: 0.2 pt
- Formatted: Numbered + Level: 2 + Numbering Style: 2, 3, ... + Start at: 1 + Alignment: Left + Aligned at: 0.34" + Indent at: 0.65"
- Formatted: Condensed by 0.5 pt
- Formatted: Condensed by 0.45 pt
- Formatted: Condensed by 0.5 pt
- Formatted: Condensed by 0.45 pt
- Formatted: Condensed by 0.45 pt
- Formatted: Condensed by 0.5 pt
- Formatted: Condensed by 0.45 pt
- Formatted: Condensed by 0.5 pt
- Formatted: Condensed by 0.45 pt
- Formatted: Condensed by 0.5 pt
- Formatted: Justified, Right: 0.07"

however, if adjusting the other sliders, results should be checked using the inspector tool, for depths as well as the overall footprint.

4.3 10 4.3 Linearity

Very steep slopes may produce a strong linear landslide orientation, easily seen when multiple landslides are triggered. This occurs when the DEM at the model resolution (5 m) is so steep that it overwhelms the path selection at each time step and spreading has not yet occurred (recall that spreading is has a user defined slope limit). While natural analogs are readily found (e.g. Figure 26;23), the modeled results may nonetheless bypass local topographic effects and choose paths that vary somewhat from the real-world equivalent. DEM effects have been noticed by others; Degetto et al. (2015) and Stolz and Huggel (2008) Degetto et al. (2015) and Stolz and Huggel (2008) both demonstrate that the DEM source can dramatically influence the outcome of debris flow models, even at equivalent resolutions. Horton et al. (2013) Horton et al. (2013) propose that a 10 m resolution DEM is appropriate for regional mapping. In our case, we suggest that the 5 DEM strikes the right balance between processing power and reasonable results, and LABS has been optimized such that the agents work on a 5 m cell size.

20

4.4 Debris flows vs debris floods

Despite considerable literature, confusion about the difference between debris flows, debris floods, and hyperconcentrated flows persists (Pierson, 2005; Calhoun and Clague, 2018; Keaton, 2019) (Pierson, 2005; Calhoun and Clague, 2018; Keaton, 2019) Church and Jakob (2020). Geomorphic criteria for distinguishing between debris flows and debris floods such as those derived by Wilford et al. (2004) Wilford et al. (2004) may not fully align with other defining criteria such as sediment concentration and shear strength (Figure 27;24). LABS simulates rapid to extremely rapid landslides of the flow type, but is not intended to model debris floods or hyperconcentrated flows. LABS may, therefore, underestimate runout of channelized debris flows particularly those channels that are transitional to debris floods. However, as demonstrated in our case study, LABS can provide volumetric sediment supply to channels that can be subsequently modeled using the right tool. Further, within its intended parameters (the empirical observa-

- Formatted: Indent: Left: 0.07", Space Before: 9.8 pt, No bullets or numbering, Tab stops: Not at 0.65"
- Formatted: Font: 9 pt
- Formatted: Space Before: 0 pt
- Formatted: Condensed by 0.3 pt
- Formatted: Expanded by 1.25 pt
- Formatted: Expanded by 1.3 pt
- Formatted: Expanded by 1.25 pt
- Formatted: Expanded by 1.3 pt
- Formatted: Expanded by 1.25 pt
- Formatted: Expanded by 1.3 pt
- Formatted: Expanded by 1.3 pt
- Formatted: Expanded by 1.25 pt
- Formatted: Expanded by 1.3 pt
- Formatted: Expanded by 1.25 pt
- Formatted: Expanded by 1.3 pt
- Formatted: Expanded by 1.25 pt
- Formatted: Expanded by 1.3 pt
- Formatted: Expanded by 1.25 pt
- Formatted: Expanded by 1.3 pt
- Formatted: Expanded by 1.25 pt
- Formatted: Expanded by 1.3 pt
- Formatted: Expanded by 1.25 pt
- Formatted: Font: Arial, 8.5 pt
- Formatted: Font: 11 pt, Not Expanded by / Condensed by
- Formatted: Font: Times New Roman, 10 pt
- Formatted: Space Before: 11.7 pt, Numbered + Level 2 + Numbering Style: 1, 2, 3, ... + Start at: 4 + Alignment: Left + Aligned at: 0.34" + Indent at: 0.65"
- Formatted: Font: 8.5 pt
- Formatted: Space Before: 0.55 pt
- Formatted: Left, Indent: Left: 0.07", First line: 0", Right: 0", Line spacing: Exactly 11.35 pt
- Formatted: Font: Arial, 8.5 pt
- Formatted: Condensed by 0.25 pt
- Formatted: Font: Times New Roman, 10 pt, Condensed by 0.25 pt

tions of scour and deposition) LABS tends to show the depositional extent of debris flows in channels that might be otherwise lost to other processes. Nonetheless, the process difference should be recognized by the reader.

Formatted: Left, Indent: First line: 0", Right: 0.02", Space Before: 4.15 pt

Formatted

Formatted: Font: 12 pt

Formatted: Space Before: 0 pt

Formatted: Space Before: 9.4 pt, Numbered + Level + Numbering Style: 1, 2, 3, ... + Start at: 4 + Alignment: Left + Aligned at: 0.34" + Indent at: 0.65"

Formatted: Font: 8.5 pt

Formatted: Space Before: 0.55 pt

Formatted

4.5 Detailed simulation

LABS is a regional tool based primarily on empirical observations of aggregate debris flow behavior, particularly scour and deposition along the landslide path. Its probabilistic nature will result in similar but different outputs from one run to the next. We would expect nature to behave much the same way. However, if a detailed analysis of a single debris flow is sought, this tool

~~5 is neither at the correct scale, nor it does it adequately not address the site specific controls such as rheology, detailed topography finer than 5 m, moisture content, and geology (among other factors). Indeed, LABS explicitly seeks to ignore these factors in order to provide a practical regional tool. For detailed analysis, the reader is directed to any of several excellent dynamic models.~~

Formatted: List Paragraph, Justified, Indent: Left: 0.1
Hanging: 0.2", Space Before: 4.85 pt, Numbered +
Level: 1 + Numbering Style: 1, 2, 3, ... + Start at: 4 +
Alignment: Left + Aligned at: 0.34" + Indent at: 0.65"
Tab stops: 0.34", Left

Formatted

~~10 analysis, the reader is directed to any of several excellent dynamic models.~~

~~5 5 Conclusions~~

~~5 In order to address a perceived need for a debris flow or debris avalanche runout model that can be applied regionally with relatively few inputs, we developed, and present herein, an agent-based landslide-simulation model called LABS.~~

Formatted: Left, No bullets or numbering, Tab stops:
Not at 0.55"

Formatted: Font: 8.5 pt

Formatted: Space Before: 0.55 pt

Formatted: Left, Indent: First line: 0", Right: 0"

Formatted

Formatted: Left, Indent: Hanging: 0.27", Right: 0.01"
Space Before: 5.25 pt

Formatted: Indent: Left: 0.48", Line spacing: Exactly
11.4 pt, Tab stops: Not at 0.48"

Formatted

Formatted

Formatted: Left, Indent: Left: 0.07", First line: 0", Right:
0", Space Before: 0 pt, Line spacing: Exactly 11.4 pt

Formatted

Formatted

Formatted: Font: Times New Roman, 10 pt

Formatted: Indent: First line: 0.14"

Formatted

Formatted: Heading 1, Left, Indent: Left: 0", First line:
0", Right: 0", Space Before: 5.25 pt, Line spacing:
single

Formatted

Formatted

Formatted: Left, Indent: Left: 0.07", First line: 0", Right:
0", Line spacing: Exactly 11.35 pt

Formatted

~~40 We demonstrate the use of LABS in two case studies.~~

~~In the first, we used LABS to determine the sediment input (in m³) to a stream network in the steep mountains of Indonesia's province of Papua. Sediment input was used to bulk the hydrographs for subsequent debris flood modeling (not shown) at~~

~~20 specified return periods.~~

~~In the second case study, we used LABS to predict runout distance in a residential community on Vancouver Island, Canada.~~

~~45 By running tens of thousands of landslides, we defined a modeled landslide runout limit and demonstrated that most houses were beyond the threat of debris flow runout. For those that remained in the runout zone, we used the average depth information to assign potential damage curves to unprotected properties.~~

~~25 LABS is freely available to for non-profit groups (commercial use (e.g. universities, NGOs, government and research departments) and may be downloaded here~~

~~[ADDRESS TO BE PROVIDED IN FINAL SUBMISSION]~~

~~20 LABS simplifies extremely complex behavior to provide reasonable predictions of outcomes. Should there be a perceived difference between modeled results, and on-the-ground evidence, the ground-based evidence should take priority. LABS does not relieve professionals from using their experience, training and education to make good judgments when assessing actual~~

~~30 ground conditions, but provides additional understanding of processes and credible outcomes.~~

References

Benda, L. E. and Cundy, T. W.: Predicting deposition of debris flows in mountain channels, Canadian Geotechnical Journal, 27, 409–417, 1990.

Berti, M. and Simoni, A.: DFLOWZ: A free program to evaluate the area potentially inundated by a debris flow, Computers & Geosciences, 5 67, 14–23, 2014.

Calhoun, N. C. and Clague, J. J.: Distinguishing between debris flows and hyperconcentrated flows: an example from the eastern Swiss Alps, Earth Surface Processes and Landforms , 43, 1280–1294, 2018.

Cha, D., Hwang, J., and Choi, B.: Landslides detection and volume estimation in Jinbu area of Korea, Forest Science and Technology, 14, 61–65, 2018.

10 Chiang, S. H., Chang, K. T., Mondini, A., Tsai, B. W., and Chen, C. Y.: Simulation of event-based landslides , Geomorphology, pp. 306–318, 2012.

[Church, M. and Jakob, M.: What is a debris flood?, Water Resources Research, 56, 1–17, 2020.](#)

Ciurean, R. L., Hussin, H., van Westen, C. J., Jaboyedoff, M., Nicolet, P., Chen, L., Frigerio, S., and Glade, T.: Multi-scale debris flow vulnerability assessment and direct loss estimation of buildings in the Eastern Italian Alps, Natural Hazards, pp. 929–957, 2017.

15 Corominas, J.: The angle of reach as a mobility index for small landslides , Canadian Geotechnical Journal, 33, 260–271, 1996.

15 Corominas, J., van Westen, C., Frattini, P., Cascini, L., Mallet, J. P., Fotopoulou, S., and Catani, F.: Recommendations for the quantitative analysis of landslide risk, Bulletin of Engineering Geology and the Environment, pp. 209–263, 2014.

D’Agostino, V., Gregorio, S. D., Iovine, G., Lupiano, V., Rongo, R., and Spataro, W.: First simulations of the Sarno debris flows through Cellular Automata modelling , Geomorphology, 54, 91–117, 2003.

20 Davies, H. L.: The geology of New Guinea - the Cordilleran margin of the Australian continent, Episodes, 35, 1–16, 2012.

20 Deangeli, C.: Cellular automaton for realistic modelling of landslide, Nonlinear Processes in Geophysics, 2, 1–15, 1995.

Degetto, M., Gregoretti, C., and Bernard, M.: Comparative analysis of the differences between using LiDAR and contour-based DEMs for hydrological modeling of runoff generating debris flows in the Dolomites, Frontiers in EArth Sciences, 3, 1–15, 2015.

Ebbwater and Palmer: Geohazard Risk Assessment North Slope of Cowichan Lake, 2019.

25 Fannin, R. J. and Wise, M.: An empirical-statistical model for debris flow travel distance, Canadian Geotechnical Journal, 38, 982–994, 2001.

25 Froude, M. J. and Petley, D. N.: Global fatal landslide occurrence from 2004 to 2016, Natural Hazards Earth System Science, 18, 2161–2181, 10.5194, 2018.

10.5194, 2018.

Gregoretti, C., Degetto, M., and Boreggio, M.: GIS-based cell model for simulating debris flow runout on a fan, Journal of Hydrology, 534, 326–340, 2016.

30 Guthrie, R. H.: Geomorphology of Vancouver Island: Extended Legends to Nine Thematic Maps, 2005a.

30 Guthrie, R. H.: Geomorphology of Vancouver Island: Mass Wasting Potential, 2005b.

Guthrie, R. H. and Evans, S. G.: Analysis of landslide frequencies and characteristics in a natural system, coastal British Columbia, Earth Surface Processes and Landforms, 29, 1321–1339, 2004a.

Guthrie, R. H. and Evans, S. G.: Magnitude and frequency of landslides triggered by a storm event, Loughborough Inlet, British Columbia, Natural Hazards and Earth System Sciences, 4, 475–483, 2004b2004.

35 Guthrie, R. H. and Evans, S. G.: Work, persistence, and formative events: The geomorphic impact of landslides, Geomorphology, 88, 266–275, 2007.

Formatted: Space Before: 5 pt

Formatted: Indent: Left: 0.07"

Formatted: Indent: Hanging: 0.14"

Formatted: Indent: Left: 0.07", Hanging: 0.27", Right: 0.77", Space Before: 0.05 pt, Line spacing: Multiple 1.48 li

Formatted

Formatted: Space Before: 0.05 pt

Formatted

Formatted: Indent: Left: 0.07", Hanging: 0.27", Space Before: 5 pt

Formatted

Formatted: Space Before: 5 pt

Formatted: Indent: Left: 0.07", Hanging: 0.27", Right: 1.49", Space Before: 0.05 pt, Line spacing: Multiple 1.48 li

Formatted: Font: Times New Roman, 9 pt

Formatted: Indent: Left: 0.34", First line: 0", Line spacing: single

35 275, 2007.

Guthrie, R. H., Deadman, P., Cabrera, R., and Evans, S. G.: Exploring the magnitude-frequency distribution: a cellular automata model for landslides, Landslides, 5, 151–159, 2008.

Formatted: Space Before: 4.95 pt

- Guthrie, R. H., Hockin, A., Colquhoun, L., Nagy, T., Evans, S. G., and Ayles, C.: An examination of controls on debris flow mobility: Evidence from coastal British Columbia, *Geomorphology*, 114, 601–613, 2010.
- 5 Horton, P., Jaboyedoff, M., and Zimmermann, M.: Flow-R, a model for susceptibility mapping of debris flows and other gravitational hazards at a regional scale, *Natural Hazards and Earth System Sciences*, 13, 869–885, 2013.
- 5 Hungr, O.: A model for the runout analysis of rapid flow slides, debris flows and avalanches, *Canadian Geotechnical Journal*, 32, 610–623, 1995.
- Hussin, H. Y.: Probabilistic Run-out Modeling of a Debris Flow in Barcelonnette, France, 2011.
- 40 Imaizumi, F. and Sidle, R. C.: Linkage of sediment supply and transport processes in Miyagawa Dam catchment, Japan, *Journal of Geophysical Research*, 112, 1–17, 2007.
- 10 Imaizumi, F., Sidle, R. C., and Kamei, R.: Effects of forest harvesting on the occurrence of landslides and debris flows in steep terrain of central Japan, *Earth Surface Processes and Landforms*, 33, 827–840, 2008.
- Iverson, R. M.: The physics of debris flows, *Review of Geophysics*, 35, 245–296, 1997.
- 45 Jakob, M., Stein, D., and Ulmi, M.: Vulnerability of buildings to debris flow impact, *Natural Hazards*, 60, 241–261, 2012.
- Keaton, J. R.: Review of contemporary terminology for damaging surficial processes - Stream flow, hyperconcentrated sediment flow, debris flow, mud flow, mud flood, mudslide, in: 7th International Conference of Debris-Flow Hazards Mitigation, Golden, Colorado, 2019.
- 15 Martin, Y., Rood, K., Schwab, J. W., and Church, M.: Sediment transfer by shallow landsliding in the Queen Charlotte Islands, British Columbia, *Canadian Journal of Earth Sciences*, 39, 189–205, 2002.
- ~~Columbia, Canadian Journal of Earth Sciences, 39, 189–205, 2002, 20–~~
- Mavrouli, O., Fotopoulou, S., Pitiakis, K., Zuccaro, G., Corominas, J., Santo, A., Cacace, F., DeGregorio, D., DiCrescenzo, G., Foerster, E., and Ulrich, T.: Vulnerability assessment for reinforced concrete buildings exposed to landslides, *Bulletin of Engineering Geology and the Environment*, pp. 265–289, 2014.
- 20 McDougall, S. D. and Hungr, O.: Objectives for the development of an integrated three-dimensional continuum model for the analysis of landslide runout, in: Debris-flow Hazards Mitigation: Mechanics, Prediction, and Assessment: Proceedings of the 3rd International DFHM
- 25 Conference, Davos, Switzerland, edited by Rickenmann, D. and Chen, C. L., pp. 481–490, Millpress, Rotterdam, 2003.
- Mergili, M., Krenn, J., and Chu, H. J.: r.randomwalk v1, a multi-functional conceptual tool for mass movement routing, *Geoscientific Model Development*, 8, 4027–4043, 2015.
- O'Brien, J. S., Julien, P. Y., and Fullerton, W. T.: Two-dimensional water flood and mudflow simulation, *Journal of Hydraulic Engineering*, 119, 244–261, 1993.
- Palmer: Lake Cowichan and Youbou Slope Hazard Assessment, 2018.
- 30 Papathoma-Kohle, M., Keiler, M., Totschnig, R., and Glade, T.: Improvement of vulnerability curves using data from extreme events: debris flow event in South Tyrol, *Natural Hazards*, pp. 2083–2105, 2012.
- Pierson, T. C.: Hyperconcentrated flow - transitional process between water flow and debris flow, in: Debris-flow Hazards and Related Phenomena, edited by Jakob, M. and Hungr, O., pp. 159–202, Springer, Berlin, 2005.
- Rickenmann, D.: Debris flows 1987 in Switzerland: modelling and sediment transport, *International Association of Hydrological Sciences*, 194, 371–378, 1990.
- 35 Sayre, R., Frye, C., Karagulle, D., Krauer, J., Breyer, S., Aniello, P., Aniello, P., Wright, D. J., Payne, D., Adler, C., Warner, H., VanSistine, D. P., Cress, J., et al.: A new high-resolution map of world mountains and an online tool for visualizing and comparing characterizations of global mountain distributions, *Mountain Research and Development*, 38, 240–249, 10.1659, 2018.

Formatted: Space Before: 4.05 pt

Formatted

Formatted: Indent: Hanging: 0.14", Right: 0.07", Space Before: 0.05 pt

Formatted: Indent: Hanging: 0.34", Right: 0", Space Before: 0.1 pt

Formatted: Indent: Hanging: 0.14", Right: 0.07"

Formatted

Formatted: Condensed by 0.25 pt

Formatted: Indent: Hanging: 0.41"

Formatted: Indent: Left: 0.34"

Formatted

Formatted

Formatted: Indent: Left: 0.07", Hanging: 0.27", Right: 0.07", Space Before: 5 pt, Tab stops: 0.48", Left

Formatted

Formatted

Formatted: Left, Indent: Left: 0.07", First line: 0", Right: 0", Line spacing: single, Tab stops: 0.48", Left

Formatted: Justified, Indent: Left: 0.34", Hanging: 0.14", Right: 0.07", Space Before: 5 pt, Line spacing: Multiple 1.48 li, Tab stops: Not at 0.48"

Formatted: Condensed by 1.45 pt

Formatted: Space Before: 5 pt

- Stolz, A. and Huggel, C.: Debris flows in the Swiss National Park: the influence of different flow models and varying DEM grid size in modeling results. , *Landslides*, 5, 311–319, 2008.
- Tiranti, D., Crema, S., Cavalli, M., and Deangeli, C.: An integrated study to evaluate debris flow hazard in alpine environment, *Frontiers in Earth Science*, 6, 1–14, 2018.
- 5 VanDine, D. F.: *Debris Flow Control Structures for Forest Engineering*, 1996.
- Wilford, D., Sakals, M. E., and Innes, J. L.: Recognition of debris flow, debris flood and flood hazard through watershed morphometrics, *Landslides*, 1, 61–66, 2004.
- Winter, M., Smith, J. T., Fotopoulou, S., Pitilakis, K., Mavrouli, O., Corominas, J., and Argyroudis, S.: An expert judgement approach to determining the physical vulnerability of roads to debris flow, *Bulletin of Engineering Geology and the Environment*, pp. 291–305, 2014.
- 10 Wise, M. P.: Probabilistic modelling of debris flow travel distance using empirical volumetric relationships, 1997.
- Yorath, C. J. and Nasmith, H. W.: *The Geology of Southern Vancouver Island: a Field Guide*, Orca, Victoria BC, 1995.

List of Figures

Commented [GR2]: Track changes not on Figures for readability

1	Path selection based on aspect determined by Moore neighbors. Black numbers represent time steps, and white numbers represent actual elevations. Example is from Lake Cowichan on Vancouver Island. Pixel resolution is 5 m.	19
5	2 Agent spawning (inside circles) due to a topographic change at a road that is reached in time step 18. Landslide is traveling NE (to upper right corner) and the initiation zone is the 15 x 15 m square outlined in black.	20
10	3 Comparison between historic landslides (A), modeled landslides from a single run (B), and (C) from 50 runs (the cumulative footprint). Background image © Google Earth. Example from a site in Indonesia (see case study below).	21
15	4 Example of a magnitude frequency graph of modeled and mapped landslides from a well calibrated model run and an earlier poorly calibrated model run (inset).	22
20	5 Landslide area volume relationships for modeled single run landslides in Indonesia and from Vancouver Island. Data come from case studies described in subsequent sections.	23
25	6 Topographic effects on landslide propagation is easily seen. Agents spawn at and below the road(s), causing the landslide to spread. Approximate average slopes are shown on the figure. This figure is the continuation of the landslide path from Figure 2. The landslide is moving NE (towards the top right) and the initiation zone is the 15 x 15 m square outlined in black in the lower left corner.	24
30	7 Tembagapura located in the province of Papua, Indonesia. (A) Regional view, yellow star indicates Tembagapura (Image © ESRI and National Geographic World Map), (B) vertical image over Tembagapura showing debris flows and debris floods (Image © Google Earth), (C) Oblique view of Tembagapura in the steep Jayawijaya Mountains.	25
35	8 An historical inventory revealed 375 landslides, primarily debris flows, in the slopes surrounding Tembagapura. Years refer to the year of imagery and the background image is a vertical air photograph obtained by the authors.	26
40	9 The relationship between landslides occurrence and landslide generating rainfall at Tembagapura.	27
45	10 Landslide initiation zones painted (yellow) at the estimated source of mapped debris flows (darker line work) in LABS.	28
	11 A single run of the landslides whose initiation zones were painted in Figure 10 above. Colors relate to scour (yellow to red where red is deeper) and deposition (green to blue where blue is deeper).	29
	12 Cumulative magnitude frequency comparison between mapped and modeled landslides (two runs).	30
	13 Landslides generated from susceptible slopes in LABS. Bottom figure shows depths along the landslide path.	31
	14 Cowichan Lake on Vancouver Island showing (A) Bedrock Geology and volcanics of the Sicker Group (orange), Bonanza Group (purple) and Karmutsen Formation (pink); (B) Mass movement potential ($0.004 \text{ km}^{-2}\text{yr}^{-1}$ for the orange zone, up to double that for the tan zone on the north side of the lake); (C) Surficial geology (colluvium, till, and fluvial gravels mapped as purple, green and yellow respectively); and (D) the overall location. Figure taken from Guthrie (2005a) (A) and (B) and Palmer (2018) (C).	32
	15 Test run of simulated landslides along the North Shore of Lake Cowichan. Yellow represents scour, and green and blue represent deposition (blue is deeper).	33
	16 Magnitude-Frequency comparison between Modeled (blue) and Mapped (orange) landslides on the North Shore of Cowichan Lake, BC.	34
	17 Mapped landslides from 2014 images (A) in the study area were typically wider than observed (B) or modeled landslides (C) in the study area and resulted in mapped magnitudes about twice that of modeled magnitudes for the same frequency of occurrence. Background image is © Google Earth, 2016.	35

18	A close up view of landslide initiation points and the LABS generated 15 m x 15 m initiation zones. Each zone contains nine agents. The sliders on the left control agent behavior as explained in the Methods section.	36
5	19 Modeled landslides along the north shore of Cowichan Lake from different hazard zones, and overall. Results can be imported into Google Earth, as shown here, for convenient visualization (background image is © Google Earth).	37
20	Modeled debris flow runout limit. Note that most of the 240 properties (black pentagons) are outside the modeled runout zone. Background image © ESRI World Topographic Map.....	38
10	21 Vulnerability identified by degree of expected loss for constructed buildings by debris flow depth (Ciurean et al., 2017).....	39
22	Damage map for the north shore of Cowichan Lake. The color classes match Figure 21. The darker brown represents scour and transport zones and construction is assumed unlikely. Background image © ESRI World Topographic Map.....	40
15	23 Strong linear orientation of landslide tracks on steep slopes in Indonesia (A) where multiple landslides occur at once, and on the North Shore of Cowichan Lake (B) where multiple landslides were modeled to occur at once (background images © Google Earth).	41
24	Debris flows as expected to be modeled by LABS (shaded area). S_c represents the critical shear strength beyond which gravel (4 mm or larger) is suspended. Figure modified slightly from Pierson (2005).....	42

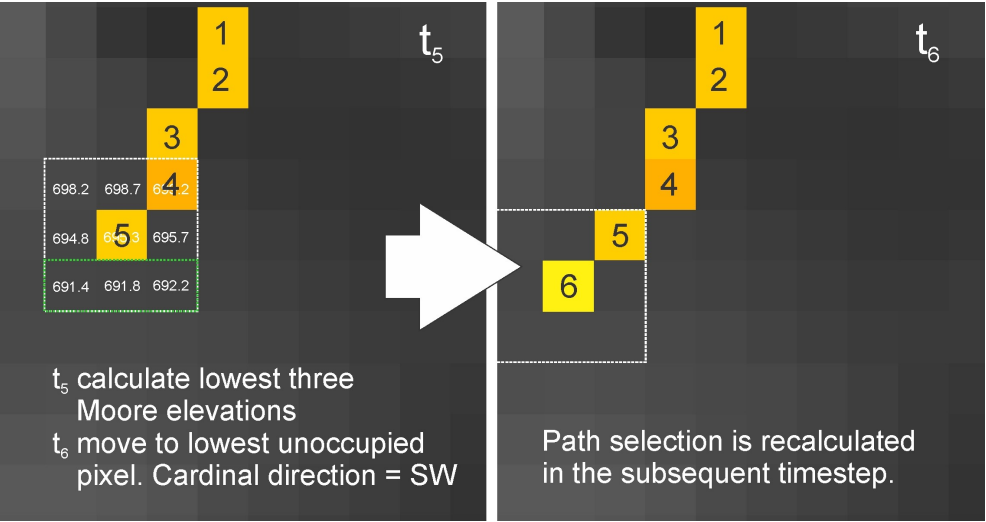


Figure 1. Path selection based on aspect determined by Moore neighbors. Black numbers represent time steps, and white numbers represent actual elevations. Example is from Lake Cowichan on Vancouver Island. Pixel resolution is 5 m.

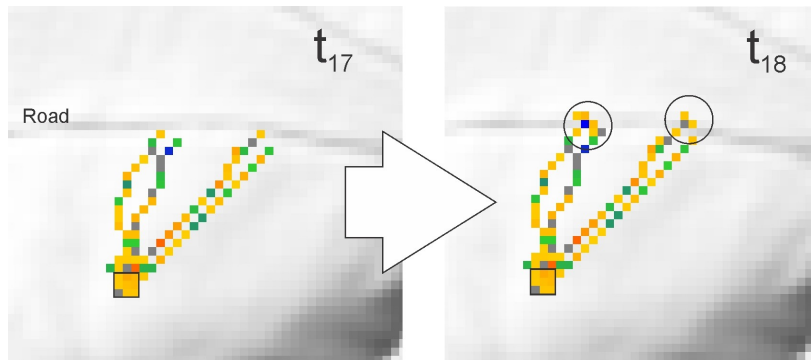


Figure 2. Agent spawning (inside circles) due to a topographic change at a road that is reached in time step 18. Landslide is traveling NE (to upper right corner) and the initiation zone is the 15 x 15 m square outlined in black.


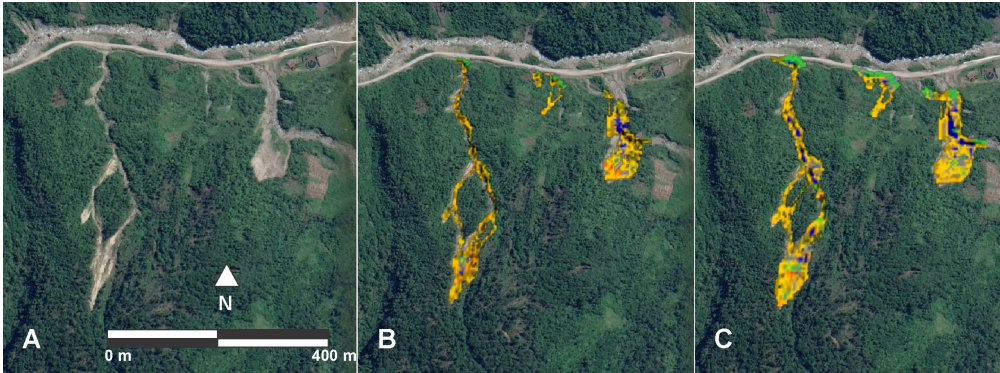


Figure 3. Comparison between historic landslides (A), modeled landslides from a single run (B), and (C) from 50 runs (the cumulative footprint). Background image © Google Earth. Example from a site in Indonesia (see case study below).

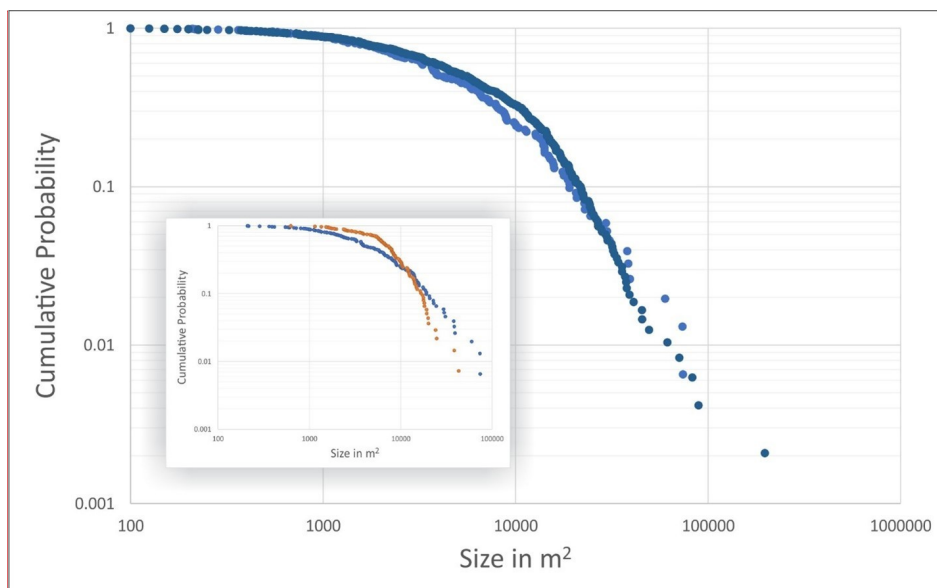

Commented [GR3]: Updated figure.

Figure 4. Example of a magnitude frequency graph of modeled and mapped landslides from a well calibrated model run and an earlier poorly calibrated model run (inset).

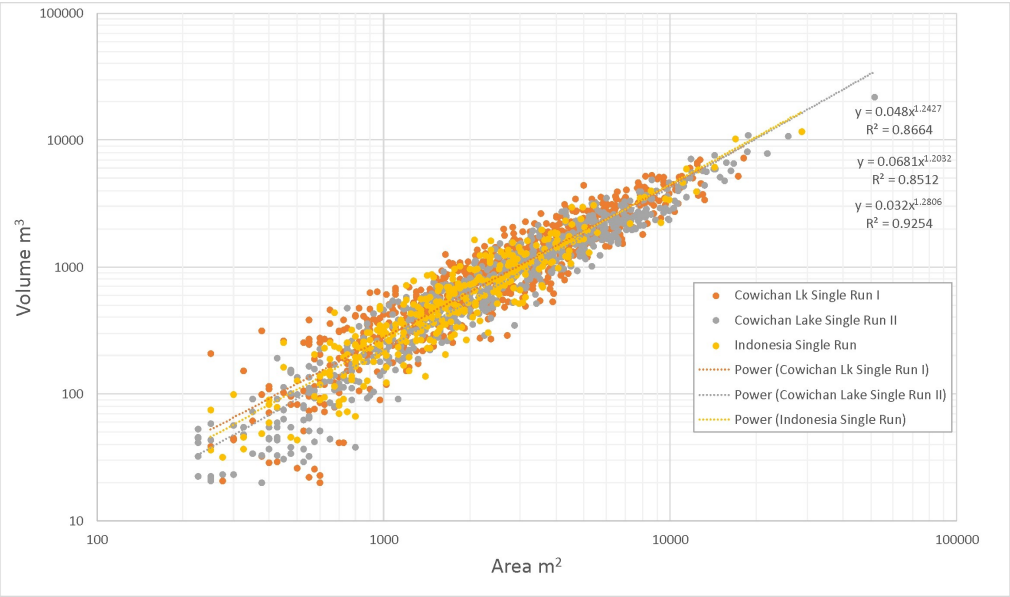


Figure 5. Landslide area volume relationships for modeled single run landslides in Indonesia and from Vancouver Island. Data come from case studies described in subsequent sections.

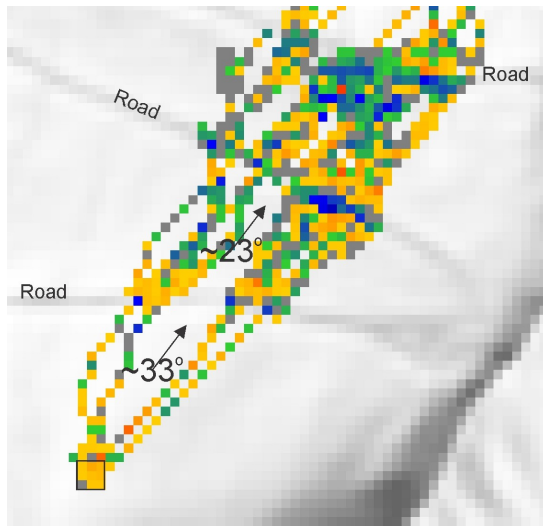


Figure 6. Topographic effects on landslide propagation is easily seen. Agents spawn at and below the road(s), causing the landslide to spread. Approximate average slopes are shown on the figure. This figure is the continuation of the landslide path from Figure 2. The landslide is moving NE (towards the top right) and the initiation zone is the 15 x 15 m square outlined in black in the lower left corner.

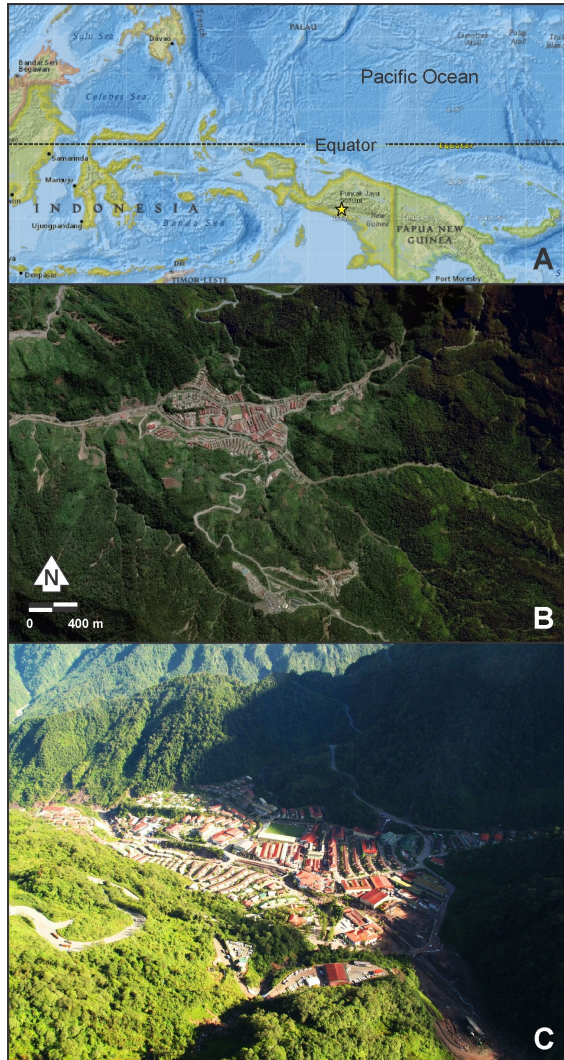


Figure 7. Tembagapura located in the province of Papua, Indonesia. (A) Regional view, yellow star indicates Tembagapura (Image © ESRI and National Geographic World Map), (B) vertical image over Tembagapura showing debris flows and debris floods (Image © Google Earth), (C) Oblique view of Tembagapura in the steep Jayawijaya Mountains.

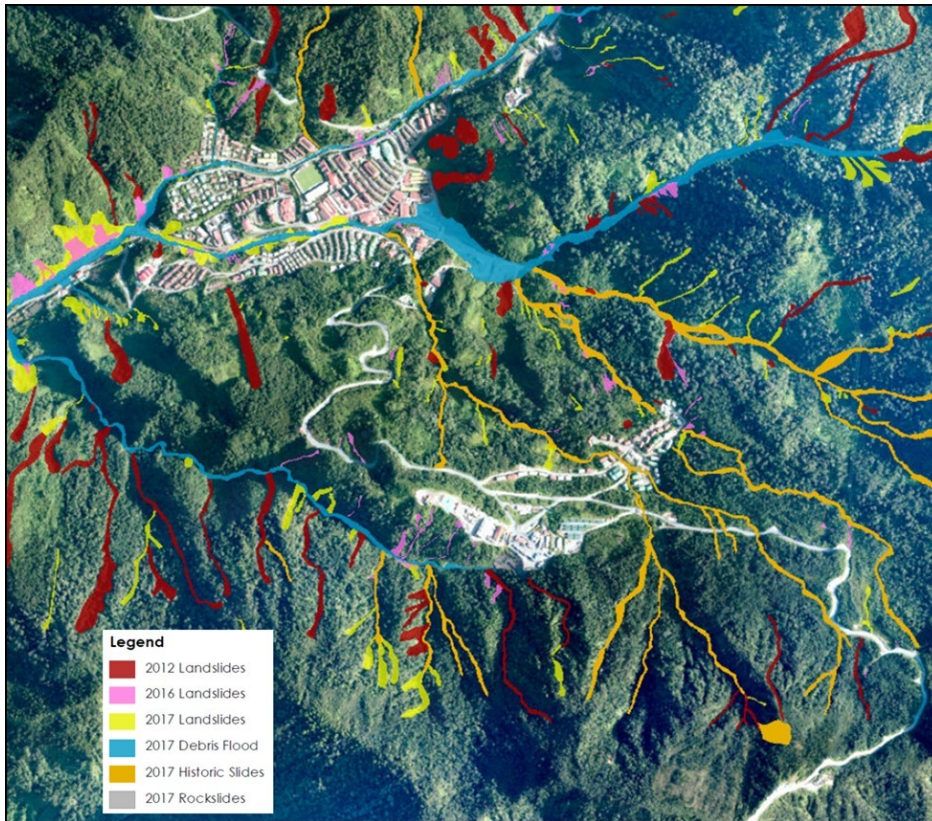


Figure 8. An historical inventory revealed 375 landslides, primarily debris flows, in the slopes surrounding Tembapura. Years refer to the year of imagery and the background image is a vertical air photograph obtained by the authors.

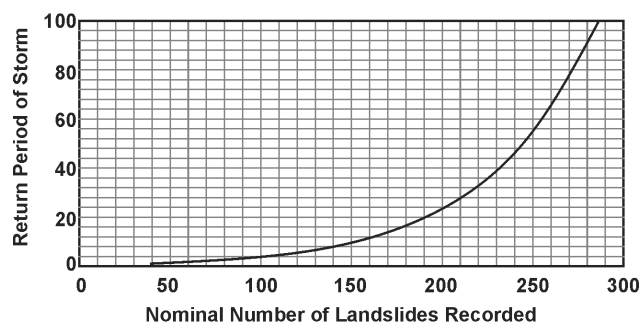


Figure 9. The relationship between landslides occurrence and landslide generating rainfall at Tembagapura.

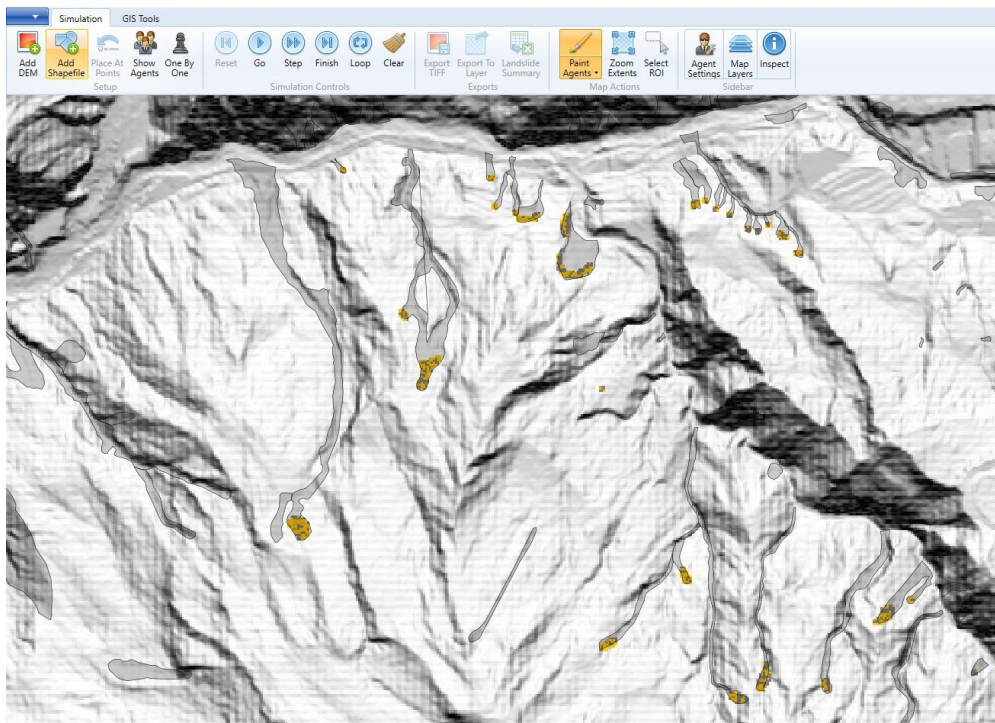


Figure 10. Landslide initiation zones painted (yellow) at the estimated source of mapped debris flows (darker line work) in LABS.

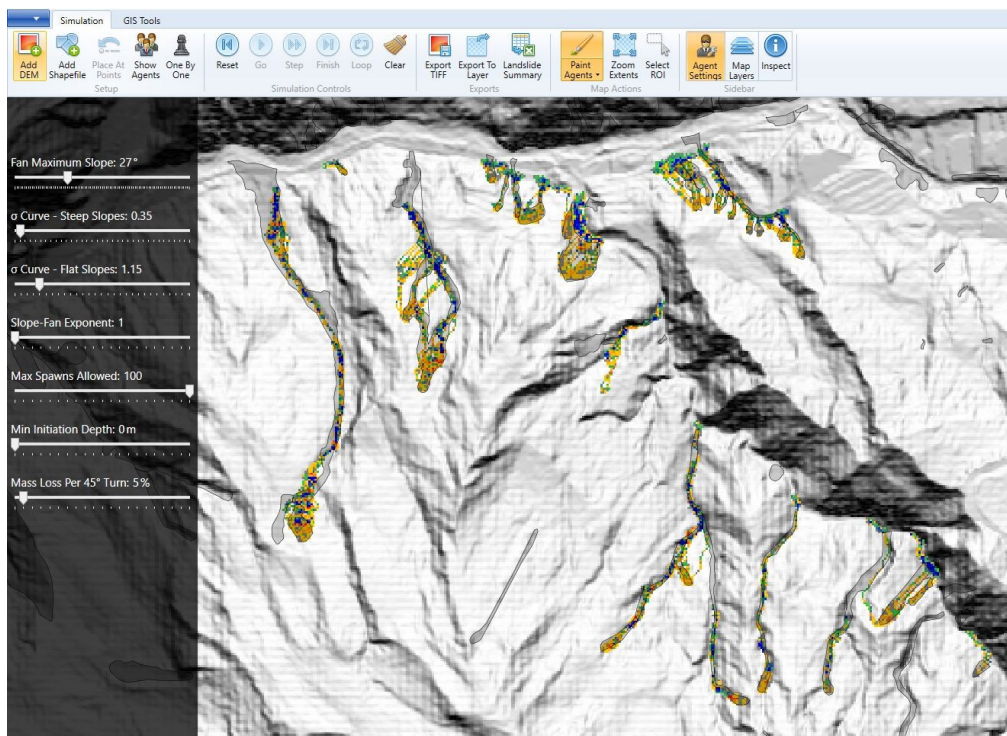


Figure 11. A single run of the landslides whose initiation zones were painted in Figure 10 above. Colors relate to scour (yellow to red where red is deeper) and deposition (green to blue where blue is deeper)

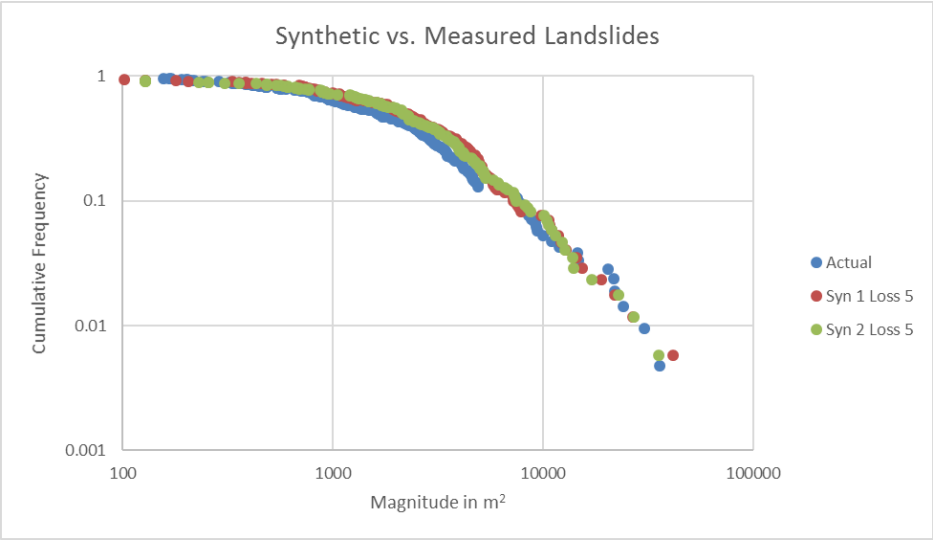


Figure 12. Cumulative magnitude frequency comparison between mapped and modeled landslides (two runs).

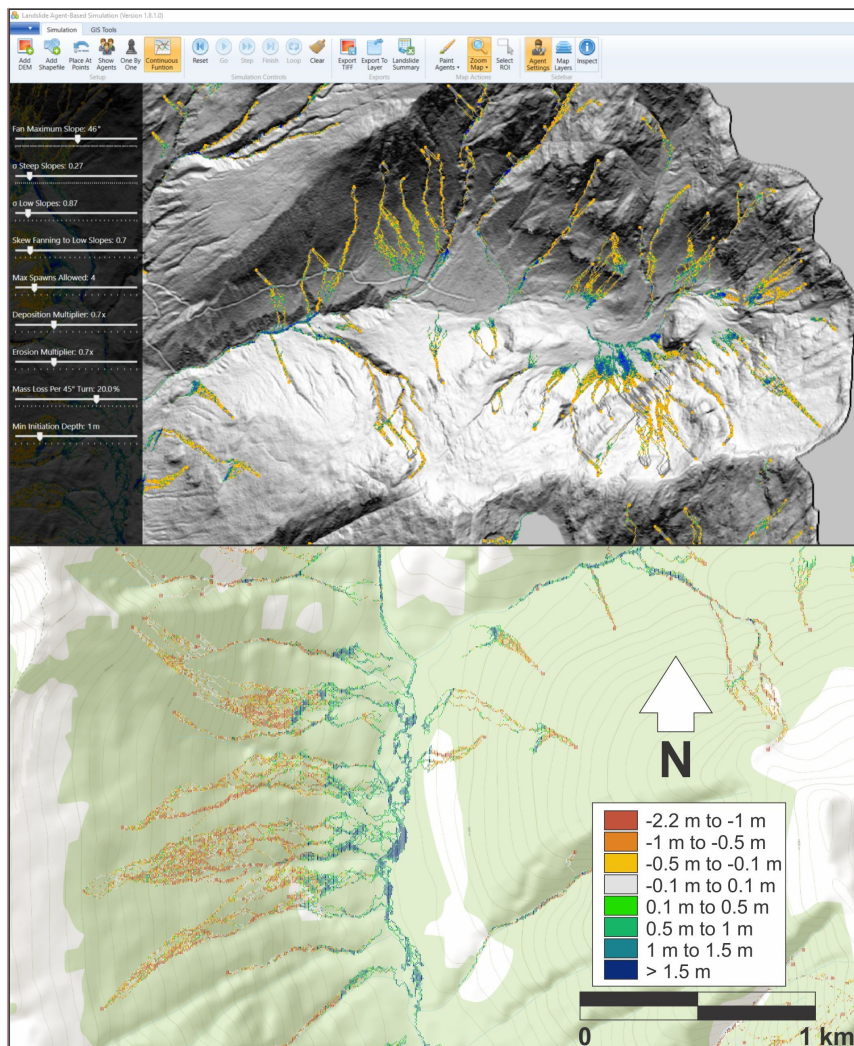


Figure 13. Landslides generated from susceptible slopes in LABS. Bottom figure shows depths along the landslide path.

Commented [GR4]: Updated figure

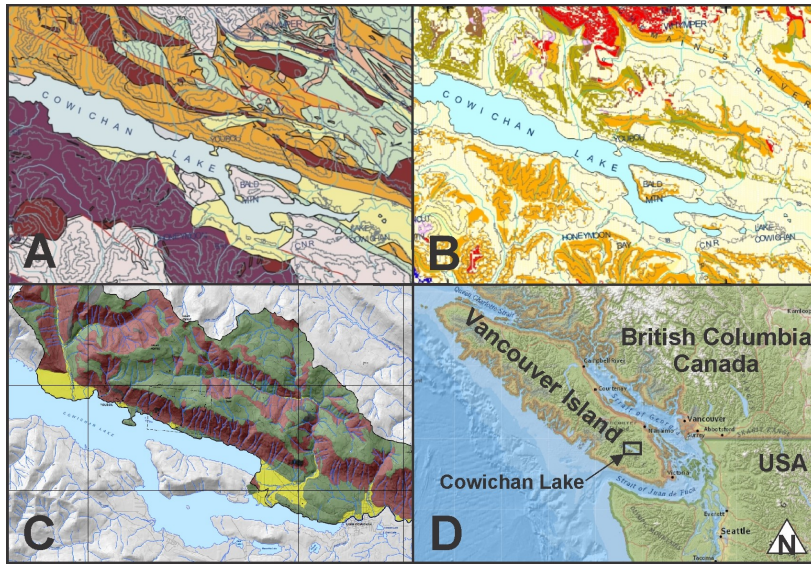


Figure 14. Cowichan Lake on Vancouver Island showing (A) Bedrock Geology and volcanics of the Sicker Group (orange), Bonanza Group (purple) and Karmutsen Formation (pink); (B) Mass movement potential ($0.004 \text{ landslides km}^{-2} \text{ yr}^{-1}$ for the orange zone, up to double that for the tan zone on the north side of the lake); (C) Surficial geology (colluvium, till, and fluvial gravels mapped as purple, green and yellow respectively); and (D) the overall location. Figure taken from Guthrie (2005a) (A) and (B) and Palmer (2018) (C).

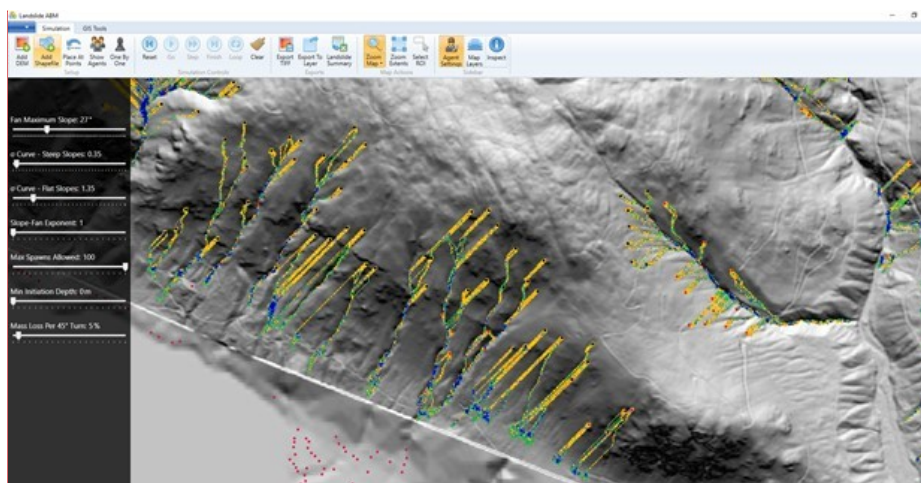


Figure 15. Test run of simulated landslides along the NorthShore of Lake Cowichan. Yellow represents scour, and green and blue represent deposition (blue is deeper).

Commented [GR5]: New figure

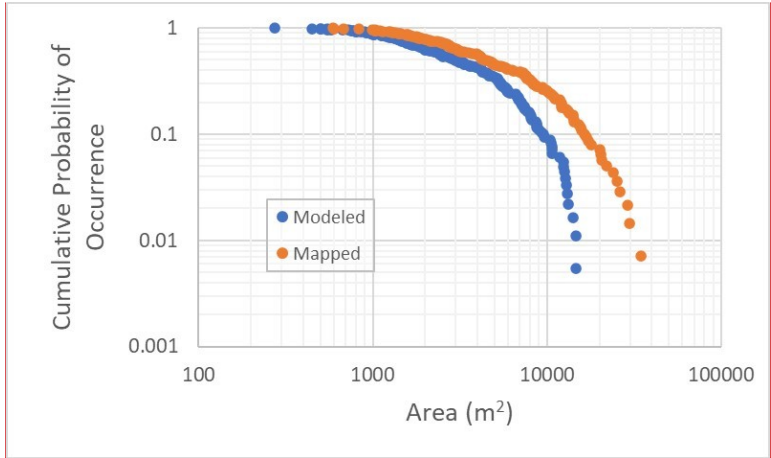


Figure 16. Magnitude-Frequency comparison between Modeled(blue) and Mapped (orange) landslides on the North Shore of Cowichan Lake, BC.

Commented [GR6]: Updated figure

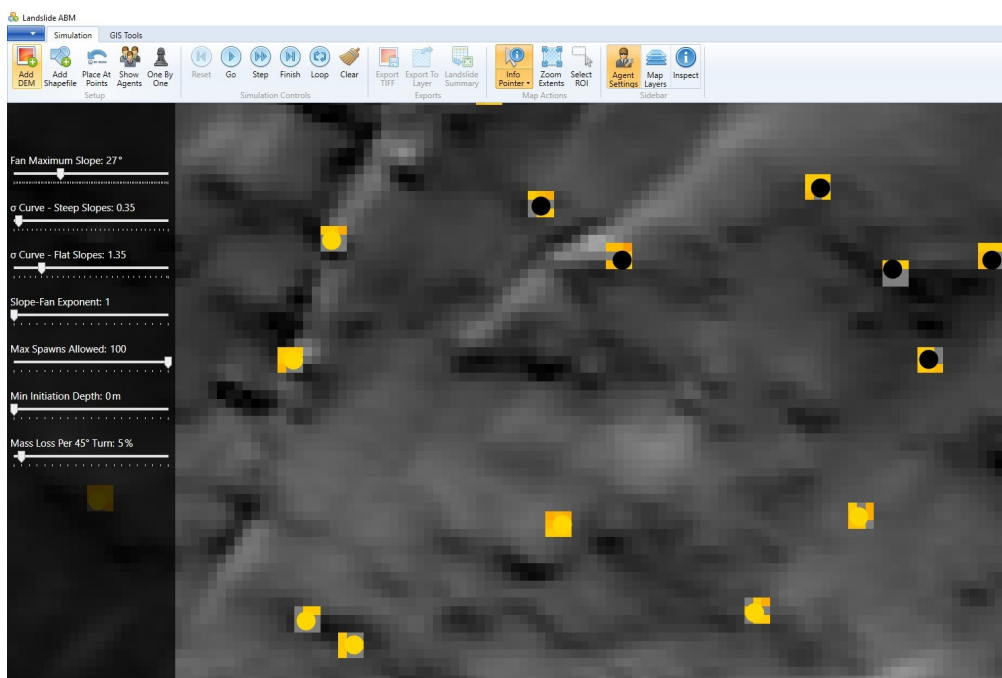


Figure 18. A close up view of landslide initiation points and the LABS generated 15 m x 15 m initiation zones. Each zone contains nine agents. The sliders on the left control agent behavior as explained in the Methods section.

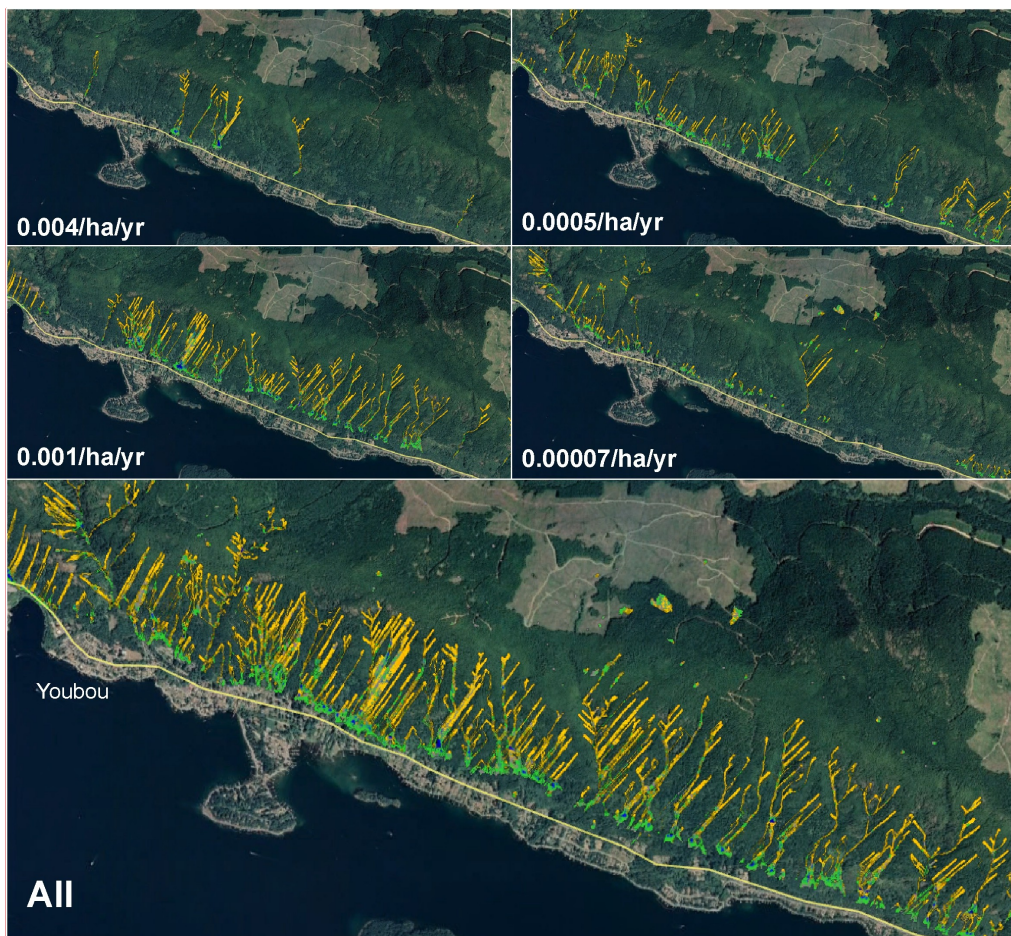


Figure 19. Modeled landslides along the north shore of Cowichan Lake from different hazard zones, and overall. Results can be imported into Google Earth, as shown here, for convenient visualization (background image is © Google Earth).

Commented [GR8]: Updated figure

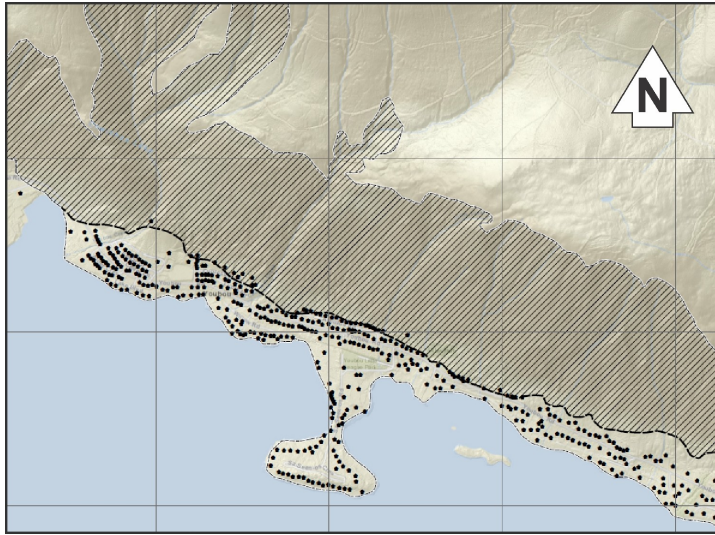


Figure 20. Modeled debris flow runout limit. Note that most of the 240 properties (black pentagons) are outside the modeled runout zone. Background image © ESRI World Topographic Map.

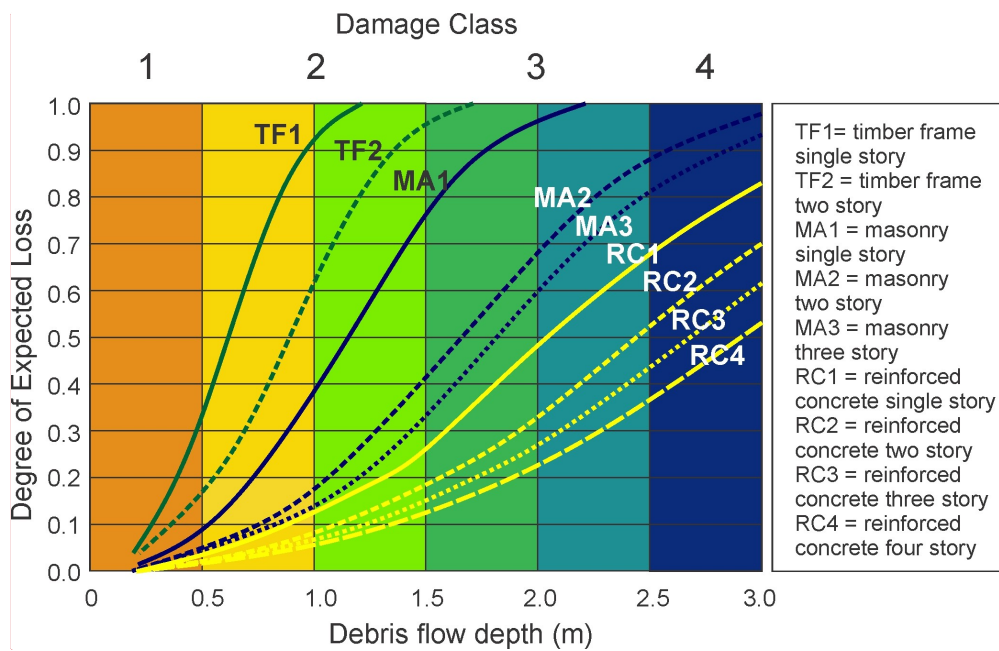


Figure 21. Vulnerability identified by degree of expected loss for constructed buildings by debris flow depth (Ciurean et al., 2017).

Commented [GR9]: Updated to match Fig 22

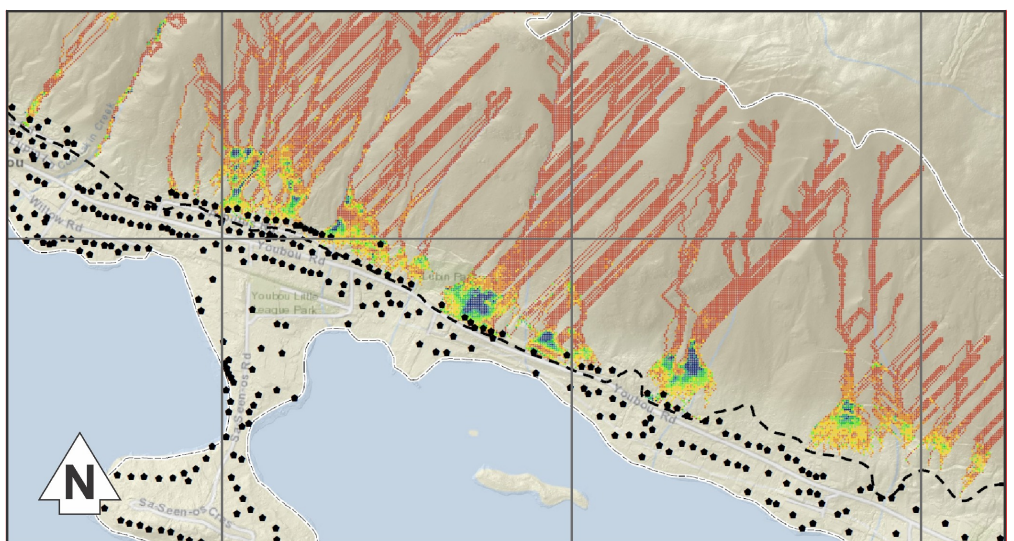


Figure 22. Damage map for the north shore of Cowichan Lake. The color classes match Figure 21. The darker brown represents scour and transport zones and construction is assumed unlikely. Background image © ESRI World Topographic Map.

Commented [GR10]: Updated figure

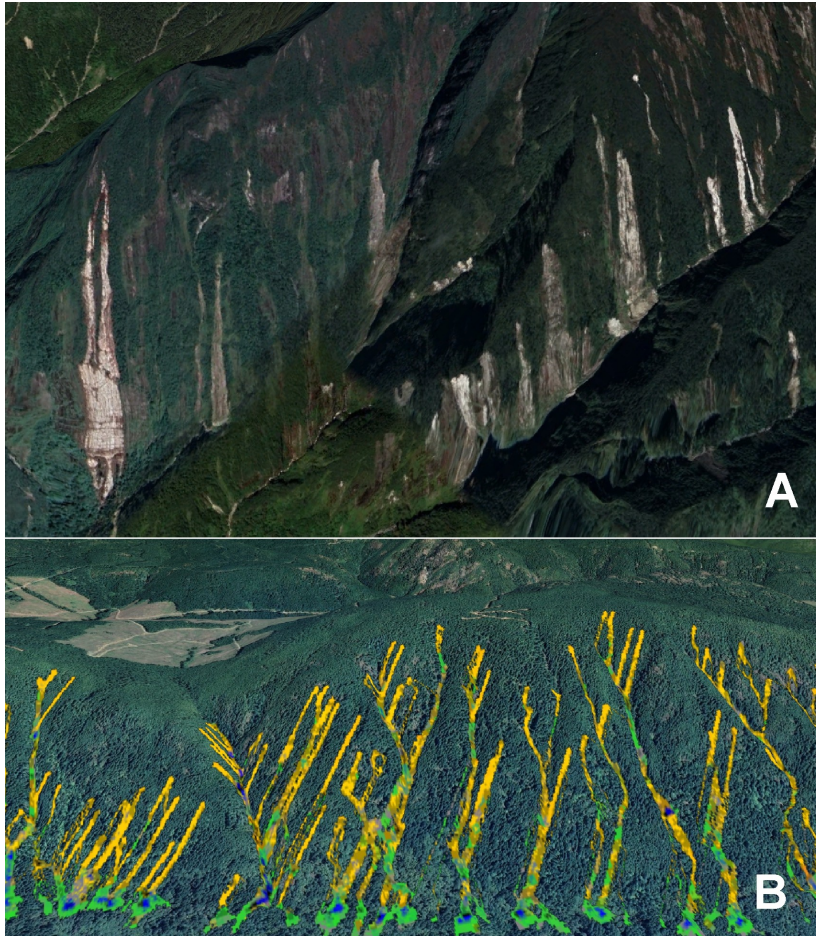


Figure 23. Strong linear orientation of landslide tracks on steep slopes in Indonesia (A) where multiple landslides occur at once, and on the North Shore of Cowichan Lake (B) where multiple landslides were modeled to occur at once (background images © Google Earth).

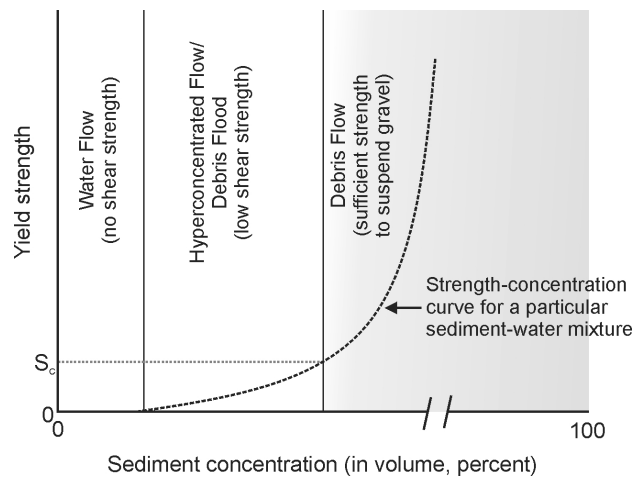


Figure 24. Debris flows as expected to be modeled by LABS (shaded area). S_c represents the critical shear strength beyond which gravel (4 mm or larger) is suspended. Figure modified slightly from Pierson (2005).

List of Tables

	1	Basic scour and deposition rules used in LABS. Data comes from Wise (1997); Guthrie et al. (2008, 2010)	44
	2	Areas and volumes from this study compared with historical studies of debris flow area volume relationships	46
5	3	Accumulated landslide generated sediment (in m ³) between known debris flood years	47
	4	Accumulated landslide generated sediment (in m ³) by return period of landslide generating storms.....	48
	5	Assigned debris flow damage classes.....	49

Table 1. Basic scour and deposition rules used in LABS. Data comes from Wise (1997); Guthrie et al. (2008, 2010)

Probability (P) of scour or deposition by slope bins			
Scour depth (m)	P	Deposition (m)	P
0° < 10°			
0	0.96	NA	NA
0.2	1	0.2	0.04
NA	NA	0.96	0.4
NA	NA	1.38	0.24
NA	NA	2.06	0.32
10° < 16°			
0	0.82	NA	NA
0.31	0.1	0.41	0.12
0.82	0.081	0.95	0.33
NA	NA	1.46	0.28
NA	NA	2.26	0.27
16° < 21°			
0	0.37	0	0.25
0.39	0.46	0.46	0.22
0.9	0.16	0.94	0.28
1.4	0.01	1.37	0.08
NA	NA	2.08	0.17
21° < 27°			
0	0.15	0	0.46
0.37	0.48	0.36	0.3
0.9	0.3	0.89	0.14
1.43	0.05	1.41	0.06
2	0.02	2	0.04
27° < 33°			
0	0.14	0	0.62
0.38	0.42	0.31	0.21
0.88	0.29	1	0.12
1.36	0.08	1.4	0.03
1.97	0.07	2	0.02
33° < 39°			
0	0.04	0	0.88
0.37	0.49	0.37	0.08
0.94	0.32	0.8	0.04
1.31	0.14	NA	NA
2	0.01	NA	NA
39° < 46°			
0	0.3	0	1
0.35	0.6	NA	NA
0.95	0.05	NA	NA
1.5	0.02	NA	NA
1.99	0.03	NA	NA
46° < 60°			

Continued on next page

<i>Table 1 continued</i>			
Probability (P) of scour or deposition by slope bins			
0	0.65	0	1
0.1	0.34	NA	NA
0.35	0.01	NA	NA
60'+			
0	0.96	0	1
0.1	0.04	NA	NA
-10° - < 0° (opposing slope)			
0	1	NA	NA
NA	NA	0.2	0.04
NA	NA	0.96	0.4
NA	NA	1.38	0.24
NA	NA	2.06	0.32
-33° - < -10° (opposing slope)			
0	1	NA	NA
NA	NA	0.96	0.04
NA	NA	1.38	0.4
NA	NA	2.06	0.24
NA	NA	3	0.32
< -33° (opposing slope)			
0	1	NA	NA
NA	NA	1.38	0.04
NA	NA	2.06	0.4
NA	NA	3	0.24
NA	NA	5	0.32

Table 2. Areas and volumes from this study compared with historical studies of debris flow area volume relationships

Equation	Min Area (m ²)	Max Area (m ²)	<i>n</i>	Source
Debris flows				
V=0.596A ^{1.02}	0.6 x 10 ¹	2.1 x 10 ³	930	Cha et al. (2018)
V=0.155A ^{1.09}	7 x 10 ²	1.2 x 10 ⁵	124	Guthrie and Evans (2004)
V=0.19A ^{1.19}	5 x 10 ¹	4 x 10 ³	11	Imaizumi et al. (2008)
V=0.39A ^{1.31}	1 x 10 ¹	3 x 10 ³	51	Imaizumi and Sidle (2007)
V=1.036A ^{0.88}	2 x 10 ²	5.2 x 10 ⁴	615	Martin et al. (2002)
V=0.048A ^{1.24}	2.5 x 10 ²	2.9 x 10 ⁵	353	Modeled, this study: Indonesia manually selected initiation zones
V=0.0681A ^{1.20}	2.5 x 10 ²	1.8 x 10 ⁵	797	Modeled, this study: Vancouver Island manually selected initiation zones
V=0.032A ^{1.28}	2.2 x 10 ²	5.1 x 10 ⁵	703	Modeled, this study: Vancouver Island randomly selected initiation zones

Table 3. Accumulated landslide generated sediment (in m³) between known debris flood years

Debris Flood Year	1998	2010	2013	2014	2016	2017
Sub-basin						
0	16,198	24,715	5,865	2,513	5,027	5,585
1	20,853	31,819	7,550	3,236	6,472	7,191
2	14,130	21,561	5,116	2,193	4,385	4,872
3	53,291	81,315	19,295	8,269	16,539	18,376
4	17,712	27,027	6,413	2,748	5,497	6,108
5	14,551	22,203	5,268	2,258	4,516	5,018
6	23,576	35,974	8,536	3,658	7,317	8,130
7	2,414	3,683	874	375	749	832
8	3,294	5,026	1,193	511	1,022	1,136
9	27,510	41,976	9,960	4,269	8,538	9,486
10	36,880	56,274	13,353	5,723	11,446	12,717
11	10,776	16,442	3,902	1,672	3,344	3,716
Total Watershed	241,185	368,015	87,325	37425	74,852	83,167

Table 4. Accumulated landslide generated sediment (in m³) by return period of landslide generating storms.

Storm Return (years)	Period	100	50	25	20	10	5
Sub-basin							
0		17,772	16,587	15,402	15,064	13,879	12,863
1		22,880	21,354	19,829	19,393	17,868	16,560
2		15,503	14,470	13,436	13,141	12,107	11,221
3		88,653	82,743	76,833	75,144	69,234	64,168
4		19,434	18,138	16,843	16,472	15,,177	14,066
5		15,965	14,901	13,836	13,532	12,468	11,556
6		25,868	24,143	22,419	21,926	20,201	18,723
7		2,649	2,472	2,295	2,245	2,068	1,917
8		3,614	3,373	3,132	3,063	2,822	2,616
9		30,183	28,171	26,159	25,584	23,572	21,847
10		40,464	37,767	35,069	34,298	31,601	29,288
11		11,823	11,035	10,246	10,021	9,233	8,558
Total Watershed		294,806	275,153	255,499	249,884	230,230	213,384

Table 5. Assigned debris flow damage classes

Damage Class	Description
0	Scour and transportation zones. Buildings assumed not present. Damage class 0 is blue on the Damage maps in Appendix B
1	Debris flow runout depth < 0.5 m
2	Debris flow depth generally between 0.5 and 1.5 m
3	Debris flow depth generally between 1.5 and 2.5 m
4	Debris flow depth generally > 2.5 m