

Authors' Reply

Dear reviewers,

Thank you for your time and effort in helping us improve the manuscript.

As suggested by the editor, we repeat the previously uploaded authors' comments (AC) with slight changes and upload the revised manuscript. A "track-change" version of the revised manuscript is also attached at the end of this document.

If you have not gone through the previous ACs, you can just read this document, in which we address all your questions and comments. Your original comments are repeated for your reference. Line numbers from the original manuscript (OM) and the revise manuscript (RM) are both provided.

Reply to Reviewer #1

<Reviewer's Comment #1>

The model is not calibrated. The authors selected a few constant values as the friction values at various locations in the models based on previous studies. Although the authors tried to justify this by saying “in favour of simplicity”, I am not convinced that a model without calibration will be of great value.

<Response>


We agree with the reviewer that it is not a good statement to say “The tuning of friction values is intentionally kept to minimum in favour of simplicity”. Calibration was indeed an important step during our model setup.

We remove the statement on Line 156-159 (OM) and add more details on calibration (Line 168, RM):

“The friction of the baseline model was tuned in the wet area (river, estuary, ocean; lower than 1 m, NAVD88) and on higher grounds (higher than 3 m, NAVD88) separately. In the wet area, drag coefficients within a range of 0.001-0.01 were tested. Commonly accepted default value of 0.0025 gave good error statistics near the landfall site; but the sensitivity is small in the range of 0.001-0.005.”

“In the watershed, drag coefficients within a range of 0.01-0.5 were tested. The optimal value was chosen based on the High Water Marks (HWMs) comparisons at 276 locations, collected by USGS. A small friction value within this range tended to under-predict the elevation at HWMs, and a large value led to over-prediction. Values within the range of 0.02-0.05 gave good error statistics. We chose 0.025 because it gave slightly better results in the Cape Fear River watershed near the landfall.”

“Note that this is the parameterization based on the region influenced by Hurricane Florence. Spatially varying parameterization of bottom friction for different systems is an on-going effort as we study more recent hurricanes and operationalize the model along the East Coast and Gulf Coast. However, as we presented in Ye et al. (2020), Zhang et al. (2020) and Huang et al. (2021), the choices described above seem to work fine in general for other systems as well.”

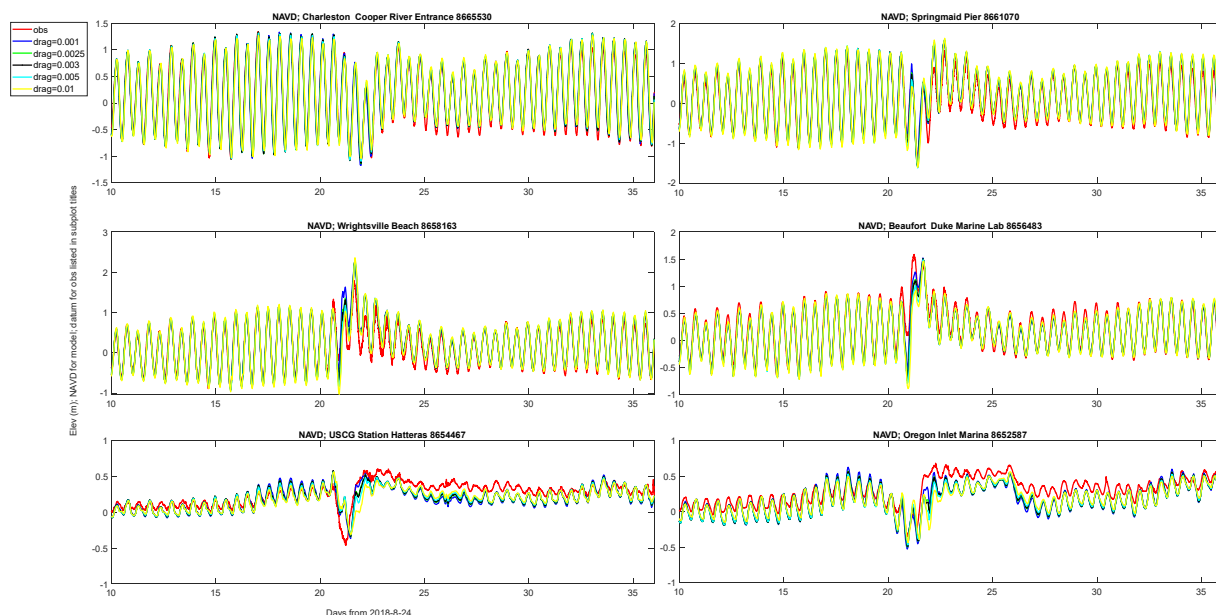

(The figure is for the reviewer’s reference)

<Reviewer’s Comment #2>

Is the NWM model calibrated?

<Response>

Yes, according to Gochis et al. (2018), “all USGS GAGES-II reference basins” and additional gages/basins are included in the calibration and validation; multiple evaluation criteria are applied with emphasis on bias reduction; then parameter sets are regionalized for the whole domain and re-validation.

We are NOT the developer of the National Water Model (NWM). In our model study, NWM is an external forcing just like HYCOM and ERA, which all have uncertainties but are the state-of-the art and the best products available to us. We are open to use any other hydrologic sources to drive our model.

To clarify this, we add the following text after Line 190 of the original manuscript (Line 232, RM):

“The forcing errors in the magnitude and timing of NWM’s peak flow should explain part of the model errors especially in the watershed. For example, we found that replacing the NWM streamflow with the gauged flow at USGS Station 02109500 (Waccamaw River at Freeland, NC) improves the model skill locally. However, this is not cost-effective for our goal of operationalizing this compound flood model along the US East Coast and Gulf Coast. The developers of NWM (Gochis et al., 2018) showed that NWM’s model skill was improved by each version update, with 44% of the gauges having bias < 20% in the latest version (NWM v2.0). We will adopt the newest and best NWM version in our ongoing study and operational forecast as soon as it is available. And we are open to using any other hydrologic sources to drive our model.”

<Reviewer's Comment #3>

With such detailed 3D modelling of such a large area, what the efficiency of the model is like? E.g. what is the computational time for a flood event lasting for a specific period of time (e.g.3 days)? What is the specs of the computing facility used?

<Response>

We add the information on computational cost (Line 164, OM; Line 186, RM) and in “Section 3. Model description” of the original manuscript:

“Although the model covers a large domain, most of the elements (those in the watersheds) are quasi-2D, making it efficient enough for operational forecast. For the baseline run, the real time to simulation time ratio is 80 with 1440 cores on TACC's Stampede2 cluster and 30 with 480 cores on W&M's SciClone cluster. Intel Skylake cores with a nominal clock speed of 2.1 GHz were used on both clusters. This means a 3-day simulation (typical forecast duration) will take about 0.9 hours using 1440 cores or 2.4 hours using 480 cores.”

<Reviewer's Comment #4>

The authors reported the average MAE. But often it is the peak error that is important. What is the peak error, when and where did it occur? What is the potential impact of this peak error?

<Response>

Revised as suggested. The revised manuscript reads:

(Line 253, OM; Line 307, RM) “The peak errors at different stations occur around the storm surge, with a maximum over-prediction of 0.64 m at Spring maid Pier, SC. The overpredicted peak surge can lead to overpredictions in elevation on coastal high water marks (HWMs). In addition, there is a maximum under-prediction of 0.66 m for the set down at Hatteras, NC, mainly due to the mismatch in the set down timing. The uncertainties in wind forcing may be the main cause of the error, which is predominantly from subtidal signals. The grid quality near the barrier islands may also contribute to the error.”

...

(Line 274, OM; Line 337, RM) “There is a slight positive bias on near-shore HWMs (Fig. 11), corresponding to the over-prediction of peak elevation at coastal stations (Fig. 9).”

...

(Line 371, OM; Line 450, RM) “Note that the ocean dominance near Wrightsville Beach, NC (NOAA Station 8658163) and Springmaid Pier, SC (NOAA Station 8661070) may be exaggerated, considering the overestimated peak elevation there (Fig. 9).”

<Reviewer's Comment #5>

Figure 11: The figure shows modelling errors of up to +/-4 meters at various locations. Do the authors have an explanation on the large errors at these locations (apart from just saying calibration can improve model

performance)? - The authors did a good job explaining model performance in relation to grid resolution. A similar explanation here will be good.

<Response>

In short, the few large errors are likely the result of similarly **under-resolved bathymetric/topographic features** or the **neglect of drainage system in the urban area**, with minor contributions from other factors such as the uncertainties in the NWM prediction and DEM. We add more explanations into the revised manuscript:

[Line 184, OM; Line 221, RM]: “As another model limitation, the drainage in urban settings is not included in our model. This may have led to some occasional big errors in the predicted elevation on high water marks, for example the one large error in the urban area in Fig. 13d. We do have a plan of explicitly accounting for infiltration and drainage as volume sinks based on NWM (or other hydrologic models). However, considering the additional uncertainty this would bring, for now we choose to continue improving more important aspects of the model for operational use; the focus is on the quality of model grid, which is very likely responsible for most of the existing large errors.”

...

[Line 293, OM; Line 357, RM]: “Our tests show that the simulated elevation on the High Water Marks (HWMs) in the watershed is sensitive to: grid resolution, precipitation, river inputs through the land boundary, and bottom friction. Grid resolution and quality is the most important factor, as explained in the last paragraph of Section 4.3. Misrepresenting flood pathways can easily lead to errors of a few meters near some very localized features like ditches, highways etc. ... The defects in grid quality can lead to large errors that are not likely to be rectified by tuning other parameters. To fix the remaining few large errors away from the landfall site, grid quality should be examined first. The continuous improvement on this model grid is part of an ongoing effort of operationalizing the model along the US East Coast and Gulf Coast, and we will report this in future studies. ... Afterwards, the inclusion of urban drainage should reduce the occasional large errors there (Fig. 13d). Other factors such as uncertainties in DEM, precipitation and the river flow through land boundary also play minor roles.”

...

[Line 300-302, OM; Line 364, RM] The only remaining large error in the “baseline” occurs in an urban area away from the river, likely due to the building or drainage effects that have not been incorporated in the model (Fig. 13d).

<Reviewer’s Comment #6>

What is the return period of flooding at various locations during this event? A comparison on the return period for floods caused with or without compounding effect will give readers a clearer picture of the impact of the compound effect.

We agree with reviewer that a clearer picture of the impact of the compound effect is needed here. US Geological Survey (USGS) provides return period (or annual exceedance probability) of streamflow at selected gages (Feaster et al. 2018). However, many of these gages are at upstream locations of the modeled watershed. On one hand, they are not much affected by the ocean; on the other hand, these streams will be nearly dry without the NWM streamflow injected at the land boundary, making the interpretation of compound effects difficult.

So, we would like to propose an alternative with a more direct measure on the elevation, serving the same purpose of clarifying the compound effect. We propose to calculate the “percent inundated area” or “average inundation depth” inside the North Carolina and South Carolina watersheds and compare this index between the baseline and each sensitivity test.

In the revised manuscript, we added the following text and table on Line 388:

“As an overview, the conditions of maximum inundation extent from all scenarios are listed in Table 2. To facilitate the comparison of inundated area, a practical value (1 foot) on the same order of the mean inundation depth is used as a threshold. For the two indices shown in Table 2, the baseline values are always larger than those from a single sensitivity test. This confirms the existence of compound regions in the two states (North Carolina and South Carolina) during the hurricane. More details of each forcing’s effect and the compound effects are discussed below.”

Table 2: Overview of the maximum inundation extent in South Carolina and North Carolina watersheds (above the NAVD88 datum) during the simulation period.

Name	Percentage of inundated area with water depth > 0.305 m (1 foot)	Spatially average inundation depth (m)
Baseline	46.7%	0.61
Ocean	12.7%	0.12
River	17.4%	0.31
Rain	34.4%	0.36

<Reviewer’s Comment #7>

Please see comments on Figure 11.

<Response>

Fig. 14’s main purpose is to show the adverse effect of excluding NWM and precipitation. Fig.14 shows more large errors (under-prediction, blue) than in Fig. 11 (baseline), because Fig.14’s has no stream flow from NWM or direct precipitation.

We add more explanations in the 2nd paragraph of Section 5 to convey the idea more clearly:

“Not surprisingly, without rivers and precipitation, watershed is mostly dry as the storm surge cannot propagate over steep terrains (Fig. 12). As a result, the predicted HWMs are biased too low (Fig. 14) as the steep topography quickly damped out any surges brought in by the ocean. *This leads to systematically underpredictions in the watershed and a 64% increase in MAE compared to the baseline (Fig. 11). ... Note that there is no apparent deterioration of model skill on the near-shore HWMs, because those locations are predominately affected by oceanic processes.*”

<Reviewer’s Minor Comment #1>


Figure 15. I understand this figure is used to show the impact from different compound flood driver. It is difficult to interpret the results. The caption can include some accompany text on how the figure can be interpreted (what the proportion values imply).

<Response>

Following the reviewer’s suggestion, we change Fig 15’s caption to:

Fig. 15. Regional map showing the spatially varying importance of each forcing factor: (a) ocean force (“Ocean” in Table 1); (b) river force (“NWM” in Table 1); and (c) precipitation (“Rain” in Table 1). The value is the proportion of a factor’s individual “disturbance” (see definition in Section 5) to the sum of the disturbance from all factors. The colors from blue to red represent increasing importance of a factor at a specific location.

We also add texts to the labels inside the figure:

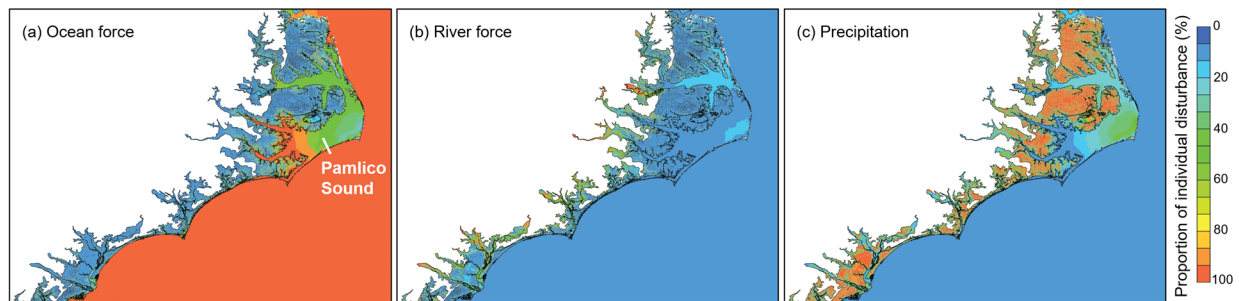

<References>

Feaster, T.D., Weaver, J.C., Gotvald, A.J. and Kolb, K.R., 2018. Preliminary peak stage and streamflow data for selected US Geological Survey streamgaging stations in North and South Carolina for flooding following Hurricane Florence, September 2018 (No. 2018-1172). US Geological Survey.

Huang, W., Ye, F., Zhang, Y.J., Park, K., Du, J., Moghimi, S., Myers, E., Pe’eri, S., Calzada, J.R., Yu, H.C. and Nunez, K., 2021. Compounding factors for extreme flooding around Galveston Bay during Hurricane Harvey. *Ocean Modelling*, 158, p.101735.

Gochis, D.J., Cosgrove, B., Dugger, A.L., Karsten, L., Sampson, K.M., McCreight, J.L., Flowers, T., Clark, E.P., Vukicevic, T., Salas, F. and FitzGerald, K., 2018, December. Multi-variate evaluation of the NOAA National Water Model. In *AGU Fall Meeting Abstracts* (Vol. 2018, pp. H33G-01).

Ye, F., Zhang, Y.J., Yu, H., Sun, W., Moghimi, S., Myers, E., Nunez, K., Zhang, R., Wang, H.V., Roland, A. and Martins, K., 2020. Simulating storm surge and compound flooding events with a creek-to-ocean model: Importance of baroclinic effects. *Ocean Modelling*, 145, p.101526.

Zhang, Y.J., Ye, F., Yu, H., Sun, W., Moghimi, S., Myers, E., Nunez, K., Zhang, R., Wang, H., Roland, A. and Du, J., 2020. Simulating compound flooding events in a hurricane. *Ocean Dynamics*, 70(5), pp.621-640.

End of Reply to Reviewer #1

Reply to Reviewer #2

<Reviewer’s Comment #1>


The authors suggest that a 3D baroclinic model is necessary to accurately capture the water level response. However, I suspect that utilizing such a complex model (plus the very large mesh size) would require a very large computational expense. The authors do not present results from using a more simplified approach (2D depth-averaged for example), so we don’t know whether the additional complexity is actually needed to capture the water level response. The manuscript would benefit from some discussion about the trade offs between model complexity and computational burden, as well as some details about how long each simulation takes to run.

<Response>

We agree with the reviewer and add more texts (before Line 50, OM; Line 49, RM)

“The trade-off between 2D and 3D was carefully weighed with the goal of operationalization in mind before the latter was chosen. In short, the advantage of 2D is the speed (about 80 times faster than its 3D baroclinic counterpart) and the simplicity of the set up; the disadvantage is that it misses baroclinic effects and 3D processes that may become important at certain times and locations. For example, the baroclinic effects during the adjustment phase after Hurricane Irene (2011) are discussed in detail in Ye et al. (2020), using a similar model setup as the one used here. Even though different setups (2D, 3D barotropic, and 3D baroclinic) were tuned to their best possible skills, the 3D baroclinic setup was shown to better capture the total elevation during the post-storm adjustment phase. In addition, during the ongoing effort to operationalize the model, we found that including 3D processes greatly simplified the bottom friction parameterization at some coastal locations (e.g., NOAA Station 8447930 at Woods Hole, MA; Huang et al., submitted). A 3D model can also produce relevant 3D variables (e.g., 3D velocity and tracer concentration) that are important for safe navigation and ecosystem health. The 3D model presented in this paper is efficient enough for operational forecasts (see Section 3.1), which are being set up at NOAA (National Oceanic and Atmospheric Administration).”

The figure below shows the model-data comparison for 2D and 3D with a similar model setup as the current paper. Although it is possible to improve the 2D skill by locally tuning bottom friction, the 3D model achieved good skill without any local tuning. The momentum budget around this location shows that the baroclinic pressure gradient is comparable to the barotropic pressure gradient.

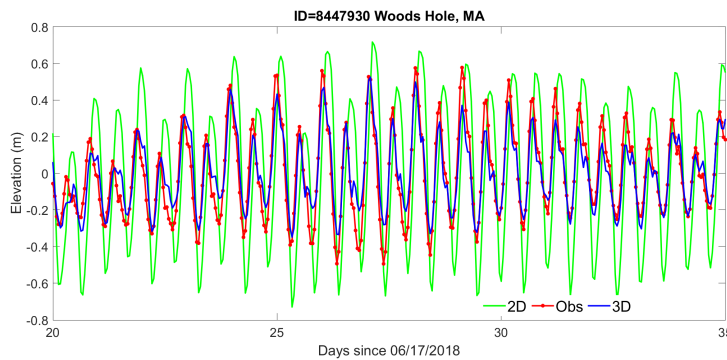

We also add the information on computational cost at the end of “Section 3.1 Model setups”:

“Although the model covers a large domain, most of the elements (those in the watersheds) are quasi-2D, making it efficient enough for operational forecast. For the baseline run, the real time to simulation time ratio is 80 with 1440 cores on TACC’s Stampede2 cluster and 30 with 480 cores on W&M’s Sciclone cluster. Intel Skylake cores with a nominal clock speed of 2.1 GHz were used on both clusters. A 3-day (typical forecast duration) simulation will take about 0.9 hours using 1440 cores or 2.4 hours using 480 cores.”

<Reviewer’s Comment #2>

In my experience, the NCEI CUDEM does not capture the bathymetry of coastal streams well, and tends to significantly underestimate the channel depth. Did the authors make any corrections/modifications to the raw DEM to better represent coastal streams?

<Response>

No, we did not do any modifications on the NCEI CUDEM. We also noticed some underestimation of channel depth, especially in the South Carolina watersheds, which may have contributed to the errors on HWMs in Fig. 11c.

Our collaborators at NOAA (including those in the author list) is working on introducing improved DEMs to our model, including some DEMs not yet open to the public. Sometimes we manually correct DEMs to make channels continuous based on navigation charts, imagery, and our best judgement; but we have not done so in the current study.

We add this information on Line 137 of the original manuscript (Line 148, RM), so that the revised manuscript reads:

“Customary of all SCHISM applications, no manipulation or smoothing of bathymetry was done in the computational grid after interpolation of the depths from DEMs (including steep slopes in the Caribbean and all shipping channels). *From our experience, CUDEM may underestimate the depth of coastal streams (e.g., in the South Carolina watersheds), which is a potential error source of our model.*”

<Reviewer’s Comment #3>

There is no mention of infiltration in this manuscript, which is an important factor controlling the pluvial flood dynamics. Did the authors completely neglect infiltration in this work? And if so, there should be some discussion/justification about why infiltration was not accounted for. Since much of the underlying soil in the NC region is sand, I expect infiltration losses would be non-negligible and neglecting infiltration could cause over-estimation of the rainfall-induced flooding.

<Response>

Yes, we neglected infiltration in this work. We agree that infiltration may be an important process. But in the case of Hurricane Florence induced flooding, we expect the effect of infiltration to be minor.

The revised manuscript reads:

[Line 184, OM; Line 215, RM] As a model limitation, infiltration is neglected in this work. In the case of Hurricane Florence induced flooding, we expect the effect of infiltration to be minor. According to NOAA’s

weather map (<https://www.wpc.ncep.noaa.gov/dailywxmap/>), there was continuous rainfall along the US east coast from Sep 11, 2018 to the date of Florence’s landfall (Sep 14, 2018), so the infiltration capacity of the soil was already reduced. Moreover, “wet” storms like Hurricane Florence (2018) and Hurricane Harvey (2017) tend to dump large amount of rain fall at a location for days because of the slow movement of the storm, so most of the rainfall is on saturated soil. As another model limitation, the drainage in urban settings is not included in our model. This may have led to some occasional big errors in the predicted elevation on high water marks, for example the one large error in the urban area in Fig. 13d. We do have a plan of explicitly accounting for infiltration and drainage as volume sinks based on NWM (or other hydrologic models). However, considering the additional uncertainty this would bring, for now we choose to continue improving more important aspects of the model for operational use; the focus is on the quality of model grid, which is very likely responsible for most of the existing large errors.

< Reviewer’s Specific Comment #1>

Line 106: What is meant by “bona fide” in this context? Please clarify.

<Response>

We delete these two words and clearly identify the merit of the current model (Line 106, OM; Line 114, RM):


As we shall see, this model solves the physical processes from the watershed to the ocean with the same set of governing equations, qualifying for Santiago-Collazo et al. (2019)’s definition of a fully-coupled compound surge and flood model.

< Reviewer’s Specific Comment #2>

Figure 3: I am a bit confused by figures 3b and 3c. The box showing the location of figure 3c indicates that 3c is north of Albermale Sound. However, when I look at Figure 3c it appears to be depicting the Cape Fear River Estuary, which is at the southern tip of NC. Please confirm/update the actual location of Fig 3c.

<Response>

Thanks for pointing this out. We have corrected the location of Fig. 3c:

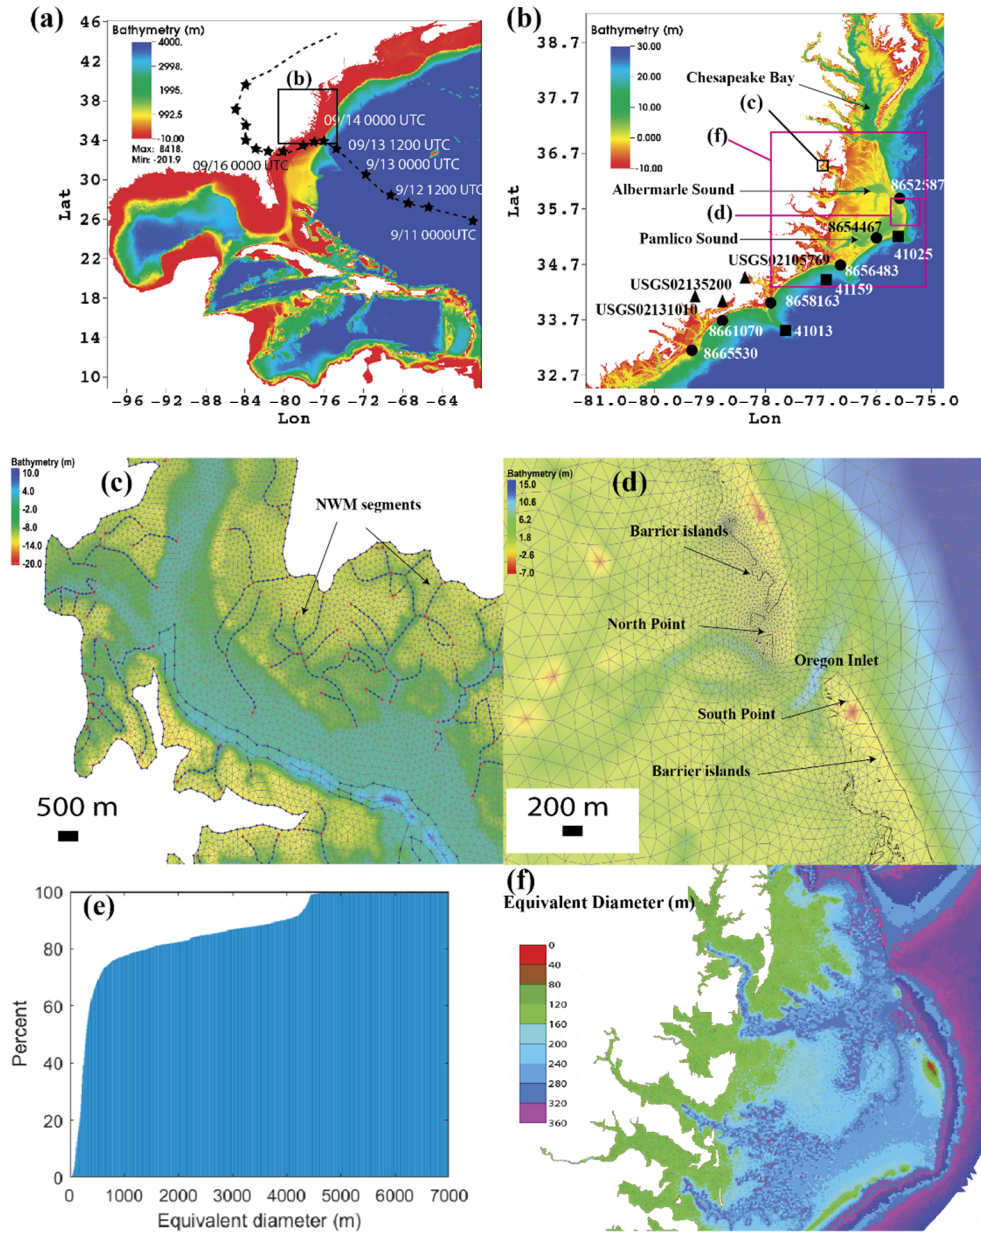

< Reviewer’s Specific Comment #3>

Table 1: The difference between the No_NWM_precip and Ocean scenario is not clear to me. It seems they both do not include river or precip forcing?

<Response>

“No_NWM_precip” and “Ocean scenario” are identical. We only use “Ocean scenario” in the revised manuscript. Thanks for catching this issue.

< Reviewer’s Specific Comment #4>

Fig 9: It is difficult to distinguish the differences between the model runs, especially for figures 9a-d. I suggest the authors shorten the depicted time window to only show 1-2 days before landfall through 4-5 days after landfall for a-d. This will allow a reader to see more clearly the differences between the scenarios and the comparison to the observed water levels.

<Response>

To improve Fig. 9, we shorten the time window, change the line style of the “Baseline_Wave”, and also add sub-tidal comparisons:

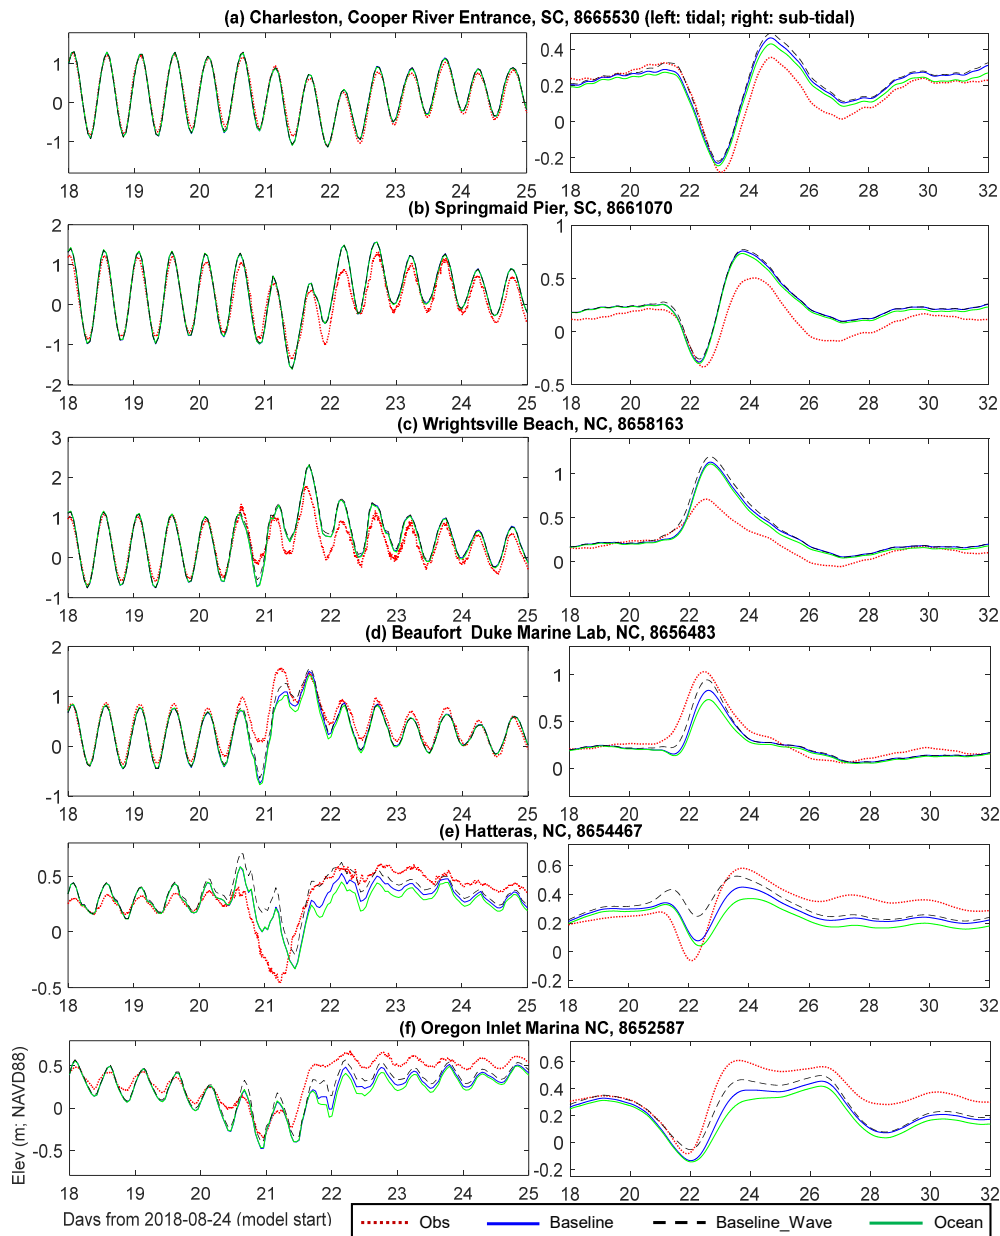


Fig. 9: Comparison of elevation at six NOAA gauges: (left) total elevation; (right) subtidal elevation. Also included are results from two sensitivity runs (“Baseline_Wave” and “No_NWM_precipOcean”; cf. Table 1). The stations in (a)-(d) are exposed to the ocean, showing small differences among scenarios; the two

stations in (e) and (f) are on the land side of the barrier islands, showing larger differences between the “Baseline” and the “Ocean” scenario in the post-storm period. Note the plots have different y-axis ranges.

References

Huang, W., Zhang, Y.J., Wang, Z., Ye, F., Moghimi, S., Myers, E., Peeri, S., Yu, H.C.: Tide simulation revisited. Submitted to Ocean Modeling in April, 2021.

End of Reply to Reviewer #2

Reply to Reviewer #3

<Reviewer's general comment>

To me the novel aspect of this work is having very much detailed representation of hydrology (via NWM based on WRF), river morphology and coastal ocean dynamics (via a 3D baroclinic model). The manuscript is well written and can be of interest of community, thus I suggest publication in NHESS, however after a major revision. The major issue to me is that, despite the efforts of authors to calibrate/validate their model, on the hydrologic fluvial side the model does not seem well calibrated, and the significant error in NWM prediction (both timing and magnitude of peak) can pose a significant error to the overall estimates. Also, not clear to me how the pluvial flooding processes (from direct rainfall) is treated here. More detailed comments below.

<Response to general comment>

We need to clarify a possible misunderstanding on our model, because some descriptions in the original manuscript (OM) may be misleading. NWM (based on WRF-Hydro) is only used as a boundary condition like HYCOM and ERA, which all have uncertainties but are the state-of-the-art. We are not the developers of NWM, so the quality of NWM prediction is out of our control. It is the best hydrologic products available to us for this regional-scale study; we are fully open to other hydrologic models. NWM segments inside the model domain are only used to guide mesh generation, because these segments correspond to thalwegs in the DEM.

The merit of this work is being an effort toward a fully coupled compound inland flood and ocean related surge model. Here “fully-coupled” means the model solves its included processes with the same set of governing equations (Santiago-Collazo et al., 2019). Specifically, we include enough watershed region in our model domain so that the interaction between pluvial/fluvial processes and estuarine/oceanic processes can be simulated directly, without the need for “coupling” or “linking” among different types of models.

In the watershed, the movement of water (including flood routing) is NOT based on a specific “routing method” (such as “cell-to-cell” or “source-to-sink”) as found in a tradition hydrologic model. The 1D Saint Venant equations or any of its approximated forms are NOT used at all. The hydrodynamic core of SCHISM, which solves the 3D Reynolds-averaged Navier–Stokes equation and transport equation, controls all water movements over land, in the rivers, estuaries and the ocean. The overland flow can occur anywhere in the model domain; there is no pre-defined stream segments as found in traditional hydrologic models that the flow must follow. This poses great challenge on the model's robustness and efficiency.

We removed the word “routing” throughout the manuscript.

We replaced the sentence on Line 134 of the OM:

“Watershed region of the grid has explicitly incorporated close to 300K NWM segments (“thalwegs”; cf. Fig. 3c), to facilitate the routing of river flow and precipitated water there.”

with (Line 144, RM)

“Moreover, to better capture the geometry/bathymetry of potential flood pathways in the watershed region, specifically the region between the 10-m contour (set as the land boundary) and the 0-m contour of the DEM (based on NAVD88), about 300K National Water Model (NWM) segments (i.e., thalwegs; Fig. 3c) are reproduced in SCHISM's horizontal grid. Note that only the geometry of the NWM segments is retained,

while NWM outputs are only used as the land boundary condition and NWM does not solve any hydrodynamics inside the model domain.”

We also added more details in “3.2 Coupling with NWM” (see responses to Reviewer’s Major Comment #1 and Reviewer’s Major Comment #2 below) to convey a clearer message on NWM’s role in our model.

<Reviewer’s Major Comment #1>

Hydrologic processes are not well represented here. River flow hydrograph estimates from NWM are significantly different than the observed flow at USGS gauges (see Figure 6). About 2-3 days of lag in peak flow estimation and up to 100% error in peak flow magnitude can pose a significant error in overall inundation and coastal water level dynamics if propagated through the system. Timing (and magnitude) of peak runoff plays a significant role in extreme water level dynamics in freshwater-influenced coastal systems and getting these hydrologic characteristics right plays a major role in accurate estimation of extent/intensity of compound flooding. This might partially explain the wide range of difference (up to 4 m) between simulated and estimated high water marks (Figure 11), with a considerable number of points having estimation error greater than 1m (Figure 11e).

<Response>

We agree with the reviewer that part of our model errors can be attributed to the errors from NWM. We add the following text after Line 188 of the original manuscript (Line 232, RM) to explain our choice:

“The forcing errors in the magnitude and timing of NWM’s peak flow should explain part of the model errors especially in the watershed. For example, we found that replacing the NWM streamflow with the gaged flow at USGS Station 02109500 (Waccamaw River at Freeland, NC) improves the model skill locally. However, this is not cost-effective for our goal of operationalizing this compound flood model along the US East Coast and Gulf Coast. The developers of NWM (Gochis et al., 2018) showed that NWM’s model skill was improved by each version update, with 44% of the gauges having bias < 20% in the latest version (NWM v2.0). We will adopt the newest and best NWM version in our ongoing study and operational forecast as soon as it is available. And we are open to using any other hydrologic sources to drive our model.”

<Reviewer’s Major Comment #2>

Could not find any information on how the pluvial processes are handled in the model. Rain-on grid modeling (L174) is a good contribution to the field which I acknowledge, but how the underlying processes and variables that contribute to the runoff generation are accounted for is vague. How infiltration capacity is accounted for? How drainage infrastructure contribution is accounted for (in urban settings)? How the generated runoff is routed between pixels? This is even more important when the results suggest that flooding in a significant portion of coastal land is dominated by "precipitation only"(Figure 15c).

<Response>

In the revised manuscript, we make it clear that all flow movements are solved by the same set of governing equations, i.e., Reynolds-averaged Navier–Stokes equations in hydrostatic form and transport equation.

And we clearly state that the neglect of infiltration and drainage is a limitation of the model and discuss the implications. We removed the original text on Line 171-173. The relevant texts in the revised manuscript read:

[Line 106, OM; Line 114, RM] This model solves the physical processes from the watershed to the ocean with the same set of governing equations, qualifying for Santiago-Collazo et al. (2019)'s definition of a fully-coupled compound surge and flood model. SCHISM (schism.wiki) uses efficient semi-implicit solvers to solve the hydrostatic form of the Reynolds-averaged Navier-Stokes equations and transport equation (Zhang et al., 2016), which govern all flow movements (including overland flow in the watersheds as well as estuarine and ocean circulations) inside the 3D model domain.

...

[Line 171-174, OM; Line 197, RM] Inside the model domain, streamflow, overland flow and precipitation are directly handled by the hydrodynamic core of SCHISM. This fully coupled configuration is rare in the existing compound flooding simulations (Santiago-Collazo et al., 2019). To ensure the accuracy and robustness of SCHISM in simulating hydrological and hydraulic processes including the overland flow, we already examined the model's performance in both lab-scale and field-scale tests in a previous study (Section 2.2 and 2.3 of Zhang et al. (2020)) and applied the model in the Delaware Bay watershed including the Delaware River with a hydraulic jump up to 40 meters above the NAVD88 datum (Fig. 14 in Zhang et al. (2020)). The NWM segments explicitly reproduced in our grid (Fig. 3c) during the mesh generation stage help capture the bathymetry of main flood pathways (thalwegs). However, flow is not restricted to these 1D segments"

...

[Line 184, OM; Line 215, RM] As a model limitation, infiltration is neglected in this work. In the case of Hurricane Florence induced flooding, we expect the effect of infiltration to be minor. According to NOAA's weather map (<https://www.wpc.ncep.noaa.gov/dailywxmap/>), there was continuous rainfall along the US east coast from Sep 11, 2018 to the date of Florence's landfall (Sep 14, 2018), so the infiltration capacity of the soil was already reduced. Moreover, "wet" storms like Hurricane Florence (2018) and Hurricane Harvey (2017) tend to dump large amount of rain fall at a location for days because of the slow movement of the storm, so most of the rainfall is on saturated soil. As another model limitation, the drainage in urban settings is not included in our model. This may lead to some occasional big errors in the prediction of elevations on high water marks for example the one large error in the urban area in Fig. 13d. We do have a plan of explicitly accounting for infiltration as volume sinks based on NWM (or other hydrologic models). However, considering the additional uncertainty this would bring, for now we choose to continue improving more important aspects of the model (especially the quality of model grid, which is likely responsible for most of the large errors in Fig. 11c) for operational use.

...

[Line 300-302, OM; Line 364, RM] The only remaining large error point in the "baseline" occurs in an urban area away from the river, likely due to the building or drainage effects that have not been incorporated in the model (Fig. 13d).

...

[Beginning of "Section 6: Conclusions"] We have successfully applied a 3D cross-scale model to examine the compound flooding processes that occurred during Hurricane Florence. The model is fully coupled in the sense that the hydrologic and hydrodynamic processes are solved by the same set of governing equations.


Limitations of the model include the neglect of infiltration and urban drainage, which will be implemented soon.

< Reviewer's Minor Comment #1 >

Figure 1: red text (in the left panels) is not readable in print. I'd also add some space between rows in the legend.

<Response>

Revised as suggested:

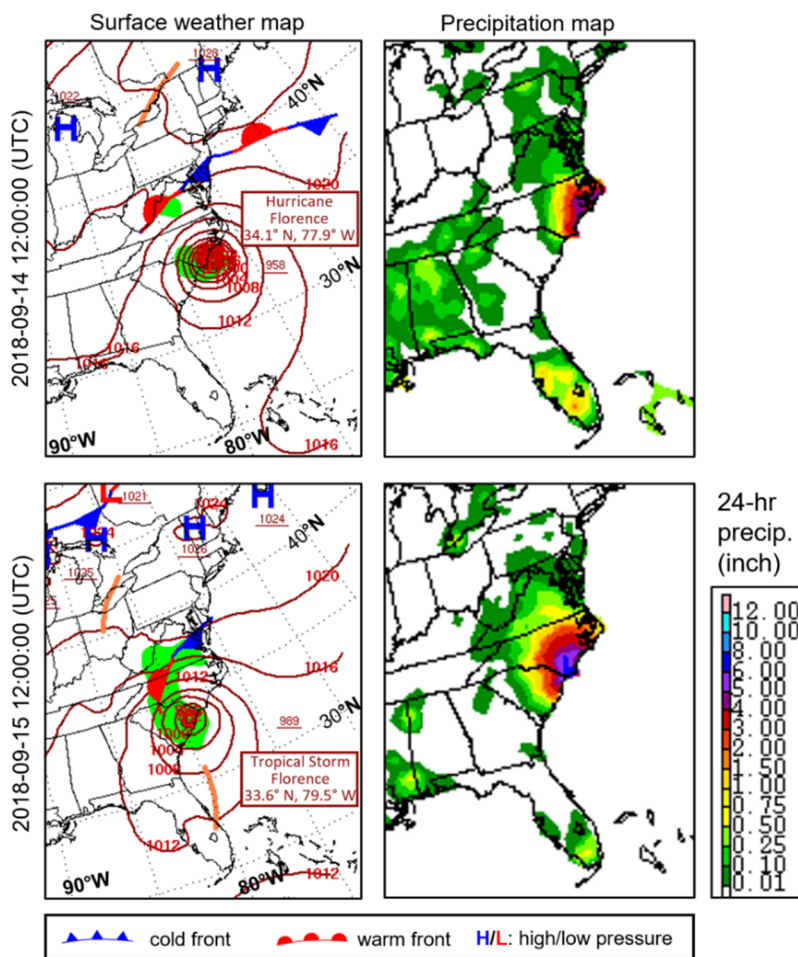

< Reviewer's Minor Comment #2 >

Figure 3: Black text is really hard to read on the dark blue background.

<Response>

Revised as suggested:

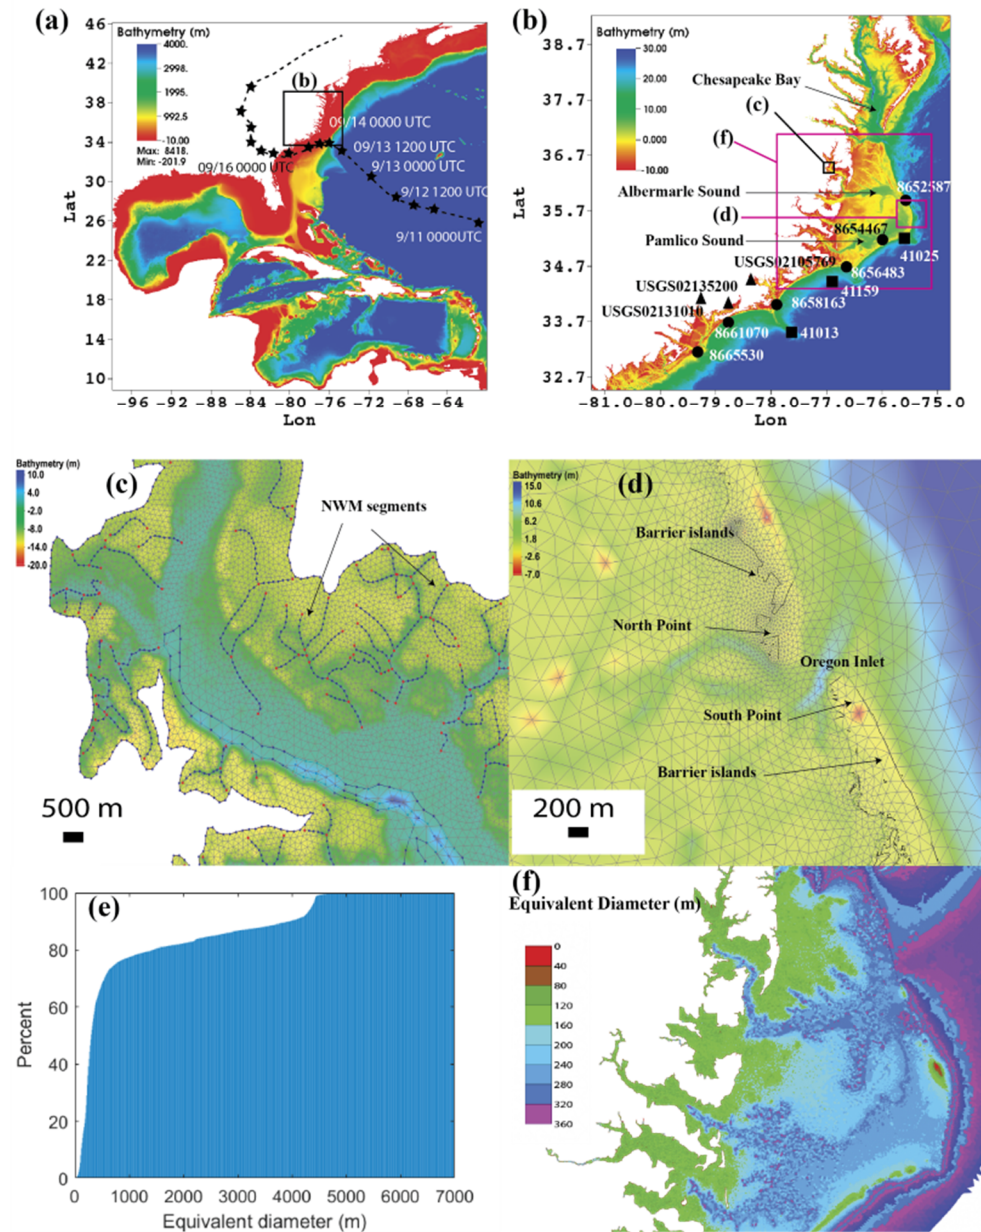


Fig. 3: Model domain and horizontal grid. (a) Domain extent and hurricane track. (b) Station locations along the North Carolina and South Carolina coast. The six NOAA gauges are: Charleston (8665530); Springmaid Pier (8661070); Wrightsville Beach (8658163); Beaufort (8656483); Hatteras (8654467); Oregon Inlet (8652587). The three squares are NDBC buoys (41013, 41159, 41025). The spatial extents of (c), (d), and (f) are also marked in (b). (c) Zoom-in of grid in a watershed area (the arcs are from NWM river network). (d) Zoom-in of grid near barrier islands and inlet (the dark line is the 0 m isobath, NAVD88); (e) Cumulative histogram of grid resolution (measured in equivalent diameters); (f) Grid resolution in North Carolina's coastal watershed area.

<Reviewer's Minor Comment #3>

Figure 4 is confusing. Hurricane track is numbered right-to-left (Panel a) and vertical grid points are numbered Left-to-Right (Panels b and c)

<Response>

Revised as suggested. The numbered points are removed and the transect is more clearly defined with along-transect distance marked in all subplots.

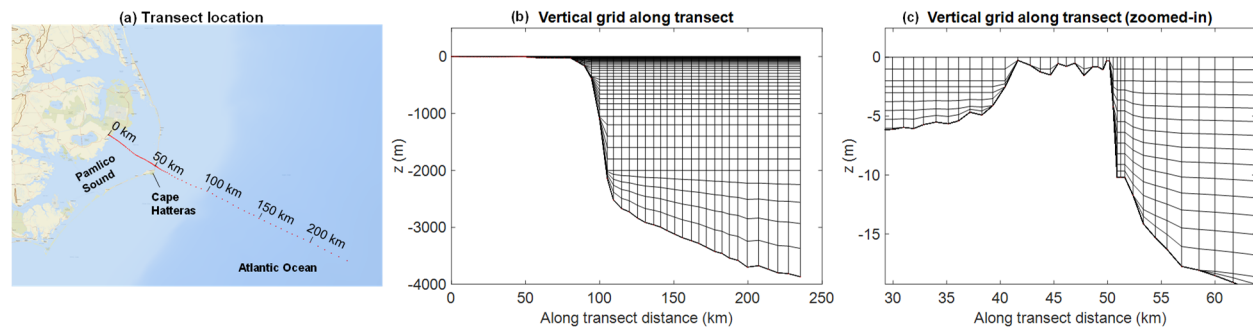


Fig. 4: Vertical grid. (a) Transect from the watershed to the ocean, used to illustrate the vertical grid; (b) vertical grid along the transect; (c) zoom-in from (b), illustrating the transitions from 3D (Pamlico Sound) to 2DH (barrier island) and back to 3D (coastal ocean).

<Reviewer's Minor Comment #4>

L110: what "LSC" stands for?

<Response>

We change this sentence to (Line 120, RM):

“... that combines a hybrid triangular-quadrangular unstructured grid in the horizontal dimension and localized sigma coordinates with shaved cells (dubbed as LSC2; Zhang et al., 2015) in the vertical dimension.”

<Reviewer's Minor Comment #5>

L120: "10 m above sea level", you mean mean sea level? if yes, is it regional or global. Please be more specific about this.

<Response>

(Line 79, RM) Changed to “10 m above the NAVD88 datum”.

<Reviewer's Minor Comment #6>

L133: what "CFL" stands for?

<Response>

(Line 143, RM) Changed to “Courant–Friedrichs–Lewy (CFL) condition”

<Reviewer’s Minor Comment #7>

L143: Explain what is HYCOM first time use it in the manuscript.

<Response>

(Line 157, RM) We use the term “Hybrid Coordinate Ocean Model (HYCOM; <https://www.hycom.org/>)” upon the first occurrence.

<Reviewer’s Minor Comment #8>

L174: Simply said rainfall is routed. Please, elaborate more on this, how exactly routed? How infiltration capacity incorporated?


Please see the response to <Reviewer’s Major Comment #2>.

<Reviewer’s Minor Comment #9>

L189: "4-6 days" in observed or modeled events? The modeled and simulated peaks seem to be few days apart them-selves.

<Response>

In the revised manuscript, we clearly labeled the date of the peaks in Fig. 6:

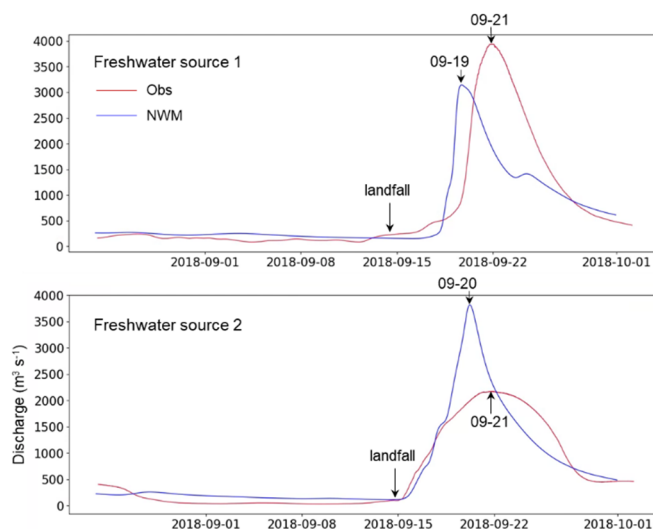

(Line 230, RM) We change the sentence to:

“The observation indicates the peak streamflow occurs about 7 days after the landfall, which is the time it takes for the rainfall induced flood to reach the coastal rivers. Note that there is typically a time lag of 1-2

days between the peak flow in NWM and the gaged flow (Fig. 6). The forcing errors in the magnitude and timing of NWM’s peak flow should explain part of the model errors especially in the watershed.”

<Reviewer’s Minor Comment #10>

Figure 9: Better to compare detided signal here. These gauges are extremely tidal influenced and estimation skills of the model for stochastic processes is diluted by highly predictable astronomic tides.

<Response>

We agree that de-tided signal will give a clearer picture of stochastic processes. We add new sub-plots on sub-tidal signals (see the figure below) to Fig. 9.

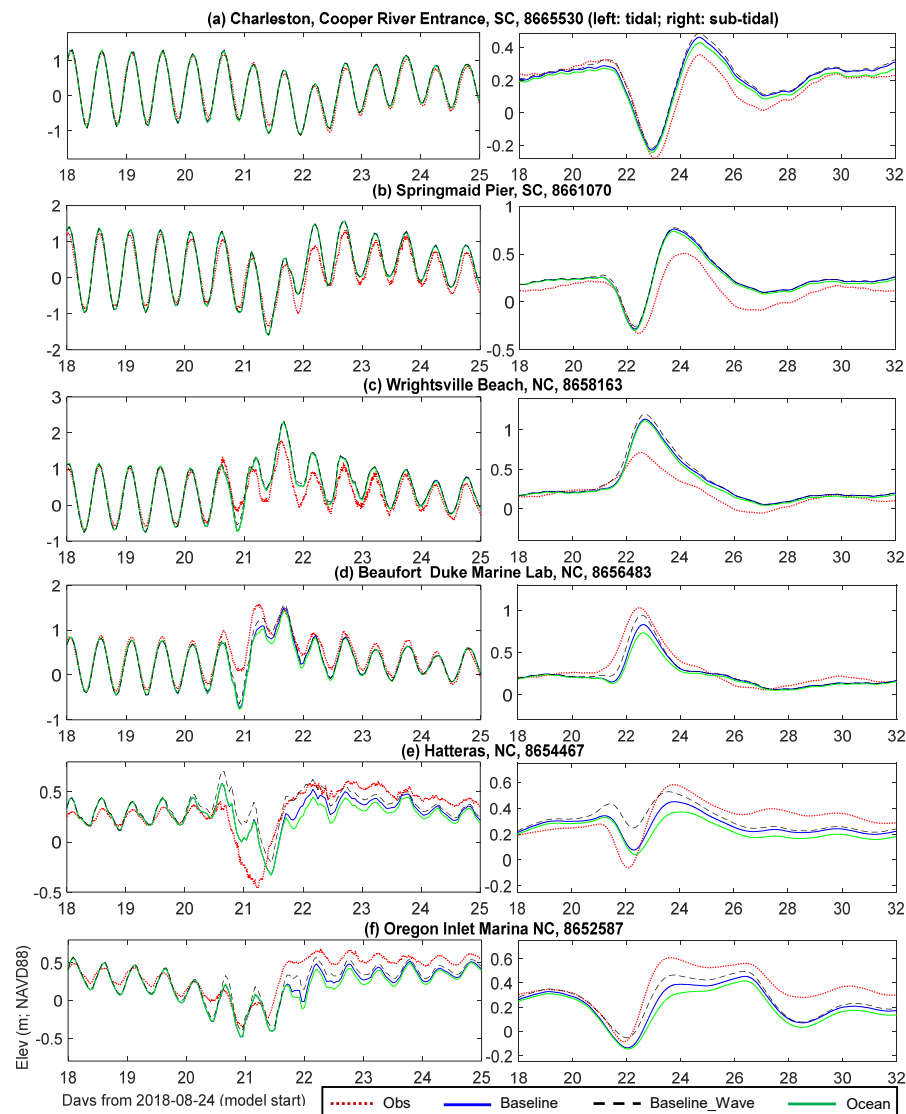


Fig. 9: Comparison of elevation at six NOAA gauges: (left) total elevation; (right) subtidal elevation. Also included are results from two sensitivity runs (“Baseline_Wave” and “No_NWM_precipOcean”; cf. Table 1). The stations in (a)-(d) are exposed to the ocean, showing small differences among scenarios; the two stations in (e) and (f) are on the land side of the barrier islands, showing larger differences between the “Baseline” and the “Ocean” scenario in the post-storm period. Note the plots have different y-axis ranges.

We also add more discussion in the text:

(Line 242, OM; Line 292, RM) “..., as seen from the total elevation (Fig. 9a) and the sub-tidal signals (Fig. 9b). The latter applies a low-pass Butterworth filter (Butterworth, 1930) only preserving longer-period (longer than 2 days) components.”

(Line 251, OM; Line 302, RM) “The mechanism causing the water level set-downs at the two South Carolina stations is similar to that causing the set-downs behind the barrier islands in North Carolina. The two South Carolina stations (Charleston and Springmaid) are located to the south of the landfall site and the wind direction is from the land to the ocean, pushing water away from shore.”

(Line 253, OM; Line 306, RM) “The averaged MAE for the subtidal comparison is 8.6 cm and averaged correlation coefficient is 0.92.”

<Reviewer’s Minor Comment #11>

L275 & L284: describing errors "quite satisfactory" and "reasonable agreement", when mean absolute error in estimated high water levels is 0.73 m and with nearly 20% of points having error >1m, is a subjective description. I'd avoid such statements and simply let the readers decide whether if such estimation errors are reasonable according to their required accuracy and project objectives.

<Response>

As suggested, we have removed all subjective claims such as "quite satisfactory" and "reasonable agreement".

<References>

Butterworth, S. (1930), On the theory of filter amplifiers, *Wireless Eng.*, 7, 536–541.

Gochis, D.J., Cosgrove, B., Dugger, A.L., Karsten, L., Sampson, K.M., McCreight, J.L., Flowers, T., Clark, E.P., Vukicevic, T., Salas, F. and FitzGerald, K., 2018, December. Multi-variate evaluation of the NOAA National Water Model. In AGU Fall Meeting Abstracts (Vol. 2018, pp. H33G-01).

Santiago-Collazo, F.L., Bilskie, M.V., Hagen, S.C.: A comprehensive review of compound inundation models in low-gradient coastal watersheds. *Environ. Model. Software* 119:166–181. <https://doi.org/10.1016/j.envsoft.2019.06.002>, 2019.

Zhang, Y.J., Ye, F., Stanev, E.V. and Grashorn, S., 2016. Seamless cross-scale modeling with SCHISM. *Ocean Modelling*, 102, pp.64-81.

Zhang, Y.J., Ye, F., Yu, H., Sun, W., Moghimi, S., Myers, E., Nunez, K., Zhang, R., Wang, H., Roland, A. and Du, J., 2020. Simulating compound flooding events in a hurricane. *Ocean Dynamics*, 70(5), pp.621-640.

<End of Reply to Reviewer #3>

Additional changes

We found a minor problem with Fig. 13d and fixed it in the new Fig. 13 (shown below) and Fig. 1d. Specifically, a different run other than the baseline model was used to plot Fig. 13d in the original manuscript, which has been corrected. This does not change the conclusion that resolving small-scale flow routing features greatly improves the prediction of HWM elevation. The “Burnt Mill Creek” was mislabeled as “Northeast Cape Fear River” in the original manuscript, which has been corrected. Lake Greenfield and more labels were also added for better illustration.

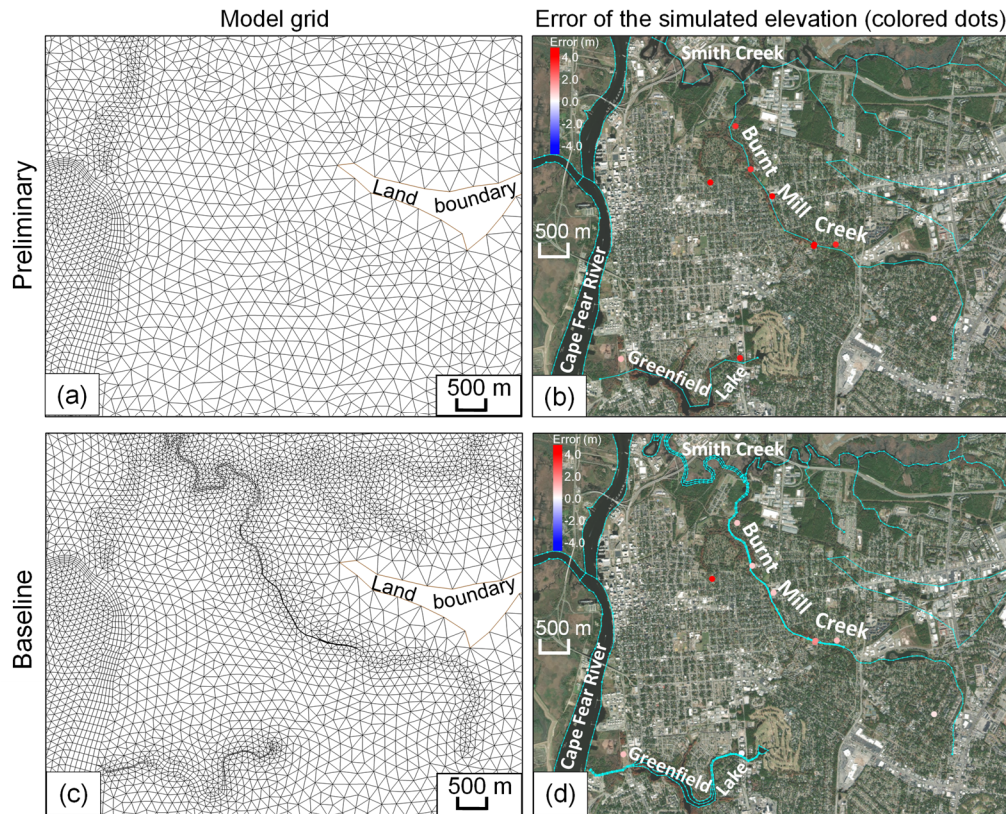


Fig. 13: Importance of resolving small-scale features on the order of a few meters in the watershed, illustrated by a comparison between a preliminary setup (a, b) and the baseline setup (c, d). To better resolve the Burnt Mill Creek, NC, more SMS feature arcs (cyan lines in (d)) are used in the baseline setup than in the preliminary setup (cyan lines in (b)), significantly reducing the HWM errors. See Fig. 2 for the location of this locally zoomed-in region. The base maps in (b) and (d) are provided by ESRI.

A cross-scale study for compound flooding processes during Hurricane Florence

Fei Ye¹, Wei Huang¹, Yinglong J. Zhang¹, Saeed Moghimi², Edward Myers², Shachak Pe'eri², Hao-Cheng Yu¹

¹Virginia Institute of Marine Science, College of William & Mary, Gloucester Point, 23062, USA

5 ²NOAA National Ocean Service, Silver Spring, 20910, USA

Correspondence to: Fei Ye (feiy@vims.edu)

Abstract

We study the compound flooding processes as occurred in Hurricane Florence (2018) that was accompanied by heavy precipitation, using a 3D creek-to-ocean hydrodynamic model. We examine the important role played by barrier islands in the observed compound surges in the coastal watershed. Locally very high resolution is used in some watershed areas in order to resolve small features that turn out to be critical for capturing the observed High Water Marks locally. The wave effects are found to be significant near barrier islands and have contributed to some observed over-toppings and breaches. Sensitivity results from applying each of the three major forcing factors (oceanic, fluvial, and pluvial) *separately* are succinctly summarized in a “dominance map” that highlights significant compound effects in most of the affected coastal watersheds, estuaries and back bays behind the barrier islands. Operational forecasts based on the current model are being set up at NOAA to help coastal resource and emergency managers with disaster planning and mitigation effort.

1 Introduction

Recently, more frequent occurrences of “wet” hurricanes (i.e. hurricanes accompanied by heavy precipitation) that stall near the coast (Pfahl et al., 2017; Hall and Kossin, 2019) have brought new challenges to coastal communities in the form of compound flooding, which is defined as concurrence of flooding from same or different origins (river, storm surge and rainfall), especially in the coastal transitional zone that sits at the border between coastal, estuarine, and hydrologic regimes (Santiago-Collazo et al., 2019). Compound flooding highlights one of the major pitfalls of the current hurricane intensity scale, which is entirely based on wind speed, leaving the potential rainfall and flooding impacts to be glossed over in initial forecasts that emphasize hurricane category. The record-setting 2020 Atlantic hurricane season including a number of very wet storms highlights the urgency, and exposes the current knowledge gap, for understanding compound flooding processes.

A recent example for compound flood events is Hurricane Florence that impacted a large area of North Carolina (NC) in September 2018. Hurricane Florence was the first major hurricane of the 2018 Atlantic hurricane season. Originated from a

strong tropical wave near Cape Verde, west Africa, it acquired tropical storm strength on September 1, followed by a rapid intensification to a Category 4 status on September 4, with estimated maximum sustained winds of 130 mph, and eventually reached its maximum strength on September 11. It made landfall south of Wrightsville Beach, near the border between NC and South Carolina (SC) as a Category 1 hurricane on September 14. The slow motion of the storm after the landfall brought heavy rainfall throughout the Carolinas for several days. Compounded by the storm surge, the rainfall caused widespread flooding along a large swath of the NC coast, and inland flooding ~~from Florence inundated~~in cities such as Fayetteville, Smithfield, Lumberton, Durham, and Chapel Hill. According to a USGS report (Fester et al., 2018), a new record rainfall total of 35.93 inches was set during the hurricane in Elizabethtown, NC. Many other locations throughout NC and SC also set new records for rainfall (Fig. 1). Florence is a quintessential example of major flooding that a slow moving, moisture-laden storm can bring, even if it does not have strong hurricane wind.

In this paper, we will study the response to the storm in the watershed rivers and estuaries and examine the processes and sources that lead to the compound flooding there. We will also examine the coastal responses to the event and the close connection between watershed and coastal ocean. The existing modeling efforts on compound flooding (Chen et al., 2010; Cho et al., 2012; Dresback et al., 2013; Chen and Liu, 2014; Ikeuchi et al., 2017; Kumbier et al., 2018; Pasquier et al., 2018; Wing et al., 2019; Muñoz et al., 2020) often focus on a subset of the processes (storm surges, tides, waves, fluvial flooding, pluvial flooding, and potential baroclinic effects), leaving gaps in accurately representing the complex interactions among them (Santiago-Collazo et al., 2019). What distinguishes this study from traditional compound flooding simulations is a holistic approach that ~~includes solves~~ interrelated processes in different regimes and on multiple temporal/spatial scales with the same hydrodynamic core (i.e., the same set of governing equations) in a single modeling framework. An overview of the processes studied in this paper is shown in Fig. 2. The primary tool used in this study is a proven cross-scale 3D baroclinic model designed for effective and holistic simulation of intertwined processes as found during this event. The trade-off between 2D and 3D setups was carefully weighed with the goal of operationalization in mind before the latter was chosen. In short, the advantage of 2D is the speed (about 80 times faster than its 3D baroclinic counterpart) and the simplicity of the set up; the disadvantage is that it misses baroclinic effects and 3D processes that can vary in space and time. For example, the baroclinic effects during the adjustment phase after Hurricane Irene (2011) are discussed in detail in Ye et al. (2020), using a similar model setup as the one used here. Even though different setups (2D, 3D barotropic, and 3D baroclinic) were tuned to their best possible skills, the 3D baroclinic setup was shown to better capture the total elevation during the post-storm adjustment phase. In addition, during the ongoing effort to operationalize the model, we found that including 3D processes greatly simplified the bottom friction parameterization at some coastal locations (e.g., NOAA Station 8447930 at Woods Hole, MA; Huang et al., submitted). We chose a 3D model instead of a more efficient 2D model because as demonstrated in Ye et al. (2020), large-scale processes (e.g. Gulf Stream) can affect the total water level through the process of baroclinic adjustment especially after the storm; specifically, a 3D baroclinic model can lead to better predictions of sub-tidal elevations that are important for the inundation process. In addition, a 3D model can also produce relevant 3D variables (e.g., 3D velocity and tracer concentration) ~~velocity, tracers etc~~ that are important for safe navigation and ecosystem health.

The 3D model presented in this paper is efficient enough for operational forecasts (see Section 3.1), which are being set up at NOAA (National Oceanic and Atmospheric Administration).

65 The paper is structured as follows. Section 2 will review the study site and available observations collected during the event in the watershed, estuaries, and coastal ocean. Section 3 describes the numerical model used and its set-up ~~including its coupling to National Water Model version 2.0 (NWM v2.0; the hydrological model that provides the river flows)~~. Section 4 presents model validation and important sensitivity test results; the validation is done in a cross-scale fashion from small-scale watershed areas to large-scale coastal ocean. Section 5 discusses the compound effects as revealed by the 3D model in all regimes. Section 6 summarizes the major findings ~~of the paper~~ and planned follow-up work.

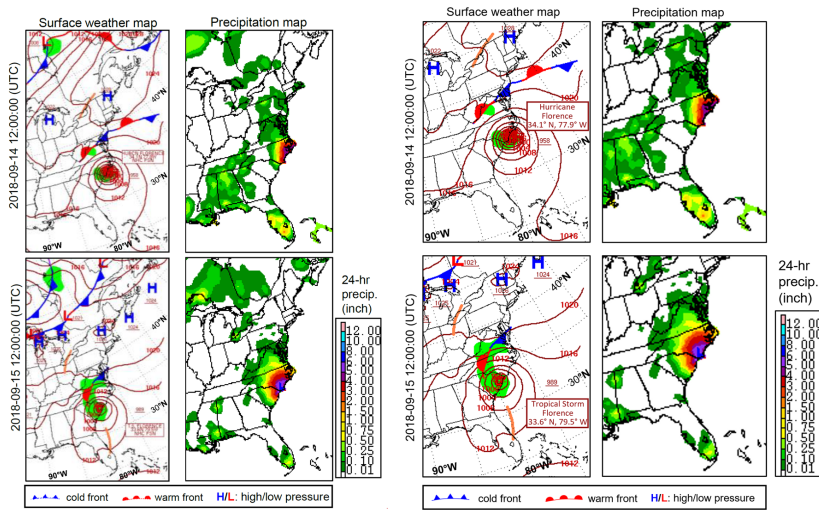


Fig. 1: Weather map showing the low-pressure system and amount of rainfall Florence brought to North Carolina and South Carolina coast around landfall. Credit: NOAA Central Library U.S. Daily Weather Maps Project (<https://www.wpc.ncep.noaa.gov/dailywxmap/>); partial views of the original online maps.

75




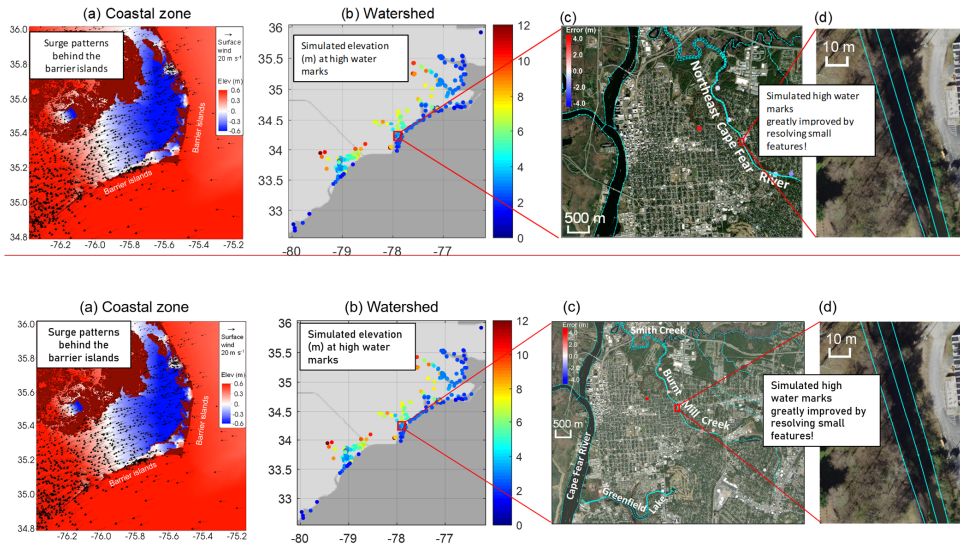


Fig. 2: Overview of the processes studied in the paper, from (a) coastal zone to (b) watershed, and down to very small local scales in the watershed in (c) and (d). The base maps in (c) and (d) are provided by ESRI.



2 Study site and observation

The focus (high-resolution) area of this study is on the NC and SC coast and coastal watersheds that saw most of the impact from Florence (Fig. 3b and Fig. 3f). Similar to what we did for other hurricane events, the spatial domain's landward boundary is set at 10 m above the sea-levelNAVD88 datum, which is deemed sufficient to capture most backwater effects (Ye et al., 2020; Zhang et al., 2020). A rich set of observations for physical and biological variables are available from satellites, autonomous instruments (e.g., gliders and Argo floats), in situ stations operated by NOAA and USGS's field estimates collected during after-event surveys (e.g., High Water Marks or "HWMs";) (Fig. 2b and Fig. 2c). Analysis and quality control of these datasets have been done by the data distributors, together with uncertainty assessments. Some of the datasets will be presented in the context of model validation sections below to allow for a comprehensive and objective assessment of the model errors and uncertainties. Assessment of compound flood models such as ours inevitably involves observation collected at disparate spatial and temporal scales of several orders of magnitudes contrasts, as illustrated in Fig. 2. To the best of our knowledge, this type of model assessment has rarely been attempted before even in 2D setting, due to the formidable challenges to numerical models (Santiago-Collazo et al., 2019), but is badly needed in order to gain a holistic understanding of the complex processes at play (Ye et al., 2020; Zhang et al., 2020; Huang et al., submitted2021).

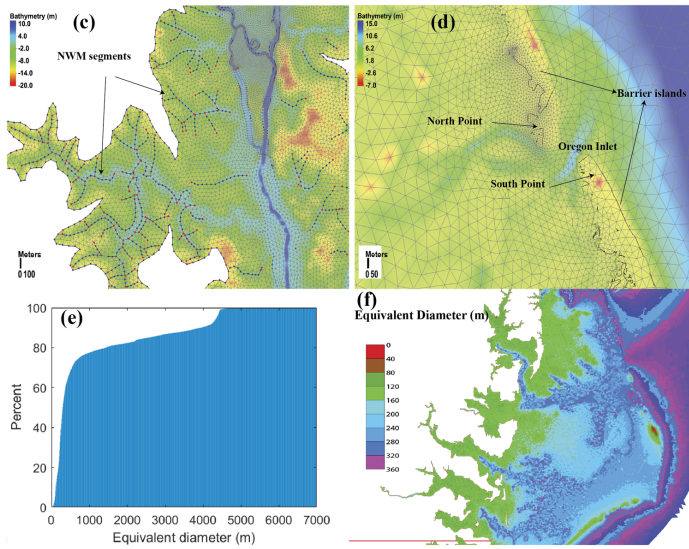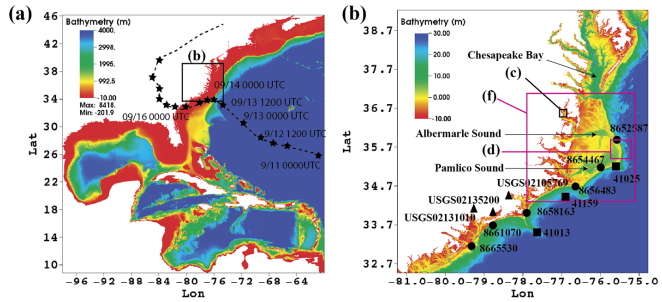

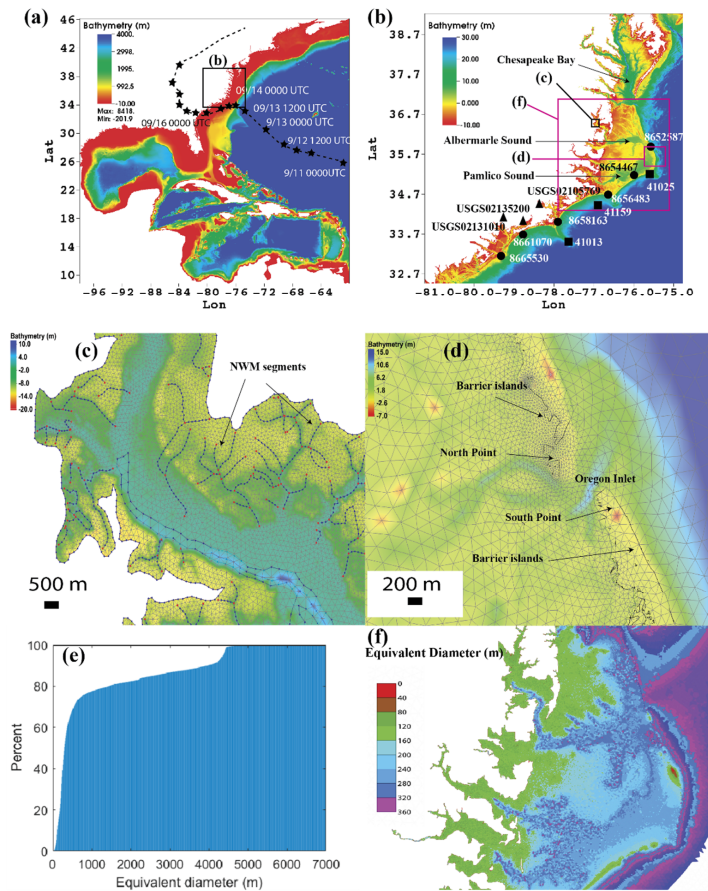

100 Fig. 3: Model domain and horizontal grid. (a) Domain extent and hurricane track. (b) Station locations along the North Carolina
 105 and South Carolina coast. The six NOAA gauges are: Charleston (8665530); Springmaid Pier (8661070); Wrightsville Beach
 (8658163); Beaufort (8656483); Hatteras (8654467); Oregon Inlet (8652587). The 3-three squares are NDBC buoys (41013, 41159,
 41025). The spatial extents of (c), (d), and (f) are also marked in (b). (c) Zoom-in of grid in a watershed area (the arcs are from
 NWM river network). (d) Zoom-in of grid near barrier islands and inlet (the dark line is the 0 m isobath, NAVD88); (e)
 Cumulative histogram of grid resolution (measured in equivalent diameters); (f) Grid resolution in North Carolina's coastal
 watershed area.

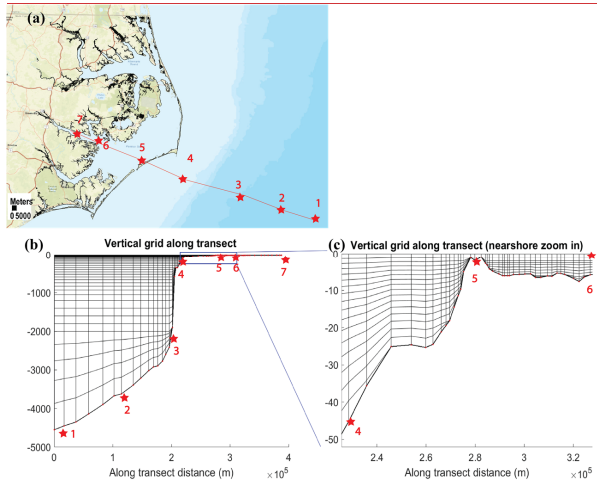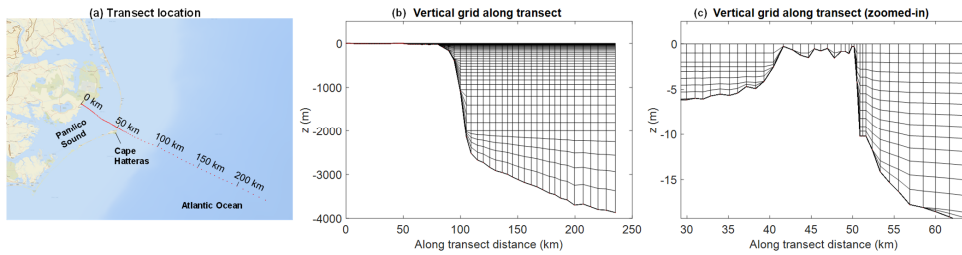

Formatted: Space After: 0 pt

Fig. 4: Vertical grid. (a) Transect from coastal watershed to the ocean into watershed, used to show illustrate the vertical grid; (b) vertical grid along the transect; (c) zoom-in from (b), illustrating the transitions from 3D (Pamlico Sound in coastal ocean) to 2DH (on barrier island) and back to 3D (coastal ocean back bay).

3 Model description

3.1 Model setups

To capture the storm surge effects we use a large study domain that encompasses the north Atlantic west of 60°W (Fig. 3a). An added benefit of using such a large domain in conjunction of a 3D baroclinic model is that the interaction between large- and small-scale processes can be organically examined in a single model, as explained by Ye et al. (2020). The disruption and oscillation of Gulf Stream by storms can directly affect the coastal inundation (i.e., the fair-weather flooding described reported by Ezer (2018)). Our results suggest that the converse is also true, as watershed processes can also affect Gulf

120 Stream and other coastal processes (Ye et al., 2020). Therefore, a seamless creek-to-ocean model is advantageous for compound flood studies.

125 ~~As we shall see, this model solves the physical processes from the watershed to the ocean with the same set of governing equations, qualifying for Santiago-Collazo et al. (2019)'s definition of a fully-coupled compound surge and flood model. As one of the first bona fide compound surge and flood models, SCHISM (schism.wiki; Zhang et al., 2016) uses a very-efficient semi-implicit solvers to solve the hydrostatic form of the Reynolds-averaged Navier-Stokes equations and transport equation (Zhang et al., 2016), which govern all flow movements (including overland flow in the watersheds as well as estuarine and ocean circulations) inside the 3D model domain.~~ Major characteristics of the model that ensure a balance of accuracy, efficiency, robustness and flexibility include: hybrid finite-element/finite-volume methods and a highly flexible 3D gridding system (“polymorphism”) that combines a hybrid triangular-quadrangular unstructured grid in the horizontal dimension; and 130 ~~localized sigma coordinates with shaved cells (dubbed as LSC²; Zhang et al., 2015) in the vertical dimension, a hybrid LSC² grid in the vertical (Zhang et al., 2015).~~ The polymorphism allows a single SCHISM grid to seamlessly morph between full 3D, 2DH (2D depth-averaged), 2DV (2D laterally averaged), and quasi-1D configurations. The employment of shaved cells near the bottom in particular faithfully preserves the original bathymetry without any smoothing required. The detrimental effects of bathymetry smoothing on important physical and biological processes (e.g.e.g., residual transport, lateral 135 circulation, nutrient cycling etc) have been carefully documented in Ye et al. (2018) and Cai et al. (2020).

Similar to a recent compound flooding study using SCHISM for Hurricane Harvey (Huang et al., submitted2021), the current model domain covers the entire US East Coast and the entire Gulf of Mexico, with all major bays/estuaries and coastal watersheds resolved (Fig. 3). The horizontal grid, generated using the software SMS (aquaveo.com), has 2.2 million nodes and 4.4 million elements (Fig. 3). About 50% and 40% of the elements have resolution finer than 300_m and 220_m 140 respectively (Fig. 3e). The grid bathymetry is interpolated from a combination of DEM sources from coarse (ETOPO1, 90-m Coastal Relief Model (<https://ngdc.noaa.gov/mgg/coastal/crm.html>)) to fine resolution (1/9 arc-second CUDEM (<https://www.ncei.noaa.gov/metadata/geoportal/rest/metadata/item/gov.noaa.ngdc.mgg.dem:999919/html>), 1–3 m CoNED (<https://www.usgs.gov/core-science-systems/eros/coned>)), and the vertical datum used is NAVD88, with appropriate conversion between datums done by VDatum tool (vdatum.noaa.gov). ~~Altogether close to 400 DEM tiles are used to cover 145 such a large region.~~ Note that NAVD88 is a more convenient datum to use in the model as most of recent observation data refer to this datum, and therefore we use this datum in the model setup and allow the model to automatically set up the sub-tidal surface slope from coastal ocean into watershed (due to the friction effects). ~~Altogether close to 400 DEM tiles are used to cover such a large region.~~ The horizontal grid resolution ranges from 6–7 km in the open ocean to ~400 m near the shoreline, with barrier island and narrow inlets resolved; river channels and creeks ~~represented by NWM streams~~ have about 150 300 m along-channel resolution and variable cross-channel resolutions to ensure adequate representation of the channelized flow. Shipping channels are represented by quadrangles and have 20 m or finer cross-channel resolution in NC. The finest grid resolution used is ~1 m used to represent many levees in other parts of the coast; note that as an implicit model SCHISM is not constraint by ~~Courant-Friedrichs-Lewy (CFL) CFL~~ condition and thus can handle high resolution efficiently.

155 ~~Moreover, to better capture the geometry/bathymetry of flood pathways in the W~~watershed region ~~of the grid~~, specifically
the region between the 10-m contour (set as the land boundary) and the 0-m contour of the DEM (~~based on NAVD88~~), ~~has~~
~~explicitly incorporated close to about~~ 300K National Water Model (NWM) segments (~~“thalwegs”; cf. (i.e., thalwegs;~~ Fig. 3c)
~~are reproduced in SCHISM’s horizontal grid, to facilitate the routing of river flow and precipitated water there. Note that~~
~~only the geometry of the NWM segments is retained, while NWM outputs are only used as the land boundary condition and~~
~~NWM does not solve any hydrodynamics inside the model domain.~~ Customary of all SCHISM applications, no manipulation
160 or smoothing of bathymetry was done in the computational grid after interpolation of the depths from DEMs (including steep
slopes in the Caribbean and all shipping channels). ~~From our experience, CUDEM may underestimate the depth of coastal~~
~~streams (e.g., in the South Carolina watersheds), which is a potential error source of our model.~~ In the vertical dimension we
use 1–43 layers, with 43 layers being applied in the deep ocean and 1 layer in most of the watershed (Fig. 4), thus effectively
rendering the model 2DH there, which is sufficient for ~~processes like flow-routing overland flow~~ and inundation ~~processes~~.

165 Table 1 shows the setups for “baseline” and ~~a few~~ important sensitivity simulations used in this paper. For the baseline,
imposed at the ocean boundary (60°W) are tidal elevation and barotropic velocity of 8 tidal constituents (S2, M2, N2, K2,
K1, P1, O1, and Q1), extracted from the FES2014 database (<https://datastore.cls.fr/catalogues/fes2014-tide-model/>). The
baroclinic components for the elevation and velocity are derived from the ~~daily outputs of the “HYbrid Coordinate Ocean~~
~~Model” (HYCOM; https://www.hycom.org/), daily HYCOM outputs.~~ The initial condition for the water elevation is set to be
170 0 in all areas with positive ~~grid~~ depths (“wet”) and to be equal to the bottom elevation at “dry” watershed locations (~~so that~~
~~the total water depth there is equal to 0 initially~~0 initial water depth). The initial condition for the horizontal velocity is zero
in the watershed and is interpolated from HYCOM elsewhere. Commensurate with the non-zero velocity (fully dynamic
state) are salinity and temperature values interpolated from HYCOM; however, in the nearshore areas where HYCOM
results are less accurate, the initial conditions for salinity and temperature are interpolated from the sparse observation at
175 several USGS ~~gauges~~ in order to speed up the dynamic adjustment process. The surface meteorological forcing applied in
the model is a combination of two products: (1) a high-resolution ERA re-analysis product from the European Centre for
Medium-range Weather Forecast (ECMWF) with a ~9 km horizontal resolution (~~seeef~~ Acknowledgements), and (2) a ~~3-3-h~~
time interval with NOAA’s High-Resolution Rapid Refresh (HRRR; <https://rapidrefresh.noaa.gov/hrrr/>), which is a cloud-
resolving and convection-allowing atmospheric model with a ~~3-3-km~~ horizontal resolution and a ~~4-1-h~~ time interval. ~~The~~
180 ~~friction of the baseline model was tuned in the wet area (river, estuary, ocean; lower than 1 m, NAVD88) and on higher~~
~~grounds (higher than 3 m, NAVD88) separately. In the wet area, drag coefficients within a range of 0.001-0.01 were tested.~~
~~Commonly accepted default value of 0.0025 gave good error statistics near the landfall site; but the sensitivity is small in the~~
~~range of 0.001-0.005. In the watershed, drag coefficients within a range of 0.01-0.5 were tested. The optimal value was~~
~~chosen based on the High Water Marks (HWMs) comparisons (Section 4.3) at 276 locations collected by USGS. A small~~
185 ~~friction value within this range tended to under-predict the elevation at HWMs, and a large value led to over-prediction.~~
~~Values within the range of 0.02-0.05 gave good error statistics. We chose 0.025 because it gave slightly better results in the~~
~~Cape Fear River watershed near the landfall site. To sum up, bottom friction coefficient is set at a constant value of 0.0025 at~~

all “wet” locations, then linearly increases to 0.025 as the ground elevation increases from 1 m to 3 m (NAVD88), then a constant value of 0.025 is used for higher grounds where the bed texture is generally rougher than the riverbed. Note that this is the parameterization based on the region influenced by Hurricane Florence. Spatially varying parameterization of bottom friction for different systems is an on-going effort as we study more recent hurricanes and operationalize the model along the East Coast and Gulf Coast. However, as we presented in Ye et al. (2020), Zhang et al. (2020) and Huang et al. (2021), the choices described above seem to work fine in general for other systems as well. Bottom friction coefficient is set at a constant value of 0.0025 at all “wet” locations, then linearly increases to 0.025 as the ground elevation increases from 1 m to 3 m (above NAVD88). A constant value of 0.025 is used for higher grounds where the bed texture is generally rougher than the riverbed (Ye et al., 2020). The tuning of friction values is intentionally kept to minimum in favour of simplicity and ease of extension to national scale, while leaving room for fine adjustment if the information on sediment characteristics and bedforms is available in a specific system in the future. The method used to impose the river flow in the model is described in the next subsection.

Choices of the “baseline” model parameters are similar to those used for Irene (Ye et al., 2020). The time step is 150 seconds (sensitivity tests using 100–150 s gave very similar results). The level-2.5 equation turbulence closure scheme chosen is from the generic length scale model of $k-kl$ (Umlauf and Burchard, 2003). The simulation starts from 2018-08-24 00:00 (UTC) and lasts for 36 days to cover the hurricane and ensuing restoration period. Although the model covers a large domain, most of the elements (those in the watersheds) are quasi-2D, making it efficient enough for operational forecast. For the baseline run, the real time to simulation time ratio is 80 with 1440 cores on TACC’s Stampede2 cluster and 30 with 480 cores on W&M’s SciClone cluster. Intel Skylake cores with a nominal clock speed of 2.1 GHz were used on both clusters. This means a 3-day (typical forecast duration) simulation will take about 0.9 hours using 1440 cores or 2.4 hours using 480 cores.

Table 1: Baseline and sensitivity runs used in this paper.

Name	Scenario	Description
Baseline		With forcing from tides, atmosphere, rivers (from NWM) and precipitation, initialized with HYCOM GOFS 3.1
Baseline_Wave		Baseline with added wave effects incorporated
No_NWM_precip		Baseline without rivers (via NWM) and precipitation
Ocean		Baseline forced by ocean and atmosphere only (i.e., tides and storm surge) (but without precipitation)
NWM_River		Baseline forced by rivers (freshwater inputs from NWM) only
Rain		Baseline forced by precipitation (directly on top of the domain) only

3.2 Coupling with NWM

–River discharges are introduced into our model at its land boundary. First, About 6752 intersection points are identified between the NWM river segments and our SCHISM’s land boundary, where the freshwater is injected as volume sources (at

Formatted: Line spacing: single

Formatted Table

Formatted: Line spacing: single

Formatted: Line spacing: single

Formatted: Line spacing: single

Formatted: Line spacing: single

Formatted: Line spacing: single

Formatted: Line spacing: single

Formatted: Indent: First line: 0.07"

215 ~~40m above sea level). Inside the model domain, streamflow, overland flow and precipitation are directly handled by the hydrodynamic core of SCHISM. This fully coupled configuration is rare in the existing compound flooding simulations (Santiago-Collazo et al., 2019). To ensure the accuracy and robustness of SCHISM in simulating hydrological and hydraulic processes including the overland flow, we already examined the model's performance in both lab-scale and field-scale tests in a previous study (Section 2.2 and 2.3 of Zhang et al. (2020)) and applied the model in the Delaware Bay watershed~~
220 ~~including the Delaware River with a hydraulic jump up to 40 meters above the NAVD88 datum (Fig. 14 in Zhang et al. (2020)).The NWM flow time series (<https://water.noaa.gov/about/nwm>) is then injected at the boundary elements immediately adjacent to those intersection points (Fig. 5), as sources (for inflow condition) or sinks (for outflow condition). The flow is then routed inside the SCHISM domain by the model. The NWM segments that are explicitly incorporated reproduced into in our grid (Fig. 3c) during the mesh generation stage during the mesh generation stage (Fig. 3c) help~~
225 ~~capture the bathymetry of main flood pathways (thalwegs). However, flow is *not* restricted to these 1D segments; in fact, precipitation may generate overland flow on any 2D horizontal grid elements in the watershed, facilitate the routing of water from watershed to coastal ocean. In addition, the rain that falls onto our grid domain is also routed together with the river flow.~~ Note that the river flows injected ~~at our model~~the land boundary have indirectly incorporated the precipitation that occurred *outside* (but not *inside*) the model domain, and therefore, the addition of direct precipitation onto ~~our model~~
230 ~~domain~~the model domain is appropriate and is an integral component of the compound flood processes. To accurately simulate the initial movement of the very thin layer of rain water on the dry land, which is dominated by friction, a very small threshold of 10^{-6} m is used to differentiate between wet and dry states (Zhang et al., 2020). Since we have no information on the scalar concentrations for river inflows and rainfall, we applied 0 PSU for salinity and ambient water temperature (i.e., the temperature at the local receiving cell calculated without accounting for the rivers or raindrops) for the
235 injected river water and also for the rainfall. Obviously, the latter represents a source of uncertainty for the modelled temperature results. As explained in Huang et al. ([submitted2021](#)), heat exchange between air and water would misbehave on such a thin layer of water on watershed, so a threshold of 0.1 mm is set for local water depth, below which the heat exchange is turned off. ~~As a model limitation, infiltration is neglected in this work. In the case of Hurricane Florence induced flooding, we expect the effect of infiltration to be minor. According to NOAA's weather map~~
240 ~~(<https://www.wpc.ncep.noaa.gov/dailywxmap/>), there was continuous rainfall along the US east coast from Sep 11, 2018 to the date of Florence's landfall (Sep 14, 2018), so the infiltration capacity of the soil was already reduced. Moreover, "wet" storms like Hurricane Florence (2018) and Hurricane Harvey (2017) tend to dump large amount of rain fall at a location for days because of the slow movement of the storm, so most of the rainfall is on saturated soil. As another model limitation, the drainage in urban settings is not included in our model. This may have led to some occasional big errors in the predicted~~
245 ~~elevation on high water marks, for example the one large error in the urban area in Fig. 13d. We do have a plan of explicitly accounting for infiltration and drainage as volume sinks based on NWM (or other hydrologic models). However, considering the additional uncertainty this would bring, for now we choose to continue improving more important aspects of the model~~

Formatted: Font: Italic

for operational use; the focus is on the quality of model grid, which is very likely responsible for most of the existing large errors.

The assessment of NWM calculated flow against observed flow at the two largest rivers in the region is shown in Fig. 6. Similar to our findings for other storm events, the flow produced by this particular version of NWM (v2.0) produces flow that is generally consistent with USGS observation but tends to predict show narrower and higher peaks, with roughly the same total volume of water during the event (Fig. 6). The observation indicates the peak streamflow occurs about 7 days after the landfall, which is the time it takes for the rainfall induced flood to reach the coastal rivers. Note that there is typically a time lag of 1-2 days between the peak flow in NWM and the gauged flow (Fig. 6). The forcing errors in the magnitude and timing of NWM's peak flow should explain part of the model errors especially in the watershed. This forcing error should explain part of the model errors especially in the watershed. For example, we found that replacing the NWM streamflow with the gauged flow at USGS Station 02109500 (Waccamaw River at Freeland, NC) improves the model skill locally. However, this is not cost-effective for our goal of operationalizing this compound flood model along the US East Coast and Gulf Coast. The developers of NWM (Gochis et al., 2018) showed that NWM's model skill was improved by each version update, with 44% of the gauges having bias < 20% in the latest version (NWM v2.0). We will adopt the newest and best NWM version in our ongoing study and operational forecast as soon as it is available. And we are open to using any other hydrologic sources to drive our model. Note that the peak streamflow occurs about 4-6 days after the landfall, which is the time it takes for the rainfall induced flood to reach the coastal rivers.


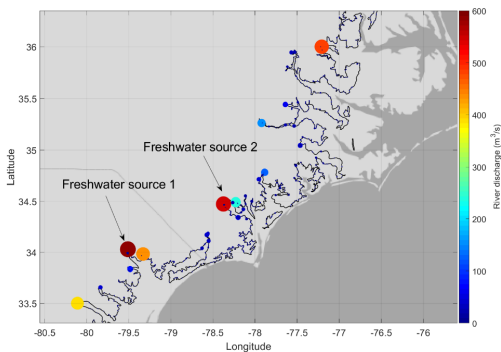


Fig. 5: Distribution of average river flow in North Carolina and South Carolina, from National Water Model (NWM).

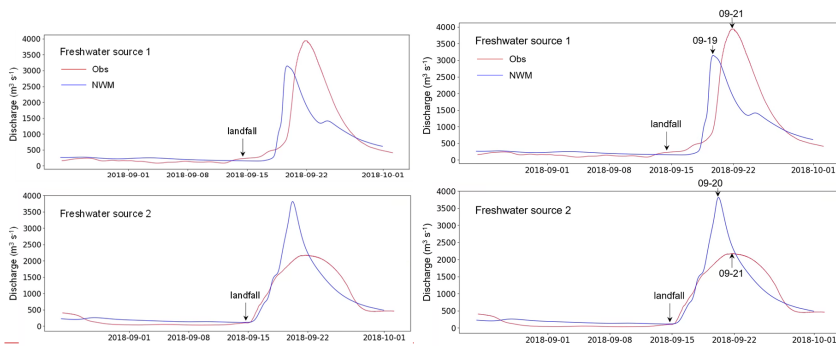

270 **Fig. 6:** Discharges at the two largest freshwater sources in the impact region (locations marked in Fig. 5). At each location, the NWM streamflow is taken at the intersection of the NWM segment and SCHISM's land boundary; the observation is based on the closest USGS station.

4 Model validation and sensitivity


275 In this section we will assess the model results for elevation, inundation and flow in the watershed and estuary. The spatial scales covered by the validation vary from O(10 km) to O(1 m). The model validation for non-storm period will not be discussed here; in short, the averaged amplitude error for the major constituent (M2 in east coast and K1 in northern Gulf of Mexico) for non-storm period is 3–4 cm (seeef- Huang et al., submitted2021). We will start by looking at the wave effects nearshore.

4.1 Wave effects

280 Multiple breaches and over-toppings were reported across several NC barrier islands during the event, including Surf City, North Top Sail Beach, and New River inlet (<https://www.wusa9.com/article/weather/before-and-after-hurricane-florence-changes-north-carolina-coastline/65-595918389>). Some of these breaches may be related to significant wave activities; activities, e.g. for example the maximum wave height at buoy 41025, ~30 km offshore from Cape Hatteras, reached ~10 m. Interestingly, the maximum wave heights are more modest nearer to the landfall: 4–6 m at Buoys 41159 and 285 41013 (see Fig. 3b for their locations). Therefore, to investigate this possibility, we have also conducted a simulation with the wave model inside SCHISM activated (“Baseline_Wave” in Table 1). The details of the wave model (Wind Wave Model) have been described in Roland et al. (2012) and the coupled model has been applied to other systems (Guerin et al., 2018; Khan et al., 2020). The wave model was initialized and forced at the ocean boundary by a global Wave Watch III simulation (<ftp://ftp.ifremer.fr/ifremer/ww3/HINDCAST>), and used a spectral resolution of 36 directional bins and 24 290 frequency bins to cover a frequency range of 0.04 to 1 Hz. The coupling time step between the two models (at which information was exchange including surface elevation, velocity and wave radiation stress) was 600 seconds.

Our results indicate that the barrier islands near Surf City, North Top Sail Beach and New River inlet were indeed over-topped with 1–2 m of water (Fig. 7b; the locations of the islands can be seen in Fig. 8b). On the other hand, large portion of the island north of Cape Hatteras (Outer Banks) was spared (Fig. 7c), likely due to its N-S shoreline orientation, even with the 10 m wave approximately 30 km offshore from there. More quantitative validation for the breaching processes is out of scope here because (1) we do not have accurate and update-to-date bathymetry just before the event, and (2) more importantly, a sediment transport study is required to simulate the bathymetric changes.

The wave effects on the surface elevation are further quantified in Fig. 8, which suggests that the effects are most pronounced (with 30 cm or larger differences) inside the estuaries and Albemarle-Pamlico Sound (APS) due to large wave breaking nearby. In the intermediate and deep water, however, the wave effects are on the order of a few centimetres and negligible (Fig. 8a). The Baseline results (without wave effects) also showed over-topping of the barrier islands similar to the Baseline_Wave (not shown).

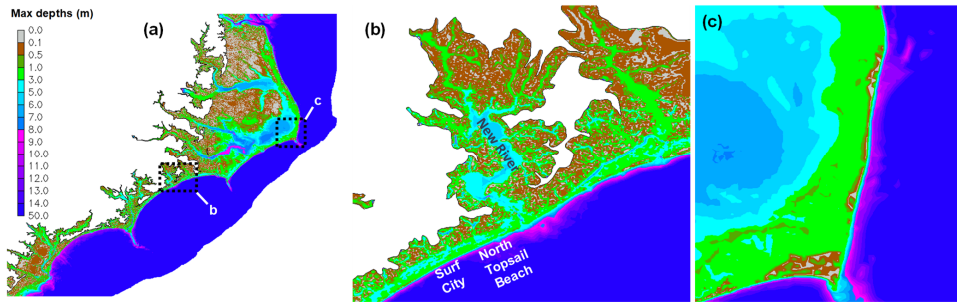

305 Fig. 7: The maximum water depths from Baseline_Wave. The spatial extents of the local regions of (b) and (c) are marked in (a).

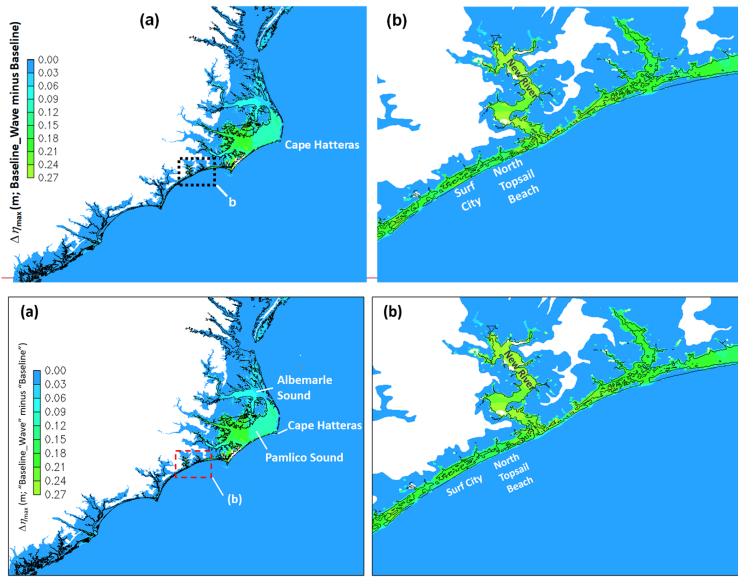


Fig. 8: Differences of the maximum elevations between Baseline_Wave and Baseline. (b) is zoom-in from (a). The thin black lines are the 0 m isobath.


310


In summary, the wave effects are significant nearshore and have contributed to the observed breaching and over-toppings of barrier islands. However, because the current study does not focus on the breaching processes and because of the significant computational overhead introduced by adding the wave model (>50%), we will proceed in the following by using the run without waves as the “baseline”.

315 4.2 Bays and estuaries


We assess the calculated total water levels at six NOAA tide gauges near the impact area (see locations inef: Fig. 3b). Three gauges are facing the open ocean (Charleston, Springmaid, and Wrightsville), and the other three gauges are either sheltered inside a bay (Beaufort) or behind barrier islands (Hatteras and Oregon Inlet). The responses to the hurricane are different at those gauges, as seen from the total elevation (Fig. 9a) and the sub-tidal signals (Fig. 9b). The latter applies a
 320 low-pass Butterworth filter (Butterworth, 1930) only preserving longer-period (longer than 2 days) components. In particularThe observation shows, we see mostly set-downs of ~0.3–0.5 m at Charleston, and Springmaid, Hatteras and Oregon Inlet followed by surges of ~0.2–0.5 m; and surges of ~0.5 to 1 m at Wrightsville and Beaufort, and surges of ~30 cm followed by pronounced set-downs of ~40 cm at Hatteras and Oregon Inlet (Fig. 9). The different responses at these gauges are due to the wind curl of Florence that led to different dominant wind directions between southern and northern

325 stations, and are also due to specific geographic settings of each gauge. Most intriguing are the prominent set-downs
observed at Hatteras and Oregon Inlet, which are explained by a combination of wind direction and blocking effects of
barrier islands. Fig. 10 demonstrates that around the time of landfall of the hurricane, the predominantly westward wind felt
in the Pamlico Sound has pushed water away from the barrier island. Meanwhile, the surge that propagated from the ocean
side is effectively blocked by the barrier island chain, thus creating a ~70 cm elevation difference between the waters
immediately outside and inside the islands (Fig. 10), and the difference lasted for ~2 days (Fig. 9). The mechanism causing
the water level set-downs at the two South Carolina stations is similar to that causing the set-downs behind the barrier islands
in North Carolina. The two South Carolina stations (Charleston and Springmaid) are located to the south of the landfall site
and the wind direction is from the land to the ocean, pushing water away from shore. The model captured the different
regional responses ~~quite well~~; overall, the averaged MAE (mean absolute error) for elevation is 11 cm. The averaged MAE
for the subtidal comparison is 8.6 cm and averaged correlation coefficient is 0.92. The peak errors at different stations occur
around the storm surge, with a maximum over-prediction of 0.64 m for the peak surge at Spring maid Pier, SC. The
overpredicted peak surge can lead to overpredictions in elevation on coastal high water marks (HWMs). In addition, there is
a maximum under-prediction of 0.66 m for the set down at Hatteras, NC, mainly due to the mismatch in the set down timing.
The uncertainties in wind forcing may be the main cause of the error, which is predominantly from subtidal signals. The grid
quality near the barrier islands may also contribute to the error. ~~The addition of~~ Adding wave effects ~~is seen to~~ slightly
330
335
340 increase_s the surge and rebounding waves at the last ~~3~~three gauges, resulting in slightly better model skills there.

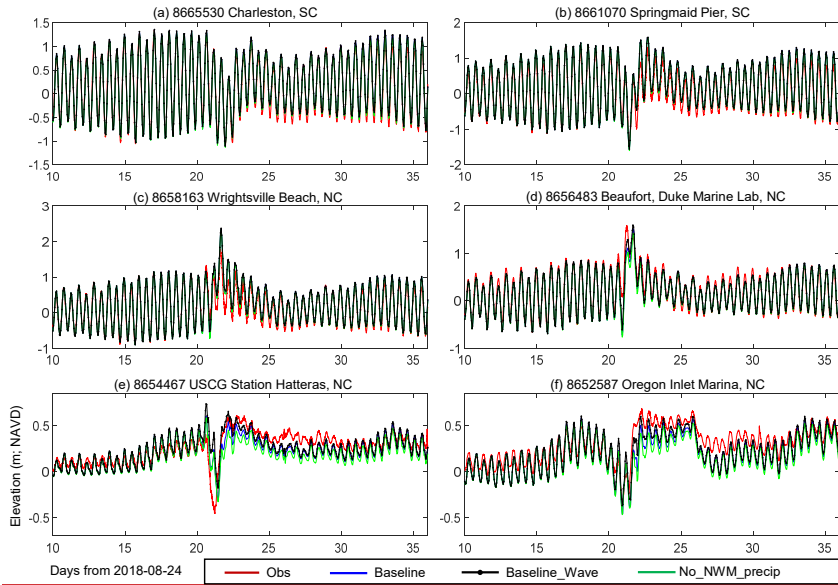

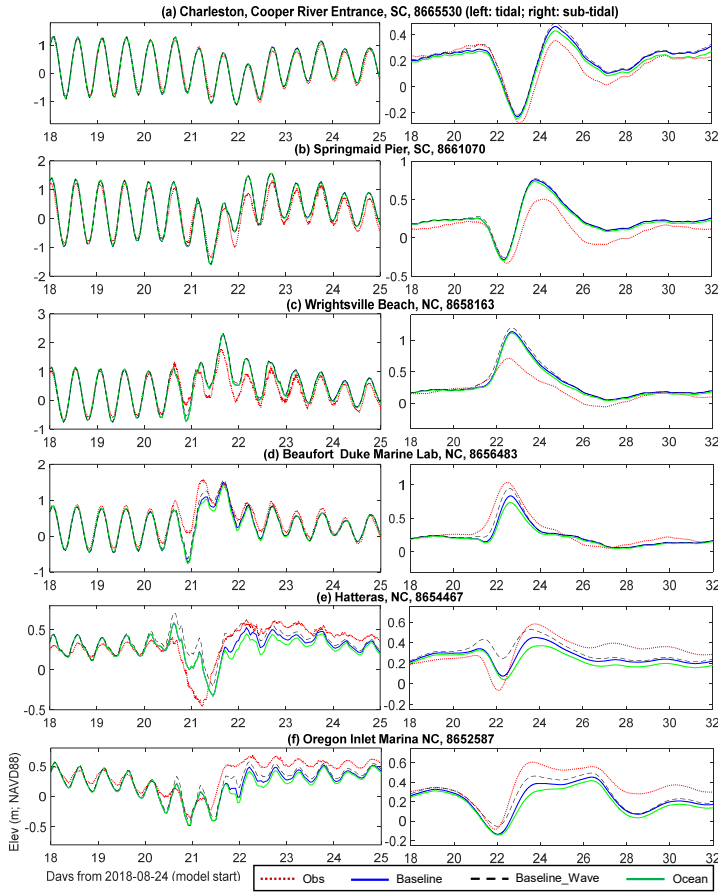

345 **Fig. 9: Comparison of elevation at six NOAA gauges: (left) total elevation; (right) subtidal elevation. Also included are results from**
two sensitivity runs (“Baseline Wave” and “No NWM precip Ocean”; see descriptions in ef. Table 1). The stations in (a)-(d) are
exposed to the ocean, showing small differences among scenarios; the two stations in (e) and (f) are on the land side of the barrier
islands, showing larger differences between the “Baseline” and the “Ocean” scenario in the post-storm period. Note the plots have
different y-axis ranges. Comparison of elevation at 6 NOAA gauges. Also included are results from 2 sensitivity runs
350 **(Baseline_Wave and No_NWM_precip; cf. Table 1). The two stations on the last row are on the back side of the barrier islands,**
thus showing larger differences between “baseline” and the sensitivity runs.

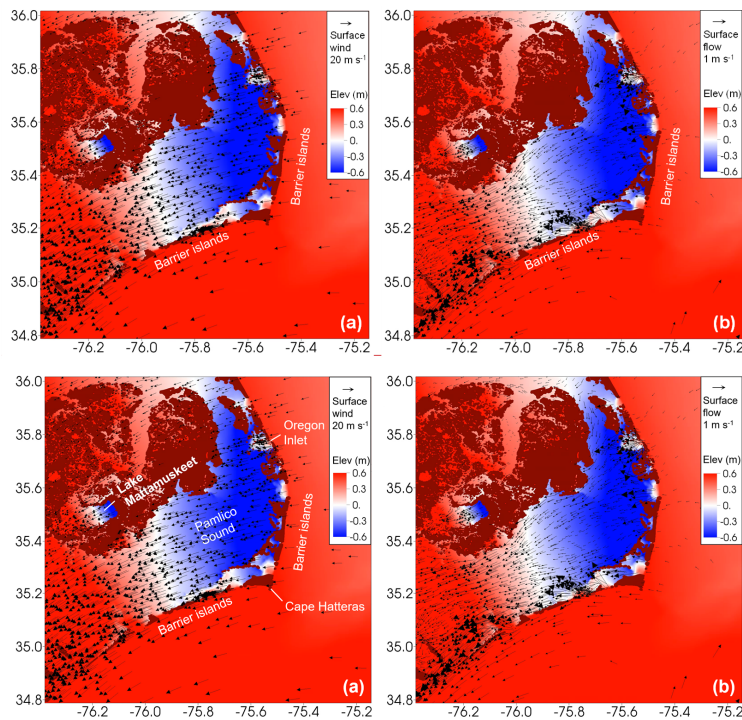

355 **Fig. 10:** Snapshots of water surface elevation at the time of Florence’s landfall (2018-09-14) around the barrier islands **near Cape Hatteras** around Pamlico Sound, overlaid by (a) wind speed and (b) water surface flow. **Note that the overall pattern of wind-induced set-up/set-down is also present on a smaller-scale (Lake Mattamuskeet).**

4.3 Watershed

360 High Water Marks (HWMs) are collected by USGS experts more than two weeks after Hurricane Florence’s landfall on Sep. 14. They are derived from small seeds or floating debris carried by floodwaters that adhere to smooth surfaces or lodge in tree bark to form a distinct line, and also by stain lines on buildings, fences, and other structures. Therefore, HWMs are time sensitive and usually have vertical uncertainties of ± 0.3 feet, or equivalently ± 0.09 m (Koenig, et al., 2016; Austin, et al., 2018).

365 The simulated elevation on 276 HWMs (276 of them) in the NC and SC watersheds are compared with field estimates (Fig. 11). The model is able to capture well the transition from estuarine to riverine regimes; note that the averaged bottom

elevation for all observation points is 3.8 m based on NAVD88, and about 70% of the points are located above 2 m (NAVD88), beyond the reach of storm surges. Overall, the averaged MAE for all HWMs is 0.73 m, with a correlation coefficient of 0.92 and a positive mean bias of 0.09 m. There is a slight positive bias on near-shore HWMs (Fig. 11), corresponding to the over-prediction of peak elevation at coastal stations (Fig. 9a-c). These skill scores are similar to what we obtained for Hurricane Harvey (Huang et al., submitted2021) and are quite satisfactory given the large uncertainties typically found in the watersheds.


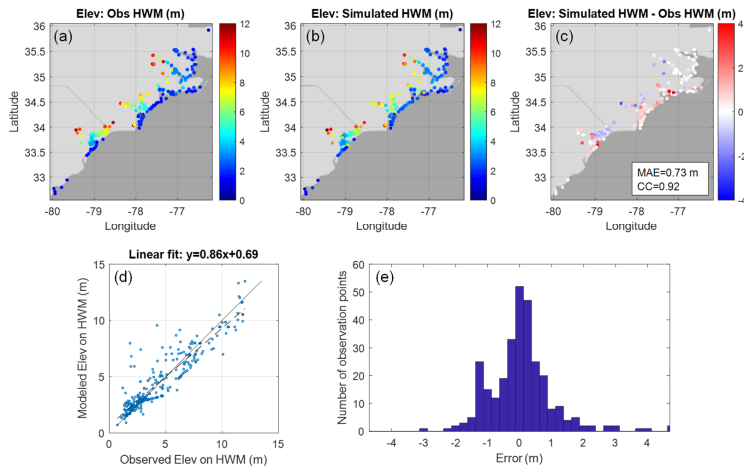


Fig. 11: Comparison of HWMs. (a) Field estimates from USGS; (b) model prediction; (c) model minus observation; (d) regression between model prediction and observation; (e) histogram showing the error distribution.

Some of the HWM estimates are derived from the measured time series at USGS in situ gauges. Fig. 12 shows the comparison for both elevation (gauge height) and discharge in a large river in the study region. The , at a gauge is in the interior of our grid, near "Freshwater Source 2" in Fig. 6 for both elevation (gauge height) and discharge. Because the observation's vertical datum is NAVD29 and the model's datum is NAVD88, we have adjusted the mean model elevations to match the observed mean in the elevation comparison (Fig. 12b); in other words, only the elevation variability is compared. Given all the uncertainties in the watershed, a reasonable agreement is found; our model over-predicted the flow and under-predicted the flood-induced surges. Further calibration of the model, for example by Using more accurate fresh water source at the land boundary, improving the channel representation in the model grid, and locally adjusting the bottom friction should help improve the skill but given our ultimate goal of sealing up to the national scale in an operational setting, we chose to keep the parameterization as simple as possible here.

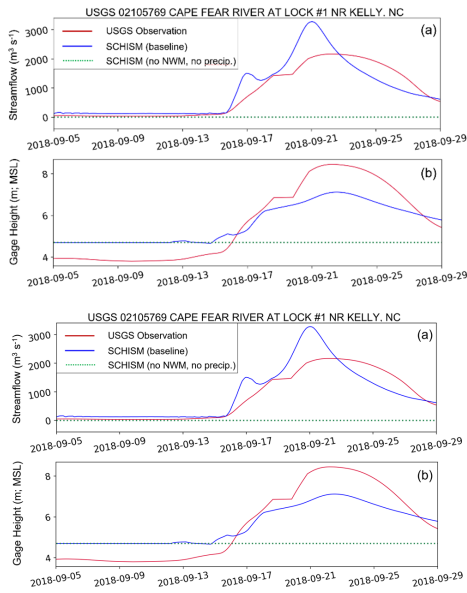

390 **Fig. 12: Model—data comparison near the landfall location: (a) streamflow; (b) gauge height. The sensitivity run (without freshwater inputs from NWM or precipitation) is also shown, in which the channels are dry even during the hurricane, indicating they are beyond the storm surge influence. The station is away from the land boundary (location marked in Fig. 3b).**

395 Our tests show that the simulated elevation on the High Water Marks (HWMs) in the watershed is sensitive to: grid resolution, precipitation, river inputs through the land boundary, and bottom friction. Grid resolution and quality is the most important factor. Misrepresenting flood pathways can easily lead to errors of a few meters near some very localized features like ditches, highways etc. The model skill in the watershed was found to be sensitive to the grid resolution there, particularly in urban environment where small scale structures (such as buildings and ditches) bring additional challenges and uncertainties (e.g., variable infiltration rates). Fig. 13 illustrates such an example around the Northeast Cape Fear River/Burnt Mill Creek in the city of Wilmington, NC. Large HWM errors were found in the preliminary setup, because the computational grid did not resolve the small creeks that served as the main conduit in draining out the storm water after the flood. This resulted in stacking of water locally and thus large over-prediction of HWMs there. The channel of the creek is about 6–10 m wide, and once resolved using 2 rows of quadrangles as done in the baseline (Fig. 13c), the model skill was greatly improved (Fig. 13d). The only remaining large error point in the “baseline” occurs in an urban area away from the

400

river (Fig. 13d), likely due to the building or drainage effects that have not been incorporated in the model (Fig. 13d). The defects in grid quality can lead to large errors that are not likely to be rectified by tuning other parameters. To fix the remaining few large errors away from the landfall site, grid quality should be examined first. The continuous improvement on this model grid is part of an ongoing effort of operationalizing the model along the US East Coast and Gulf Coast, and we will report this in future studies. Resolving small-scale flow routing features in a national scale requires automated tools such as Pysheds (<https://github.com/mbartos/pysheds>) that can detect and delineate the channels automatically, ~~which can then be effectively incorporated into grid-generation tools such as SMS.~~ Initial tests showed very promising results from this package. We remark that it is feasible to resolve these features efficiently without significantly increasing the grid size due to SCHISM's flexibility and robustness in handling poor-quality meshes. Afterwards, the inclusion of urban drainage should reduce the occasional large errors there. Other factors such as uncertainties in DEM, precipitation and the river flow through land boundary also play minor roles.

405

410

415

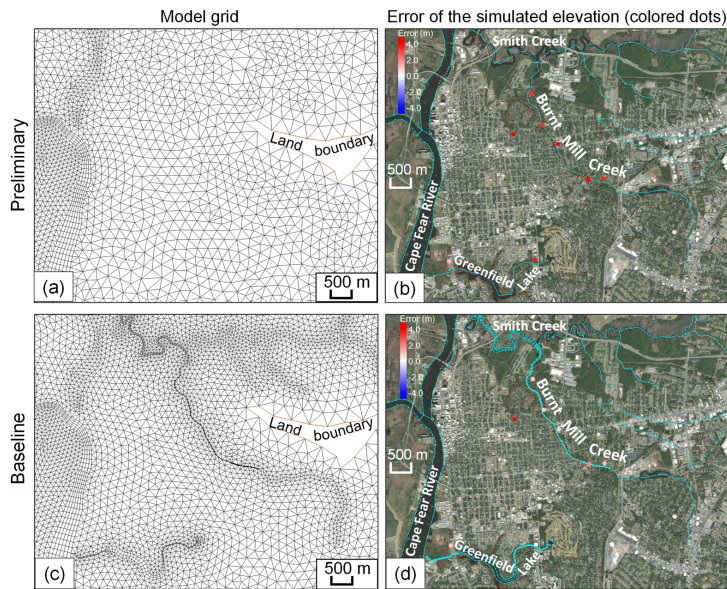
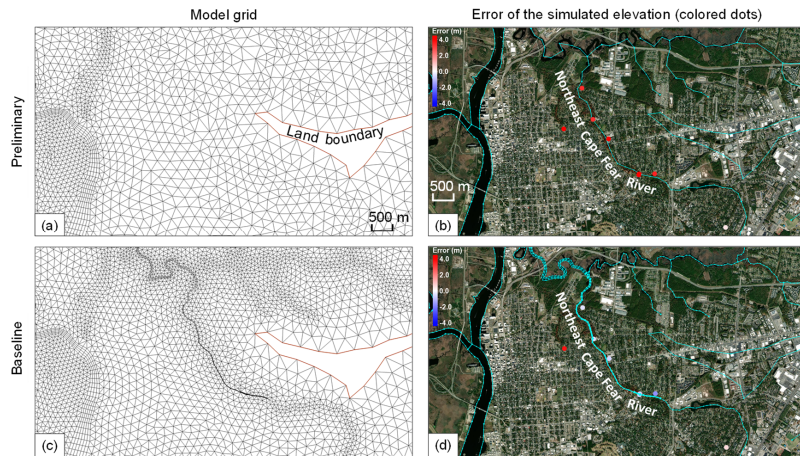


Fig. 13: Importance of resolving small-scale features on the order of a few meters in the watershed, illustrated by a comparison between a preliminary setup (a, b) and the baseline setup (c, d). To better resolve the Burnt Mill Creek, NC, more SMS feature

420 arcs (cyan lines in (d)) are used in the baseline setup than in the preliminary setup (cyan lines in (b)), significantly reducing the
HWM errors. See Fig. 2 for the location of this locally zoomed-in region. The base maps in (b) and (d) are provided by
ESRI. Importance of resolving small-scale features on the order of a few meters in the watershed, illustrated by a comparison
425 between a preliminary setup (a, b) and the baseline setup (c, d). To better resolve the Northeast Cape Fear River, more SMS
feature arcs (cyan lines in (d)) are used in the baseline setup than in the preliminary setup (cyan lines in (b)), significantly reducing
the HWM errors. See Fig. 2 for the location of this locally zoomed-in region. The base maps in (b) and (d) are provided by ESRI.

5 Compound effects

A carefully validated 3D model such as the one presented here can effectively separate out compounding factors from
different sources: coastal surge, river flooding and precipitation. In this section we apply this approach to examine the
430 contributing factors to the observed total flooding during Florence. The design of the numerical experiments is such that we
selectively turn on/off forcing from ocean, river, and precipitation to examine their individual effects in isolation (Table 1).
This section summarizes the major findings from those experiments. As an overview, the conditions of maximum inundation
435 extent from all scenarios are listed in Table 2. To facilitate the comparison of inundated area, a practical value (1 foot) on the
same order of the mean inundation depth is used as a threshold. For the two indices shown in Table 2, the baseline values are
always larger than those from a single sensitivity test. This confirms the existence of compound regions in the two states
(North Carolina and South Carolina) during the hurricane. More details of each forcing's effect and the compound effects are
discussed below.

Table 2: Overview of the maximum inundation extent in South Carolina and North Carolina watersheds (above the NAVD88 datum) during the simulation period.

Scenario	Percentage of inundated area with water depth > 0.305 m (1 foot)	Spatially averaged maximum inundation depth (m)
Baseline	46.7%	0.61
Ocean	12.7%	0.12
River	17.4%	0.31
Rain	34.4%	0.36

Turning off both rivers and precipitation (i.e., storm surge only) is expected to have major impact on flooding in the watershed. This is confirmed in Fig. 12 in the previous section. Not surprisingly, without rivers and precipitation, watershed is mostly dry as the storm surge cannot propagate over steep terrains (Fig. 12). As a result, the predicted HWMs are biased
440 too low (Fig. 14) as the steep topography quickly damped out any surges brought in by the ocean. This leads to systematically underpredictions in the watershed and a 64% increase in MAE compared to the baseline (Fig. 11). On the other hand, Zhang et al. (2020) demonstrated that the storm surges can propagate much further into watershed if watershed rivers are included. There is no apparent deterioration of model skill on the near-shore HWMs, because those locations are predominately affected by oceanic processes.

Formatted: Space Before: 0 pt, After: 12 pt

Formatted: Line spacing: single

Formatted: Centered, Line spacing: single

Formatted Table

Formatted: Centered, Line spacing: single

Formatted: Font: Not Bold

Formatted: Centered, Line spacing: single

Formatted: Centered, Line spacing: single

Formatted: Centered, Line spacing: single

Formatted: Centered, Line spacing: single

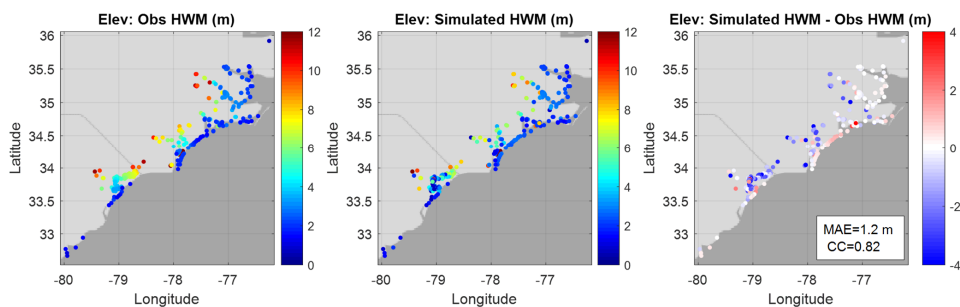


Fig. 14: Simulated HWMs from the sensitivity run “no_NWM_precipOcean”, i.e., without the freshwater inputs from NWM or precipitation. Note the underpredictions in the watershed and worse model skill compared with “baseline” (Fig. 11).

455 Less obvious are the effects of rivers and precipitation on the observed surges in the coastal bays. Fig. 9 indicates that the effects are negligible at the 3 coastal stations away from barrier islands (Fig. 9a–c), as the large amount of freshwater from the watershed directly drains into the coastal ocean (which has much larger volume of water). On the other hand, the impounding effects are clearly seen at the 2 stations behind the barrier islands (Fig. 9ef), where the discharged water is trapped for almost a week; the difference reaches ~30 cm at times there (seeef Fig. 8). As we showed in Section 4.2, the barrier islands are effective in creating separation and thus large elevation gradient between water immediately outside and inside (efsee Fig. 10).

460 To assess the contributions from each of the 3 forcing factors to the total sum, we follow Huang et al. (submitted2021) and use the concept of “disturbance”. We recognize that for compound flooding processes that involve both ocean and watershed, neither the water surface elevation nor the water depth is a satisfactory metric, because the nominally large water elevations on the high ground of watershed are dominated by the high bottom elevation there, and the large water depths in the bays and ocean are dominated by the local bathymetry. Therefore, we adopt the concept of “disturbance”, defined as:

$$D = \begin{cases} \eta, & \text{if } h \geq 0, \\ \eta + h, & \text{if } h < 0, \end{cases}$$

470 where η is the water surface elevation and h is the bathymetry (positive downward; $h > 0$ for ocean and $h < 0$ for high grounds in watershed), so $(\eta + h)$ is water depth. Basically, D represents the departure from “initial condition” (either the initial water surface or bottom, whichever is higher). Note that D is continuous across $h = 0$. On the initially “dry” ground in watershed, D represents the local water depth; whereas at initially “wet” locations, D is simply the surface elevation. D is also a smoother metric to measure the compound effects as one transition from oceanic into watershed regimes.

Formatted: Justified

The comparison between the maximum disturbances from the three experiments using only one of the three forcing factors and the total sum helps shed lights on the contributions from each. The results are presented in Fig. 15, in terms of proportion of total maximum disturbance as explained by each forcing factor at a given location (therefore, the sum of all proportions equals unity). Our results clearly indicate that: (1) the ocean (and atmospheric) forcing dominates in the open and part of southern Pamlico Sound in the APS system; (2) river forcing is most dominant in the river network of watershed; (3) precipitation effects are dominant in other parts of the watershed away from the river network. However, the presence of the barrier islands significantly complicates the interaction among different forcings (e.g., the significant contribution from precipitation in Pamlico Sound as shown in Fig. 15c). On the other hand, the inclusion of the wave effects is not expected to alter the findings here because their contribution to the total elevation is relatively minor as compared to the atmospheric effects (see Fig. 9).

The competition among different forcing factors in different regions can be succinctly summarized as a “dominance” map as shown in Fig. 16: a factor is deemed dominant if it explains at least 80% of the total disturbance; if, however, none of the 3 factors contribute to 80% or more at a particular place, the nonlinear compound effects are expected to be significant there. The ocean response is overwhelmingly dominated by the oceanic and atmospheric forcing, the response in the watershed rivers by the river flow, and the response in large portion of highly-elevated watersheds by the precipitation, as seen in Fig. 16. Most of the response in the southern Pamlico Sound is of oceanic origin, because of the wider openings to the south (e.g., Ocracoke and Hatteras inlets etc). On the other hand, there are only a few narrow inlets to the east (e.g., Oregon Inlet), thus effectively blocking off the oceanic influence there (Fig. 16b; also see Fig. 10). It is the “grey areas” (Fig. 16) of compound flooding zones that are most intriguing. These include most of the APS and coastal rivers (Fig. 16b), where the weakened oceanic influence competes with river flow and large rainfall there (Fig. 15). In the estuaries with large river discharges with limited openings to the coastal ocean (Fig. 16c and Fig. 16e), the compound flooding zone is a result of competition among all 3 factors. On the other hand, for the estuaries to the south of the landfall in SC that are less influenced by the heavy precipitation, and not protected by barrier islands and have smaller river discharges, oceanic effects can penetrate very deep into the coastal watershed (Fig.16d). Note that the ocean dominance near Wrightsville Beach, NC (NOAA Station 8658163) and Springmaid Pier, SC (NOAA Station 8661070) may be exaggerated, considering the overestimated peak elevation there (Fig. 9). The compound map like the one shown in Fig. 16 clearly demonstrates the urgent need for a holistic management approach in the planning of mitigation effort for the flood hazard during and after hurricane events.



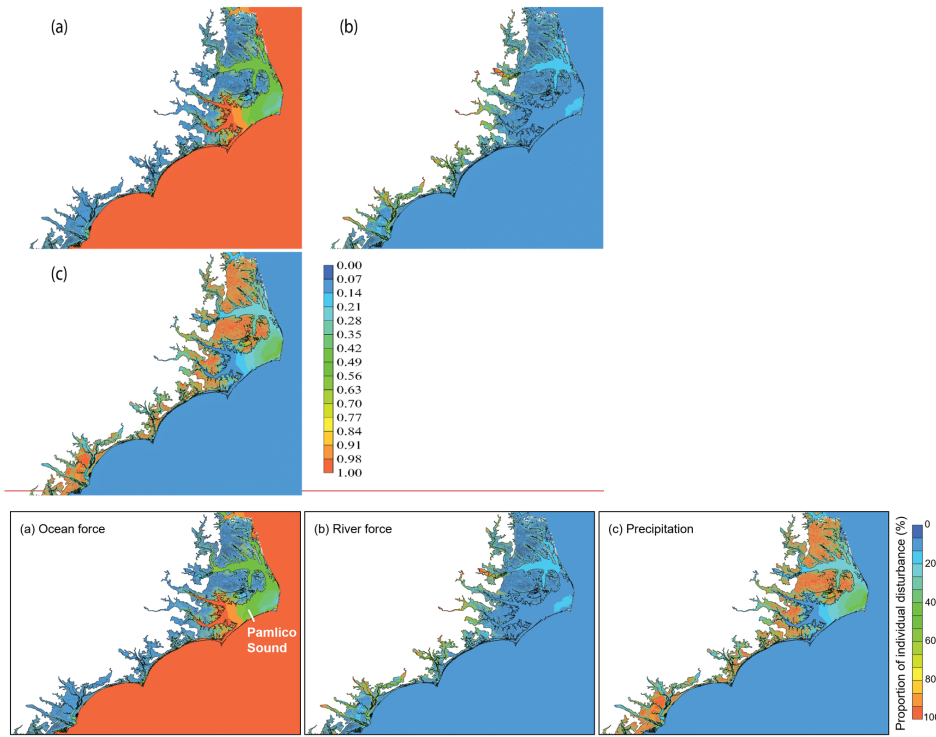


Fig. 15: Regional map showing the spatially varying importance of each forcing factor: (a) ocean force (“Ocean” in Table 1); (b) river force (“River” in Table 1); and (c) precipitation (“Rain” in Table 1). The value is the proportion of a factor’s individual “disturbance” (see definition in Section 5) to the sum of the disturbance from all factors. The colors from blue to red represent increasing importance of a factor at a specific location. Regional map showing portions explained by each forcing factor: (a) ocean force only (“Ocean” in Table 1); (b) river force only (“NWM” in Table 1); and (c) precipitation only (“Rain” in Table 1).

505

Formatted: Caption, Space Before: 0 pt, After: 0 pt

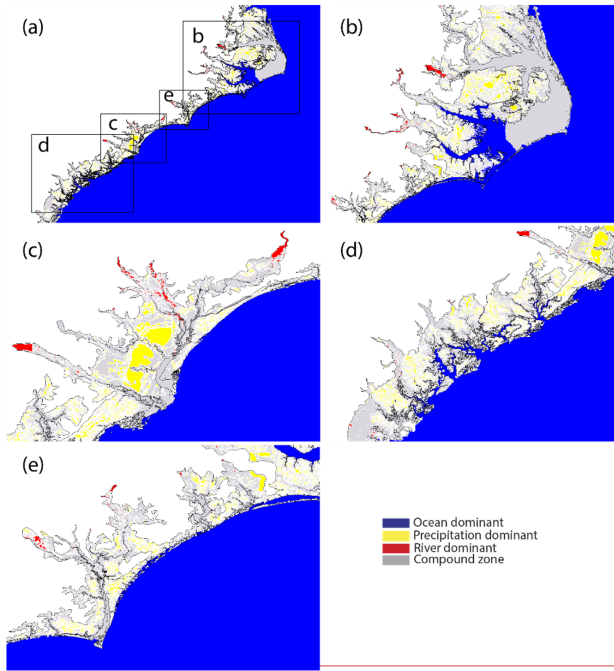

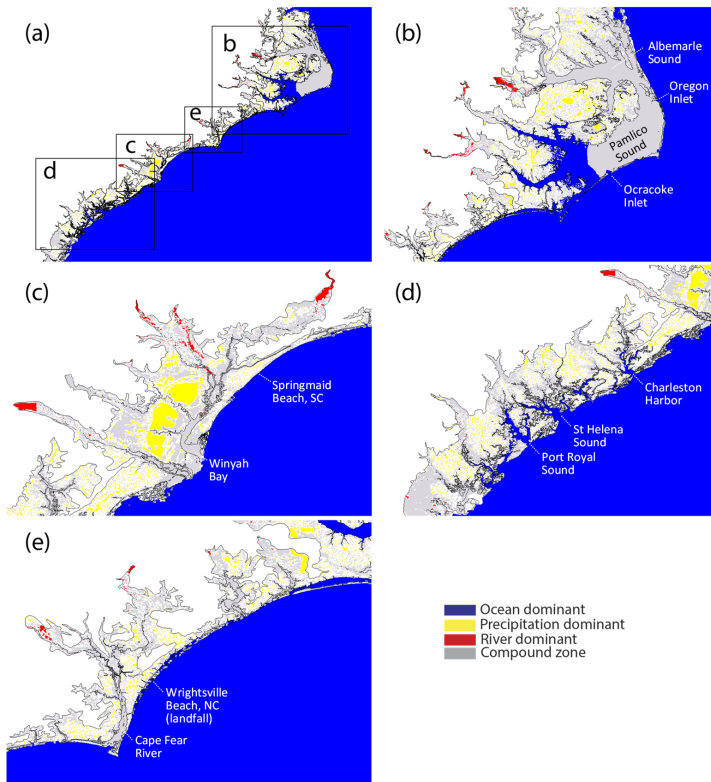

510 **Fig. 16: Dominance map showing the spatial dominance of different flood drivers during Hurricane Florence. (b–e) are zoom-ins from (a) in different regions.**

6 Conclusions

515 We have successfully applied a 3D cross-scale model to examine the compound flooding processes that occurred during Hurricane Florence. The model is fully coupled in the sense that the hydrologic and hydrodynamic processes are solved by the same set of governing equations. Limitations of the model include the neglect of infiltration and urban drainage, which will be implemented soon. The model was validated with observation data collected in the watershed and coastal ocean. The mean absolute errors for major variables are: 11 cm for coastal elevation, 72 cm for High Water Marks (HWMs).

520 Locally very high resolution was used in some watershed areas to resolve small features that were critical for a good model

skill for the HWMs. The wave effects were found to be significant near barrier islands and had contributed to some over-toppings and breaches there. The validated model was then used to reveal significant nonlinear compound effects in most parts of coastal watersheds and behind the barrier islands. The barrier islands were shown to be particularly effective in separating the processes in the water bodies inside and outside.

525 The results of the current study, especially the regional compound zone map, filled in a critical knowledge gap in our understanding of compound flooding events. In fact, operational forecasts based on the current model are being set up at NOAA to help coastal resource and emergency managers with disaster planning and mitigation effort. The model can also be used to facilitate new scientific discovery of novel coastal processes; for example, preliminary results for the fate of pollutants discharged from the watershed suggest that the large watershed outflow resulted from heavy precipitation played
530 an essential role in exporting pollutants far into the ocean through the large and long-lasting freshwater plumes that occurred after the event.

Data availability

The model source code is freely available at <https://github.com/schism-dev>.

535 **Author contributions**

All authors conceived the idea of the study under the NOAA's Water Initiative project; FY, WH and YJZ developed the methodology with the support of other co-authors; FY and WH produced the results with the support of YJZ, HY; FY analyzed the results with the support of other co-authors. All authors contributed to writing of the paper.

Competing interests.

540 The authors declare that they have no conflict of interest.

Acknowledgements

This work is funded by NOAA's Water Initiative (Grant Number NA16NWS4620043). The authors thank Dr. Linus Magnusson (ECMWF) for providing the high-resolution ERA forcing. Simulations used in this paper were conducted using the following computational facilities: (1) William & Mary Research Computing for providing computational resources
545 and/or technical support (URL: <https://www.wm.edu/it/rc>) (2) the Extreme Science and Engineering Discovery Environment (XSEDE; Grant TG-OCE130032), which is supported by National Science Foundation grant number OCI-1053575; (3) the NASA High-End Computing (HEC) Program through the NASA Advanced Supercomputing (NAS) Division at Ames Research Center.

550 **References**

Austin, S.H., Watson, K.M., Lotspeich, R.R., Cauller, S.J., White, J.S., and Wicklein, S.M.: Characteristics of peak streamflows and extent of inundation in areas of West Virginia and southwestern Virginia affected by flooding, June 2016

(ver. 1.1, September 2018): U.S. Geological Survey Open-File Report 2017-1140, 35 p., <https://doi.org/10.3133/ofr20171140>, 2018.

555 [Butterworth, S. \(1930\), On the theory of filter amplifiers, *Wireless Eng.*, 7, 536-541.](#)

Cai, X., Zhang, Y.J., Shen, J., Wang, H., Wang, Z., Qin, Q. and Ye, F.: A Numerical Study of Hypoxia in Chesapeake Bay Using an Unstructured Grid Model: Validation and Sensitivity to Bathymetry Representation. *Journal of the American Water Resources Association*, <https://doi.org/10.1111/1752-1688.12887>, 2020.

560 Ezer, T.: On the interaction between a hurricane, the Gulf stream and coastal sea level. *Ocean Dyn.* 68 (10), 1259-1272, 2018.

Chen, W.B. and Liu, W.C.: Modeling flood inundation induced by river flow and storm surges over a river basin. *Water*, 6(10), pp.3182-3199, 2014.

Chen, A.S., Djordjević, S., Leandro, J. and Savić, D.A.: An analysis of the combined consequences of pluvial and fluvial flooding. *Water Science and Technology*, 62(7), pp.1491-1498, 2020.

565 Cho, K.H., Wang, H.V., Shen, J., Valle-Levinson, A. and Teng, Y.C.: A modeling study on the response of Chesapeake Bay to hurricane events of Floyd and Isabel. *Ocean Modelling*, 49, pp.22-46, 2012.

Feaster T.D., Weaver J.C., Gotvald A.J., Kolb K.R.: Preliminary peak stage and streamflow data for selected US Geological Survey streamgaging stations in North and South Carolina for flooding following Hurricane Florence, September 2018. US Geological Survey, 2018.

570 Dresback, K.M., Fleming, J.G., Blanton, B.O., Kaiser, C., Gourley, J.J., Tromble, E.M., Luettich Jr, R.A., Kolar, R.L., Hong, Y., Van Cooten, S. and Vergara, H.J.: Skill assessment of a real-time forecast system utilizing a coupled hydrologic and coastal hydrodynamic model during Hurricane Irene (2011). *Continental Shelf Research*, 71, pp.78-94, 2013.

[Gochis, D.J., Cosgrove, B., Dugger, A.L., Karsten, L., Sampson, K.M., McCreight, J.L., Flowers, T., Clark, E.P., Vukicevic, T., Salas, F. and FitzGerald, K., 2018, December. Multi-variate evaluation of the NOAA National Water Model. In *AGU Fall Meeting Abstracts \(Vol. 2018, pp. H33G-01\)*.](#)

Guérin, T., Bertin, X., Coulombier, T., de Bakker, A.: Impacts of wave-induced circulation in the surf zone on wave setup. *Ocean Model.* 123, 86-97, 2018.

580 Hall, T.M. and Kossin, J.P.: Hurricane stalling along the North American coast and implications for rainfall. *Clim. Atmos. Sci.* 2, 17, doi:10.1038/s41612-019-0074-8ence, 2019.

Huang, W., Ye, F., Zhang, Y.J., Park, K., Du, J., Moghimi, S., Myers, E., Pe'eri, S., Calzada, J.R., Yu, H.C. and Nunez, K.: Compounding factors for extreme flooding around Galveston Bay during Hurricane Harvey. *Ocean Modelling*, 158, p.101735, 2021.

585 [Huang, W., Zhang, Y.J., Wang, Z., Ye, F., Moghimi, S., Myers, E., Peeri, S., Yu, H.C.: Tide simulation revisited. Submitted to Ocean Modeling in April, 2021.](#)

Ikeuchi, H., Hirabayashi, Y., Yamazaki, D., Muis, S., Ward, P.J., Winsemius, H.C., Verlaan, M. and Kanae, S.: Compound simulation of fluvial floods and storm surges in a global coupled river-coast flood model: Model development and its application to 2007 C yclone S idr in B angladesh. *Journal of Advances in Modeling Earth Systems*, 9(4), pp.1847-1862, 2017.

590 Khan, J., Durand, F., Testut, L., Krien, Y., Islam, A.K.M.: Sea level rise inducing tidal modulation along the coasts of Bengal delta, *Continental Shelf Research*, 211, <https://doi.org/10.1016/j.csr.2020.104289>, 2020.

Koenig, T.A., Bruce, J.L., O'Connor, J.E., McGee, B.D., Holmes, R.R., Jr., Hollins, Ryan, Forbes, B.T., Kohn, M.S., Schellekens, M.F., Martin, Z.W., and Pepler, M.C.: Identifying and preserving high-water mark data: U.S. Geological Survey Techniques and Methods, book 3, chap. A24, 47 p., <http://dx.doi.org/10.3133/tm3A24>, 2016.

595 Kumbier, K., Carvalho, R. C., Vafeidis, A. T. & Woodroffe, C. D.: Investigating compound flooding in an estuary using hydrodynamic modelling: A case study from the Shoalhaven River, Australia. *Natural Hazards and Earth System Sciences*, 18 (2), 463-477, 2018.

Muñoz, D.F., Moftakhari, H. and Moradkhani, H.: Compound effects of flood drivers and wetland elevation correction on coastal flood hazard assessment. *Water Resources Research*, 56(7), p.e2020WR027544, 2020.

600 Pasquier, U., He, Y., Hooton, S., Goulden, M. and Hiscock, K.M.: An integrated 1D–2D hydraulic modelling approach to assess the sensitivity of a coastal region to compound flooding hazard under climate change. *Natural Hazards*, 98(3), pp.915-937, 2019.

Pfahl, S., O'Gorman, P.A., and Fischer, E.M.: Understanding the regional pattern of projected future changes in extreme precipitation. *Nat. Clim. Chang.* 7, 423-427, 2017.

605 Roland, A., Zhang, Y., Wang, H.V., Meng, Y., Teng, Y., Maderich, V., Brovchenko, I., Dutour-Sikiric, M. and Zanke, U.: A fully coupled wave-current model on unstructured grids, *Journal of Geophysical Research-Oceans*, 117, C00J33, doi:10.1029/2012JC007952, 2012.

Santiago-Collazo, F.L., Bilskie, M.V., Hagen, S.C.: A comprehensive review of compound inundation models in low-gradient coastal watersheds. *Environ. Model. Software* 119:166–181. <https://doi.org/10.1016/j.envsoft.2019.06.002>, 2019.

610 Umlauf, L. and Burchard, H.: A generic length-scale equation for geophysical turbulence models. *J. Mar. Res.*, 61, 235-265, 2003.

Wing, O.E., Sampson, C.C., Bates, P.D., Quinn, N., Smith, A.M. and Neal, J.C.: A flood inundation forecast of Hurricane Harvey using a continental-scale 2D hydrodynamic model. *Journal of Hydrology X*, 4, p.100039, 2019

- Ye, F., Zhang, Y.J., Wang, H.V., Friedrichs, M.A., Irby, I.D., Ateljevich, E., Valle- Levinson, A., Wang, Z., Huang, H.,
615 Shen, J., Du, J.: A 3D unstructured-grid model for Chesapeake Bay: Importance of bathymetry. *Ocean Model.* 127, 16–39,
2018.
- Ye, F., Zhang, Y., Yu, H., Sun, W., Moghimi, S., Myers, E.P., Nunez, K., Zhang, R., Wang, H.V., Roland, A., Martins, K.,
Bertin, X., Du, J., Liu, Z.: Simulating storm surge and compound flooding events with a creek-to-ocean model: importance
of baroclinic effects. *Ocean Model* 145, 101526. <https://doi.org/10.1016/j.ocemod.2019.101526>, 2020.
- 620 Zhang, Y., Ateljevich, E., Yu, H.-C., Wu, C.H., and Yu, J.C.S.: A new vertical coordinate system for a 3D unstructured-grid
model. *Ocean Modelling*, 85, 16-31., 2015.
- Zhang, Y., Ye, F., Stanev, E.V., Grashorn, S.: Seamless cross-scale modeling with SCHISM. *Ocean Model* 102:64–81,
2016.
- Zhang, Y., Ye, F., Yu, H., Sun, W., Moghimi, S., Myers, E., Nunez, K., Zhang, R., Wang, H., Roland, A., Du, J., Liu, Z.:
625 Simulating compound flooding events in a hurricane. *Ocean Dyn.* 70, 621–640, 2020.