

Development of a country-wide seismic site-response zonation map for the Netherlands

Janneke van Ginkel^{1,2}, Elmer Ruigrok^{2,3}, Jan Stafleu⁴, and Rien Herber¹

¹Energy and Sustainability Research Institute Groningen, University of Groningen, Nijenborgh 6, 9747 AG Groningen, the Netherlands.

²R&D Seismology and Acoustics, Royal Netherlands Meteorological Institute, Utrechtseweg 297, 3731 GA De Bilt, the Netherlands.

³Department of Earth Sciences, Utrecht University, Princetonlaan 8a, 3584 CB Utrecht, the Netherlands

⁴TNO - Geological Survey of the Netherlands, Princetonlaan 6, 3584 CB Utrecht, the Netherlands

Correspondence: Janneke van Ginkel (j.a.van.ginkel@rug.nl, ORCID-iD 0000-0001-7601-5119)

Abstract.

Earthquake site-response is an essential part of seismic hazard assessment, especially in densely populated areas. The shallow geology of the Netherlands consists of a very heterogeneous soft sediment cover, which has a strong effect on the amplitude of ground shaking. Even though the Netherlands is a low-to-moderate seismicity area, the seismic risk cannot be neglected, in particular, because shallow induced earthquakes occur. The aim of this study is to establish a nation-wide site-response zonation by combining 3D lithostratigraphic models, earthquake- and ambient vibration recordings.

As a first step, we constrain the parameters (velocity contrast and shear-wave velocity) that are indicative of ground-motion amplification in the Groningen area. For this, we compare ambient vibration and earthquake recordings using resp. the horizontal-to-vertical spectral ratio method (HVSR), borehole empirical transfer functions (ETFs) and amplification factors (AFs). This enables us to define an empirical relationship between the amplification measured from earthquakes by using the ETF and AF, and the amplification estimated from ambient vibrations by using the HVSR. With this, we show that the HVSR can be used as a first proxy for site-response. Subsequently, HVSR curves throughout the Netherlands are estimated. The HVSR amplitude characteristics largely coincide with the in-situ lithostratigraphic sequences and the presence of a strong velocity contrast in the near-surface. Next, sediment profiles representing the Dutch shallow subsurface are categorized into five classes, where each class is representing a level of expected amplification. The mean amplification for each class, and its variability, is quantified using 66 sites with measured earthquake amplification (ETF and AF) and 115 sites with HVSR curves.

The site-response (amplification) zonation map for the Netherlands is designed by transforming geological 3D grid cell models into the five classes and an AF is assigned to most of the classes. This site-response assessment, presented on a nation-wide scale is important for a first identification of regions with increased seismic hazard potential, for example at locations with mining or geothermal energy activities.

Copyright statement. TEXT

1 Introduction

Site-response estimation is a key parameter for seismic hazard assessment and risk mitigation, since local lithostratigraphic conditions can strongly influence the level of ground motion amplification during an earthquake (e.g. Bard (1998); Bonnefoy-Claudet et al. (2006b, 2009); Borchardt (1970); Bradley (2012)). Especially near-surface low-velocity sediments overlying stiffer bedrock modify earthquake ground-motions in terms of amplitude and frequency content, as for instance observed after the Mexico City earthquake in 1985 (Bard et al., 1988) as well as more recent ones (e.g. L'Aquila, Italy, 2009; Tokyo, Japan, 2011; Darfield, New Zealand 2012). Site-response estimations require detailed geological and geotechnical information of the subsurface. This can be retrieved from in-situ investigations, however, this is a costly procedure. Because of the time and costs involved, there is a lack of site-response investigations covering large areas, while the availability of detailed and uniform ground-motion amplification maps is fundamental for preliminary estimates of damage on buildings (e.g. Falcone et al. (2021); Gallipoli et al. (2020); Bonnefoy-Claudet et al. (2009); Weatherill et al. (2020)).

Empirical seismic site-response is widely investigated by the use of microtremor horizontal-to-vertical spectral ratios (HVSR, e.g. Fäh et al. (2001); Lachetl and Bard (1994); Bonnefoy-Claudet et al. (2006a); Albarello and Lunedei (2013); Molnar et al. (2018); Lunedei and Malischewsky (2015)). The HVSR is obtained by taking the ratio between the Fourier amplitude spectra of the horizontal and the vertical components of a seismic recording. When a shallow velocity contrast is present, the peak in the HVSR curve is closely related to the shear-wave resonance frequency for that site. However, the HVSR peak amplitude cannot be treated as the actual site amplification factor, but serves as a qualitative estimate (Field and Jacob, 1995; Lachetl and Bard, 1994; Lermo and Chavez-Garcia, 1993).

The Netherlands experiences tectonically related seismic activity in the southern part of the country, with magnitudes up to 5.8 measured so far (Camelbeeck and Van Eck, 1994; Houtgast and Van Balen, 2000; Paulssen et al., 1992). Additionally, gas extraction in the northern part of the Netherlands is regularly causing shallow (3 km), low magnitude ($M_w \leq 3.6$ thus far) induced earthquakes (Dost et al., 2017). Over the last decades, an increasing number of these induced seismic events stimulated the research on earthquake site-response in the Netherlands. Various studies (van Ginkel et al., 2019; Kruiver et al., 2017a, b; Bommer et al., 2017; Noorlandt et al., 2018) undertaken in the Groningen area (north-eastern part of the Netherlands) concluded that the heterogeneous unconsolidated sediments are responsible for significant amplification of seismic waves over a range of frequencies pertinent to engineering interest. Although the local earthquake magnitudes are relatively small, the damage to the houses can be significant. Hence multiple studies (e.g. Rodriguez-Marek et al. (2017); Bommer et al. (2017); Kruiver et al. (2017a); Noorlandt et al. (2018)) were performed on ground-motion modeling including the site amplification factor for the Groningen region.

Groningen forms an excellent study area due to the presence of the permanently operating borehole seismic network (G-network). Local earthquake recordings over the Groningen borehole show that the largest amplification develops in the top 50 meters of the sedimentary cover (van Ginkel et al., 2019), although the entire sediment layer has a thickness of around 800 m in this region. Furthermore, van Ginkel et al. (2019) showed existence of a the correlation between the spatial distribution of microtremor horizontal-to vertical spectral ratio (HVSR) peak amplitudes and the measured earthquake amplification. This

observation is in accordance with those of e.g. Pilz et al. (2009); Perron et al. (2018); Panzera et al. (2021) who show a comparison of site-response techniques using earthquake data and ambient seismic noise analysis.

The aim of this work is to design a site-response zonation map for the Netherlands, which is both detailed and spatially extensive. Rather than using ground-motion prediction equations with generic site amplification factors conditioned on V_{s30} , we propose a novel approach for the development of a nation-wide zonation of amplification factors. To this end, we combine multiple seismological records, geophysical data and detailed 3D lithostratigraphic models in order to estimate and interpret site-response. We first select the Groningen borehole network where detailed information on subsurface lithology, numerous earthquake ground-motion recordings as well as ambient seismic noise recordings are available since their deployment in 2015. From this, we extract empirical relationships between seismic wave amplification and different lithostratigraphic conditions, building upon the proxies defined in van Ginkel et al. (2019).

Next, the ambient vibration measurements of the seismic network across the Netherlands are used, necessary to calibrate the amplification (via HVSR) with the local lithostratigraphic conditions. By combining the detailed 3D geological subsurface models GeoTOP (Staffeu et al., 2011, 2021) and NL3D (Van der Meulen et al., 2013), with a derived classification scheme, a zonation map for the Netherlands is constructed.

The presented site-response zonation map for the Netherlands is especially designed for seismically quiet regions where tectonic seismicity is absent, but with a potential risk of induced seismicity, for example due to mining or geothermal energy activity (Majer et al., 2007; Mena et al., 2013; Mignan et al., 2015). As a result, this map can be implemented in seismic hazard analysis.

2 Geological setting and regional seismicity

The Netherlands is positioned at the southeastern margin of the Cenozoic North Sea basin. The onshore basin infill is characterized by Paleogene, Neogene and Quaternary sediments reaching a maximum thickness of ~ 1800 m. Minimum onshore thicknesses are reached along the basin flanks in the eastern and southern Netherlands and locally at uplifted blocks like the Peel Block. The main tectonic feature of the country is the Roer Valley Graben, bounded by the Peel Boundary Fault in the northeast and the Rijen, Veldhoven and Feldbiss Faults in the south and southwest (Figure 1).

The Paleogene and Neogene sediments are dominated by marine clays and sands that were primarily deposited in shallow marine environments. The Quaternary sediments, reaching a maximum onshore thickness of ~ 600 m, reflect a transition from shallow marine to fluvio-deltaic and fluvial depositional environments in the early Quaternary to a complex alternation of shallow marine, estuarine and fluvial sediments in the younger periods (Zagwijn, 1989; Rondeel et al., 1996; De Gans, 2007; Busschers et al., 2007; Peeters et al., 2016). Imprints of glacial conditions are recorded in the upper part of the basin fill by among others, deep erosive structures (subglacial valleys, tongue basins) and glacial till (Van den Berg and Beets, 1987).

2.1 Surface geology

The surface geology (Figure 1) is mainly characterized by a Holocene coastal barrier and coastal plain in the west and north, and an interior zone with Pleistocene deposits cut by a Holocene fluvial system (Rondeel et al., 1996; Beets and van der Spek, 2000). The coastal barrier consists of sandy shoreface and dune deposits and is up to 10 km wide. It is intersected in the south
90 by the estuary of the Rhine, Meuse and Scheldt, and in the north by the tidal inlets of the Wadden Sea. The coastal plain is formed by mainly of marine clay as well as peat. Although much of the peat has disappeared because of mining and drainage, thick sequences of peat (> 6 m) still occur. The Holocene fluvial deposits of the rivers Rhine and Meuse are characterized by a complex of sandy channel belt systems embedded in flood basin clays (Gouw and Erkens, 2007). The fluvial channel belts pass downstream into sandy tidal channel systems in the coastal plain (Hijma et al., 2009).

95 The Pleistocene interior of the country mainly consists glacial, eolian and fluvial deposits (Rondeel et al., 1996; Van den Berg and Beets, 1987). Glacial deposits include coarse grained meltwater sands and tills. Ice-pushed ridges, with heights up to 100 m, occur in the middle and east of the country. Eolian deposits mainly consist of cover sands and are locally made up by drift sand and inland dunes. In the south and east of the country, sandy channel and clayey flood basin deposits of small rivers occur.

100 Neogene and older deposits are only exposed in the eastern- and southernmost areas of the country. In the east, these sediments include unconsolidated Paleogene formations as well as Mesozoic limestones, sandstones and shales. In the south, the older deposits comprise unconsolidated Neogene and Paleogene sands and clays, as well as Cretaceous limestones (chalk), sandstones and shales, and Carboniferous sandstones and shales.

2.2 Regional seismicity

105 The Netherlands experiences tectonically related earthquake activity in the south east and induced earthquakes occur in the north at shallow depths due to exploitation of gas fields. Tectonic seismicity occurs mainly in the Roer Valley Graben (yellow circles, Figure 2) which is part of a larger basin and range system in Western Europe, the Rhine Graben Rift System. At the beginning of the Quaternary, the subsidence rate in the Roer Valley Graben did increase significantly (Geluk et al., 1995; Houtgast and Van Balen, 2000) and the rift system still shows active extension (Hinzen et al., 2020). The largest earthquake
110 recorded ($M_w=5.8$) in the Netherlands was in Roermond in 1992, due to extensional activity along the Peel Boundary Fault (Paulssen et al., 1992). Gariel et al. (1995) quantified the near-surface amplification based on spectral ratios of aftershocks from the 1992 earthquake in Roermond. They observed great variety in ground-motion amplitudes over different stations which is the site effect of shallow sedimentary deposits.

115 Most induced earthquakes in the Netherlands (orange circles, Figure 2) have their epicentre in the Groningen region due to production of the gas field. Here, reservoir compaction due to pressure depletion has reactivated the existing normal fault system that traverses the reservoir layer throughout the whole field. (Buijze et al. (2017); Bourne et al. (2014)). Even though the magnitudes are relatively low (van Thienen-Visser and Breunese, 2015), the damage to buildings in the area is substantial

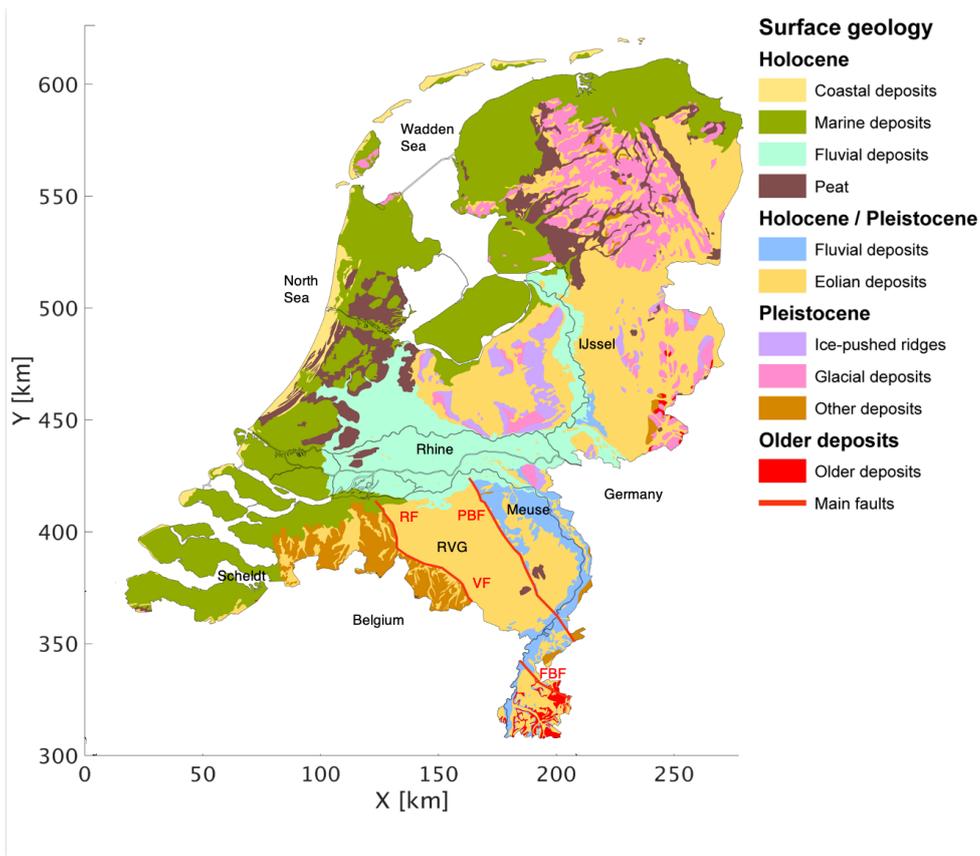


Figure 1. Surface geological map of the Netherlands. Older deposits comprise unconsolidated Neogene and Paleogene deposits as well as Mesozoic and Carboniferous limestones, sandstones and shales. Modified after Schokker (2010). RF = Rijen Fault, VF = Veldhoven Fault, PBF = Peel Boundary Fault, FBF = Feldbiss Fault, RVG = Roer Valley Graben.

due to shallow hypocenters and amplification on the soft near-surface soils (Bommer et al., 2017; Kruiver et al., 2017a).

120

3 Data set

For this study, we use the seismic network of the Royal Netherlands Meteorological Institute (KNMI, 1993), consisting of borehole and surface seismometers distributed over the Netherlands (Figure 2). The network includes 88 locations with vertical borehole arrays where each station is equipped with three-component, 4.5 Hz seismometers at 50m depth intervals (50, 100, 150, 200 m) and an accelerometer at the surface. The southernmost station is at Terziet (TERZ). This station consists of a borehole seismometer at 250 m depth and a surface seismometer. In Groningen, multiple boreholes have Seismic Cone Penetration Tests (SCPT) taken directly adjacent to the borehole. The remaining triangles represent 29 locations of sin-

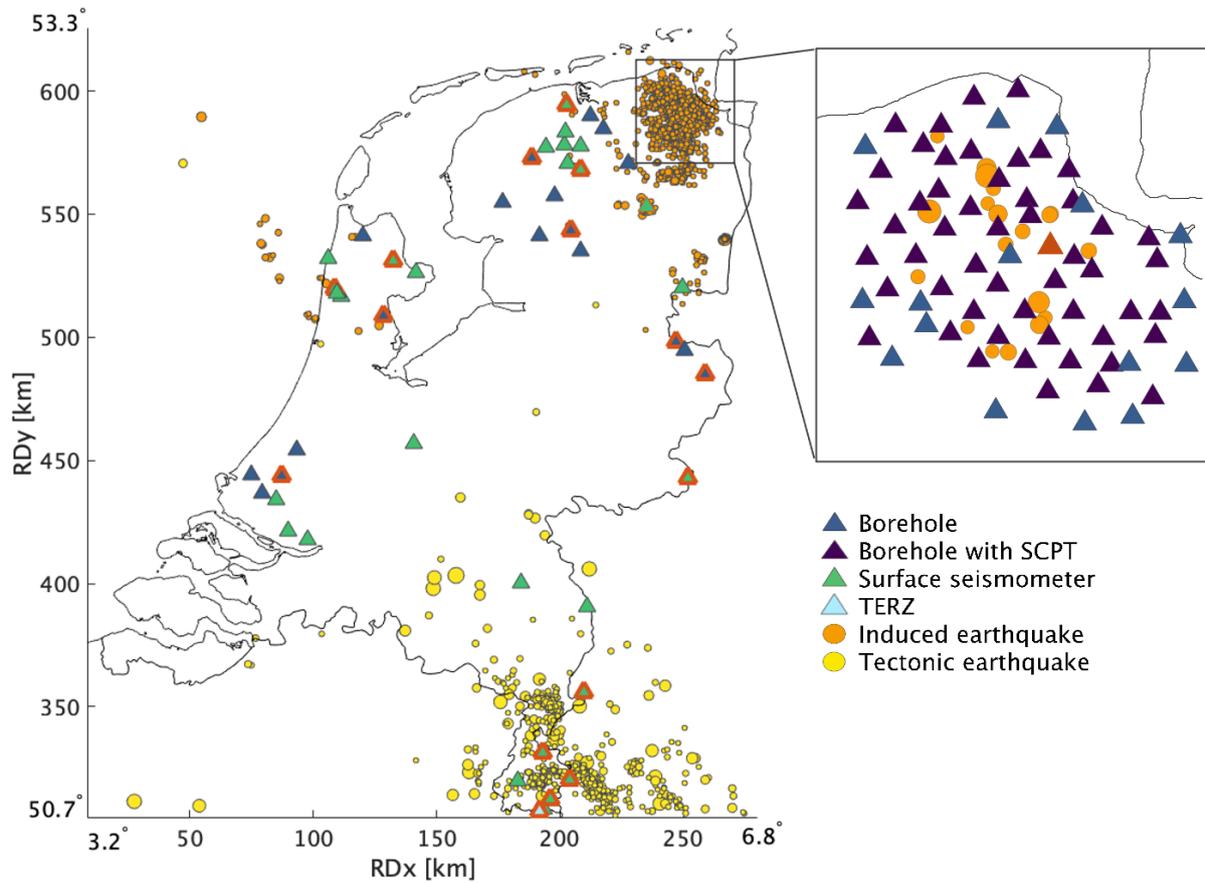


Figure 2. Map of the Netherlands depicting epicentres of all induced (M_w 0.5-3.6, orange) and tectonic (M_w 0.5-5.8, yellow) earthquakes from 1910-2020. The diameter of the circles indicates the relative earthquake magnitude. The triangles represent the surface location of the borehole stations (blue), borehole stations with SCPT measurement (purple) and single surface seismometers (green). The triangles with red outlines depict the locations of example HVSR curves presented in Figure 8. The inset in the north-east depicts the location of the Groningen borehole network (G-network). Here, the red triangle depicts the location of borehole G24. The 19 ($M_w \geq 2$) induced earthquakes in this panel are used for the AF and ETF computations. Coordinates are shown within the Dutch National Triangulation Grid (Rijksdriehoekstelsel or RD) and lat/long coordinates are added in the corners for international referencing.

130 gle surface seismometers (accelerometers and broad bands). All seismometers have three components and are continuously recording the ambient seismic field and, when present, local earthquakes. In Section 4 we use 19 local earthquakes of $M \geq 2$, recorded in the Groningen borehole network between 05-2015 and 05-2019. All data is available through the KNMI data portal (<http://rdsa.knmi.nl/network/NL/>).

In the construction of the site-response map we have made extensive use of the detailed 3D geological subsurface models GeoTOP and NL3D. Both models are developed and maintained by TNO – Geological Survey of the Netherlands (Van der Meulen et al., 2013). GeoTOP schematizes the shallow subsurface of the Netherlands in a regular grid of rectangular blocks (voxels, tiles or 3D grid cells), each measuring 100 by 100 by 0.5 m (x ,y, z) up to a depth of 50 m below ordnance datum (Staffeu et al., 2011, 2021). Each voxel contains multiple properties that describe the geometry of lithostratigraphic units (formations, members and beds), the spatial variation of lithology and sand grain-size within these units as well as measures of model uncertainty. GeoTOP is publicly available from the TNO’s web portal: <https://www.dinoloket.nl/en/subsurface-models> To date, the GeoTOP model covers about 70% of the country (including inland waters such as the Wadden Sea). For the missing areas we have used the lower-resolution voxel model NL3D, which is available for the entire country (Van der Meulen et al., 2013). NL3D models lithology and sand grain-size classes within the geological units of the layer-based subsurface model DGM (Gunnink et al., 2013) in voxels measuring 250 by 250 by 1 m (x ,y, z) up to a depth of 50 m below ordnance datum. To determine the depth of bed rock in the shallow subsurface, we consulted the layer-based subsurface models DGM and DGM-deep. These models are also available from the web portal mentioned above. More details on the models GeoTOP and NL3D are given in Appendix B.

4 Empirical relationships from the Groningen borehole network

The dense Groningen borehole network (G-network) provides the opportunity to derive empirical relationships between measured amplification in the time and frequency domain, estimated amplification from ambient vibrations and the local lithostratigraphic conditions. First, we present results of three different methods to assess amplification. Next, we compare subsurface parameters with the measured amplification in order to evaluate which parameters are most critical.

4.1 Definition of amplification

The majority of site-response studies define the level of soft sediment amplification with respect to the surface seismic response of a nearby outcropping hard rock. In the Netherlands, no representative seismic response of outcropping bedrock is available. As an alternative, we define reference conditions as found in Groningen at 200 m depth, where we have many seismic recordings. These same reference conditions can be found at this depth over most locations in the Netherlands, though it can be sometimes deeper or shallower than 200 m. The corresponding elastic properties (shear-wave velocity and density) form the basis from which the ground motion amplification effect of any site with respect to the reference can be predicted. This approach is akin the reference velocity profile that is used in Switzerland (Poggi et al., 2011).

For a recording at the Earth’s surface, simultaneously the up- and down-going waves are recorded, which leads to an amplitude doubling. This is called the free-surface effect. If the amplification is defined with respect to a surface (hard-rock) site, both the site of investigation and the reference site experience the same free-surface effect and there is no need to remove it in order to isolate the relative amplification. We have a reference site at depth, where no free-surface effect takes place. Hence, we need to remove the free-surface effect first from the surface recording before isolating the relative amplification.

The G-network forms a representative resource for the definition of the reference horizon parameters. Hofman et al. (2017) and (Kruiver et al., 2017a) determined shear-wave velocities at all borehole seismometers levels in Groningen. From their velocities found at 200 m depth, the average is taken, resulting in a reference shear-wave velocity of 500 m/s. At this depth, the sediment density is on average 2.0 kg/m^3 . At 200 m depth, 95% of the Dutch subsurface is composed of laterally extensive Pleistocene-and Pliocene sediments, hence the estimated site-response and corresponding amplification factors can be applied on a large part of the country. The remaining 5% consists of shallow ($<100 \text{ m}$) Triassic, Cretaceous and locally Carboniferous bedrock, and therefore these locations need to be evaluated separately.

4.1.1 Frequency bandwidth

Data processing is applied on a frequency bandpass filter for 1-10 Hz, covering the periods of interest from an earthquake engineering point of view. Moreover, for these frequencies, the used instrumentation (broadband seismometers, accelerometers and geophones) have high sensitivity for ground-motion.

Since most of the amplification is occurring in the top sedimentary layer (van Ginkel et al., 2019), the corresponding resonance frequencies are covered in the used frequency filter as well. Above 10 Hz, the amplitude increase due to soil softening and resonance is counteracted by an-elastic attenuation and 3D scattering. Furthermore, what exactly happens above 10 Hz is of little interest since most of the local earthquake energy is contained in the frequency band between 1 and 10 Hz. This is illustrated in Figure 3, which presents the particle-velocity Fourier Amplitude Spectrum of a local earthquake recorded in borehole G24. The location of this borehole is presented as red triangle in Figure 2.

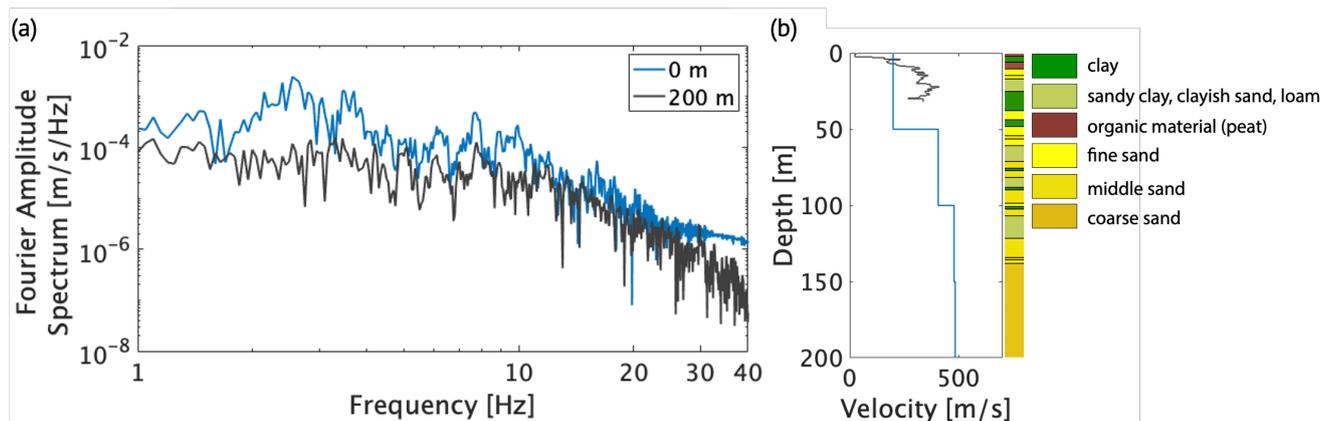


Figure 3. a) Particle velocity Fourier Amplitude Spectrum measured on the radial component for the 200 m (gray) and surface seismometer (blue) for borehole G24 for a 20 s time window of the 08-01-2018 Zeerijp M3.4 earthquake. Borehole G24 has an epicentral distance of 10 km. b) Shear-wave velocity profile for G24 with in blue the interval velocities from Hofman et al. (2017), and the shear-wave velocity from the adjacent SCPT over the top 30 m (black line). The corresponding lithological profile is derived from GeoTop (www.dinoloket.nl/subsurface-models, last access 15-10-2021).

4.2 Amplification Factors

We compute an overall amplification factor from the G-network earthquake recordings by taking the ratio of the maximum amplitudes recorded at the surface and the 200 m deep seismometer, following the procedure described in van Ginkel et al. (2019). This ratio is taken for both the radial (R) and transverse (T) component and the results are averaged. The amplitude at the surface is divided by a factor of 2 in order to remove the effect of the up-and down going waves recorded at the same time. Earthquake records are processed in the time domain for a 20 s time window and frequency band of 1-10 Hz. Next, the AF per borehole is obtained by repeating the above procedure for 19 available $M \geq 2.0$ local induced earthquakes and subsequently averaging the values. It is determined in the time domain and therewith provides an average amplification over the applied frequency band.

Many studies (e.g., Bommer et al., 2017; Rodriguez-Marek et al., 2017; Borchardt, 1994) model site-response amplification factors (AF) for different periods of spectral-accelerations, which is tailoring to engineering structures with different resonance frequencies. In this study we aim to provide an average amplification level in a broad frequency band. The choice for the specific AF frequency band was supported by evaluating amplification over a range of frequency bands. Figure 4 shows the AFs over the Groningen network for several bands. AF-values are highest in the band 1-5 Hz due to the strong resonances of the Holocene infill (van Ginkel et al., 2019). In the 1-10 Hz band the AFs are lower, but contains considerable earthquake amplitudes (Figure 3). When the frequency band is extended beyond 10 Hz (Figure 4c, d), the AF-values are not changing significantly. We decided to pick the frequency band of 1-10 Hz as representative AF since it is a better overall representation of amplification by the soft sediments than the higher values of 1-5 Hz, as shown in Wassing et al. (2012).

4.3 Empirical Transfer Functions

Empirical transfer functions (ETF) represent shear-wave amplification in the frequency domain. ETFs are defined as a division of the Fourier amplitude spectra at two different depth levels. With a reference horizon at 200 m depth and the level of interest at the Earth's surface, the transfer function has both a causal and acausal part. The causal part maps upward-propagating waves, from the reference level to the surface. The acausal part maps downward-propagating waves back to the free surface (Nakata et al., 2013). When describing amplification, we are only interested in the causal part. We select this causal part of the estimated transfer function and compute its Fourier amplitude spectrum to obtain a measure of frequency-dependent amplification. We use 20 s long time windows for particle velocity recordings on the radial component of the G-network seismometers. Subsequently, we average over 19 local earthquakes with magnitudes ≥ 2.0 . This can be seen as an implementation of seismic interferometry by deconvolution (Wapenaar et al., 2010). Lastly, the deconvolution results are stacked to enhance stationary contributions.

From the ETF between the 200 m depth and surface seismometer (ETF_{200}), peak amplitudes are identified. Some example ETF curves are plotted in Figure 5. Additionally, ETF curves for the top 50 m are calculated (ETF_{50}). The ETF curves for the different intervals show very similar peak characteristics and peak amplitudes, demonstrating that most amplification are developed in the top 50 m of the sediment cover. Furthermore, the borehole sites with highest ETF peak amplitudes can be

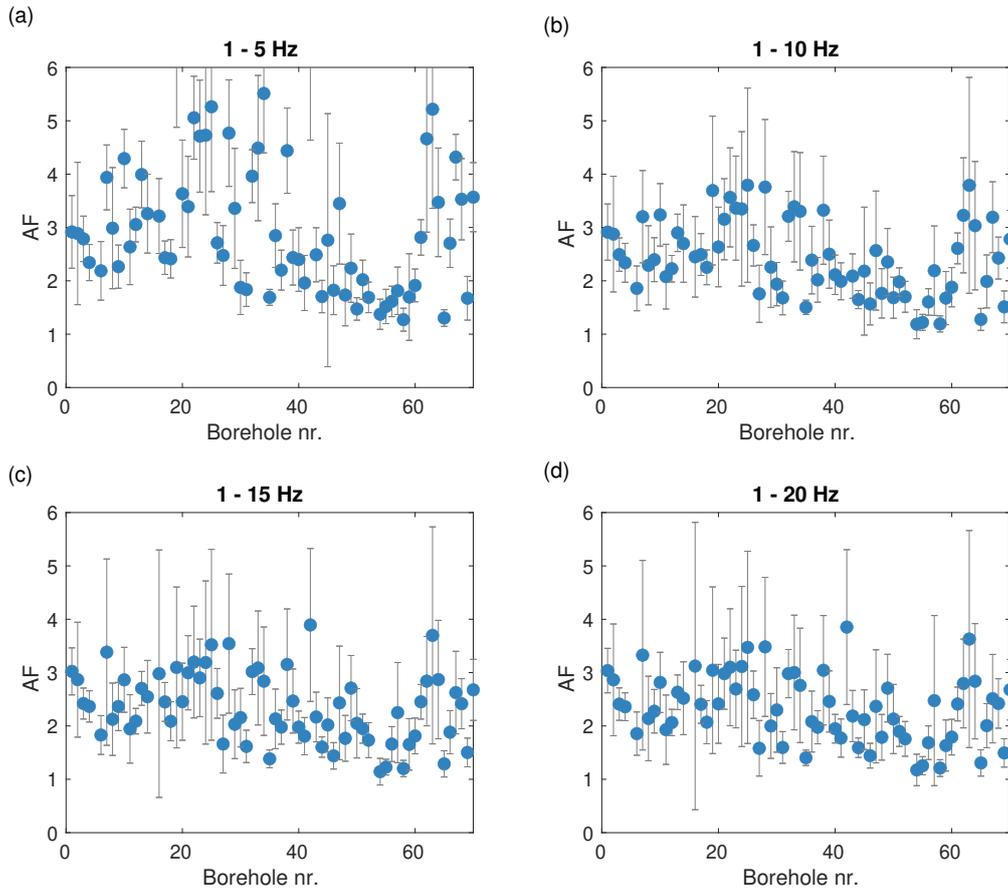


Figure 4. Amplification factors (AFs) for a) frequency band 1-5 Hz, b) 1-10 Hz, c) 1-15 Hz and d) 1-20 Hz and corresponding standard deviations (error bars) associated to the averaged AFs over 19 $M \geq 2.0$ local earthquakes.

linked to the local geology, as presented in van Ginkel et al. (2019, figure 9). Here, highest peak amplitudes are measured at sites with unconsolidated Holocene alternations of clay and peat, overlying consolidated Pleistocene sediments.

215 4.4 H/V spectral ratios from the ambient seismic field

The Groningen surface seismometers are continuously recording the ambient seismic field (ASF) and this data is used to estimate horizontal-to-vertical spectral ratios (HVSr). In this study we focus on the second peak (≥ 1 Hz) in the HVSr curve which represents shear-wave resonances at the shallowest interface of soft sediments on top of more consolidated sediments. Resonances of the complete sediment layer display a peak at lower frequencies (van Ginkel et al., 2020). Above 1 Hz the noise
 220 field is dominated by anthropogenic sources. The details of the method to obtain stable HVSr curves from the ASF in the Groningen borehole network can be found in van Ginkel et al. (2020). In summary, from power spectral densities for each component, the H/V division is performed for each day. Subsequently, a probability density function is computed over one

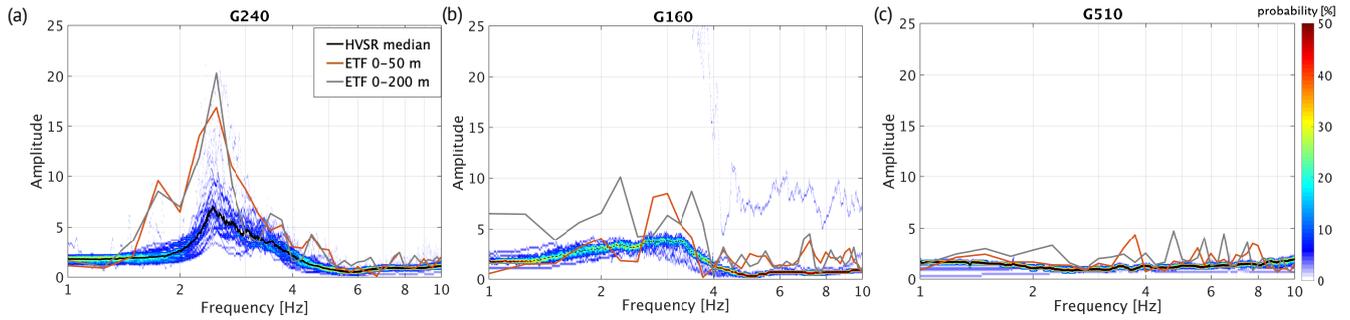


Figure 5. Probability density function of one month of daily HVSRs and the mean HVSR (solid black line) and ETF for the borehole seismometer interval of 0-50 m (gray dashed line) and 0-200 m (gray solid line). The selected borehole sites exhibit differences in curve characteristics with a) G24, illustrating clearly peaked curves (>4). b) G16, illustrating medium (2-4) peak amplitudes. c) G51, no pronounced peak.

month of H/V ratios and the mean is extracted. This yields a stable HVSR curve that is not much affected by transients like nearby footsteps or traffic.

225 Based on the HVSR curve-and peak characteristics, different criteria are defined conformable to the SESAME consensus (Bard, 2002): 1) Clear peaked curves (HVSR amplitude > 4) related to a sharp velocity contrast in the shallow subsurface. 2) HVSR peak amplitude between 2-4, associated with a weak velocity contrast. 3) No distinguishable peak and a flat curve indicate the absence of a velocity contrast in the shallow subsurface. Example HVSRs for these three criteria are plotted in Figure 5. Its associated peak amplitudes are derived from the mean HVSR curve and presented in van Ginkel et al. (2019).
 230 The correlation between peaks on the HVSR curves and the presence of a velocity contrast at some depth is stressed in studies from Bonnefoy-Claudet et al. (2008), Konno and Ohmachi (1998) and Lermo and Chavez-Garcia (1993) and this contrast is very likely to amplify the ground-motion.

4.5 Amplification parameters

Across the Netherlands, the ASF is continuously recorded on all seismometers, while many locations lack recordings of local
 235 earthquakes. Therefore we further investigate whether the HVSR can be used as a proxy for amplification as measured by the earthquake-derived ETF and AF. Figure 6 displays the correlation between the peak amplitudes of the HVSR and ETF_{200} as well as HVSR and AF. Secondly, we evaluate the subsurface seismic parameters enhancing amplification (Figure 7).

Based on these data points, relationships are defined in order to be able to estimate amplification factors using HVSR peak amplitudes (A_0), amplification factors:

$$240 \quad AF = 1.49 + 0.87 \log(1.12 A_0) \quad (1)$$

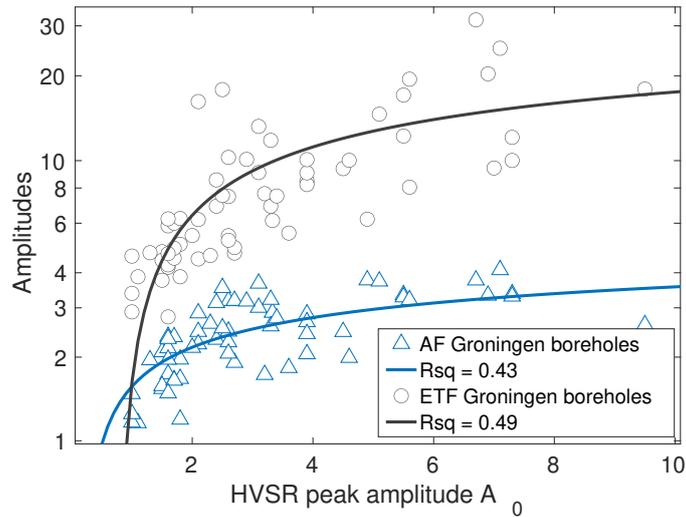


Figure 6. Relation between the HVSr peak amplitudes (A_0) and the ETF peak amplitudes (gray) and the HVSr peak amplitudes and the AF (blue). The solid line represent the fitting function (Equation 1 and 2 between the HVSr peak amplitudes and the measured amplification from AF and ETF, respectively). R_{sq} (R-squared) represents the coefficient of determination of the fitting. Note the log-scale of the y-axis.

and maximum amplification as measured by the ETF:

$$ETF = 1.08 + 6.89 \log(1.09 A_0). \quad (2)$$

The relationship between the AF derived from the Groningen borehole locations and local site conditions is investigated in the following.

245 Many ground-motion prediction equations which include site-response consider the shear-wave velocity for the top 30 m (V_{s30}) as the main parameter affecting amplification (Akkar et al., 2014; Bindi et al., 2014; Kruijer et al., 2017b; Wills et al., 2000), as well as Eurocode 8 (CEN et al., 2004). However, studies (Castellaro et al., 2008; Kokusho and Sato, 2008; Lee and Trifunac, 2010) have drawn attention to the fact that using only V_{s30} as proxy for site-response is inadequate, because it does not uniquely correlate with amplification. They show that amplification is defined by several parameters, including the the
250 depth and degree of the seismic impedance contrast. Furthermore Joyner and Boore (1981) introduce the shear-wave velocity ratio between the top and base layer as a proxy for site amplification by is and this is further explored by Boore (2003).

In order to assess the impact of different parameters, firstly, the AF at each borehole location is fitted against several subsurface parameters. Using $AF = a + b * e^{c * V_s}$ as a functional form, where a, b and c are unknown coefficients to be fitted. This fitting is applied with averaged shear-wave velocities over various depth intervals. V_{s10} , V_{s20} and V_{s30} -values are derived
255 from SCPTs, acquired directly adjacent to 53 borehole sites in Groningen (Figure 2). Hofman et al. (2017) derived interval velocities determined from the G-network, using seismic interferometry applied to local induced events. The velocities from this reference are used to determine V_{s50} . Secondly, from the SCPT data we derive the depth and size of the velocity contrast.

The contrast is computed by the division of the two different velocity values bounding each 1 m interval. This division is done for each 1 m interval over the 30 m of SCPT records. The largest division value is defined as the (main) velocity contrast (VC) and corresponding depth is the depth of the contrast (zVC). Thereafter the VC-values and their depth are fitted with the AF using $AF = a + b * \log(c * VC)$ as a functional form. This procedure is also performed for the relation between the subsurface parameters (V_s , VC) and the HVSr. The results are given in Appendix A.

Figure 7 presents the fit between the AF and the six relevant subsurface parameters. Best fit ($R_{sq}=0.47$, Figure 7a,b) is observed between the AF and V_{s10} and V_{s20} . In line with findings of Gallipoli and Mucciarelli (2009) who use the V_{s10} as the main amplification parameter instead of the more common V_{s30} . In Groningen, the low-velocity and unconsolidated Holocene sediments have a thickness of 1 to 25 m and below these depths the velocities increase in the more compacted Pleistocene sediments. The reduced fitting quality of the V_{s30} and V_{s50} arises since the amplification develops mainly in the Holocene sediments (van Ginkel et al., 2019). Although the fit is relatively poor, a relationship is observable between a large VC and an elevated AF (Figure 7e). By contrast, Figure A1 presents a good correlation between VC and HVSr. A large VC-value leads to resonance in the near-surface, which is expressed in high amplitude peaks of the HVSr.

5 HVSr estimations throughout the Netherlands

Based on the good relationship between Groningen HVSr peak amplitudes (A_0), ETF peak amplitudes and AF (Figure 6), we conclude that the HVSr can be further used as proxy for amplification. Therefore, for all surface seismometers in the Netherlands seismic network, the HVSr curves are estimated following the method described in Section 4.4. Figure 8 displays a selection of representative examples of HVSr curves. It also includes the sediment classification profile presented in Section 6 and Figure 9. In addition, for boreholes T010, T060 and TERZ, the ETF curve is added, calculated from local earthquakes similar to the approach described in Section 4.3. These 16 HVSr curves illustrate the diversity in curve characteristics throughout the Netherlands. Here, we can distinguish the three types of curves as described in Section 4.4. The flat curves with no distinguishable peak (FR040, DRA, T060, T010, WTSB, HRKB, ROLD and BING) are recorded at seismometers on top of outcropping Pleistocene sands (Holocene/Pleistocene eolian and fluvial deposits in Figure 1). Also ALK2 exhibits no peak amplitude since this seismometer is positioned on dune sands (Holocene coastal deposits in Figure 1). These locations are characterised by absence of a strong velocity contrast in the shallow subsurface. Selected examples of HVSr curves exhibiting clear peak amplitudes (NH01,J01, ZH030, FR010, EETW) are located at sites with a distinct velocity contrast between unconsolidated Holocene marine sediments overlying Pleistocene sediments.

In the southernmost part of the Netherlands, Cretaceous bedrock is either outcropping or situated less than 100 m deep. MAME and TERZ are examples of locations with soft sediments overlying hard rock and the HVSr curves exhibit a clear peak amplitude.

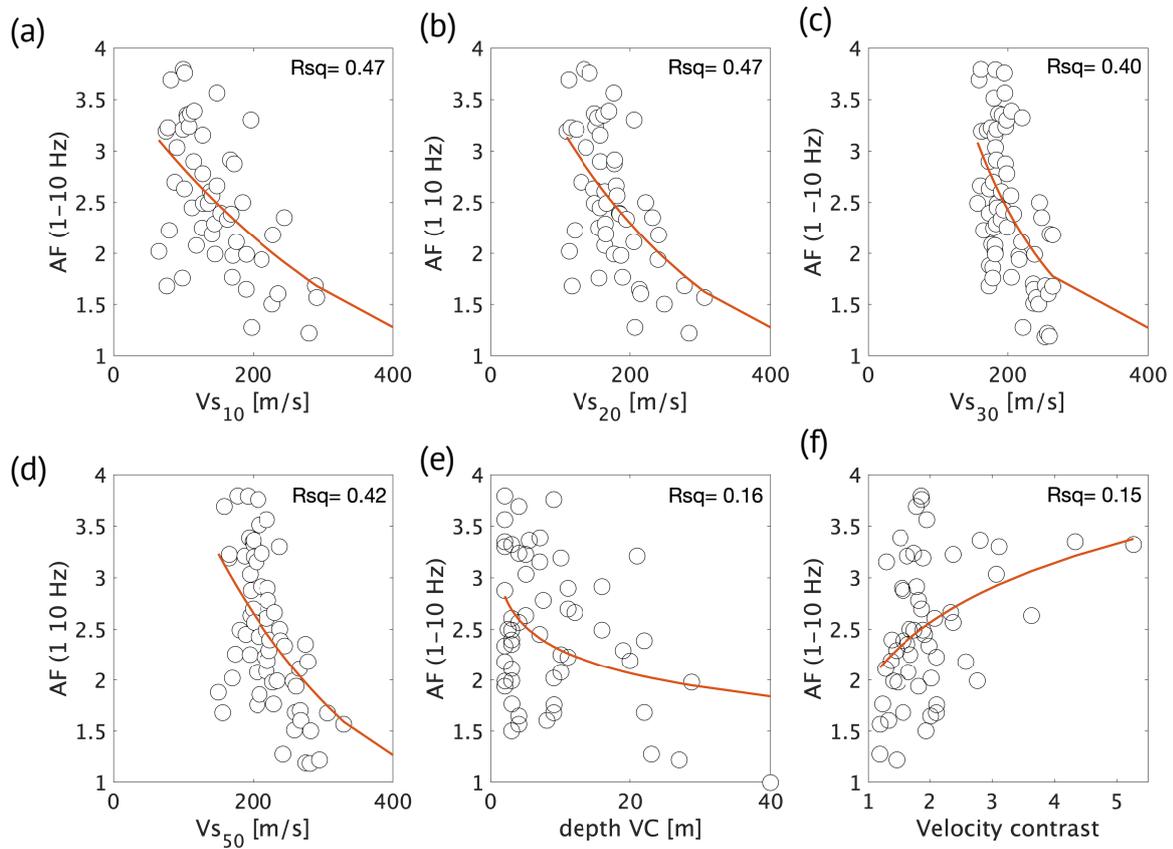


Figure 7. Each panel depicts the fitted function and the coefficient of determination (R_{sq}) of the AF (1-10Hz) per G-network borehole location and the corresponding subsurface parameter. In a) the V_{s10} , b) V_{s20} , c) V_{s30} , d) V_{s50} , e) depth of the velocity contrast, and e) size of the velocity contrast.

6 Zonation map for the Netherlands

The effect of local site-response on earthquake ground motion is included in the Eurocode 8 seismic design of buildings (CEN
 290 et al., 2004, EC8). In order to estimate the risk of enhanced site-response, EC8 presents five soil types based on shear-wave
 velocities and stratigraphic profiles. Soil-type E is essentially characterised by a sharp contrast of a soft layer overlying a stiffer
 one. However, in our opinion, this single classification for soft sediments is rather limited, especially concerning the wide
 variety of lithostratigraphic conditions throughout the Netherlands. Therefore, we present an alternative, or extended, classifi-
 cation for ground characteristics designed to specify the large heterogeneity in site conditions than exists within Eurocode 8
 295 ground-type E.

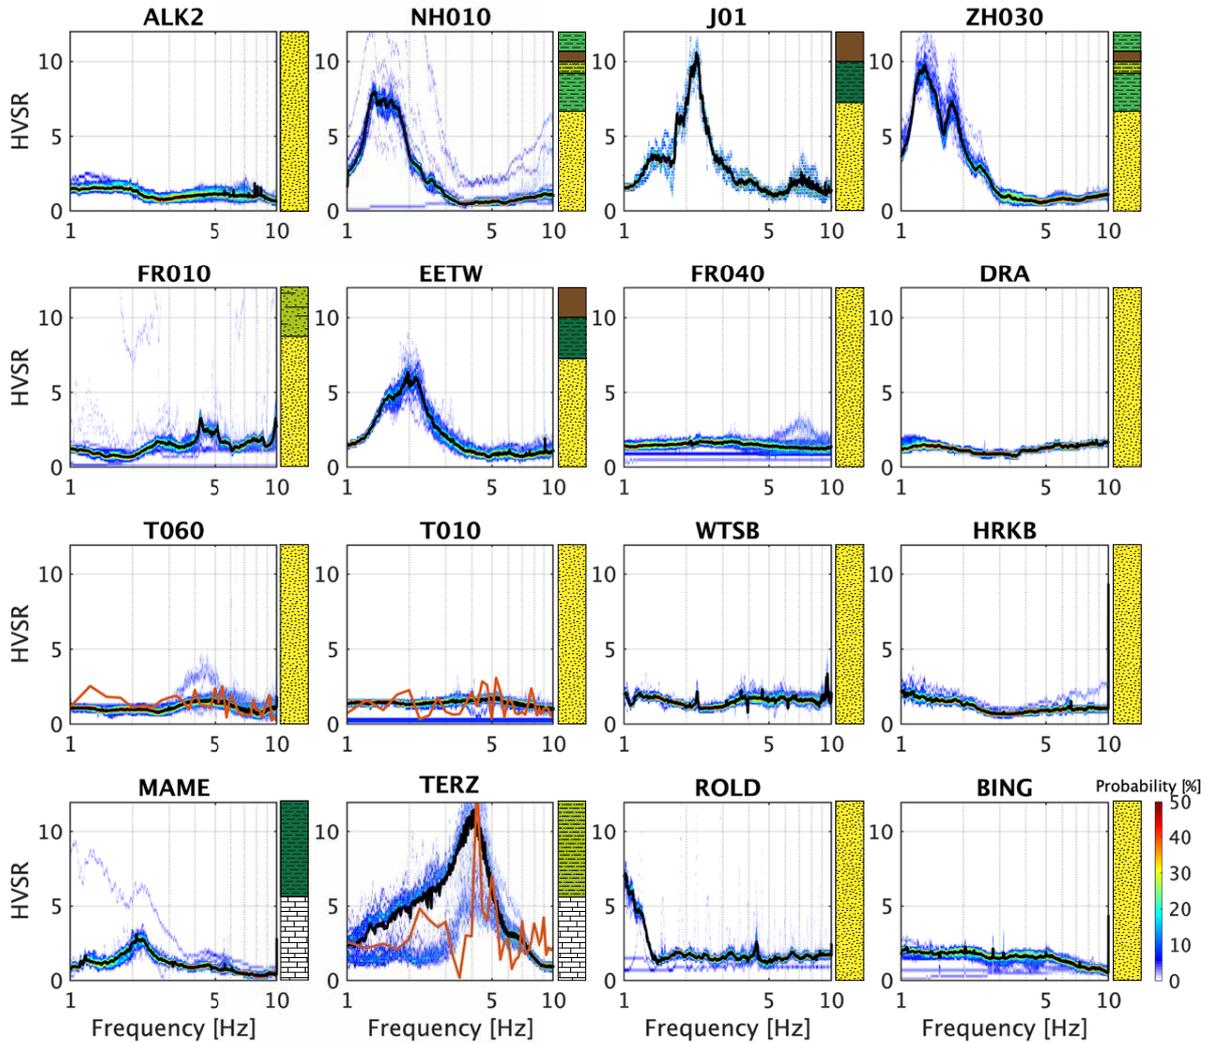


Figure 8. Each panel depicts a probability density function from ambient noise HVSr curves and sediment classification profile (Section 6) for 16 stations of the NL-network. The black line represents the mean HVSr and the red line in the panel of T06, T010 and TERZ represents the ETF calculated from 10 local earthquakes. The color bar in the lower right displays the HVSr probability range that is valid for all panels.

In this section, in a few steps, the site-response zonation map for the Netherlands is derived. For this, the country is subdivided in grid cells. As a result, about 95% of the grid cells is populated with a site-response class with corresponding AF.

6.1 Classification scheme

The borehole ETFs confirm that most of the amplification is developed in the top 50 m (Figure 5) of the sedimentary cover, corresponding to the findings in van Ginkel et al. (2019). Beyond 50 m depth, the Quarternary deposits mainly consist of more compacted marine and fluvial sediments. Therefore the sediment classification presented in this section uses the top 50 m with a special focus on the top 10 m. Also the presence of a velocity contrast is used in the classification, as it was shown to have a (albeit weaker) link with amplification (Figures 7 and A1).

Following Convertito et al. (2010) and from the studies by Kruiver et al. (2017a); van Ginkel et al. (2019), the Eurocode 8 classification requires modification, caused by the heterogeneous shallow sediment composition and bedrock depth of the Dutch subsurface. Table 1 lists the criteria for the classification division defined for the Netherlands (NL classification). The NL classification is divided into five classes based on the top 50 m lithostratigraphic composition, the velocity contrast (VC) and average shear-wave velocity for the top 10 m.

For setting up the classification we initially use A_0 , the peak amplitude from HVSR. We only have measured AF in Groningen, whereas we have measured A_0 for many sites throughout the Netherlands (all stations depicted on Figure 2). Moreover, we found a clear relationship between A_0 and AF (Equation 1). The relationships between V_{s10} , VC and A_0 are estimated from lithological conditions in Groningen, where the sites are assigned to Classes II, III and IV. For Classes I and V we have insufficient empirical constraint on A_0 and AF. Only sites with bedrock at depths shallower than 100 m fall into Class V, for which the resonance over the complete unconsolidated cover can reach frequencies larger than 1 Hz. Therewith, these sites become distinct from Classes II, III and IV, where such resonances occur at frequencies <1 Hz. At these lower frequencies, there is no match with resonance periods of most building types in the Netherlands.

The short lithological description in Table 1 is not sufficient to classify each site. To further aid the classification, representative sediment profiles are obtained (Figure 9) based on the lithologic class sequences of the GeoTOP and NL3D. By grouping the main sediment profiles into the classes, we link the lithostratigraphic conditions to the expected amplification behaviour of the shallow subsurface. The classification is tested and optimized using all the sites with an estimated HVSR curve. Next step is to attribute a class to each lithostratigraphic profile per grid cell in the GeoTOP and NL3D models.

6.2 Lithology-based classification

Based on the site-response amplification estimated with the HVSR peak amplitudes at 115 sites, we have categorized each sedimentary profile (Figure 9) into a class. Next step is to substitute GeoTOP and NL3D into these five classes. This geologically based method allows the determination of site-response on regional and nation-wide scale. Figure 10 gives a general outline of the procedure used to assign the appropriate sediment class to each of the voxel-stacks in GeoTOP and NL3D. A voxel-stack is the vertical sequence of voxels at a particular (x,y)-location in GeoTOP or NL3D. Details on each of the processing steps are given in Appendix C. Next step is to attribute an amplification factor to each class.

Table 1. Comparison between the Eurocode 8 ground type classification and the sediment classification (NL classification) we present in this paper. The V_{s10} and velocity contrast (VC) values assigned to each class are based on the amplification relationships presented in Section 4 and Appendix A. For class V there is no empirical data available relating V_{s10} and VC with A_0 (HVSr peak amplitude), hence not determined (n.d).

Eurocode 8			NL classification				
Ground type	Description Stratigraphy	Vs30 [m/s]	Sediment class	Description top 200m	V_{s10} [m/s]	VC	A_0
A	Hard rock & rock	>800	I	Hard rock	>800	-	-
B	Soft rock & very dense soil	360-800	II	Stiff sediment	>200	none or <1.5	<2
C	Stiff soil	180-360	III	Soft sediment on stiff sediment	100-200	1.5-2.0	2-4
D	Soft soil	<180	IV	Very soft sediment on stiff sediment	<100	>2.0	>4
E	Special soil	<100	V	shallow bed rock (<100 m)	no data	no data	n.d.

6.3 Amplification factors for the Netherlands

330 For shake-map implementations or seismic hazard analysis, amplification factors (AF) are usually derived from the V_{s30} (e.g. Borchardt (1994)). In this study, we estimate AFs by substituting the HVSr peak amplitudes (A_0) for 115 stations throughout the Netherlands into Equation 1. This allows the calculation of nation-wide applicable AF-values (AF_{NL}) assigned to each of the classes presented in Figure 9.

In order to obtain an AF_{NL} for each class, the 115 calculated AFs are plotted against their site sediment class in Figure 335 11a. For these 115 locations, the sediment classes are manually assigned based on the geological models, SCPT or other geological data available. From the AF distributions, the mean AF-values (AF_{NL}) and corresponding standard deviation (σ_{AF}) are calculated for each class (Table 2). In Class II there are a number of sites with exactly the same AF of 1.6. These are sites with no distinguishable peak, where A_0 is set to 1, which yields, after filling out in Equation 1, $AF=1.6$.

The AF_{NL} -values are valid on a national scale for a frequency range of 1-10 Hz and for reference conditions of $V_s = 500$ m/s 340 (Section 4.1). There are no AF values for sites in the farthest south and east of the Netherlands, so these areas fall into Classes I and V. There is too little data to calibrate the corresponding amplification factor.

By applying the workflow that we introduced in Section 6.2, automatic classification for the 115 sites is performed based on resp. GeoTOP and NL3D and plotted against the AF (Figure 11b and c). Due to uncertainties in the models (Appendix C), these distributions deviate from the manual classification (Figure 11a). Note that for the manual classification, e.g., SCPT

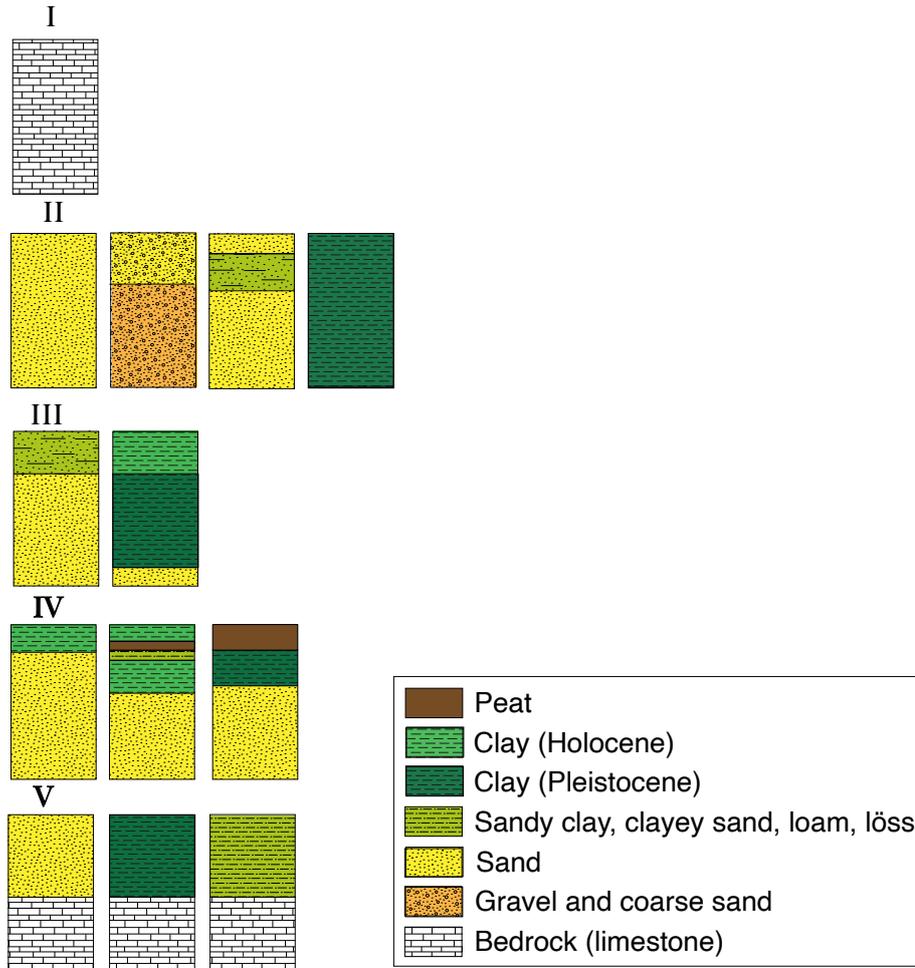


Figure 9. Sediment profiles corresponding to the classification presented in Table 1, where the different columns are typical examples of the top 50 m of the Netherlands. The division in classes is based on the shallow subsurface composition related to the expected level of wave amplification during a seismic event.

345 information could be used at 53 sites, which local information is not included in GeoTOP and NL3D. We therefore distinguish two types of uncertainty:

1. σ_{AF} : this is the variability that originates from the classification. Within the classification, a number of different sites is binned into the same class (Figure 9) although in reality there is still a range of amplification behavior. This variability is approximated with the outcome of the manual classification (Figure 11a), which could be done in great detail.
- 350 2. σ_{mod} : the geological models are geostatistical models where not all grid cells contain individual lithological data. Hence, there is an uncertainty of the actual lithological succession at each grid cell. The total uncertainty σ_{tot} (derived from Figure 11b,c) can be written as $\sqrt{\sigma_{AF}^2 + \sigma_{mod}^2}$. By additionally averaging over the classes (labeled with subscript i) we

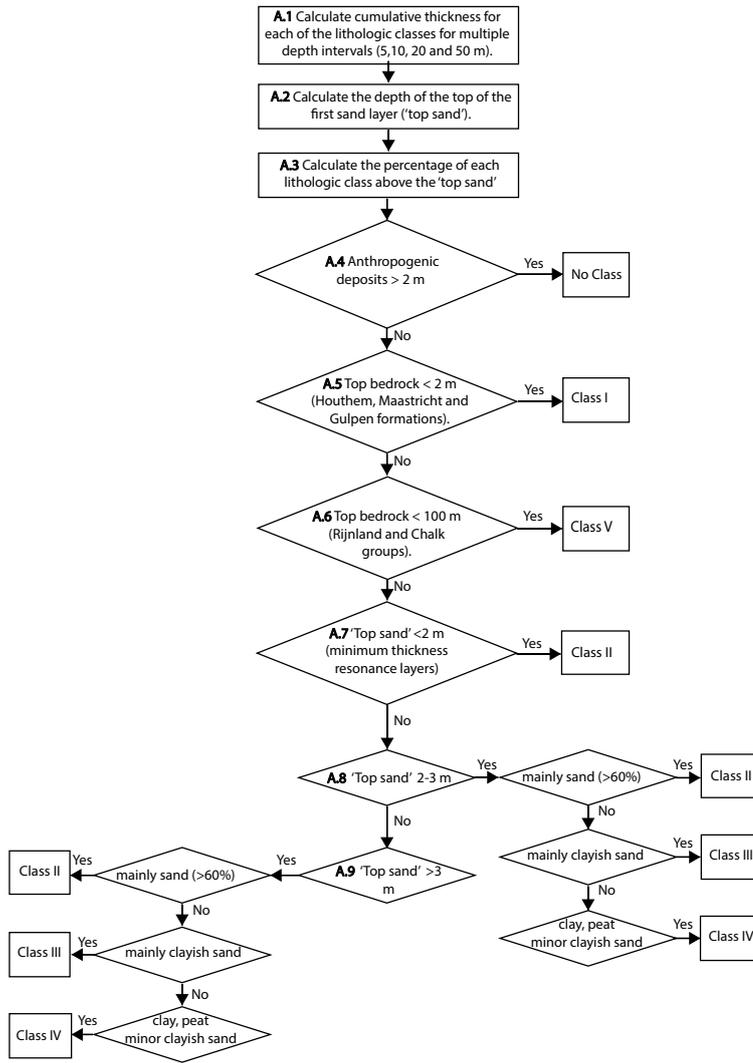


Figure 10. General outline of the vertical voxel-stack analysis used to assign the appropriate sediment class into each grid cell of the GeoTOP and NL3D geological models in the construction of the site-response zonation map.

find the model uncertainty σ_{mod} :

$$\sigma_{mod} = \frac{1}{n} \sum_{i=1}^n \sqrt{\sigma_{tot,i}^2 - \sigma_{AF,i}^2}. \quad (3)$$

355 Table 2 lists the mean AF values, the uncertainty in AF (σ_{AF}) and the uncertainty (σ) for the GeoTOP and NL3D models.

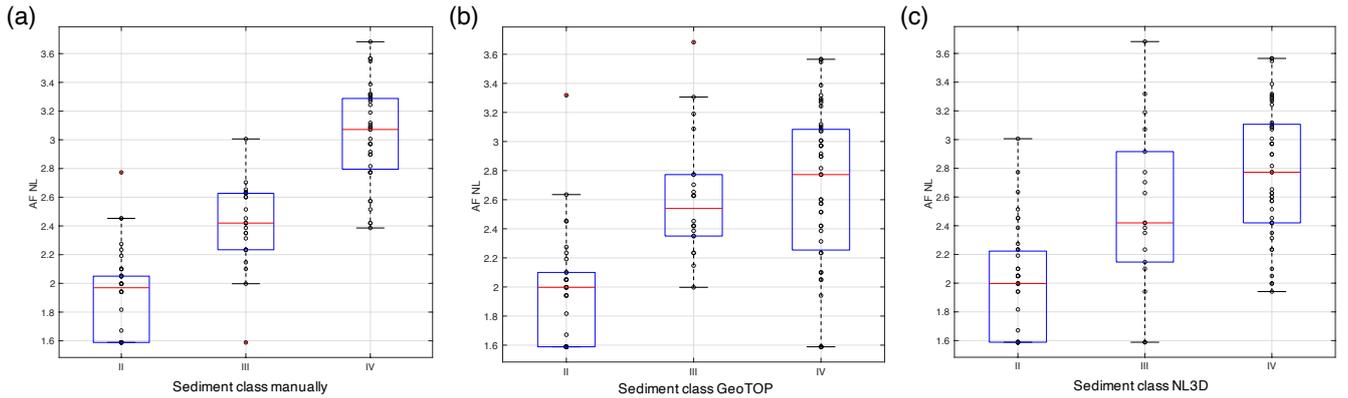


Figure 11. Comparison of calculated AF distribution in terms of manual classification (a), automatic classification by GeoTOP (b) and by NL3D (c). The locations where the empirical AF relationship is not valid are eliminated (class I and V). The red central mark indicates the median; the bottom and top edges of the box indicate resp. the 25th and 75th percentiles. The whiskers extend to the most extreme data points and the outliers (1.5x away from the interquartile range) are plotted individually as red circles.

Table 2. Amplification factors and standard deviations (σ) for the NL classification. σ_{AF} is the uncertainty when a local (HVSr) recording is available. σ_{GeoTOP} and σ_{NL3D} represents the additional uncertainty associated with the GeoTOP and NL3D models.

Class	AF_{NL}	σ_{AF}	σ_{GeoTOP}	σ_{NL3D}
II	1.94	0.30	-	-
III	2.4	0.28	0.32	0.34
IV	3.03	0.34	-	-

6.4 Site-response zonation map

The workflow presented in Figure 10 results in a class category assigned to each grid cell of the GeoTOP and NL3D models. As a result, we present the national site-response zonation map (Figure 12), where each class characterises a certain level of expected site-response amplification. Additionally, each class has an AF_{NL} assigned (Table 1). Figure 13 presents four zoom-in panels of the map, each depicting a region of particular interest.

Some areas show a large scatter in classes, which is derived from a large heterogeneity in the near surface as represented in the lithostratigraphic models. Typically, at these places there is large model uncertainty, for example in north-east Noord-Holland (Figure 13a). Here, the Holocene lithological successions are very heterogeneous in terms of clay, peat and clayish sand. This region also exhibits discrepancies between the model's lithological successions and HVSr curve characteristics, for instance with seismometers J01 (Figure 8) and J02. The geological model at these locations presents large portions of clayish sand, resulting in class category III, while the HVSr curves exhibit distinctive, high amplitude peaks, demonstrating local conditions related to class IV.

For larger sedimentary bodies, like the dune area, there is less model uncertainty. Dune sand is identified as class II, and here, the HVSR of the seismometers (e.g. ALK2, Figure 8) deficit any peak due to the absence of a velocity contrast in the near-surface.

Figure 13b covers the "Randstad" region, most densely urbanized part of the Netherlands, where the class is mainly determined as IV. Figure 13c shows the southeastern part. Most of the northern part of this region is Class II due to Pleistocene sands reaching the surface. Most of the southern part of this region falls into Class V since the bedrock occurs at depth less than 100 m. A few places with bed rock outcrops fall into Class I.

Since Groningen has been studied in much detail, we also present the site-response zonation for this region (Figure 13d), and discuss this in Section 7.

7 Discussion

The seismic site-response zonation map presented in Figure 12 distinguishes five classes, each of which defining the potential of occurrence of the related site-response amplification. Here, the lithological conditions are collated into zonations (classes) using the classification as shown in Figure 9. In the development of the lithostratigraphically based classification, we used i) HVSR peak amplitudes, ii) the presence of a velocity contrast at depth, iii) shear wave velocities. Amplification factors are assigned to each class. In the following paragraphs we discuss the validity and uncertainties of the classification, the AF distributions, as well as the usage and limitations of the presented map.

Since the ambient noise sources in the frequency band of interest (1-1 Hz) partly have an anthropogenic origin, one should be careful about contamination by local strong noise because it may seriously affect the amplitude of the HVSR as shown in Guillier et al. (2007); Molnar et al. (2018). We resolved this problem by using large portions (30 days) of noise data to create stable HVSR curves (van Ginkel et al., 2020). It is important to mention the qualitative character of the microtremor HVSR peak amplitudes which in itself do not directly relate to the amplification of a signal at the surface during an earthquake. However, the microtremor HVSR curve characteristics show major similarities with the measured amplification from earthquake ETFs (Figure 5), but not in terms of absolute values. Therefore an additional fitting-relationship (Equation 1) has been defined, suitable to use the microtremor HVSR peak amplitudes as proxy for amplification. HVSR measurements have proven to be very informative for site-response estimation and remain a valuable input for seismic site-response zonation (Molnar et al., 2018; Bonnefoy-Claudet et al., 2009).

Considering the difficulty in observing sufficient numbers of earthquake ground-motions in areas that are not seismically active, or where no large seismic networks are available, we resorted to deriving and calibrating a lithology-based classification scheme. We took advantage of the detailed models of Cenozoic lithostratigraphy which are available in the Netherlands. As a consequence, the site-response map (Figure 12) exhibits a regional pattern which is rather similar to the geological map (Figure 1). We showed that the use of these models yields additional uncertainty in the determination of the AF (Table 2). This uncertainty of the actual lithostratigraphic profile at a site can be circumvented by a local recording. This may be an HVSR to

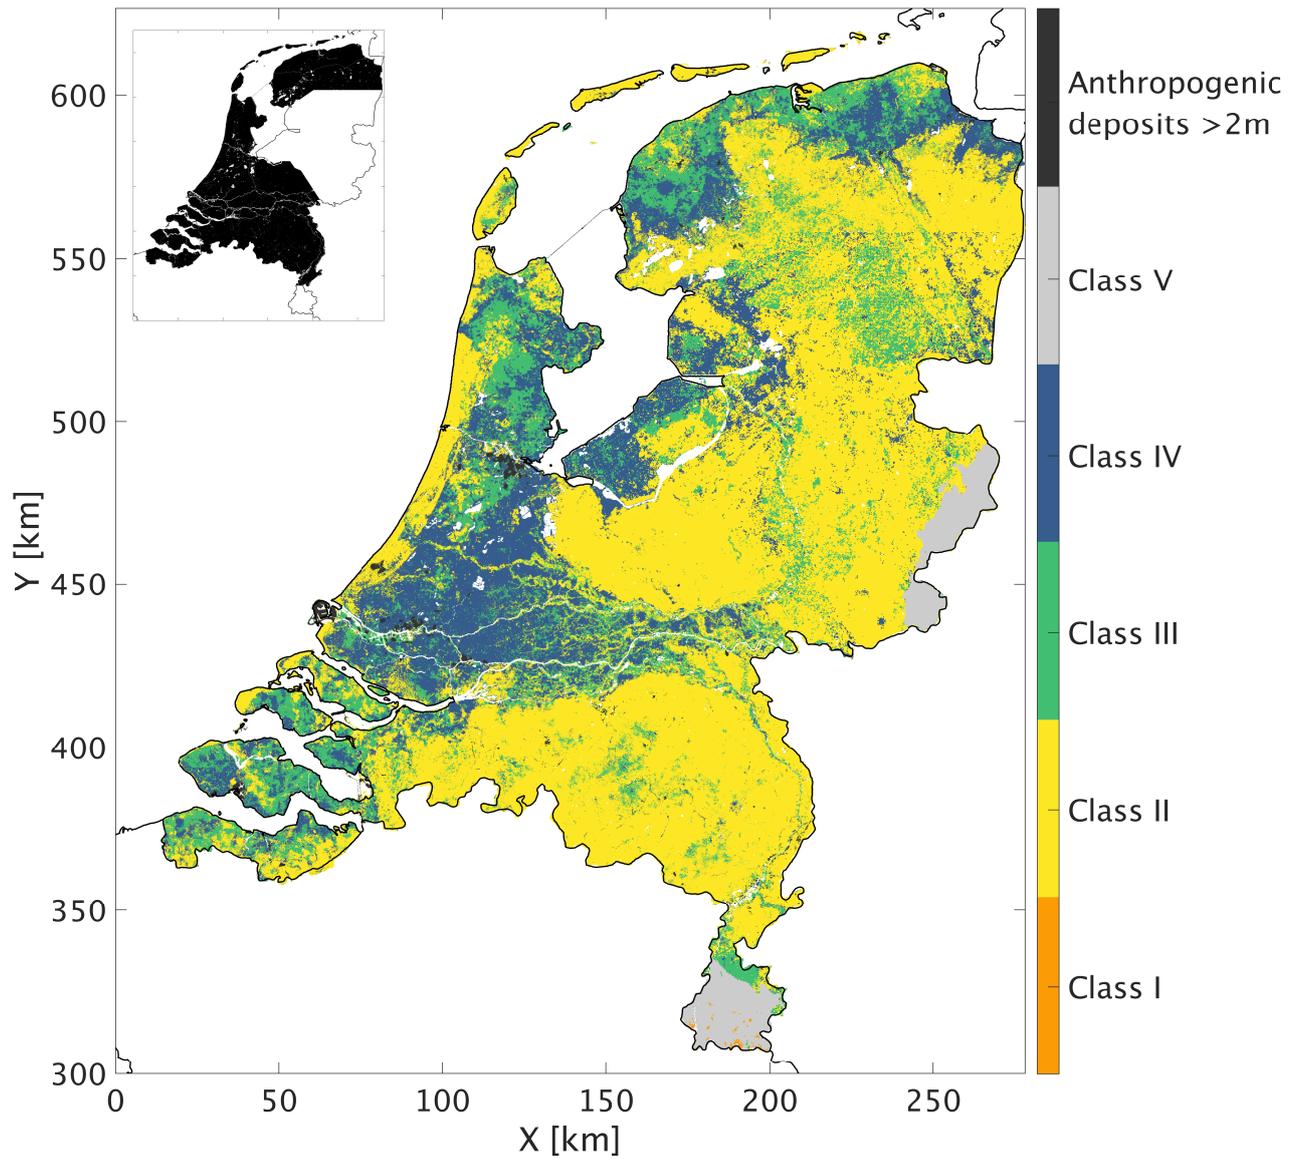


Figure 12. Seismic site-response zonation map for the Netherlands designed for low-magnitude induced earthquakes. The GeoTOP model coverage is highlighted in black in the small inset. For the remaining part of the Netherlands, the NL3D model is used as foundation for the classification. The white spots are water bodies. The amplification factors and related uncertainties are presented in Table 2.

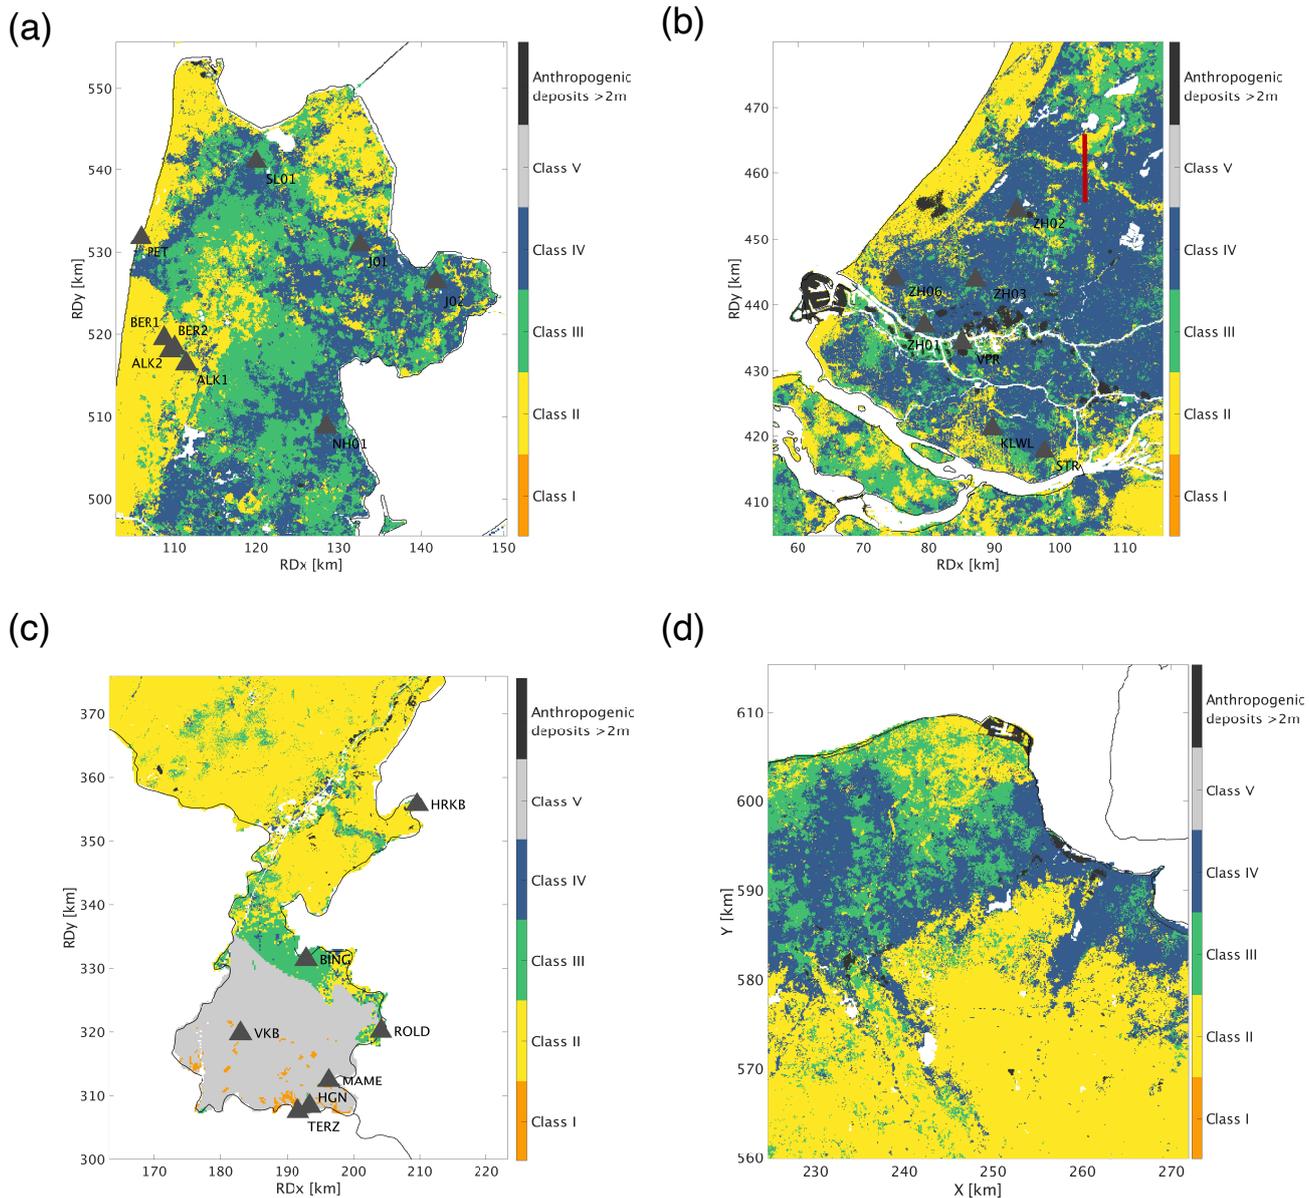


Figure 13. Panels highlighting different regions in the site-response zonation map, including the seismometer locations. a) Noord Holland: with a heterogeneous pattern between class III and IV, b) The densely urbanized area of Zuid Holland, the red line indicates the S-N cross-section through the GeoTOP voxel model (Figure C1). c) Limburg is in the north a quite homogeneous zone of class II, while the south is dominating by class I and V due to shallow and outcropping bedrock. d) North-east Groningen is added as comparison to other studies performed in that region. No seismometer locations are plotted here because of the high density covering the map.

400 obtain more certainty on the site effect (Table 1), a cone-penetration test (CPT) to obtain constraints on the lithology, or, better still, a seismic cone penetration test (SCPT) to get a local shear-wave velocity profile.

Rodriguez-Marek et al. (2017) defined a site-response model including magnitude and distance dependent linear amplification factors (AF_{Gr}) for several period intervals (0.01-1.0 s) for the Groningen region as input for ground-motion prediction equations by Bommer et al. (2017). This site-response model starts from a reference horizon at the interface between the unconsolidated sediments and the stiffer Chalk formation below at around 800-1000 m depth. However, this contrast is both variable
405 in depth and value throughout the Netherlands and therefore not easily applicable as a reference horizon for the purpose of our study. The class-dependent AF_{NL} presented in this paper is defined against a reference rock with a velocity at 500 m/s (which in Groningen is situated at 200 m depth). Therefore the AF_{Gr} cannot be directly be quantitatively correlated to the AF_{NL} ; this requires a correction which includes the transmission coefficient calculated at the base of the North Sea Group and a damping
410 model. By ignoring the absolute values and comparing both AF s qualitatively, the overall spatial distribution of AF_{NL} in the Groningen region (Figure 13d, in a frequency band 1-10 Hz) corresponds best with AF_{Gr} at a spectral period of 0.01 s (Figure 10; Rodriguez-Marek et al., 2017). This is in line with or findings that AFs do not change much anymore when frequencies above 10 Hz are included (Figure 4).

7.1 Usage of the site-response zonation map

415 The map presented in Figure 12 enables a prediction of site-response after a local earthquake as recommended in the following. It is very important to note that lithological information from geological voxel models is based on spatial interpolation and aimed at interpretations on regional scale. As a consequence, the presented site-response zonation map is also designed for regional interpretation, and not on individual grid cell scale. Furthermore, at locations with large subsurface heterogeneity, the interpretation should be handled with care. Additional local investigations like SCPT measurements should be performed at
420 sites of interest in order to assess the site-response in detail. For the map presented, the uncertainties to keep in mind are: first, the AF distribution along the classes (Figure 11a), and secondly the uncertainty of the geological model used (σ GeoTOP and σ NL3D, Table 2). The AF_{NL} is designed to be added to an input seismic signal at a reference horizon with a shear-wave velocity of 500 m/s. This AF_{NL} is class-dependent and covering only frequencies of 1-10 Hz. Furthermore, the AF_{NL} including the σ_{AF} does not reflect the maximum amplification that might occur within a smaller frequency band.

425 The frequency content of large tectonic-related earthquakes differs from induced tremors. The national AF is based on low-magnitude induced earthquakes and incorporates a frequency range of 1-10 Hz. In case of a strong tectonic earthquake, frequencies below 1 Hz start to play a role and resonances with deeper velocity contrasts (>100 m) which are not reflected in the current AF_{NL} might become important. Also, for very strong ground-motions, which would occur in the epicentral area of large-magnitude tectonic events, non-linearity and distance dependence could become important (Bazzurro* and Cornell,
430 2004; Kwok et al., 2008). Both effects have not been included in the derivation of the AF_{NL} . Moreover, in the country's southern regions, a topographic effect may influence the site-response. It is important to mention that for now these areas are aggregated in Class V and require additional detailed site investigations for site-response assessment.

8 Conclusions

In this paper we presented a workflow to create a nationwide site-response zonation, using lithological sequences as proxy for seismic site-response. To that end, we first analysed the observed earthquake and ambient seismic field recorded at 69 stations of the Groningen borehole network in order to obtain empirical relationships for amplification. Based on the shallow subsurface resonance frequencies and earthquake amplitude spectra, the earthquake and ambient noise frequency band-pass filtering was applied in the range 1-10 Hz. Derived from the Groningen empirical relationships, we showed that the horizontal-to-vertical spectral ratio (HVSr) approach provides a simple means of determining the amplification potential for most subsurface conditions in the Netherlands. In a second stage, we determined the HVSr curves for additional 46 surface seismometers throughout the Netherlands and calculated the subsequent peak amplitudes. These peak amplitude distributions were related to specific lithological profiles and amplification factors. With the accrued knowledge of amplification potential of different lithological sequences, a classification scheme was designed. This turned out to be a useful tool for translation of the grid cells of the geological models into five classes, and therewith establishing a national site-response zonation map. Most classes have an AF_{NL} assigned, which values can be added to input seismic responses adhering the reference seismic bedrock conditions.

Class I are sites with a hard rock setting. These sites can only be found in the very south and east of the Netherlands. An amplification factor (AF) of 1, meaning no amplification, is assigned to these locations. Class II is associated to sites with stiff sands or Pleistocene clays without strong impedance contrasts in the near surface. One may expect only small amplification at these sites. Class III are sites with relatively soft sediments (clays, sandy clays, löss) overlying stiffer sands, resulting in impedance contrasts in the near surface. Class IV is related mostly to very soft and unconsolidated Holocene clay and peat successions overlying stiffer sands, forming a strong impedance contrasts. At these sites, the largest amplification occurs. Class V are sites at which the bedrock occurs shallower than 100 m, which is not very common in the Netherlands. For these sites there was insufficient data to assign an amplification factor.

Some limitations exist in this study. The method and map proposed is not applicable to regions with strongly deviating lithological sequences, or for earthquakes with very strong low-frequency ($f < 1$ Hz) shaking.

Finally, it is worth noting that the proposed map could be improved by i) adding new site geotechnical data like SCPTs, ii) including updates and extensions of GeoTOP, iii) including amplification factors derived from new KNMI stations and iv) adding new records of earthquake motions to constrain amplification factors for class V.

Appendix A: HVSr amplification parameters

In this appendix, HVSr peak amplitudes (A_0) are fitted with the six parameters that influence ground-motion site-response (Figure A1). Best fit ($R_{sq}=0.39$) is observed between A_0 and V_{s10} . Hence, the V_{s10} is used for further correlation purposes instead of the more common V_{s30} , supporting the findings of Gallipoli and Mucciarelli (2009) by using the V_{s10} as main amplification parameter. The depth of the first strong velocity contrast (VC, which is defined within the top 50 m) has a poor relation with A_0 (Figure A1e). The size of the velocity contrast, however, does have a strong relation with A_0 (Figure A1f).

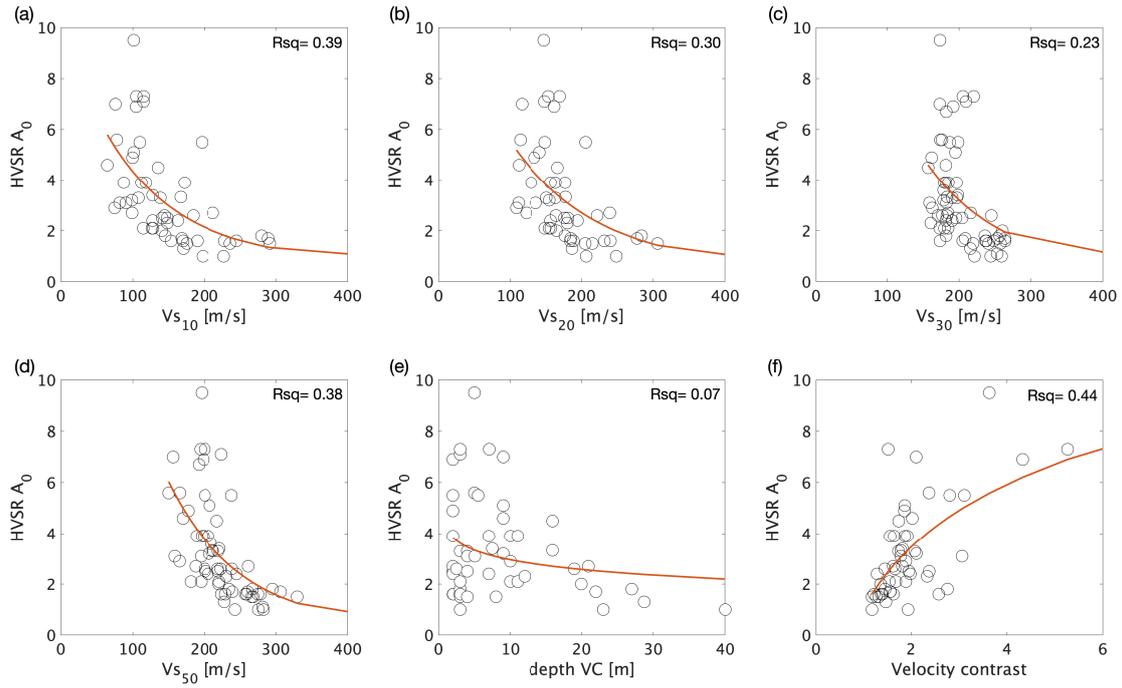


Figure A1. Each panel depicts the fitted function and the coefficient of determinations (Rsq) of the HVSr peak amplitude A_0 per G-network borehole location and the corresponding subsurface parameter. In a) the V_{s10} , b) V_{s20} , c) V_{s30} , d) V_{s50} , e) depth of the velocity contrast, and e) size of the velocity contrast.

465 Compared to individual 1D correlations, a 2D correlation (Figure A2) using both the VC and the V_{s10} results in an improved correlation ($R_{sq}=0.53$) and allows to define an empirical relationship for HVSr peak amplitudes (A_0) based on these two parameters:

$$A_0 = -1.29\log(0.01V_{s10}) + 0.99VC + 1.94 \quad (A1)$$

470 Furthermore, this equation supports the hypothesis of Joyner and Boore (1981); Boore (2003) that A_0 is depending on also the VC. The motivation for equation A1 is to achieve an amplification equation based on subsurface parameters only. Using equation A1 an estimate is obtained of A_0 . Subsequently, Equation 1 can be used to obtain an estimate of the amplification factor.

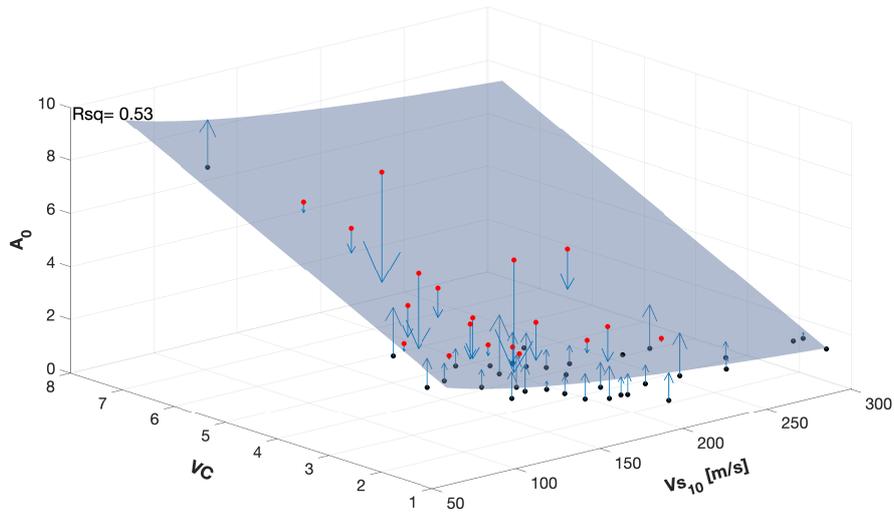


Figure A2. 3D-Plot of the two main parameters that define amplification; the velocity contrast and V_{s10} . The pale blue surface depicts the fitting function between the parameters and divides the data points where the red points are above the surface and black points below. Blue arrows indicate the difference (error) between the surface and data point.

Appendix B: Geological models

B1 GeoTOP

475 GeoTOP schematizes the shallow subsurface of the Netherlands in voxels measuring 100 by 100 by 0.5 m (x, y, z) up to a depth
of 50 m below ordnance datum (Stafleu et al., 2011, 2021). Each voxel contains estimates of the lithostratigraphic unit the voxel
belongs to and the lithologic class (including a sand grain-size class) that is representative for the voxel. GeoTOP is publicly
available from the web portal of TNO – Geological Survey of the Netherlands (GDN; [https://www.dinoloket.nl/en/subsurface-](https://www.dinoloket.nl/en/subsurface-models)
models). GeoTOP is constructed using some 275,000 borehole descriptions from DINO, the national Dutch subsurface database
480 operated by GDN (<https://www.dinoloket.nl/en/subsurface-data>), complemented with some 125,000 borehole logs from Utrecht
University in the central Rhine-Meuse river area. The modelling procedure involves four steps: First, the borehole descriptions
are interpreted into standardized lithostratigraphic units with uniform sediment characteristics. Given the large number of
boreholes, automated lithostratigraphic interpretation routines (Python scripts) were developed. These routines combine dig-
ital maps, stratigraphic rules (e.g. superposition) and lithologic criteria (e.g. main lithology, admixtures, grainsize and shell
485 content, amongst other criteria) to determine the depth of the top and base of the lithostratigraphic units in each of the bore-
hole descriptions. Next, 2D interpolation techniques are used to construct surfaces bounding the bases of the lithostratigraphic
units as observed in the boreholes. The interpolation algorithm allows for the calculation of a mean depth estimate of each
surface and its standard deviation. Subsequently, all surfaces are stacked according to their stratigraphical position, resulting in

a consistent layer-based model with estimates of top and base of each lithostratigraphic unit. Top surfaces are derived from the
490 bases of the overlying units. The surfaces are then used to place each voxel in the model within the correct lithostratigraphic
unit. In the third step, the borehole descriptions are revisited and classified in six different lithologic classes ('peat', 'clay',
'clayey sand & sandy clay', 'fine sand', 'medium sand' and 'coarse sand and gravel'). In the last modelling step, a 3D stochas-
tic simulation is performed for each lithostratigraphic unit separately. The simulation results in 100 equiprobable realizations
of lithologic and grain-size class for each voxel. Post-processing of the realizations results in probabilities of occurrence as
495 well as a 'most likely' estimate of lithologic and grain-size class. This 'most likely' estimate is used in the construction of the
seismic site-response zonation map (Appendix C).

B2 NL3D

To date, the GeoTOP model covers about 70% of the country (including inland waters such as the Wadden Sea). For the
missing areas we have used the lower-resolution voxel model NL3D, which is available for the entire country (Van der Meulen
500 et al., 2013). NL3D models lithology and sand grain-size classes within the geological units of the layer-based subsurface
model DGM (Gunnink et al., 2013) in voxels measuring 250 by 250 by 1 m (x ,y, z) up to a depth of 50 m below ordnance
datum. NL3D uses a much simpler modelling procedure than GeoTOP: First, the borehole descriptions are interpreted by
intersecting each borehole with the top and base raster layers from the DGM model. The resulting stratigraphical interpretations
are geometrically consistent with the DGM model, but not necessarily consistent with the borehole descriptions (e.g., a borehole
505 interval describing 'sand' may erroneously fall within a unit that is characterized by clay deposits). Second, the surfaces of the
DGM model are used to place each voxel in the model within the correct lithostratigraphic unit. DGM is a layer-based model
using a smaller dataset of some 26,500 manually interpreted borehole descriptions from the DINO database. Consequently, it
is less refined than GeoTOP. For instance, DGM combines all Holocene formations in a single unit, whereas GeoTOP features
some 25 different Holocene formations, members and beds. The third and fourth steps are identical to the ones described for
510 GeoTOP. The resulting NL3D model has a similar 'most likely' estimate of lithologic and grain-size class which is used in the
construction of the seismic site-response zonation map (Appendix C).

B3 Model uncertainty

The current version of GeoTOP covers about 28,605 km² using some 400,000 boreholes. This implies that only about 7% of
the voxels at land surface contain a borehole. Moreover, this number rapidly decreases with depth because many boreholes are
515 quite shallow. Therefore, the lithostratigraphic unit and the lithologic class of almost all voxels are estimated on the basis of
nearby borehole descriptions. As a 'rule-of'-thumb', the limited amount of data available deeper than 30 m below land surface
strongly reduces the quality of the lithologic class estimates of GeoTOP (Stafleu et al., 2021). For NL3D, this number is 15 m.

B4 Applicability

GeoTOP and NL3D model the subsurface at a regional to subregional scale that is suitable for applications at the levels of
520 province, municipality and district. The models are not suited for applications that require a finer scale at the level of streets or
individual buildings.

Appendix C: Workflow site-response map

The steps below describe the procedure used to assign the appropriate sediment (site-response) class to each of the voxel-
stacks in GeoTOP and NL3D, as exemplified in Figure C1. A voxel-stack is the vertical sequence of voxels at a particular
525 (x,y)-location in GeoTOP or NL3D. At each voxel there is an estimate of the lithostratigraphic unit and the lithologic class
(Appendix B).

- **A.1** Calculate the cumulative thickness for each of the lithologic classes ('peat', 'clay', 'clayey sand & sandy clay' and
'sand') in the models for multiple depth intervals (5,10, 20 and 50 m). The thicknesses of the lithologic classes 'fine
sand', 'medium sand' and 'coarse sand gravel' have been added together in the superclass 'sand'.
- 530 - **A.2** Calculate the depth of the top of the first consecutive sequence of sand with a minimum thickness of 1.5 m (GeoTOP)
or 2 m (NL3D). This depth is further referred to as 'top sand'. In general, 'thick' sequences of sand represent the stiffer
Pleistocene sediments. In other cases, they may represent Holocene sediments of, for example, the fluvial channel belt
systems of the Rhine and Meuse, or the coastal dunes. These sands form the contrast with the overlying soft sediments
('peat', 'clay' and 'clayey sand and sandy clay'). Voxel-stacks containing a continuous Pleistocene clay sequence (El-
535 sterian tunnel valleys) are included in the depth of the first sand (top sand), since no amplification is estimated here with
the HVSr of site N02.
- **A.3** Calculate the percentage of each lithologic class above the 'top sand'. These percentages play an important role in
assigning sediment site-response classes as described in steps **A.8** and **A.9**.
- **A.4** If anthropogenic deposits reach up to depths larger than 2 m, no sediment class is assigned. Anthropogenic activities
540 have modified the near-surface composition at many locations in the urbanized areas of the Netherlands. The lithologic
class of these sediments is unknown. Therefore, we are not able to assign a sediment site-response class to those locations.
- **A.5** If bedrock outcrops or occurs at a depth smaller than 2 m, the site is assigned to Class I. The depth criterion is set
at a maximum of 2 m since a deeper top bedrock would lead to a top layer with a possible resonance in the 1-10 Hz
545 frequency band and hence a different site-response class. The top of the bedrock is determined from the DGM model
(Gunnink et al., 2013) (top surfaces of the Houthem, Maastricht and Gulpen formations).
- **A.6** If bedrock in the eastern and southern part of the country occurs at a depth smaller than 100 m, the sediment site-
response class is set to V. These are sites where the layer on top of the bedrock could yield a resonance in the 1-10 Hz

band, which resonance has not sufficiently be calibrated to assign an AF_{NL} . Class V thus corresponds to sites with a currently unknown amplification potential. The top of the bedrock is determined from the DGM-deep model (Gunnink et al., 2013) (top surfaces of the Rijnland and Chalk groups).

- **A.7** If ‘top sand’ is less than 2 m, the site-response class is set at II. Examples of HVSR curves with ‘top sand’ less than 2 m, do not exhibit any peak amplitude due to the absence of a resonating soft layer on top of a stiffer one.
- **A.8** If ‘top sand’ is between 2 and 3 m, the lithologic distribution of the overlying soft sediments determine if the sediment site-response class will be II, III or IV. Examples of HVSR-curves with ‘top sand’ between 2 and 3 m show peaks for certain lithological successions, forming a resonating layer. Class II is assigned if the overlying sediments contain more than 60% sand. Class III is assigned if the overlying sediments are mainly composed of clayey sand sandy clay; and class IV if clay and peat dominate. We do not elaborate on the exact percentages to decide between Class III and IV. While testing the different criteria, this step appeared to be quite sensitive, and needed the implementation of several exceptions to the general rule.
- **A.9** If ‘top sand’ is larger than 3 m, the approach is basically the same as in **A.8**. Class II is assigned if the overlying sediments contain more than 60% sand. However, the exact criteria to decide between class III and IV differ from those in **A.8**.

Code and data availability. The data for the compilation of the site-response zonation map can be downloaded from the KNMI Data Platform: <https://dataplatform.knmi.nl/dataset/seismic-site-response-zonation-map-1-0>.

Author contributions. Janneke van Ginkel: method development, data analysis, construction of the map and underlying criteria, writing of manuscript with input from all co-authors. Elmer Ruigrok: daily advisor, input on data analysis method and results, performed text input. Jan Stafleu: provided the GeoTOP and NL3D data, supported and quality checked the voxel-stack analysis and advised on the criteria for the construction of the site-response zonation map and performed text input. Rien Herber: promotor, initiator of this research project, advisor, method development, final text editor.

Competing interests. The authors declare no competing interests.

Acknowledgements. The authors thank the two reviewers for their valuable suggestions. This work is funded by EPI Kenniscentrum. Ambient noise and earthquake recordings were provided by KNMI and are publicly available through the website (<http://rdsa.knmi.nl/dataportal>).

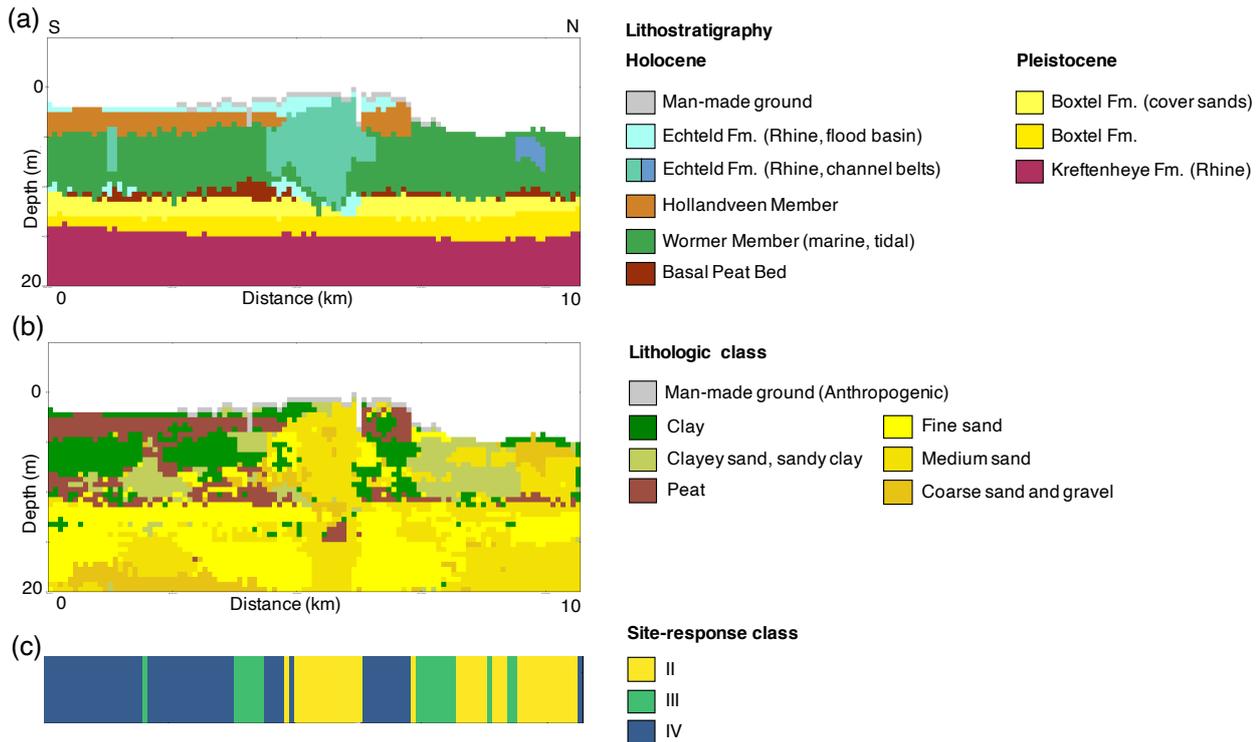


Figure C1. Cross-section through the GeoTOP voxel model: a) lithostratigraphy, b) lithologic class and c) corresponding sediment site-response class. The cross-section runs S-N through the city of Alphen aan den Rijn, situated on a sandy Holocene channel belt of the river Oude Rijn ('Old Rhine'). For location see Figure 13b). Class III and IV appear where soft, Holocene sediments (clay and peat) are overlying stiff Pleistocene deposits (sand). However, where Holocene sediments are sandy, such as in the channel belt in the center of the cross-section, Class II occurs.

Figures are produced in Matlab. We would like to thank Deltares for the use of the SCPT data and lithological interpretations and TNO for the use of the 3D geological models and maps.

575 **References**

- Akkar, S., Sandikkaya, M., and Bommer, J. J.: Empirical ground-motion models for point-and extended-source crustal earthquake scenarios in Europe and the Middle East, *Bulletin of earthquake engineering*, 12, 359–387, 2014.
- Albarelo, D. and Lunedei, E.: Combining horizontal ambient vibration components for H/V spectral ratio estimates, *Geophysical Journal International*, 194, 936–951, 2013.
- 580 Bard, P.-Y.: Microtremor measurements: a tool for site effect estimation, in: *Proceeding of the Second International Symposium on the Effects of Surface Geology on Seismic Motion*, vol. 3, pp. 1251–1279, AA Balkema Rotterdam, 1998.
- Bard, P.-Y.: Extracting information from ambient seismic noise: the SESAME project (Site EffectS assessment using AMBient Excitations), European Project EVG1-CT-2000-00026 SESAME, 2002.
- Bard, P.-Y., Campillo, M., Chavez-Garcia, F., and Sanchez-Sesma, F.: The Mexico earthquake of September 19, 1985—A theoretical investigation of large-and small-scale amplification effects in the Mexico City Valley, *Earthquake spectra*, 4, 609–633, 1988.
- 585 Bazzurro*, P. and Cornell, C. A.: Nonlinear soil-site effects in probabilistic seismic-hazard analysis, *Bulletin of the seismological society of America*, 94, 2110–2123, 2004.
- Beets, D. J. and van der Spek, A. J.: The Holocene evolution of the barrier and the back-barrier basins of Belgium and the Netherlands as a function of late Weichselian morphology, relative sea-level rise and sediment supply, *Netherlands Journal of Geosciences*, 79, 3–16, 2000.
- 590 Bindi, D., Massa, M., Luzi, L., Ameri, G., Pacor, F., Puglia, R., and Augliera, P.: Pan-European ground-motion prediction equations for the average horizontal component of PGA, PGV, and 5%-damped PSA at spectral periods up to 3.0 s using the RESORCE dataset, *Bulletin of Earthquake Engineering*, 12, 391–430, 2014.
- Bommer, J. J., Stafford, P. J., Edwards, B., Dost, B., van Dedem, E., Rodriguez-Marek, A., Kruiver, P., van Elk, J., Doornhof, D., and Ntinalexis, M.: Framework for a ground-motion model for induced seismic hazard and risk analysis in the Groningen gas field, the Netherlands, *Earthquake Spectra*, 33, 481–498, 2017.
- 595 Bonnefoy-Claudet, S., Cornou, C., Bard, P.-Y., Cotton, F., Moczo, P., Kristek, J., and Donat, F.: H/V ratio: a tool for site effects evaluation. Results from 1-D noise simulations, *Geophysical Journal International*, 167, 827–837, 2006a.
- Bonnefoy-Claudet, S., Cotton, F., and Bard, P.-Y.: The nature of noise wavefield and its applications for site effects studies: A literature review, *Earth-Science Reviews*, 79, 205–227, 2006b.
- 600 Bonnefoy-Claudet, S., Köhler, A., Cornou, C., Wathelet, M., and Bard, P.-Y.: Effects of Love waves on microtremor H/V ratio, *Bulletin of the Seismological Society of America*, 98, 288–300, 2008.
- Bonnefoy-Claudet, S., Baize, S., Bonilla, L. F., Berge-Thierry, C., Pasten, C., Campos, J., Volant, P., and Verdugo, R.: Site effect evaluation in the basin of Santiago de Chile using ambient noise measurements, *Geophysical Journal International*, 176, 925–937, 2009.
- Boore, D. M.: Simulation of ground motion using the stochastic method, *Pure and applied geophysics*, 160, 635–676, 2003.
- 605 Borchardt, R. D.: Effects of local geology on ground motion near San Francisco Bay, *Bulletin of the Seismological Society of America*, 60, 29–61, 1970.
- Borchardt, R. D.: Estimates of site-dependent response spectra for design (methodology and justification), *Earthquake spectra*, 10, 617–653, 1994.
- Bourne, S., Oates, S., van Elk, J., and Doornhof, D.: A seismological model for earthquakes induced by fluid extraction from a subsurface reservoir, *Journal of Geophysical Research: Solid Earth*, 119, 8991–9015, 2014.
- 610

- Bradley, B. A.: Strong ground motion characteristics observed in the 4 September 2010 Darfield, New Zealand earthquake, *Soil Dynamics and Earthquake Engineering*, 42, 32–46, 2012.
- Buijze, L., Van Den Bogert, P. A., Wassing, B. B., Orlic, B., and Ten Veen, J.: Fault reactivation mechanisms and dynamic rupture modelling of depletion-induced seismic events in a Rotliegend gas reservoir, *Netherlands Journal of Geosciences*, 96, s131–s148, 2017.
- 615 Busschers, F., Kasse, C., Van Balen, R., Vandenberghe, J., Cohen, K., Weerts, H., Wallinga, J., Johns, C., Cleveringa, P., and Bunnik, F.: Late Pleistocene evolution of the Rhine-Meuse system in the southern North Sea basin: imprints of climate change, sea-level oscillation and glacio-isostasy, *Quaternary Science Reviews*, 26, 3216–3248, 2007.
- Camelbeeck, T. and Van Eck, T.: The 1992 Roermond earthquake, the Netherlands, and its aftershocks T. Camelbeeck", T. van Eck ", R. Pelzing", L. Ahorner ", J. Loohuis", HW Haak°, * P. Hoang-Trong° & D. Hollnack", *Geologie en Mijnbouw*, 73, 181–197, 1994.
- 620 Castellarò, S., Mulargia, F., and Rossi, P. L.: VS30: Proxy for seismic amplification?, *seismological research letters*, 79, 540–543, 2008.
- CEN, E. et al.: 1 Design of structures for earthquake resistance–Part 1: General rules seismic actions and rules for buildings, European Committee for Standardization, 2004.
- Convertito, V., De Matteis, R., Cantore, L., Zollo, A., Iannaccone, G., and Caccavale, M.: Rapid estimation of ground-shaking maps for seismic emergency management in the Campania Region of southern Italy, *Natural hazards*, 52, 97, 2010.
- 625 De Gans, W.: Quaternary Geology of the Netherlands, In *Geology of the Netherlands* by Wong, Th.E., Batjes, D.A.J. and De Jager, J. (eds.), pp. 173–195, 2007.
- Dost, B., Ruigrok, E., and Spetzler, J.: Development of seismicity and probabilistic hazard assessment for the Groningen gas field, *Netherlands Journal of Geosciences*, 96, s235–s245, 2017.
- Fäh, D., Kind, F., and Giardini, D.: A theoretical investigation of average H/V ratios, *Geophysical Journal International*, 145, 535–549, 2001.
- 630 Falcone, G., Acunzo, G., Mendicelli, A., Mori, F., Naso, G., Peronace, E., Porchia, A., Romagnoli, G., Tarquini, E., and Moscatelli, M.: Seismic amplification maps of Italy based on site-specific microzonation dataset and one-dimensional numerical approach, *Engineering Geology*, p. 106170, 2021.
- Field, E. H. and Jacob, K. H.: A comparison and test of various site-response estimation techniques, including three that are not reference-site dependent, *Bulletin of the seismological society of America*, 85, 1127–1143, 1995.
- 635 Gallipoli, M., Calamita, G., Tragni, N., Pisapia, D., Lupo, M., Mucciarelli, M., Stabile, T., Perrone, A., Amato, L., Izzi, F., et al.: Evaluation of soil-building resonance effect in the urban area of the city of Matera (Italy), *Engineering Geology*, 272, 105 645, 2020.
- Gallipoli, M. R. and Mucciarelli, M.: Comparison of site classification from VS 30, VS 10, and HVSR in Italy, *Bulletin of the Seismological Society of America*, 99, 340–351, 2009.
- Gariel, J., Horrent, C., Jongmans, D., and Camelbeeck, T.: Strong ground motion computation of the 1992 Roermond earthquake, the Netherlands, from linear methods using locally recorded aftershocks, *Geologie en Mijnbouw*, 73, 315–315, 1995.
- 640 Geluk, M., Duin, E. T., Dugar, M., Rijkers, R., Van den Berg, M., and Van Rooijen, P.: Stratigraphy and tectonics of the Roer Valley Graben, *Geologie en Mijnbouw*, 73, 129–129, 1995.
- Gouw, M. and Erkens, G.: Architecture of the Holocene Rhine-Meuse delta (the Netherlands)-a result of changing external controls, *Netherlands Journal of Geosciences*, 86, 23–54, 2007.
- 645 Guillier, B., Chatelain, J.-L., Bonnefoy-Claudet, S., and Haghshenas, E.: Use of ambient noise: From spectral amplitude variability to H/V stability, *Journal of Earthquake Engineering*, 11, 925–942, 2007.
- Gunnink, J., Maljers, D., Van Gessel, S., Menkovic, A., and Hummelman, H.: Digital Geological Model (DGM): a 3D raster model of the subsurface of the Netherlands, *Netherlands Journal of Geosciences*, 92, 33–46, 2013.

- Hijma, M. P., Cohen, K. M., Hoffmann, G., Van der Spek, A. J., and Stouthamer, E.: From river valley to estuary: the evolution of the Rhine mouth in the early to middle Holocene (western Netherlands, Rhine-Meuse delta), *Netherlands Journal of Geosciences*, 88, 13–53, 2009.
- 650 Hinzen, K.-G., Reamer, S. K., and Fleischer, C.: Seismicity in the Northern Rhine Area (1995–2018), *Journal of Seismology*, pp. 1–17, 2020.
- Hofman, L., Ruigrok, E., Dost, B., and Paulssen, H.: A shallow seismic velocity model for the Groningen area in the Netherlands, *Journal of Geophysical Research: Solid Earth*, 122, 8035–8050, 2017.
- Houtgast, R. and Van Balen, R.: Neotectonics of the Roer Valley rift system, the Netherlands, *Global and Planetary Change*, 27, 131–146, 655 2000.
- Joyner, W. B. and Boore, D. M.: Peak horizontal acceleration and velocity from strong-motion records including records from the 1979 Imperial Valley, California, earthquake, *Bulletin of the seismological Society of America*, 71, 2011–2038, 1981.
- KNMI: Netherlands Seismic and Acoustic Network, Royal Netherlands Meteorological Institute (KNMI), Other/Seismic Network, <https://doi.org/https://doi.org/10.21944/e970fd34-23b9-3411-b366-e4f72877d2c5>, 1993.
- 660 Kokusho, T. and Sato, K.: Surface-to-base amplification evaluated from KiK-net vertical array strong motion records, *Soil Dynamics and Earthquake Engineering*, 28, 707–716, 2008.
- Konno, K. and Ohmachi, T.: Ground-motion characteristics estimated from spectral ratio between horizontal and vertical components of microtremor, *Bulletin of the Seismological Society of America*, 88, 228–241, 1998.
- Kruiver, P. P., van Dedem, E., Romijn, R., de Lange, G., Korff, M., Stafleu, J., Gunnink, J. L., Rodriguez-Marek, A., Bommer, J. J., van Elk, 665 J., et al.: An integrated shear-wave velocity model for the Groningen gas field, the Netherlands, *Bulletin of Earthquake Engineering*, pp. 1–26, doi: 10.1007/s10518-017-0105-y, 2017a.
- Kruiver, P. P., Wiersma, A., Kloosterman, F. H., de Lange, G., Korff, M., Stafleu, J., Busschers, F. S., Harting, R., Gunnink, J. L., Green, R. A., et al.: Characterisation of the Groningen subsurface for seismic hazard and risk modelling, *Netherlands Journal of Geosciences*, 96, s215–s233, 2017b.
- 670 Kwok, A. O., Stewart, J. P., and Hashash, Y. M.: Nonlinear ground-response analysis of Turkey Flat shallow stiff-soil site to strong ground motion, *Bulletin of the Seismological Society of America*, 98, 331–343, 2008.
- Lachel, C. and Bard, P.-Y.: Numerical and theoretical investigations on the possibilities and limitations of Nakamura’s technique, *Journal of Physics of the Earth*, 42, 377–397, 1994.
- Lee, V. W. and Trifunac, M. D.: Should average shear-wave velocity in the top 30 m of soil be used to describe seismic amplification?, *Soil 675 Dynamics and Earthquake Engineering*, 30, 1250–1258, 2010.
- Lermo, J. and Chavez-Garcia, F. J.: Site effect evaluation using spectral ratios with only one station, *Bulletin of the seismological society of America*, 83, 1574–1594, 1993.
- Lunedei, E. and Malischewsky, P.: A review and some new issues on the theory of the H/V technique for ambient vibrations, in: *Perspectives on European Earthquake Engineering and Seismology*, pp. 371–394, 2015.
- 680 Majer, E. L., Baria, R., Stark, M., Oates, S., Bommer, J., Smith, B., and Asanuma, H.: Induced seismicity associated with enhanced geothermal systems, *Geothermics*, 36, 185–222, 2007.
- Mena, B., Wiemer, S., and Bachmann, C.: Building robust models to forecast the induced seismicity related to geothermal reservoir enhancement, *Bulletin of the Seismological Society of America*, 103, 383–393, 2013.
- Mignan, A., Landtwing, D., Kästli, P., Mena, B., and Wiemer, S.: Induced seismicity risk analysis of the 2006 Basel, Switzerland, Enhanced 685 Geothermal System project: Influence of uncertainties on risk mitigation, *Geothermics*, 53, 133–146, 2015.

- Molnar, S., Cassidy, J., Castellaro, S., Cornou, C., Crow, H., Hunter, J., Matsushima, S., Sánchez-Sesma, F., and Yong, A.: Application of microtremor horizontal-to-vertical spectral ratio (MHVSR) analysis for site characterization: State of the art, *Surveys in Geophysics*, 39, 613–631, 2018.
- 690 Nakata, N., Snieder, R., Kuroda, S., Ito, S., Aizawa, T., and Kunimi, T.: Monitoring a building using deconvolution interferometry. I: Earthquake-data analysis, *Bulletin of the Seismological Society of America*, 103, 1662–1678, 2013.
- Noorlandt, R., Kruiver, P. P., de Kleine, M. P., Karaoulis, M., de Lange, G., Di Matteo, A., von Ketelhodt, J., Ruigrok, E., Edwards, B., Rodriguez-Marek, A., et al.: Characterisation of ground motion recording stations in the Groningen gas field, *Journal of seismology*, 22, 605–623, 2018.
- Panzer, F., Bergamo, P., and Fäh, D.: Canonical Correlation Analysis Based on Site-Response Proxies to Predict Site-Specific Amplification Functions in Switzerland, *Bulletin of the Seismological Society of America*, 2021.
- 695 Paulssen, H., Dost, B., and Van Eck, T.: The April 13, 1992 earthquake of Roermond (The Netherlands); first interpretation of the NARS seismograms, *Geologie en Mijnbouw*, 71, 91–91, 1992.
- Peeters, J., Busschers, F., Stouthamer, E., Bosch, J., Van den Berg, M., Wallinga, J., Versendaal, A., Bunnik, F., and Middelkoop, H.: Sedimentary architecture and chronostratigraphy of a late Quaternary incised-valley fill: a case study of the late Middle and Late Pleistocene Rhine system in the Netherlands, *Quaternary Science Reviews*, 131, 211–236, 2016.
- 700 Perron, V., Gélis, C., Froment, B., Hollender, F., Bard, P.-Y., Cultrera, G., and Cushing, E. M.: Can broad-band earthquake site responses be predicted by the ambient noise spectral ratio? Insight from observations at two sedimentary basins, *Geophysical Journal International*, 215, 1442–1454, 2018.
- Pilz, M., Parolai, S., Leyton, F., Campos, J., and Zschau, J.: A comparison of site response techniques using earthquake data and ambient seismic noise analysis in the large urban areas of Santiago de Chile, *Geophysical Journal International*, 178, 713–728, 2009.
- 705 Poggi, V., Edwards, B., and Fäh, D.: Derivation of a reference shear-wave velocity model from empirical site amplification, *Bulletin of the Seismological Society of America*, 101, 258–274, 2011.
- Rodriguez-Marek, A., Kruiver, P. P., Meijers, P., Bommer, J. J., Dost, B., van Elk, J., and Doornhof, D.: A Regional Site-Response Model for the Groningen Gas Field, *Bulletin of the Seismological Society of America*, 107, 2067–2077, 2017.
- 710 Rondeel, H., Batjes, D., and Nieuwenhuijs, W.: Synopsis: Petroleum geology of the Netherlands—1993, *Geology of gas and oil under the Netherlands: The Royal Geological and Mining Society of The Netherlands*, pp. S3–S20, 1996.
- Schokker, J.: *Geologische overzichtskaart van Nederland*, TNO Bouw en Ondergrond (Utrecht), 2010.
- Stafleu, J., Maljers, D., Gunnink, J., Menkovic, A., and Busschers, F.: 3D modelling of the shallow subsurface of Zeeland, the Netherlands, *Netherlands Journal of Geosciences*, 90, 293–310, 2011.
- 715 Stafleu, J., Maljers, D., Busschers, F. S., Schokker, J., Gunnink, J. L., and Dambrink, R. M.: Models Created as 3-D Cellular Voxel Arrays, *Applied Multidimensional Geological Modeling: Informing sustainable human interactions with the shallow subsurface*, pp. 247–271, <https://doi.org/10.1002/9781119163091.ch11>, 2021.
- Van den Berg, M. and Beets, D.: Saalian glacial deposits and morphology in The Netherlands, *Tills and Glaciotectonics*. Balkema, Rotterdam, pp. 235–251, 1987.
- 720 Van der Meulen, M., Doornbal, J., Gunnink, J., Stafleu, J., Schokker, J., Vernes, R., Van Geer, F., Van Gessel, S., Van Heteren, S., Van Leeuwen, R., et al.: 3D geology in a 2D country: perspectives for geological surveying in the Netherlands, *Netherlands Journal of Geosciences*, 92, 217–241, 2013.
- van Ginkel, J., Ruigrok, E., and Herber, R.: Assessing soil amplifications in Groningen, the Netherlands, *First Break*, 37, 33–38, 2019.

- van Ginkel, J., Ruigrok, E., and Herber, R.: Using horizontal-to-vertical spectral ratios to construct shear-wave velocity profiles, *Solid Earth*, 11, 2015–2030, <https://doi.org/10.5194/se-11-2015-2020>, 2020.
- 725 van Thienen-Visser, K. and Breunese, J.: Induced seismicity of the Groningen gas field: history and recent developments, *The Leading Edge*, 34, 664–671, 2015.
- Wapenaar, K., Slob, E., Snieder, R., and Curtis, A.: Tutorial on seismic interferometry: Part 2—Underlying theory and new advances, *Geophysics*, 75, 75A211–75A227, 2010.
- 730 Wassing, B., Dost, B., and Vermillion, N. P.: Seismisch hazard van geïnduceerde aardbevingen: integratie van deelstudies, 2012.
- Weatherill, G., Kotha, S. R., and Cotton, F.: Re-thinking site amplification in regional seismic risk assessment, *Earthquake Spectra*, 36, 274–297, 2020.
- Wills, C., Petersen, M., Bryant, W., Reichle, M., Saucedo, G., Tan, S., Taylor, G., and Treiman, J.: A site-conditions map for California based on geology and shear-wave velocity, *Bulletin of the Seismological Society of America*, 90, S187–S208, 2000.
- 735 Zagwijn, W.: The Netherlands during the Tertiary and the Quaternary: a case history of coastal lowland evolution, in: *Coastal Lowlands*, pp. 107–120, Springer, 1989.