

1 GIS-models with fuzzy logic for Susceptibility Maps of debris flow using multiple types of parameters: A Case Study
2 in Pinggu District of Beijing, China

3 Yiwei Zhang¹, Jianping Chen^{1,*}, Qing Wang¹, Chun Tan^{2,3}, Yongchao Li^{4,5,6}, Xiaohui Sun⁷, Yang Li⁸

4
5 1 College of Construction Engineering, Jilin University, Changchun 130026, China

6 2 China Water Northeastern Investigation, Design and Research Co., Ltd, Changchun, Jilin 130026, China

7 3 North China Power Engineering Co., Ltd. of China Power Engineering Consulting Group, Changchun, Jilin 130000,
8 China

9 4 Key Laboratory of Shale Gas and Geoengineering, Institute of Geology and Geophysics, Chinese Academy of
10 Sciences, China.

11 5 University of Chinese Academy of Sciences.

12 6 Innovation Academy for Earth Science, Chinese Academy of Sciences, China.

13 7 Department of Earth Sciences and Engineering, Taiyuan University of Technology, Taiyuan 030024, China

14 8 Beijing institute of geological and prospecting engineering, Beijing 100020, China

15 * Corresponding author. Tel.:+86 13843047952

16 * Email address: chenjp@jlu.edu.cn

17
18
19 **Abstract**

20 Debris flow is one of the main causes of life loss and infrastructure damage in mountainous areas, ~~so these~~this
21 ~~hazards~~ must be recognized in the early stage of land development planning. According to field investigation and
22 expert experience, a scientific and effective quantitative susceptibility assessment model was established in Pinggu
23 District of Beijing. This model is based on Geographic Information System (GIS), combining with grey relational
24 ~~method~~, data-driven and fuzzy logic methods. The inherent influence factors, which are divided into two categories,
25 are selected in the model consistent with the system characteristics of debris flow gully and ~~some-one~~ new important
26 ~~factors~~ are proposed. The results of the 17 models are verified by results published by the authority, and validated by
27 two other indexes as well as Area Under Curve (AUC). Through the comparison and analysis of the results, a method
28 to optimize is proposed, including reasonable application of field investigation and expert experience, simplification
29 of factors and scientific classification. ~~Finally, And~~ the final optimal susceptibility map with full discussion has the
30 potential ~~to~~-help in determining regional-scale land use planning and debris flow hazard mitigation for decision
31 makers, with full use of insufficient data, scientific calculation, and reliable results. The model has advantages in
32 economically backward areas with insufficient data in mountainous areas because of its simplicity, interpretability
33 and engineering usefulness.

34 Key words: debris flow; susceptibility assessment; fuzzy logic; model optimization; hazard mitigation

36 1 Introduction

37 Debris flows are processes of rapid transport of water and soil materials in mountain watersheds, with sudden
38 and destructive outbreaks(Di et al., 2019). Some debris flows can often cause devastating disasters and huge
39 losses(Zhang et al., 2021) and seriously threaten the lives and properties of the people in the mountains, the safety of
40 major projects, and restrict social and economic development (Iverson, 1997; Hungr et al., 2005; Hu et al., 2011;
41 Takahashi, 2014; Wu et al., 2019). Mass movements in Beijing range in scale from shallow slope failures and rockfalls
42 to catastrophic rock avalanches frequently mobilize to form debris flows, threatening the ecological environment of
43 the mountainous area (Zhong et al., 2004). Especially, in recent years, due to the superposition of extreme rainstorm
44 weather and human engineering activities, debris flow events have increased gradually(Li et al., 2021b). Besides,
45 ~~As~~ the capital of China, Beijing ~~also~~ has strong influence and radiation at home and abroad, where geological
46 disasters are widely concerned (Xie et al., 2004; Li et al., 2020b). With the deepening understanding of debris flow
47 disaster and the updating of database, a new and more accurate evaluation is also very necessary. Therefore, it is of
48 great significance to establish accurate and scientific debris flow susceptibility map.

49 Through previous studies, it can be summarized that the current research on debris flow mainly focuses on the
50 following aspects: study on mechanism of debris flow, study on early warning and prediction of debris flow, study
51 on numerical simulation of debris flow and study on debris flow hazard analysis. Especially, studies on debris flow
52 hazard analysis have raised the attention of the researchers as soon as it appears(Dong et al., 2009). ~~Communicating~~
53 ~~information about debris flow hazard analysis is a crucial component of preparedness and hazard mitigation~~ (Chiou
54 et al., 2015). Susceptibility assessment, an important part of a hazard assessment of geological processes is more
55 flexible(Li et al., 2021a). ~~In the early days, the susceptibility assessment of debris flows was mainly qualitative~~
56 ~~research using geomorphological information~~ (Guzzetti et al., 1999).~~In the early days, the susceptibility assessment~~
57 ~~of debris flows was mainly qualitative research. In 1976, the United Nations commissioned the International Union~~
58 ~~of Engineering Geology to conduct a risk assessment of debris flows, which marked the beginning of research on the~~
59 ~~susceptibility assessment of debris flows as an important research direction for disaster prevention and prediction~~(Li
60 et al., 2020a).~~Many methods and techniques~~ (Wu et al., 2019; Li et al., 2020a) ~~have been proposed to evaluate debris~~
61 ~~flow susceptibility assessment based on different qualitative and quantitative approaches and geo-environmental~~
62 ~~information~~(Liu and Wang, 1995):

63 ~~In 1976, the United Nations commissioned the International Union of Engineering Geology to conduct a risk~~
64 ~~assessment of debris flows, which marked the beginning of research on the susceptibility assessment of debris flows~~
65 ~~as an important research direction for disaster prevention and prediction~~ (Li et al., 2020b). ~~Many methods and~~
66 ~~techniques have been proposed to evaluate debris flow susceptibility assessment based on different qualitative and~~
67 ~~quantitative approaches and geo-environmental information~~ (Liu and Wang, 1995). ~~Such as the analytic hierarchy~~
68 ~~process~~ (Wu et al., 2016), ~~logistic regression method~~ (Regmi et al., 2013; Conoscenti et al., 2015), ~~information value~~
69 (Akbar and Ha, 2011; Melo et al., 2012), ~~support vector machine~~(Pourghasemi et al., 2017), ~~frequency ratio (FR)~~
70 (Sun et al., 2018), ~~certainty factor (CF)~~ (Tsangaratos and Iliu, 2015), ~~neural network~~ (Lee et al., 2003; Liu et al., 2005)
71 ~~and Bayesian network algorithm~~ (Liang et al., 2012; Tien Bui et al., 2012), etc. ~~These methods have corresponding~~
72 ~~advantages and limitations for research subjects with different geological conditions. Generally speaking, it is easier~~

带格式的: 字体颜色: 自动设置

73 to get satisfactory results by combining and comparing various methods (Meyer et al., 2014; Di Napoli et al., 2020;
74 Fang et al., 2020). In summary, with the development of mathematical theory, the susceptibility assessment of debris
75 flows has been extensively and quantitatively studied, and the research methods have also changed from single to
76 comprehensive.

77 The economy in mountainous areas is often backward, we cannot supervise and verify every basin due to the
78 limited funds. ~~Surely, they are also wasteful and unnecessary.~~ The debris flow susceptibility assessment can give
79 decision makers a basis for rational allocation of resources, and determine which gullies should be focused on. In
80 other words, the study plays a link role for other studies. Recently, with the development of mathematical theory,
81 computer technology, the application of 3S (~~Remote sensing, Geography information systems, Global positioning~~
82 ~~systems~~), the susceptibility assessment of debris flows has been extensively and quantitatively studied (Li et al.,
83 2020a). ~~As research progresses, debris flows are increasingly seen as an open system. There are many factors~~
84 ~~influencing the system and the combination of factors is non-linear and the interactions are chaotic~~ While due to the
85 ~~nonlinearity of debris flow system and the openness and complexity of geological environment, we realize that it is~~
86 ~~chaotic, with many factors affecting the system.~~ Therefore, it is very difficult to find a unified and standard evaluation
87 model. At present, when the information is insufficient, the field investigation and experience of experts are necessary
88 basis. However, the experience is often subjective and needs a lot of professional experience accumulation. ~~Therefore,~~
89 ~~it~~ It is very important to express the experience of experts objectively and ~~easily~~ understandably to serve decision
90 makers. The application of fuzzy set theory in GIS environments is effective for similar problems (Luo and
91 Dimitrakopoulos, 2003; Porwal et al., 2006).

92 ~~The main objective of this paper is to propose a quantitative geographic information system (GIS)-based model.~~
93 ~~The results of expert experience scoring and site surveys are used as guidance and reference in the modelling process.~~
94 ~~We have tried to apply methods that can indicate the non-linearity of the debris flow system. Finally, the modelling~~
95 ~~process should respect the laws of geomorphological evolution and the geological basis. Otherwise, the result will~~
96 ~~tend to be simply data fitting~~ According to the summary above, the primary object of my present study is to explore
97 a geographic information system (GIS)-based quantitative model based on expert experience and field investigation.
98 ~~And the model is consistent with the system characteristics of debris flow gully and can also indicate the~~
99 ~~characteristics of disaster chain and the geomorphic evolution of basin rather than data fitting (Porwal et al., 2006).~~

100 2 Study area

101 The study area is located on the northeast of Beijing, China (Fig. 1), with a total area of 948.24 square kilometers.
102 The ~~terrace~~ ~~elevation~~ of Pinggu is high in the northeast and low in the southwest. It is surrounded by mountains,
103 accounts for about two-thirds of the total area, on three sides in the southeast and north. The central and southern
104 parts are alluvial plains. The area-, geologically, is the ~~West-west~~ extension of the famous Jixian section, whose
105 bedrock is mainly Middle and Late Proterozoic dolomite (Lü et al., 2017). ~~The administrative unit of Pinggu District~~
106 ~~is used as the study area boundary, mainly considering that~~ With Pinggu District of Beijing taken as the research
107 ~~object, the following reasons are considered: First of all,~~ geological hazards frequently influence human economic
108 activities, so political factors must be taken into account. And within the administrative region, inconsistent decision-
109 making can be effectively avoided. ~~Next, the regional boundary is basically divided by ridge line and stream line,~~

and the regional geological environment is relatively uniform; Last but not the least, the relationship between the precision of the base map and the size of the study area is also relatively reasonable.

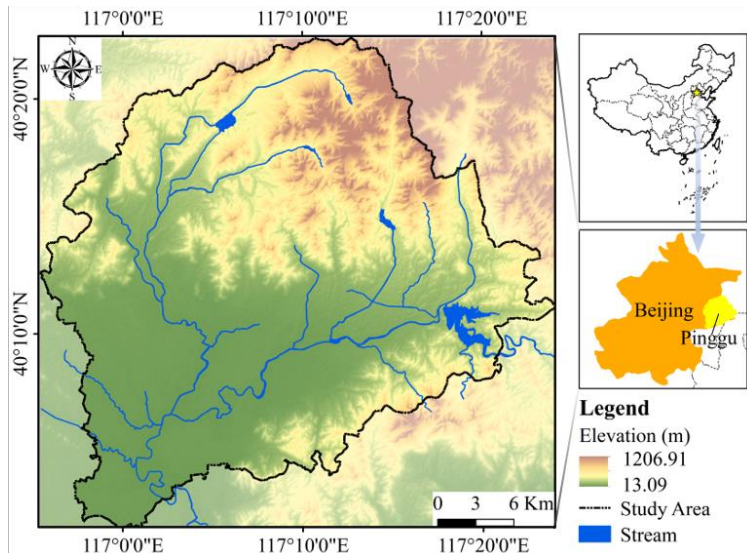


Fig. 1 Study area

3. Data and Methodology

In this study, the susceptibility assessment of debris flow hazard was based on the drainage basins unit. In a debris flow susceptibility assessment model, hydro-logical response unit can fully represent the hydrological process of hillside and will make the results more meaningful (Khan et al., 2013; Khan et al., 2016; Zou et al., 2019). Therefore, drainage networks were extracted from the ASTER-DEM by using the ArcGIS ArcHydro Toolbox and regions without obvious watershed characteristics were directly deleted. Then for each drainage basin, 19 controlling and triggering factors divided into two types were calculated. In addition, for these factors have different characteristics, different methods were used to calculate the fuzzy membership for different type factors. Field investigation is generally required in geological hazard surveys. If the data from the field investigation is applied to the model, it can help the model building and reduce the time for model training. The weights derived from the grey relational analysis method used in the following section (section 3.4.1) are based on the data from the field investigation. Because the field survey data are based on the watershed, it is scientific to make full use of qualitative understanding to determine the weight of the parameters of watershed characteristics factors, while geology and geomorphology factors are independent of watershed characteristics, it is suitable to use statistical methods to determine the objective weight. Finally, the debris flow susceptibility index (DFSI) map was derived by overlaying the factor thematic layers with fuzzy logic method. The workflow of debris flow susceptibility assessment is showed in Fig.2. First, a DEM map of the Pinggu area was downloaded. Then, the basin units were generated from the DEM map using the ArcHydro tool. The derived results were analyzed and units that did not fit the characteristics of the watershed were removed. During the analysis, the field investigation data and Google images were referenced. After that, the controlling and triggering

factors for the remaining 135 catchments were counted. For the fuzzy memberships, watershed characteristic parameters were determined by grey correlation and the geological and geomorphological factors were determined by the frequency ratio (FR) method and the cosine amplitude method. Finally, the individual layers were overlaid by fuzzy logic operations to obtain the final map. As there were different combinations of factors, 17 results were derived. Three indexes (AUC, AR and RR) were used to evaluate advantages and disadvantages of these results. Throughout the modeling process, our primary assumptions here are as follows: Firstly, while local properties surely affect the timing, size, and behavior of a mass movement, the dominant control on where they occur is the local surface topography, as it in turn defines local slope and shallow subsurface flow convergence; Secondly, all the evaluated basins have the possibility of debris flow; Thirdly, each evaluation factors should be available for all basins, otherwise, it should be excluded; Finally, the model should also need to integrate the system characteristics of debris flow disaster, the future development trend of climate change, and the social demand under the theoretical background of the new era to carry out reasonable modeling.

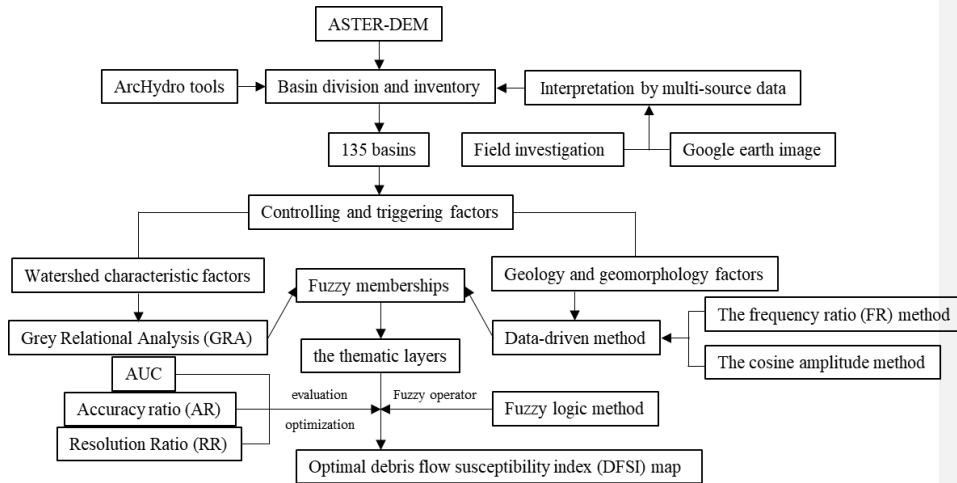


Fig.2 Workflow of debris flow susceptibility assessment

3.1 Debris flow basin division and inventory

There are many geological hazard points in mountainous area, so it is not realistic to monitor them completely by professional teams. According to the monitoring and preventing staff and the villagers, the detailed field investigation (Fig.3) for the evidence collection of debris flows will be carried out at the reported disaster point, aiming at record the loose material, delineating the basin and exploring other important information of the debris flow gullies. Moreover, field investigation is also very important for model modification. Then based on the Hydrology module in ArcGIS 10.2, the research object can be determined. Compared with grid unit and slope unit, hydrological response unit for susceptibility of debris flow has greater advantages(Li et al., 2021b; Zou et al., 2019). Finally, 135 basins are divided after removing the flat and irregular areas (Fig. 4), referring to the result of the field investigation and the remote sensing image. In the 135 basins, 48 basins were investigated on field, accounting for 36%.



158
 159 Fig.3 Field investigation photos. **a** Loose material; **b** Middle and Late Proterozoic dolomite; **c** colluvium deposit; **d**
 160 Slope fracture; **e** Channel erosion phenomenon
 161

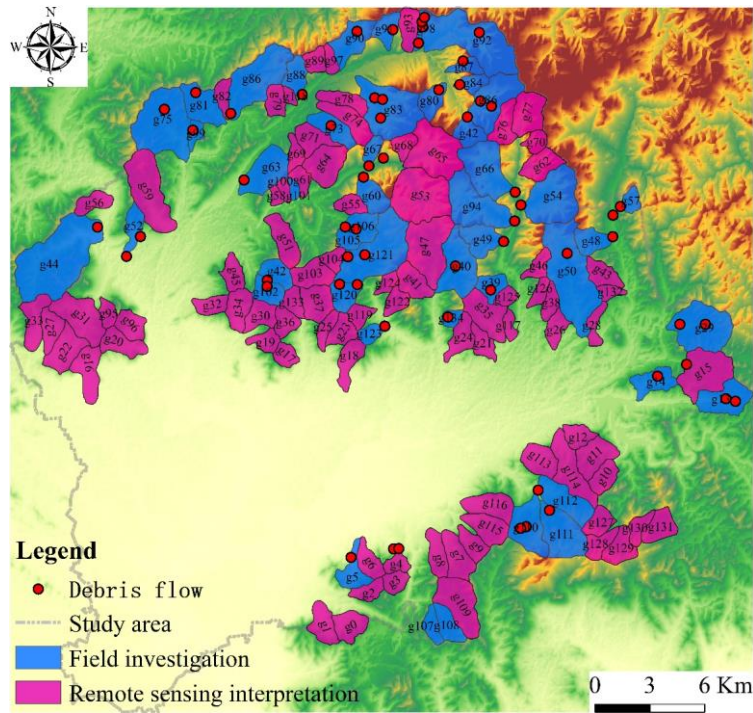


Fig. 4 Debris flow basin division and inventory.

Note: The data of debris flow points comes from Beijing Municipal Commission of Planning and Natural Resources websites (http://ghzrzyw.beijing.gov.cn/zhengwuxinxi/zxzt/dzzhfztt/zzzhdcpg/202008/t20200807_1976436.html)

3.2 Debris flow controlling and triggering factors

The basic requirement for the assessment of debris flows is that ~~at least some factors~~ included are easily obtainable, are meaningful for susceptibility assessment, and can be used for evaluating the need for passive or active debris flow mitigation. According to previous studies, 19 factors are selected ~~in this paper~~ in this study. the factors are divided into two types (Table 1) because of their different characteristics. Watershed characteristic factors (Type A) can be directly quantified, once the basin is determined (Fig. 5). The influence of these parameters is bounded by the watershed; Geology and geomorphology factors (Type B) need to be further processed, even if the watershed is determined. The scope of these parameters is independent of the watershed boundary. ~~Besides, rainfall and total amount of loose material source are also very important influencing factors. But according to the Beijing hydrological manual, the rainfall change in the study area is not obvious, so it is not considered in my model. And the total amount of loose material source cannot be obtained for the watershed without on-site investigation, so calculations are impossible. In fact, we indirectly consider the influence of natural loose material source by evaluating geological conditions, but cannot consider the impact of human activities.~~

Table 1 Factors for susceptibility assessment

Factors and Description		Significance	obtaining ways
A ₁	The planimetric (projected) area of the catchment	Geometric parameter; affecting the accumulative total volume of water and representing the potential magnitude(Zhang et al., 2011; Cao et al., 2016; Chang and Chien, 2007)	derived from DEM
A ₂	The curved surface area of the catchment	Real contact area between rainfall and basin	derived from DEM
A ₃	The surface roughness of the catchment	Dimensionless parameters, reflecting the fragmentation degrees of the surface and the ground surface micro-topography. Wu et al. (2019) believe the factor can further reflects the ability of the earth to resist wind erosion.	Calculated by $A_3 = A_2 / A_1$
A ₄	The perimeter of catchment	Geometric parameter, controlling the boundaries of a watershed	derived from DEM
A ₅	Form factor	Hydrologic parameter, related to the distribution of flow rate hydrograph(Chang and Chien, 2007)	Calculated by $A_5 = \frac{A_4}{2\sqrt{\pi A_1}}$
A ₆	The curve length of the main channel	Importance for the travel distance of materials and affecting the potential of erosive agents to dislodge and transport materials(Gómez and Kavzoglu, 2005)	derived from DEM
A ₇	The straight length of the main channel	Geometric parameter, representing the change of material source in space	derived from DEM
A ₈	Bending coefficient of the main channel	Affecting the discharge situation of debris flows(Li et al., 2020a; Zhang et al., 2013)	Calculated by $A_8 = A_6 / A_7$
A ₉	The gradient of the main channel	Hydraulic gradient parameter, affecting water transport capacity	Calculated by $A_9 = A_{12} / A_6$
A ₁₀	Maximum elevation in the catchment	Affecting vegetation and bedrock exposure	derived from DEM
A ₁₁	Minimum elevation in the catchment	Affecting vegetation and bedrock exposure slightly	derived from DEM
A ₁₂	Maximum relative relief in the catchment	The higher the value of A ₁₂ is, the large relative relief provides favorable terrain conditions for the initiation of the debris flow source.	Calculated by $A_{12} = A_{10} - A_{11}$
A ₁₃	Basin volume: the volume above the level of the minimum elevation in the basin	Representing the maximum material source that can be produced in an ideal state, loose material volume	derived from DEM
A ₁₄	Drainage density	Representing the geological structure, lithology, and the degree of rock weathering comprehensively and affecting the	the ratio of the total length of river network lines to A ₁

带格式的: 字体颜色: 背景 1

			range of lateral erosions and retrogressive(Cao et al., 2016; Zhang et al., 2011)	
Geology and geomorphology factors (Type B)	B ₁	Lithology	Affecting the rock mass shear strength and permeability (Donati and Turrini, 2002)	derived from 1:50,000 numerical geological maps
	B ₂	Proximity to faults	correlated with slope failures by generally reducing the strength of the rock mass (Dramis and Sorriso-Valvo, 1994; Korup, 2004; Kellogg, 2001; Kritikos and Davies, 2015).	derived from 1:50,000 numerical geological maps
	B ₃	Slope (degrees)	correlated with the probability of landslide occurrence (Dai and Lee, 2002; Lee and Choi, 2004; He and Beighley, 2008). The greater the slope, the greater the vertical component of gravity (Donati and Turrini, 2002), and the higher frequency of slope failures (Lee and Sambath, 2006; Lee and Talib, 2005)	derived from DEM
	B ₄	Slope aspect	affecting slope instability directly or indirectly, as a result of drying winds, sunlight, rainfall and vegetation (Dai and Lee, 2002; Dai et al., 2001).	derived from DEM
	B ₅	Curvature	Affecting slope stability. While Lee and Talib (2005) and Ohlmacher (2007) argue on how curvature affect slope stability.	derived from DEM

181 Note: The geological maps are provided by Beijing institute of geological and prospecting engineering and the digital elevation model-(DEM) of study area are from
182 SRTM-DEM with a resolution of 30 m ([http://gdex. cr. usgs. gov/gdex/](http://gdex.cr.usgs.gov/gdex/)).
183

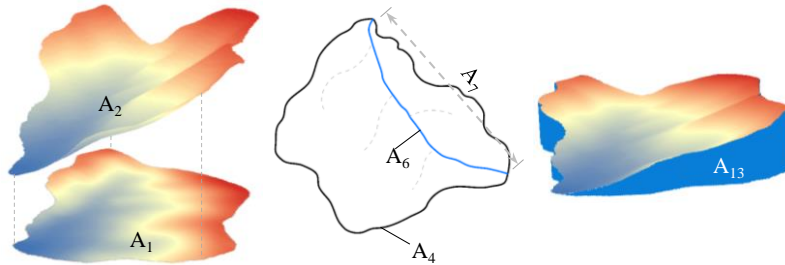


Fig. 5 Graphical illustration of some Type A factors. A_1 is the planimetric (projected) area of the catchment; A_2 is the curved surface area of the catchment; A_4 is the perimeter of catchment; A_6 is the curve length of the main channel; A_7 is the straight length of the main channel; A_{13} is basin volume

3.3 Fuzzy logic in susceptibility modelling

Fuzzy set theory is proposed by Zadeh (1965). It is an efficient way of expressing the concept of partial set membership degree. This concept differs from classical binary (0-1 value) logic. More words with a transitional fuzzy descriptions (such as low, medium, and high) are used as a effective method to express the concept of partial set membership degree. This concept is different from the classical binary (two-valued) logic by using fuzzy descriptions such as low, moderate, high, steep, favourable and close to (Kritikos and Davies, 2015). This fuzzy expression is particularly applicable to geological hazard classification. In the theory of fuzzy sets, elements have different degrees of membership in the interval $[0,1]$. 1 represents complete membership, and 0 represents non membership. Ross (1995) showed that fuzzy systems are useful in two general situations (Kritikos and Davies, 2015). The method is very consistent with the characteristics of debris flow system, whose predisposing factors are fuzzy in nature and mechanism is complex and not fully understood. Application of fuzzy logic method, the most-critical step is to find the suitable fuzzy membership of the factors. And fuzzy membership degree is equivalent to the weight in expert scoring method, which is calculated by objective method rather than given subjectively.

3.4 fuzzy-Fuzzy memberships

3.4.1 Grey Relational Analysis (GRA) in susceptibility modeling

GRA is proposed by Deng (1982) and it is an important part of grey system theory (Wang et al., 2014). Comparing with mathematical statistics methods which need lots of sample data, typical probability distribution and large calculation, GRA is applicable to small sample size and whether the data is regular or not. There will be no inconsistency between qualitative analysis and quantitative analysis (Deng, 1988). Besides it is to excogitate the leading and potential factors that affect the development of the system, and quantitatively describe the development and change trend of the system by studying whether the relative change trend of the grey factor variables with complex relationship is consistent in the process of system development and evolution (Liu et al., 2004). Thus, grey correlation analysis is introduced to quantify the correlation between each factor and the evaluation results according to field investigation expert experience. First, the procedure of GRA is to translate the performance of every alternative into a comparability sequence (Lin and Lin, 2002; Kuo et al., 2008; Wei et al., 2017). Therefore, according

213 to technical standard, "Specification of geological investigation for debris flow stabilization (DZ/T0220-2006)",
 214 published by the China Ministry of Lands and Resources, the preliminary assessment results of debris flow
 215 susceptibility are obtained, which are used as the reference sequence of grey relation method (Table 2). Second, the
 216 grey correlation coefficient of all A factors is calculated by Eq. (1). Finally, the average grey relational coefficient
 217 (the correlation degree) is calculated by Eq. (2) as the fuzzy memberships (Table 3).

$$218 \quad \xi_i(k) = \frac{\min_k \min_i |x_0(k) - x_i(k)| + 0.5 \max_k \max_i |x_0(k) - x_i(k)|}{|x_0(k) - x_i(k)| + 0.5 \min_k \min_i |x_0(k) - x_i(k)|} \quad (1)$$

219 Where $\xi_i(k)$ is the grey relational coefficient, $i=1, 2, \dots, n$ are the number i type A factors, $k=1, 2, \dots, n$ are the
 220 numbers of basins, $x_0(k)$ is the reference sequence (ideal target sequence), $x_i(k)$ is the number i type A factor sequence

$$221 \quad r_i = \frac{1}{N} \sum_{k=1}^n \xi_i(k) \quad (2)$$

222 Where r_i is the correlation degree in the range (0,1). N is the total number of basins in Table 2

Table 2 Quantitative evaluation grade standard table for Debris flow susceptibility

gullyname	g5	g13	g14	g29	g39	g40	g42	g44	g48	g49	g50	g52	g54
score	59	54	50	63	61	66	55	65	78	69	85	46	70
gullyname	g57	g60	g63	g66	g67	g72	g73	g75	g80	g81	g83	g84	g85
score	56	63	58	73	62	84	62	67	84	69	80	75	86
gullyname	g86	g87	g88	g90	g91	g92	g94	g98	g99	g101	g102	g105	g106
score	73	84	60	70	80	84	71	78	61	65	67	65	70
gullyname	g107	g108	g110	g111	g112	g120	g121	g123	g134	-	-	-	-
score	45	45	69	69	74	62	63	73	56	-	-	-	-

带格式表格

带格式表格

带格式表格

带格式表格

223 Note: (130≥score≥116, VH) , (115≥score≥87, M) , (86≥score≥44, L) , (43≥score≥15, N)
 224 VH=very high susceptibility, M=moderate susceptibility, L=low susceptibility, N= Non-debris flow
 225

Table 3 The fuzzy memberships of type A factors

Factor	A ₁	A ₂	A ₃	A ₄	A ₅	A ₆	A ₇
Fuzzy membership	0.77	0.77	0.63	0.6	0.54	0.55	0.67
Factor	A ₈	A ₉	A ₁₀	A ₁₁	A ₁₂	A ₁₃	A ₁₄
Fuzzy membership	0.71	0.55	0.55	0.59	0.61	0.79	0.54

227 It can be seen from the results that the occurrence of debris flow is highly correlated with basin volume, basin area
 228 and main gully bending coefficient with fuzzy membership above 0.7 in Beijing area. In the case of sufficient rainfall,
 229 the basin directly determines the total amount of catchment, and the bending coefficient reflects the replenishment of
 230 the source along the river. The basin volume is closely related to the number of supplementary sources. Therefore, it
 231 is necessary to do well in rainfall monitoring and early warning in large watersheds, check for loose matter
 232 accumulation in river basins before rainy season, and pay attention to slope protection of basin with large volume
 233 potential energy for the purpose of disaster prevention and reduction.

234 3.4.2 Data-driven method in susceptibility modeling

235 Without regard to the influence of human activities, landslide is one of the main fixed sources of debris flow in
 236 mountainous area. Shallow landslides are one of the most common categories of landslides. They frequently involve
 237 large areas and different soils in various climatic zones (Benda and Dunne, 1987; Selby, 1982; Borrelli et al., 2014).
 238 Great debris flows may result from numerous, small slope failures that subsequently coalesce (Fairchild, 1987;
 239 Roeloffs, 1996), from flow enlargement due to incorporation of bed and bank debris (Pierson et al., 1990; Bovis and

240 Dagg, 1992), or from large, individual landslides that mobilize partially or almost totally (Vallance and Scott, 1997;
 241 Iverson et al., 1997). Debris flows may also scour steep channels to bedrock and accelerate sediment delivery to
 242 downstream, lower-gradient channels. The spatial and temporal distribution of shallow landslides are important
 243 controls on landscape evolution and a major component of both natural and management-related disturbance regimes
 244 in mountain drainage basins (Tsukamoto et al., 1982; Dietrich et al., 1986; Benda, 1987; Crozier et al., 1990).
 245 Therefore, the landslide susceptibility assessment methods can be used for reference to debris flow susceptibility
 246 assessment.

247 For type B factors which cannot be characterized by a specific number, the frequency ratio (FR) method and the
 248 cosine amplitude method can be used to derive their fuzzy memberships. The FR ratio defined as Eq. (3).
 249 Considering the fuzzy membership must be in the interval [0,1], the FR values of the different categories are
 250 normalized by the largest FR value (Lee, 2006; Pradhan, 2010, 2011a, b) within the same type factor (Table 4) in
 251 order to derive the function.

$$FR = \frac{N_{(Di)}/N_{(ci)}}{N_{(D)}/N_{(A)}} \quad (3)$$

252 where $N_{(Di)}$ is the number of debris flow pixels in the category i , $N_{(ci)}$ is the total number of pixels in the category
 253 i , $N_{(D)}$ is total number of debris flow pixels in the study area, and $N_{(A)}$ is the total number of pixels in the study area.

254
 255
 256 The cosine amplitude method (Ross, 1995) is also widely used (Ercanoglu and Gokceoglu, 2004; Kanungo et
 257 al., 2006; Kanungo et al., 2009; Ercanoglu and Temiz, 2011) to establish relationships among elements of two or
 258 more datasets (Kritikos and Davies, 2015). Assuming that n is the number of data samples (categories of a factor
 259 used in the analysis) represented as an array $X = \{x_1, x_2, \dots, x_n\}$ and that each of its elements, x_i , is a vector of length
 260 m (i.e. the size of the raster image) and can be expressed as $X = \{x_{i1}, x_{i2}, \dots, x_{im}\}$, then each element of a relation r_{ij}
 261 results from a pairwise comparison of a factor category x_i with a category of the debris flow distribution layer x_j
 262 (debris flow or non-debris flow). The memberships can be calculated by Eq. (4):

$$r_{ij} = \frac{|\sum_{k=1}^m x_{ik}x_{jk}|}{\sqrt{(\sum_{k=1}^m x_{ik}^2)(\sum_{k=1}^m x_{jk}^2)}} \quad (4)$$

263
 264 Analogy with the study of Kanungo et al. (2006), we defined the r_{ij} value for any given factor category as the
 265 ratio of the total number of debris flow pixels in the category to the square root of the product of the total number of
 266 pixels in that category and the total number of debris flow pixels in the area. Values of r_{ij} close to 1 indicate similarity
 267 whereas values close to 0 indicate dissimilarity between the two datasets (Kritikos and Davies, 2015). What's more,
 268 In order to use properly, every every thematic layer must have-use the same pixel size to use the method properly.
 269

270 Table 4 Factor categories and their fuzzy membership degrees

Factor	Factor class	Number of pixels	Number of pixels %	Number of pixels classified as debris flows	Number of pixels classified as debris flow %	Frequency ratio (FR)	Normalized frequency ratio	r_{ij}	Comprehensive ratio (FRR)
Lithology	Quaternary sediments-unconsolidatede clastic sediments	7562017	0.320	48190	0.017	0.026	0.021	0.091	0.002
	Coarse-grained sediments	1148321	0.049	21741	0.008	0.076	0.063	0.061	0.004
	Medium-grained sediments	259619	0.011	12013	0.004	0.186	0.154	0.045	0.007
	Fine-grained sediments	754655	0.032	76380	0.027	0.407	0.337	0.114	0.038
	High-grade metamorphics	986435	0.042	154332	0.055	0.629	0.522	0.162	0.085
	Granitoids	725651	0.031	140936	0.050	0.781	0.648	0.155	0.100
	Mafic extrusive	75495	0.003	16398	0.006	0.873	0.724	0.053	0.038
	Terrigenous clastic rock	3289458	0.139	986495	0.352	1.205	1.000	0.41	0.410
proximity to faults	Limestones	8804379	0.373	1343754	0.480	0.614	0.509	0.478	0.243
	<100	1057209	0.045	231016	0.083	0.878	1.000	0.198	0.198
	100-500	3778095	0.160	774566	0.277	0.824	0.938	0.363	0.341
	500-1000	3894600	0.165	716963	0.256	0.740	0.842	0.349	0.294
	1000-2000	5707265	0.241	760699	0.272	0.536	0.610	0.36	0.220
	2000-3000	2749240	0.116	246925	0.088	0.361	0.411	0.205	0.084
slope (degrees)	>3000	6421103	0.272	69382	0.025	0.043	0.049	0.109	0.005
	0-5	9674508	0.410	153889	0.055	0.064	0.056	0.162	0.009
	5-10	2815606	0.119	383198	0.137	0.547	0.480	0.255	0.123
	10-15	2955913	0.125	521040	0.186	0.709	0.622	0.298	0.185
	15-20	2879704	0.122	570515	0.204	0.797	0.699	0.312	0.218
	20-25	2432724	0.103	498303	0.178	0.824	0.723	0.291	0.210
	25-30	1620325	0.069	350686	0.125	0.870	0.764	0.244	0.187
	30-35	837185	0.035	209574	0.075	1.007	0.883	0.189	0.167
	35-40	294141	0.012	82000	0.029	1.121	0.983	0.118	0.116
	40-45	77038	0.003	21133	0.008	1.103	0.968	0.06	0.058
Slope aspect	>45	30091	0.001	8529	0.003	1.140	1.000	0.038	0.038
	Flat	380875	0.016	463	0.000	0.005	0.005	0.009	0.000
	North	2370048	0.100	296900	0.106	1.006	1.000	0.318	0.111
	Northeast	2193998	0.093	279917	0.100	0.513	0.510	0.218	0.092
	East	2873308	0.122	295555	0.106	0.414	0.411	0.224	0.111
	Southeast	3122267	0.132	353489	0.126	0.455	0.453	0.245	0.108

	South	3219111	0.136	354420	0.127	0.443	0.440	0.246	0.133
	Southwest	3144353	0.133	400064	0.143	0.512	0.509	0.261	0.135
	West	3525895	0.149	436381	0.156	0.498	0.495	0.273	0.140
	Northwest	2787380	0.118	381679	0.136	0.551	0.547	0.255	0.318
Curvature	Concave	490900	0.021	109157	0.039	0.893	1.000	0.136	0.136
	Less concave	2037602	0.269	394583	0.141	0.778	0.871	0.259	0.226
	Flat	18364429	15.992	1769210	0.631	0.387	0.433	0.549	0.238
	Less convex	2202019	8.482	416142	0.149	0.759	0.850	0.266	0.226
	Convex	522285	0.692	112740	0.040	0.867	0.971	0.139	0.135


271

272 **3.5 DFSI map**

273 To derive the debris flow susceptibility index (DFSI) map by overlaying the factor thematic layers using fuzzy
 274 logic method, the "fuzzified" factors represented by information layers in raster format with values ranging from 0
 275 to 1 need to be combined. Compared with other four fuzzy operators, Fuzzy Gamma (Eq.65) is more suitable for the
 276 research (Kritikos and Davies, 2015). To determine the appropriate γ value, the results of different gamma values
 277 were compared by the greatest distance (Kritikos and Davies, 2015) between the average DFSI curves of the debris
 278 flows locations and non-debris flows locations (For example, flat pixels)(Fig. 6). Finally, 0.9 is determined for the γ
 279 value, because there is the greatest difference between debris flow and non-debris flows locations areas. In order to
 280 illustrate the superiority of our model through comparison, seventeen results are calculated in ArcGIS (Fig. 7).

281
$$\mu_{(x)} = (1 - \prod_{i=1}^n (1 - \mu_i))^\gamma * (\prod_{i=1}^n \mu_i)^{1-\gamma} \quad (5)$$

282 where $\mu_{(x)}$ is the combined membership value, μ_i is the fuzzy membership function for the i th map, $i=1,2, \dots, n$
 283 are the numbers of thematic layers to be combined, and γ is a parameter in the range (0,1).

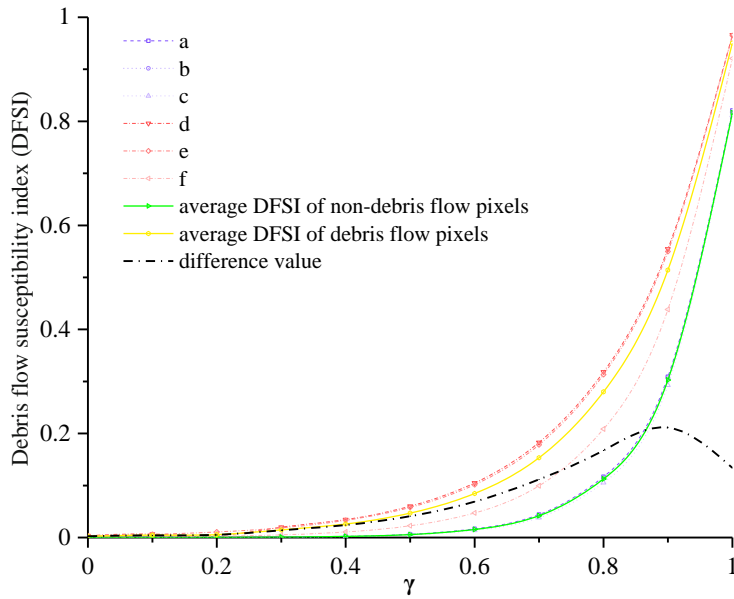

284 Fig. 6 Effect of γ value on Debris flow susceptibility index (DFSI). Curves d, e and f correspond to debris flow pixels,
 285 and curves a, b and c correspond to non-debris flow area where a Debris flow is unlikely. According to curve i, the
 286 maximum difference between the average DFSI values is observed for $\gamma \approx 0.9$
 287
 288

289 In order to find the optimal model, seventeen results were compared (Table 65). According to the distribution
 290 map of potential geological hazard points and susceptibility map in Pinggu District published by Beijing Municipal
 291 Commission of Planning and Natural Resources (Bmcp&Nr, 2020), three indexes are used to verify the validity and
 292 accuracy of the model.

293 The results of the model are independent of the model itself, so the predictive performance of the final map is

294 not just “the goodness of fit” of the data (Chung et al., 1995; Remondo et al., 2003). A relatively reliable technique
 295 for quantitatively assessing how well a model is the construction of validation or success rate curves (Chung and
 296 Fabbri, 1999; Westen et al., 2003; Remondo et al., 2003; Frattini et al., 2010) based on a comparison between the
 297 spatial distribution of debris flows and modelled debris flow susceptibility. The curves illustrate the debris flow
 298 recorded in the area with respect to susceptibility values also expressed as cumulative percentages of the total area.
 299 The area under the curve (AUC) defines the success rate (Marjanović et al., 2011). Generally, AUC values above 0.7
 300 indicate model performance can be acceptable, while below 0.7, the performance is considered poor (Kritikos and
 301 Davies, 2015).

302 Although AUC is an effective evaluation method, the results ~~is-are~~ not comprehensive as mathematical
 303 features for selecting the best measurement model because of insufficiency data for validation. In order to ensure
 304 the objectivity of the results, we can only effectively use the recorded debris flow gully as positive, while the others
 305 as negative. Thus, a two-category test is proposed to verify the model in this paper. First, the DFSI map of each
 306 model are divided into two categories by Natural Breaks (Jenks) method (Fig. 7). Then the accuracy ratio (AR) is
 307 defined as the frequency of the number of debris flow both classified by model and simultaneously recorded in site
 308 to the number of debris flow recorded in site. The Resolution Ratio (RR) is defined as the number of debris flow
 309 classified by model and simultaneously recorded in site to the total number debris flow classified by the model (in
 310 red color). Take R₄ for example, there are total 135 basins in the research area, but only 46 records of debris flows
 311 (Fig.3). And in the results of two categories by Natural Breaks (Jenks) method, 20 basins are divided in to debris
 312 flow, while there are only 14 debris flows among them. Then AR is calculated by dividing 14 into 46 and RR was
 313 calculated by dividing 14 into 20.

314 The higher the two values, the better the susceptibility map. Finally, the performance of models (P value) can
 315 be obtained by the Eq. (6). AUC values less than 0.6 are directly eliminated. Comparing the results of rest models,
 316 the result of R₁₆ is optimal, and the results of DFSI map are in good agreement with those of field investigation
 317 (Fig. 8).

$$318 \quad P = AUC + \sqrt{(AR * RR)} \quad (6)$$


319 Table 5 Predictive performance of different models

Result and Description		AUC	Two-category test		Performance index (centesimal grade)	
			Accuracy Ratio (AR)	Resolution Ratio (RR)		
A factors only or B factors only	R ₁	B factors with r _{ij}	0.460	/	/	/
	R ₂	B factors with FR	0.687	/	/	/
	R ₃	B factors with FRR	0.602	/	/	/
	R ₄	All A factors	0.786	0.304	0.700	83
	R ₅	Selected A factors	0.760	0.391	0.750	94
All factors as a single thematic layer	R ₆	All A factors and B factors with r _{ij}	0.776	0.261	0.667	74
	R ₇	All A factors and B factors with FR	0.779	0.283	0.684	78
	R ₈	All A factors and B factors with FRR	0.753	0.326	0.600	76
	R ₉	Selected A factors and B	0.746	0.348	0.727	86

		factors with r_{ij}				
	R ₁₀	Selected A factors B factors with FR	0.761	0.348	0.727	87
	R ₁₁	Selected A factors B factors with FRR	0.740	0.348	0.727	85
A factors combined into one thematic layers, B factor combined into another thematic layers	R ₁₂	All A factors and B factors with r_{ij}	0.708	0.5	0.511	82
	R ₁₃	All A factors and B factors with FR	0.753	0.848	0.394	99
	R ₁₄	All A factors and B factors with FRR	0.711	0.870	0.404	96
	R ₁₅	Selected A factors and B factors with r_{ij}	0.726	0.348	0.667	80
	R ₁₆	Selected A factors and B factors with FR	0.768	0.739	0.442	100
	R ₁₇	Selected A factors B factors with FRR	0.740	0.457	0.600	88

Note: Selected A factors with fuzzy membership more than 0.6; FRR represents the product of FR and r_{ij} ; Performance index is normalized by the largest FR value

320
321
322

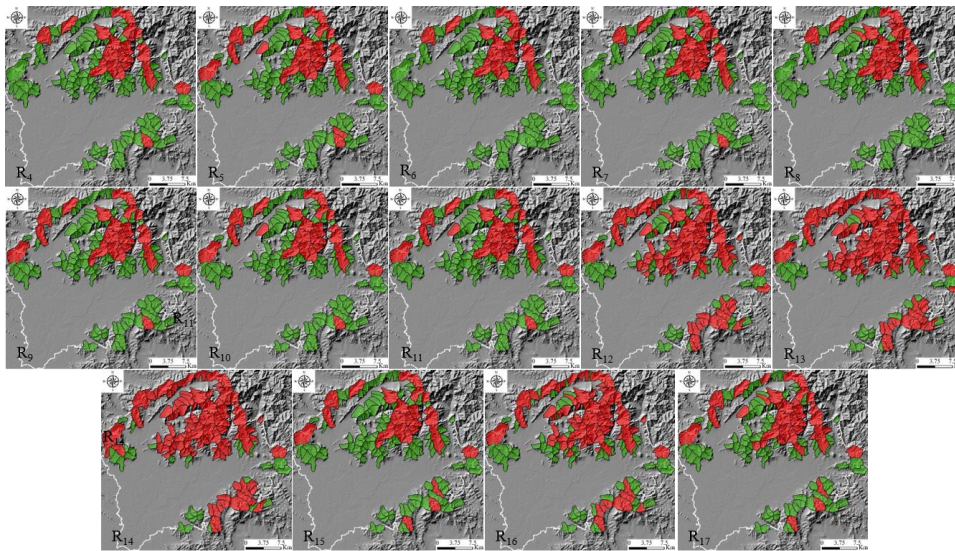

323
324

Fig.7 Results of two categories by Natural Breaks (Jenks) method

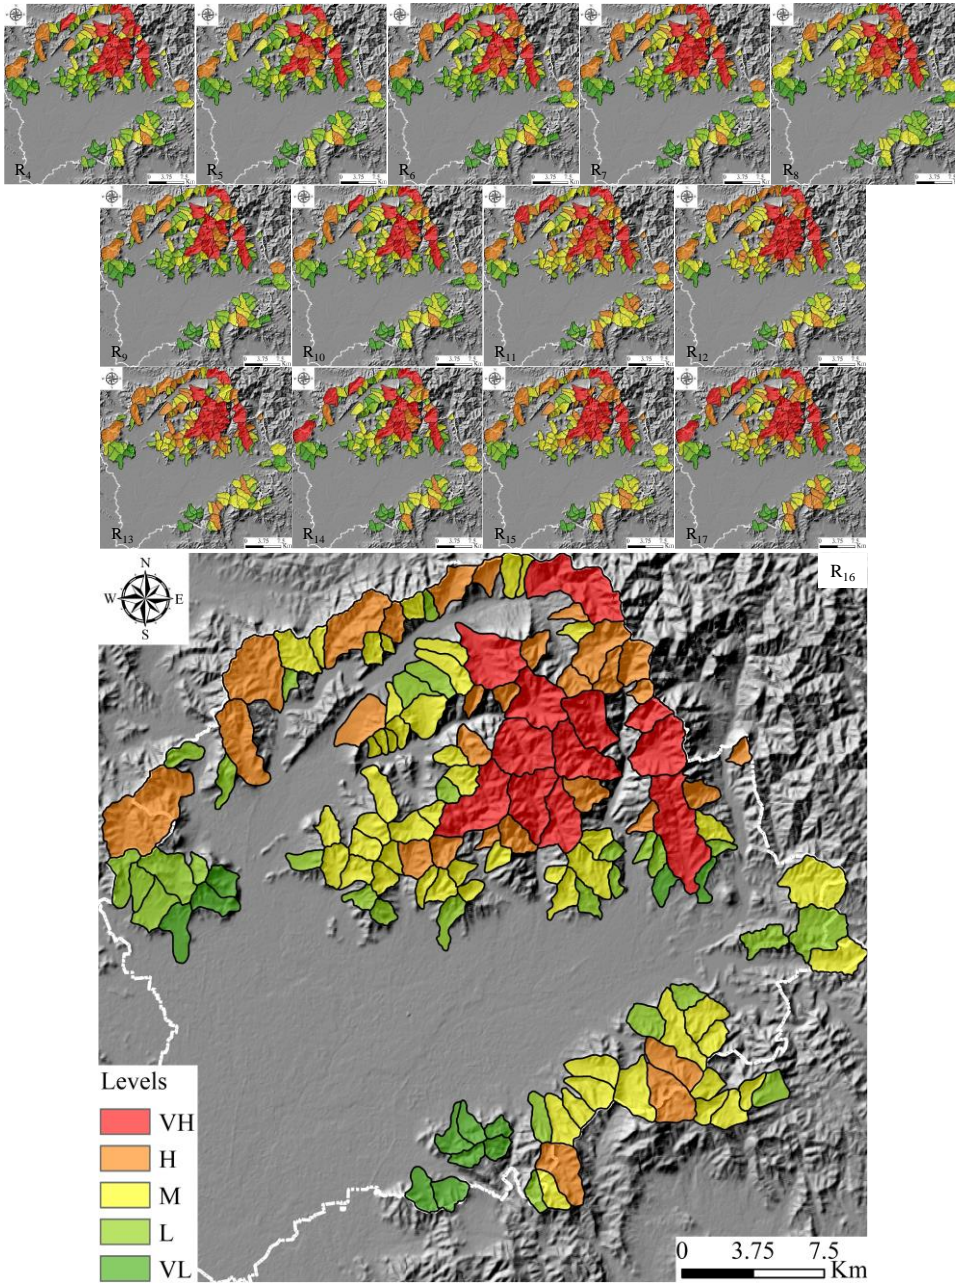


Fig. 8 Debris flow susceptibility maps. Note:- AUC results of R₁-R₄ below 0.7 were not shown.

带格式的: 下标

4 Results and Discussion

329 Through the modelling process, relatively satisfactory results are obtained in this paper. The predictive
330 performance of the output debris flow susceptibility maps, obtained from seventeen different models, is verified by
331 comparing with maps published by authority. By comparing the results, the following results are discussed:

332 Firstly, comparing R₁, R₂, R₃, R₄ and R₅, it can be concluded that the model based on field investigation and
333 expert experience is more effective than data-driven directly, when the information is insufficient. This is mainly
334 because when the basin area reaches a certain size, it is no longer controlled by one or several factors, but becomes
335 a complex system. It is not only the factors that affect the system, but also the system will react on each factor.
336 Geomorphic evolution is basically the result of the interaction of the endogenic and exogenic geological processes.
337 A geological period can be regarded as the beginning of an endogenic geological processes to the next one. In the
338 early stage of geological period, endogenic geological processes play a major role, and in the later relatively stable
339 period, exogenic geological processes will play a more and more important role. In this large cycle, the basin
340 continuously occurs a small cycle of accumulating and releasing energy, which leads to extremely complex system
341 changes. In addition, there is a contradiction between the scale of geological evolution and the scale of engineering
342 activities. So limited information can be obtained under these conditions that leads to the unreliability of data-driven
343 evaluation. Therefore, in the current period, field investigation and expert experience are fundamental.

344 Secondly, by comparing R₄ and R₅, R₆ and R₉, R₇ and R₁₀, R₈ and R₁₁, R₁₂ and R₁₅, R₁₃ and R₁₆, R₁₄ and R₁₇, it
345 can be concluded that the accuracy and resolution of the model can be improved by simplifying the factors, which
346 will eliminate the weak correlation and independence factors. In practical application, even if the susceptibility map
347 is obtained, the classification of the susceptibility degree is still a very difficult problem. Because everyone's
348 subjective definition of "susceptibility degree" is different. By simplifying the factors, the main factors can be selected,
349 which magnifies the differences between basins, so the boundaries between different susceptibility degrees are more
350 obvious.

351 Thirdly, by comparing R₆ and R₁₂, R₇ and R₁₃, R₈ and R₁₄, R₉ and R₁₅, R₁₀ and R₁₆, R₁₁ and R₁₇, it can be
352 concluded that the model in which factors are classified into two types is better than the method in which all factors
353 as a single thematic layer without classification. Because the factors categorized separately are more closely linked
354 and has consistent influence on the system in mechanism. We can also infer that the non-linear combination
355 characteristics between different types are stronger and scientific classification can improve the performance of the
356 model.

357 Fourthly, comparing R₁₂ and R₁₃, R₁₅ and R₁₆, it can be concluded that the frequency ratio method is better than
358 the cosine amplitude method in the study. Different from the study of (Kritikos and Davies, 2015), the watershed unit
359 rather than the grid unit is used, which indicates that the former has a wide range of application, while the latter has
360 a disadvantage of strict conditions.

361 Based on the results of the above four analyses, the most optimal model should have the features of being based
362 on expert experience, using selected factors, classifying factors before using them, and using frequency ratio method.
363 Then the model R₁₆ is selected according to the features, which is well in accordance with theoretical method
364 performance score, and gets fine mutual verification.

365 There is also much to discuss, the selection of factors is still a very complex dilemma. Although 19 factors
366 selected cannot fully evaluate the character of a basin, it is necessary to consider that they are easily and relatively

带格式的: 缩进: 左侧: 0 厘米, 首行缩进: 2 字符, 行距: 1.5 倍行距, 不对齐到网格

367 accurately obtainable for each basin. This will facilitate a wide range of applications. Besides, rainfall and total
368 amount of loose material source are also very important influencing factors. But according to the Beijing hydrological
369 manual, the rainfall change in the study area is not obvious, so it is not considered in my-model. And the total amount
370 of loose material source cannot be obtained for the watershed without on-site investigation, so calculations are
371 impossible. In fact, we indirectly consider the influence of natural loose material source by evaluating geological
372 conditions, but cannot consider the impact of human activities. As for the factors describing debris flow magnitude,
373 usually, several channels have the recorded data.

374 The scientific and systematic principle of model building is another challenge. To correctly classify the factors,
375 it is necessary to grasp the characteristics of the formation, movement and accumulation of debris flow. Therefore,
376 the classification should comprehensively consider the development background (geology, geomorphology, climate,
377 hydrology, soil, vegetation, human activities and other factors). The practical principle refers to that the study should
378 not only fully obtain scientific and accurate results, but also make the professional results understood by decision
379 makers. Although the susceptibility grade and susceptibility value of each watershed is obtained, the results are
380 relatively effective in this study area. In addition, with the development of technology and theory, we should replace
381 some traditional factors which are not easy to quantify with more precise quantitative factors to improve the efficiency
382 and accuracy of evaluation, such as surface roughness instead of drainage density.

383 For the results derived from Table 3, we would like to further discuss. It can be seen from the results that the
384 occurrence of debris flow is highly correlated with basin volume, basin area and main gully bending coefficient with
385 fuzzy membership above 0.7 in Beijing area. Rainfall in the study area is abundant to induce the debris flow. Loose
386 source and sinks the total volume of catchment become more important. The watershed area determines the total
387 volume of catchment. For the same rainfall, generally, the larger the area, the larger the catchment is. The bending
388 coefficient reflects the replenishment sources along the channel. The greater the coefficient, the slower the flow is.
389 Then loose source along the channel has more time to replenish. Basin volume characterizes the maximum amount
390 of loose material that can be supplied. These three features reflect the development characteristics of debris flow in
391 the study area. It also provides ideas for disaster prevention and mitigation.

392 **5 Conclusion**

393 In the present study, a new combination model for debris-flow susceptibility based on GIS was developed in
394 Pinggu, the eastern of Beijing. The objective and motivation of this study is to demonstrate a simple, extensible,
395 and convenient analytical model for the debris flow prediction. Three methods are selected in the model with their
396 own advantages. GRA has great advantages in the case of less samples, data-driven method is mainly used to
397 reduce subjectivity and fuzzy logic is fitted to solve nonlinear problems with fuzzy classification. The output debris
398 flow susceptibility maps obtained from the optimal models demonstrated satisfactory performance predicting
399 approximately 50 % of the debris flow gully with the relative higher susceptibility values corresponding to
400 AUC \geq 0.7. Considering that the data used for verification is only the recorded debris flow points rather than all
401 debris flow records in the area, its accuracy should be higher. The predictive performance of the susceptibility maps
402 and the spatial correlation of debris flow gully with H and VH susceptibility with recorded debris flow illustrate
403 that the assessment at regional scale using the proposed method is feasible. Compared with the previous results(Li

404 et al., 2020b) based on grid units in this area, the evaluation results are basically the same, but ~~they-the model~~ are
405 more targeted for debris flow disasters for decision makers. Besides, considering that the meaning of the used
406 factors is clear and the data is easy to obtain, these conditions mentioned enable the model to be widely applied.

407 Preliminary research indicates that: ~~First-first~~ of all, the ~~relatively ideal~~ evaluation results are obtained by
408 combining the landslide susceptibility analysis method with the debris flow. It reveals a systematic idea and disaster
409 chain phenomenon. Further more, we should pay more attention to the relative susceptibility value rather than
410 absolute values in different models, unless we need further study such as risk assessment. It is realized that the
411 performance of the model is ~~to a great extent~~, determined by the effect of its classification. What's more,
412 comprehensive consideration of endogenic and exogenic geological processes in susceptibility assessment has better
413 expected results. Last but not least, under the engineering geological environment with acceptable difference, it has
414 advantages of practical significance to regard the administrative region as a research area for policy making. because
415 different regions have different status constraints in population quality and economy.

416 In short, an effort has been made to develop a cost- and time-efficient debris flow susceptibility assessment
417 ~~model. The model with-has~~ an acceptable degree of accuracy for regional-scale planning and contributes ~~to making~~
418 ~~hazard~~, susceptibility and risk maps more accessible to individuals and local authorities. The ~~evolution of~~ GIS-based
419 methods and modern data availability especially through online databases are significantly ~~contribute~~
420 ~~towardsbeneficial to~~ this aim. However, a challenge remains in producing results with meaningful accuracy for the
421 scale of planning, using available resources. Previous studies, as well as the present work, highlight that the
422 effectiveness of the final map depends on the quality of input data. Comparison with a very high-resolution LIDAR-
423 derived DEM indicated that the spatial accuracy of the DEM varies between different landforms (lakes, river channels,
424 riverbeds, floodplains etc.) and the areas of greatest errors are predominantly confined to valley floors .However,
425 with overall RMS error of 8.15 m, the DEM meets the internationally accepted accuracy standards as set out by US
426 Geological Survey (USGS 1997) and is of sufficient quality for regional-scale studies such as the present one.
427 Updating and improving existing debris flow catalogues and inventories are crucial for the development of reliable
428 susceptibility and risk assessment methods.

429 Acknowledgements

430 This research was financially supported by the Key Project of NSFC-Yunnan Joint Fund (Grant no. U1702241) and
431 the National Key Research and Development Plan (Grant No. 2018YFC1505301). The authors would like to thank Yuchao
432 Li, Zhihai Li, Jiejie Shen, Feifan Gu et al. for their contributions to the collection of field data, and the editor and anonymous
433 reviewers for their comments and suggestions which helped a lot in making this paper better.
434

435 **Reference**

- 436 Akbar, T. A. and Ha, S. R.: Landslide hazard zoning along Himalayan Kaghan Valley of Pakistan—by integration of GPS, GIS, and
437 remote sensing technology, *Landslides*, 8, 527-540, 10.1007/s10346-011-0260-1, 2011.
- 438 Benda, L. E.: Sediment routing by debris flow, 1987.
- 439 Benda, L. E. and Dunne, T.: Sediment routing by debris flow, in: *Erosion and sedimentation in the Pacific Rim*, edited by: Beschta, R.
440 L., Blinn, T., Grant, G. E., Swanson, F. J., and Ice, G. G., IAHS Publ, 213-223, doi:10.1111/j.1753-4887.1977.tb06503.x, 1987.
- 441 The distribution map of potential geological hazard points and susceptibility map in pinggu district:
442 http://ghzrzyw.beijing.gov.cn/zhengwuxinxi/zxzt/dzzhfzzt/zzzhdcpj/202008/t20200807_1976436.html, last
443 Borrelli, L., Cofone, G., Coscarelli, R., and Gullà, G.: Shallow landslides triggered by consecutive rainfall events at Catanzaro strait
444 (Calabria–Southern Italy), *Journal of Maps*, 11, 730-744, 10.1080/17445647.2014.943814, 2014.
- 445 Bovis, M. and Dagg, B.: Debris flow triggering by impulsive loading - mechanical modeling and case-studies, *Canadian Geotechnical*
446 *Journal*, 29, 345-352, 10.1139/t92-040, 1992.
- 447 Cao, C., Xu, P., Chen, J., Zheng, L., and Niu, C.: Hazard assessment of debris-flow along the baicha river in heshigten banner, inner
448 mongolia, china, *Int J Environ Res Public Health*, 14, 1-19, 10.3390/ijerph14010030, 2016.
- 449 Chang, T. C. and Chien, Y. H.: The application of genetic algorithm in debris flows prediction, *Environmental Geology*, 53, 339-347,
450 10.1007/s00254-007-0649-2, 2007.
- 451 Chiou, I. J., Chen, C. H., Liu, W. L., Huang, S. M., and Chang, Y. M.: Methodology of disaster risk assessment for debris flows in a
452 river basin, *Stoch Env Res Risk A*, 29, 775-792, 10.1007/s00477-014-0932-1, 2015.
- 453 Chung, C.-J. F. and Fabbri, A. G.: Probabilistic prediction models for landslide hazard mapping, *Photogrammetric Engineering And*
454 *Remote Sensing*, 65, 1389-1399, 10.1016/S0924-2716(99)00030-1, 1999.
- 455 Chung, C. J. F., Fabbri, A., and Westen, C. J. v.: Multivariate regression analysis for landslide hazard zonation, *Geographical*
456 *Information Systems in Assessing Natural Hazards*, 5, 107-133, 1995.
- 457 Conoscenti, C., Ciaccio, M., Caraballo-Arias, N. A., Gómez-Gutiérrez, Á., Rotigliano, E., and Agnesi, V.: Assessment of susceptibility
458 to earth-flow landslide using logistic regression and multivariate adaptive regression splines: A case of the Belice River basin (western
459 Sicily, Italy), *Geomorphology*, 242, 49-64, 10.1016/j.geomorph.2014.09.020, 2015.
- 460 Crozier, M. J., Vaughan, E. E., and Tippett, J. M.: Relative instability of colluvium-filled bedrock depressions, *Earth Surface Processes*
461 *and Landforms*, 15, 329-339, 10.1002/esp.3290150404, 1990.
- 462 Dai, F. C. and Lee, C. F.: Landslide characteristics and slope instability modeling using GIS, Lantau Island, Hong Kong,
463 *Geomorphology*, 42, 213-228, 10.1016/S0169-555X(01)00087-3, 2002.
- 464 Dai, F. C., Lee, C. F., Li, H.-Z., and Xu, C.: Assessment of landslide susceptibility on the natural terrain of Lantau Island, Hong Kong,
465 *Environmental Geology*, 40, 381-391, 10.1007/s002540000163, 2001.
- 466 Deng, J. L.: Control problems of grey systems, *Systems and Control Letters*, 1, 288-294, 10.1016/S0167-6911(82)80025-X, 1982.
- 467 Deng, J. L.: *Grey prediction and decision*, Huazhong University of Science and Technology Press, Wuhan1988.
- 468 Di, B., Zhang, H., Liu, Y., Li, J., Chen, N., Stamatopoulos, C. A., Luo, Y., and Zhan, Y.: Assessing susceptibility of debris flow in
469 southwest china using gradient boosting machine, *Sci Rep*, 9, 12532, 10.1038/s41598-019-48986-5, 2019.
- 470 Di Napoli, M., Carotenuto, F., Cevasco, A., Confuorto, P., Di Martire, D., Firpo, M., Pepe, G., Raso, E., and Calcaterra, D.: Machine
471 learning ensemble modelling as a tool to improve landslide susceptibility mapping reliability, *Landslides*, 17, 1897-1914,
472 10.1007/s10346-020-01392-9, 2020.
- 473 Dietrich, W. E., Wilson, C. J., and Reneau, S. L.: Hollows, colluvium, and landslides in soil-mantled landscapes, in: *Hillslope*
474 *Processes*, edited by: Abrahams, A. D., Allen & Unwin, Boston, 1986.
- 475 Donati, L. and Turrini, M. C.: An objective method to rank the importance of the factors predisposing to landslides with the GIS
476 methodology: application to an area of the Apennines (Valnerina; Perugia, Italy), *Engineering Geology*, 63, 277-289, 10.1016/S0013-
477 7952(01)00087-4, 2002.
- 478 Dong, J.-J., Lee, C.-T., Tung, Y.-H., Liu, C.-N., Lin, K.-P., and Lee, J.-F.: The role of the sediment budget in understanding debris flow

479 susceptibility, *Earth Surface Processes and Landforms*, 34, 1612-1624, 10.1002/esp.1850, 2009.

480 Dramis, F. and Sorriso-Valvo, M.: Deep-seated gravitational slope deformations, related landslides and tectonics, *Engineering Geology*,

481 38, 231-243, 10.1016/0013-7952(94)90040-X, 1994.

482 Ercanoglu, M. and Gokceoglu, C.: Use of fuzzy relations to produce landslide susceptibility map of a landslide prone area (West Black

483 Sea Region, Turkey), *Engineering Geology*, 75, 229-250, 10.1016/j.enggeo.2004.06.001, 2004.

484 Ercanoglu, M. and Temiz, F. A.: Application of logistic regression and fuzzy operators to landslide susceptibility assessment in

485 Azdavay (Kastamonu, Turkey), *Environmental Earth Sciences*, 64, 949-964, 10.1007/s12665-011-0912-4, 2011.

486 Fairchild, L. H.: The importance of lahar initiation processes, *Reviews in Engineering Geology*, 7, 51-62, 10.1130/REG7-p51, 1987.

487 Fang, Z., Wang, Y., Peng, L., and Hong, H.: A comparative study of heterogeneous ensemble-learning techniques for landslide

488 susceptibility mapping, *International Journal of Geographical Information Science*, 35, 321-347, 10.1080/13658816.2020.1808897,

489 2020.

490 Frattini, P., Crosta, G., and Carrara, A.: Techniques for evaluating the performance of landslide susceptibility models, *Engineering*

491 *Geology*, 111, 62-72, 10.1016/j.enggeo.2009.12.004, 2010.

492 Gómez, H. and Kavzoglu, T.: Assessment of shallow landslide susceptibility using artificial neural networks in Jabonosa River Basin,

493 Venezuela, *Engineering Geology*, 78, 11-27, 10.1016/j.enggeo.2004.10.004, 2005.

494 Guzzetti, F., Carrara, A., Cardinali, M., and Reichenbach, P.: Landslide hazard evaluation: a review of current techniques and their

495 application in a multi-scale study, Central Italy, *Geomorphology*, 31, 181-216, 10.1016/s0169-555x(99)00078-1, 1999.

496 He, Y. and Beighley, R. E.: GIS-based regional landslide susceptibility mapping: a case study in southern California, *Earth Surface*

497 *Processes and Landforms*, 33, 380-393, 10.1002/esp.1562, 2008.

498 Hu, K., Wei, F., and Li, Y.: Real-time measurement and preliminary analysis of debris-flow impact force at Jiangjia Ravine, China,

499 *Earth Surface Processes and Landforms*, 36, 1268-1278, 10.1002/esp.2155, 2011.

500 Hungr, O., McDougall, S., and Bovis, M.: Entrainment of material by debris flows, in: *Debris-flow Hazards and Related Phenomena.*,

501 edited by: Jakob, M., and Hungr, O., Praxis.Springer Berlin Heidelberg, 135-158, 2005.

502 Iverson, R. M.: The physics of debris flows, *Reviews of Geophysics*, 35, 245-296., 10.1029/97RG00426, 1997.

503 Iverson, R. M., Reid, M. E., and LaHusen, R. G.: Debris-flow mobilization from landslides, *Annual Review of Earth and Planetary*

504 *Sciences*, 25, 85-138, 10.1146/annurev.earth.25.1.85, 1997.

505 Kanungo, D. P., Arora, M., Sarkar, S., and Gupta, R.: A fuzzy set based approach for integration of thematic maps for landslide

506 susceptibility zonation, *Georisk*, 3, 10.1080/17499510802541417, 2009.

507 Kanungo, D. P., Arora, M. K., Sarkar, S., and Gupta, R. P.: A comparative study of conventional, ANN black box, fuzzy and combined

508 neural and fuzzy weighting procedures for landslide susceptibility zonation in Darjeeling Himalayas, *Engineering Geology*, 85, 347-

509 366, 10.1016/j.enggeo.2006.03.004, 2006.

510 Kellogg, K. S.: Tectonic controls on a large landslide complex: Williams Fork Mountains near Dillon, Colorado, *Geomorphology*, 41,

511 355-368, 10.1016/S0169-555X(01)00067-8, 2001.

512 Khan, U., Tuteja, N. K., and Sharma, A.: Delineating hydrologic response units in large upland catchments and its evaluation using soil

513 moisture simulations, *Environmental Modelling & Software*, 46, 142-154, 10.1016/j.envsoft.2013.03.005, 2013.

514 Khan, U., Tuteja, N. K., Sharma, A., Lucas, S., Murphy, B., and Jenkins, B.: Applicability of Hydrologic Response Units in low

515 topographic relief catchments and evaluation using high resolution aerial photograph analysis, *Environmental Modelling & Software*,

516 81, 56-71, 10.1016/j.envsoft.2016.03.010, 2016.

517 Korup, O.: Geomorphic implications of fault zone weakening Slope instability along the Alpine Fault South Westland to Fiordland,

518 *New Zealand Journal of Geology and Geophysics*, 47, 257-267, 10.1080/00288306.2004.9515052, 2004.

519 Kritikos, T. and Davies, T.: Assessment of rainfall-generated shallow landslide/debris-flow susceptibility and runoff using a GIS-based

520 approach: application to western Southern Alps of New Zealand, *Landslides*, 12, 1051-1075, 10.1007/s10346-014-0533-6, 2015.

521 Kuo, Y., Yang, T., and Huang, G.-W.: The use of grey relational analysis in solving multiple attribute decision-making problems,

522 *Computers & Industrial Engineering*, 55, 80-93, 10.1016/j.cie.2007.12.002, 2008.

523 Lee, S.: Application and verification of fuzzy algebraic operators to landslide susceptibility mapping, *Environmental Geology*, 52, 615-
524 623, 10.1007/s00254-006-0491-y, 2006.

525 Lee, S. and Choi, J.: Landslide susceptibility mapping using GIS and the weight-of-evidence model, *International Journal of*
526 *Geographical Information Science*, 18, 789-814, 10.1080/13658810410001702003, 2004.

527 Lee, S. and Sambath, T.: Landslide susceptibility mapping in the Damrei Romel area, Cambodia using frequency ratio and logistic
528 regression models, *Environmental Geology*, 50, 847-855, 10.1007/s00254-006-0256-7, 2006.

529 Lee, S. and Talib, J. A.: Probabilistic landslide susceptibility and factor effect analysis, *Environmental Geology*, 47, 982-990,
530 10.1007/s00254-005-1228-z, 2005.

531 Lee, S., Ryu, J.-H., Min, K., and Won, J.-S.: Landslide susceptibility analysis using GIS and artificial neural network, *Earth Surface*
532 *Processes and Landforms*, 28, 1361-1376, 10.1002/esp.593, 2003.

533 Li, Y., Chen, J., Zhang, Y., Song, S., Han, X., and Ammar, M.: Debris flow susceptibility assessment and runoff prediction: A case
534 study in shiyang gully, beijing, china, *International Journal of Environmental Research*, 14, 365-383, 10.1007/s41742-020-00263-4,
535 2020a.

536 Li, Y., Chen, J., Li, Z., Han, X., Zhai, S., Li, Y., and Zhang, Y.: A case study of debris flow risk assessment and hazard range prediction
537 based on a neural network algorithm and finite volume shallow water flow model, *Environmental Earth Sciences*, 80, 10.1007/s12665-
538 021-09580-z, 2021a.

539 Li, Y., Chen, J., Tan, C., Li, Y., Gu, F., Zhang, Y., and Mehmood, Q.: Application of the borderline-SMOTE method in susceptibility
540 assessments of debris flows in Pinggu District, Beijing, China, *Natural Hazards*, 105, 2499-2522, 10.1007/s11069-020-04409-7,
541 2020b.

542 Li, Z., Chen, J., Tan, C., Zhou, X., Li, Y., and Han, M.: Debris flow susceptibility assessment based on topo-hydrological factors at
543 different unit scales: a case study of Mentougou district, Beijing, *Environmental Earth Sciences*, 80, 10.1007/s12665-021-09665-9,
544 2021b.

545 Liang, W.-j., Zhuang, D.-f., Jiang, D., Pan, J.-j., and Ren, H.-y.: Assessment of debris flow hazards using a Bayesian Network,
546 *Geomorphology*, 171-172, 94-100, 10.1016/j.geomorph.2012.05.008, 2012.

547 Lin, C. L. and Lin, C. L.: The use of the orthogonal array with grey relational analysis to optimize the electrical discharge machining
548 process with multiple performance characteristics, *International Journal of Machine Tools and Manufacture*, 42, 237-244,
549 10.1016/S0890-6955(01)00107-9, 2002.

550 Liu, L. and Wang, S.: Fuzzy comprehensive evaluation on landslide and debris flow risk degree in Zaatong, Yunnan, *Mountain*
551 *Research*, 13, 261-266, 1995.

552 Liu, S., Dang, Y., and Fang, Z.: Grey system theory and its applications, Science Press, Beijing2004.

553 Liu, Y., Guo, H. C., Zou, R., and Wang, L. J.: Neural network modeling for regional hazard assessment of debris flow in Lake
554 Qionghai Watershed, China, *Environmental Geology*, 49, 968-976, 10.1007/s00254-005-0135-7, 2005.

555 Lü, J., Wang, C., Liu, H., and Zhang, X.: Division of beijing geological environment system, *Urban geology*, 12, 19-25,
556 10.3969/j.issn.1007-1903.2017.03.004, 2017.

557 Luo, X. and Dimitrakopoulos, R.: Data-driven fuzzy analysis in quantitative mineral resource assessment, *Computers & Geosciences*,
558 29, 3-13, 10.1016/s0098-3004(02)00078-x, 2003.

559 Marjanović, M., Kovačević, M., Bajat, B., and Voženilek, V.: Landslide susceptibility assessment using SVM machine learning
560 algorithm, *Engineering Geology*, 123, 225-234, 10.1016/j.enggeo.2011.09.006, 2011.

561 Melo, R., Vieira, G., Caselli, A., and Ramos, M.: Susceptibility modelling of hummocky terrain distribution using the information
562 value method (Deception Island, Antarctic Peninsula), *Geomorphology*, 155-156, 88-95, 10.1016/j.geomorph.2011.12.027, 2012.

563 Meyer, N. K., Schwanghart, W., Korup, O., Romstad, B., and Eitzelmüller, B.: Estimating the topographic predictability of debris
564 flows, *Geomorphology*, 207, 114-125, 10.1016/j.geomorph.2013.10.030, 2014.

565 Ohlmacher, G. C.: Plan curvature and landslide probability in regions dominated by earth flows and earth slides, *Engineering Geology*,
566 91, 117-134, 10.1016/j.enggeo.2007.01.005, 2007.

567 Pierson, T. C., Janda, R. J., Thouret, J.-C., and Borrero, C. A.: Perturbation and melting of snow and ice by the 13 November 1985
568 eruption of Nevado del Ruiz, Colombia, and consequent mobilization, flow and deposition of lahars, *Journal of Volcanology and*
569 *Geothermal Research*, 41, 17-66, 10.1016/0377-0273(90)90082-q, 1990.

570 Porwal, A., Carranza, E. J. M., and Hale, M.: A Hybrid Fuzzy Weights-of-Evidence Model for Mineral Potential Mapping, *Natural*
571 *Resources Research*, 15, 1-14, 10.1007/s11053-006-9012-7, 2006.

572 Pourghasemi, H. R., Yousefi, S., Kornejady, A., and Cerda, A.: Performance assessment of individual and ensemble data-mining
573 techniques for gully erosion modeling, *Sci Total Environ*, 609, 764-775, 10.1016/j.scitotenv.2017.07.198, 2017.

574 Pradhan, B.: Landslide susceptibility mapping of a catchment area using frequency ratio, fuzzy logic and multivariate logistic
575 regression approaches, *Journal of the Indian Society of Remote Sensing*, 38, 301-320, 10.1007/s12524-010-0020-z, 2010.

576 Pradhan, B.: Manifestation of an advanced fuzzy logic model coupled with Geo-information techniques to landslide susceptibility
577 mapping and their comparison with logistic regression modelling, *Environmental and Ecological Statistics*, 18, 471-493,
578 10.1007/s10651-010-0147-7, 2011a.

579 Pradhan, B.: Use of GIS-based fuzzy logic relations and its cross application to produce landslide susceptibility maps in three test
580 areas in Malaysia, *Environmental Earth Sciences*, 63, 329-349, 10.1007/s12665-010-0705-1, 2011b.

581 Regmi, N. R., Giardino, J. R., McDonald, E. V., and Vitek, J. D.: A comparison of logistic regression-based models of susceptibility to
582 landslides in western Colorado, USA, *Landslides*, 11, 247-262, 10.1007/s10346-012-0380-2, 2013.

583 Remondo, J., González, A., Terán, J. R. D. D., Cendrero, A., Fabbri, A., and Chung, C.-J. F.: Validation of landslide susceptibility
584 maps; examples and applications from a case study in northern Spain, *Natural Hazards*, 30, 437-449,
585 10.1023/B:NHAZ.0000007201.80743.fc, 2003.

586 Roeloffs, E.: Poroelastic techniques in the study of earthquake-related hydrologic phenomena, 38, 135-195, 10.1016/S0065-
587 2687(08)60270-8, 1996.

588 Ross, T. J.: *Fuzzy logic with engineering applications*, McGraw-Hill, New York 1995.

589 Selby, M. J.: *Hillslope materials and processes*, Oxford University Press, Oxford 1982.

590 Sun, X., Chen, J., Bao, Y., Han, X., Zhan, J., and Peng, W.: Landslide Susceptibility Mapping Using Logistic Regression Analysis
591 along the Jinsha River and Its Tributaries Close to Derong and Deqin County, Southwestern China, *ISPRS International Journal of*
592 *Geo-Information*, 7, 10.3390/ijgi7110438, 2018.

593 Takahashi, T.: *Debris flow mechanics, prediction and countermeasures*, second, Taylor & Francis/Balkema, The Netherlands 2014.

594 Tien Bui, D., Pradhan, B., Lofman, O., Revhaug, I., and Dick, O. B.: Landslide susceptibility assessment in the Hoa Binh province of
595 Vietnam: A comparison of the Levenberg–Marquardt and Bayesian regularized neural networks, *Geomorphology*, 171-172, 12-29,
596 10.1016/j.geomorph.2012.04.023, 2012.

597 Tsangaratos, P. and Ilija, I.: Landslide susceptibility mapping using a modified decision tree classifier in the Xanthi Prefecture, Greece,
598 *Landslides*, 13, 305-320, 10.1007/s10346-015-0565-6, 2015.

599 Tsukamoto, Y., Ohta, T., and Noguchi, H.: Hydrological and geomorphological studies of debris slides on forested hillslopes in Japan,
600 *Journal des Sciences Hydrologiques*, 27, 234, 1982.

601 Vallance, J. W. and Scott, K. M.: The Osceola mudflow from Mount Rainier: Sedimentology and hazard implications of a huge clay-
602 rich debris flow, *Geological Society of America Bulletin*, 109, 143-163, 10.1130/0016-7606(1997)109<0143:TOMFMR>2.3.CO;2,
603 1997.

604 Wang, J., Yu, Y., Yang, S., Lu, G.-h., and Ou, G.-q.: A modified certainty coefficient method (M-CF) for debris flow susceptibility
605 assessment: A case study for the Wenchuan earthquake meizoseismal areas, *Journal of Mountain Science*, 11, 1286-1297,
606 10.1007/s11629-013-2781-7, 2014.

607 Wei, Z., Shang, Y., Zhao, Y., Pan, P., and Jiang, Y.: Rainfall threshold for initiation of channelized debris flows in a small catchment
608 based on in-site measurement, *Engineering Geology*, 217, 23-34, 10.1016/j.enggeo.2016.12.003, 2017.

609 Westen, C. J. v., Rengers, N., and Soeters, R.: Use of geomorphological information in indirect landslide susceptibility assessment,
610 *Natural Hazards*, 30, 399-419, 10.1023/B:NHAZ.0000007097.42735.9e, 2003.

611 Wu, S., Chen, J., Zhou, W., Iqbal, J., and Yao, L.: A modified Logit model for assessment and validation of debris-flow susceptibility,
612 *Bulletin of Engineering Geology and the Environment*, 78, 4421-4438, 10.1007/s10064-018-1412-5, 2019.

613 Wu, Y., Li, W., Liu, P., Bai, H., Wang, Q., He, J., Liu, Y., and Sun, S.: Application of analytic hierarchy process model for landslide
614 susceptibility mapping in the Gangu County, Gansu Province, China, *Environmental Earth Sciences*, 75, 10.1007/s12665-015-5194-9,
615 2016.

616 Xie, H., Zhong, D., Wei, F., and Wang, S.: Classification of debris flow in the mountains of Beijing, *Journal of mountain science*, 22,
617 212-219, 10.16089/j.cnki.1008-2786.2004.02.013, 2004.

618 Zadeh, L. A.: Fuzzy sets, *Information & Control*, 8, 338-353, 10.1016/S0019-9958(65)90241-X, 1965.

619 Zhang, W., Li, H. Z., Chen, J. p., Zhang, C., Xu, L. m., and Sang, W. f.: Comprehensive hazard assessment and protection of debris
620 flows along Jinsha River close to the Wudongde dam site in China, *Natural Hazards*, 58, 459-477, 10.1007/s11069-010-9680-9, 2011.

621 Zhang, W., Chen, J.-p., Wang, Q., An, Y., Qian, X., Xiang, L., and He, L.: Susceptibility analysis of large-scale debris flows based on
622 combination weighting and extension methods, *Natural Hazards*, 66, 1073-1100, 10.1007/s11069-012-0539-0, 2013.

623 Zhang, Y., Chen, J., Tan, C., Bao, Y., Han, X., Yan, J., and Mehmood, Q.: A novel approach to simulating debris flow runout via a
624 three-dimensional CFD code: a case study of Xiaojia Gully, *Bulletin of Engineering Geology and the Environment*, 80, 5293-5313,
625 10.1007/s10064-021-02270-x, 2021.

626 Zhong, D., Xie, H., Wang, S., Wei, F., and Jin, H.: Debris flow in Beijing mountain, Commercial Press, Beijing2004.

627 Zou, Q., Cui, P., He, J., Lei, Y., and Li, S.: Regional risk assessment of debris flows in China—An HRU-based approach,
628 *Geomorphology*, 340, 84-102, 10.1016/j.geomorph.2019.04.027, 2019.

629