

1 **Warning Water Level Determination and its Spatial Distribution in**

2 **Coastal Areas of China**

3 **Shan Liu¹ • Xianwu Shi¹ • Qiang Liu¹ • Jun Tan¹ • Yuxi Sun¹ • Qingrong Liu² • Haoshuang Guo¹**

4 ¹ National Marine Hazard Mitigation Service, Beijing 100194, China

5 ² North China Sea Marine Forecast Center, State Oceanic Administration, Qingdao 266100, China

6 *Correspondence to:* Xianwu Shi (xianwu.shi@mail.bnu.edu.cn)

7

8 **Abstract:** The warning water level is the default water level at which storm surges may occur along a
9 coast and indicates a stage of alert. This level forms the basis for storm-surge forecasting, and prewarning
10 is an important reference for governments and aids in the decision-making process for storm-surge
11 prevention and disaster risk mitigation. The warning water level has four categories (blue, yellow, orange,
12 and red) based on water level observational data. Taking into account the actual defense capability of the
13 shore, we determined the warning water level by comprehensively analyzing factors, including the high
14 water level at the typical return period of each shore section, wave exposure degree and defense
15 capability of storm surge protection facilities, and the shore section's importance level. Here, we
16 proposed a quantitative method for determining the warning water level, and the application of this
17 method was introduced by taking the determination of the warning water level at the shore section of
18 Zhifu District (Yantai City, Shandong Province, China) as an example. We analyzed the spatial
19 distribution characteristics of the warning water levels for 259 shore sections along the coast and
20 revealed their current marine disaster prevention capabilities. Our findings provide a valid direction for
21 determining future warning water levels and a reliable scientific reference for redetermining warning
22 water levels in coastal areas while improving marine disaster prevention and protection capabilities.

23 **Keywords:** Warning water level; Return period; Spatial distribution; Defense capability;

24 **1. Introduction**

25 China is severely affected by storm surges, which have caused huge economic losses and casualties in
26 coastal areas and represent an important factor restricting coastal economic and social development. A
27 statistical report showed that storm surges caused 78.407 billion yuan of direct economic losses and 33
28 deaths from 2012 to 2021 (including missing person cases) along the coast of China (Ministry of Natural
29 Resources of China, 2021). However, the number of deaths due to storm surges has decreased sharply
30 due to improvements in storm surge warning systems (Shi et al., 2015). The warning water level is the
31 default water level at which storm surges may occur along the coast of protected areas, indicating a stage
32 of alert and the need to implement disaster relief strategies (State Oceanic Administration of China,
33 2012). Notably, the warning water level is the basis of storm-surge forecasting; it also provides a distinct
34 signal to raise an alert for storm-surge disaster prevention and mitigation.

35 The warning level of a storm surge is determined based on the highest water level of each tide gauge
36 station affected by the storm surge exceeding the local warning water level. A number of simulation
37 models played an important role in the prewarning of storm surges, including Sea, Lake, and Overland
38 Surges from Hurricanes (SLOSH) in the USA, DELFT3D model in Dutch, and MIKE21 model in
39 Denmark (Konishi, 1995; Lenstra et al., 2019; Lin et al., 2010; Mercado, 1994). Several numerical
40 models have been widely applied across various countries and regions to simulate and forecast storm
41 surges and coastal flood inundation. The National Oceanic and Atmospheric Administration used the
42 SLOSH model to jointly conduct storm surge risk assessment with government agencies and make
43 large-scale National Storm Surge Hazard Maps for the Disaster Management department, insurance
44 companies, and residents(National Oceanic and Atmospheric Administration of USA, 2018). The Royal
45 Netherlands Meteorological Institute categorized the country's coastlines into several parts (according to
46 tidal changes), determined the warning water level, utilized the Dutch continental shelf model to forecast
47 storm surges, and issued alerts according to the warning water level (Herman et al., 2013; Yu et al., 2020).
48 High-precision storm surge numerical models were conducted to investigate the inundation range and
49 water depth distribution of storm surges in Pingyang County (Zhejiang Province, China), as well as in
50 Jinshan District (Shanghai, China) and Huizhou District (Guangdong, China) (Shi et al., 2020a; Shi et al.,
51 2020b; Wang et al., 2021). A 2-D flood inundation model (FloodMap-Inertial) was employed to predict
52 coastal flood inundation of Lingang New City(Shanghai, China), considering 100- and 1000-year coastal
53 flood return periods(Yin et al., 2019). Much of the current work on extreme-coastal-flooding events is
54 based on the classical extreme-value theory (EVT), which identifies the family of distribution functions
55 known as generalized-extreme-value (GEV) distribution as a general model for the distribution of
56 maxima (or minima) extracted from fixed time periods of equal length(Stuart, 2011; Maria et al., 2022;
57 Haixia et al., 2022).In the mid-1990s, the State Oceanic Administration of China determined the warning
58 water level for key ports and shore sections based on observational data from ocean stations (Huang and
59 Chen, 1995), and the created determination criterion was one-dimensional; specifically, it was one value
60 per station. With the rapid development of China's marine economy, the coastline characteristics,
61 development status, population density, and protection facilities in coastal areas have greatly changed.
62 Notably, the warning water level determined at the end of the last century is no longer applicable to
63 current conditions or appropriate for storm surge prevention and mitigation. Therefore, the State Oceanic

64 Administration of China organized a new round of warning water level assessments in coastal areas in
65 the mid-2010s, and the criteria of water warning levels was divided into four categories (blue, yellow,
66 orange, and red) , spanning 259 shore sections in 11 coastal provinces. This assessment was then issued
67 by the governments of each coastal province (National Marine Hazard Mitigation Service of China,
68 2018). In order to adapt to the new structure of coastal disaster prevention and mitigation, the newly
69 issued warning water levels were quickly applied towards the early warning and forecasting of storm
70 surges (Fu et al., 2017). The four warning water levels corresponded to the four levels of marine disaster
71 emergency response levels (State Oceanic Administration of China, 2015), which significantly
72 strengthened and supported disaster emergency management at all levels of China's coastal
73 governments.

74 Here, we describe the technical methods used for warning water level determination and introduce the
75 process and results of this determination in Zhifu District in Yantai City, Shandong Province, China.
76 Through the analysis of spatial distribution characteristics of the warning water levels in 259 shore
77 sections in China, we revealed the current marine disaster prevention capabilities of coastal areas, based
78 on which we propose improvements for future warning water level assessments. Notably, this assessment
79 can provide a scientific reference for promoting the redetermination of warning water levels in China's
80 coastal areas and further improve their marine disaster prevention and protection capabilities.

81 **2. Material and methods**

82 **2.1. Data**

83 This study entailed the processing and use of various types of data: the annual maximum observational
84 water level data from the tide gauge stations, storm surge disaster data, wave run-up data, data of storm
85 surge protection facilities, and the socioeconomic data of shore sections. The coastlines of China were
86 divided into 259 shore sections corresponding to coastal county units. More than 120 tide gauge stations
87 were used in this study. For each shore section, we selected one representative tide gauge station.

88 In order to ensure the scientific reproducibility of the process we used to determine warning tide levels,
89 the process for selecting the representative tide gauge stations of each shore section were as follows: (1)
90 The number of stations is sufficient to cover the coastal areas from north to south; (2) The station is
91 located near the corresponding shore section, making it representative of the characteristics of the shore
92 section; in terms of the tide, waves, and storm surges exhibited by the shore section; (3) If tide gauge
93 station was absent in a shore section, the tide gauge station closest to the shore section was used; (4) It
94 was ensured that each station had observational water level data for at least 5 years.

95 Based on the above mentioned procedure, four-color warning water levels of the 259 shore sections were
96 determined through the comprehensive analysis of multiple factors, including, the typical return period
97 value of high-water-level at each shore section, degree of wave exposure, actual defense capability of
98 storm surge protection facilities, and the shore section importance level.

99 **2.2. Different return periods of high water level calculation method**

100 Based on the annual maximum observational water level data of the tide gauge stations, the Gumbel
101 model was used as a frequency analysis method to evaluate the return period value of the high water level
102 (HWL) at each station. The Gumbel distribution model is shown in Eq. (1):

103
$$F(x) = e^{-e^{\frac{x-\mu}{\beta}}}$$
 (1)

104 where x refers to the annual maximum sample sequence of HWL, μ refers to the position parameter, and
105 β refers to the scale parameter. The least squares method was selected to obtain μ and β .

106 The different return period value of HWL “X” is calculated by Eq. (2):

107

108
$$X = \mu - \beta \ln \left(-\ln \left(1 - \frac{1}{T} \right) \right)$$
 (2)

109

110 The return period “T” is calculated by Eq. (3):

111

112
$$T = \frac{1}{1-F(X)}$$
 (3)

113

114 **2.3. Calculation method of blue, yellow, orange, and red warning water levels**

115 The warning water level is categorized into four types: blue, yellow, orange, and red, which are described
116 in Table 1. The four warning water levels corresponded to the four levels of storm surge disaster
117 emergency response levels: I, II, III, and IV, which are described in Table 2. Storm surge disaster alerts
118 are divided into four levels: red, orange, yellow, and blue, corresponding to the highest to lowest warning
119 water levels, respectively.

120 Tab.1 Description of the blue, yellow, orange, and red warning water levels

Warning water level	Description
Blue	Refers to the water level at which the marine disaster warning department issues a blue warning for a storm surge. When the water level reaches this default value, the coastal protected areas must enter an alert stage, and precautions must be taken against a storm surge.
Yellow	Refers to the water level at which the marine disaster warning department issues a yellow warning for a storm surge. When the water level reaches this default value, mild marine disasters may occur along the coast of the protected areas.
Orange	Refers to the water level at which the marine disaster warning department issues an orange warning for a storm surge. When the water level reaches this default value, relatively severe marine disasters may occur along the coast of the protected areas.
Red	Refers to the maximum water level at which safe operation can be ensured along the coast of protected areas and for the affiliated projects. It is the water level at which the marine disaster warning department issues a red warning for a storm surge. When the water level reaches this default value, severe marine disasters may occur along the coast of the protected areas.

121

122 Tab.2 Description of the storm surge disaster emergency response level

Storm surge disaster emergency response level	Description
---	-------------

I (particularly major disaster)	Affected by tropical cyclones or extratropical weather systems, it is expected that the high tide level of one or more representative tide gauge stations in the affected area will reach the red warning tide level in the future, a red storm surge warning should be issued, and level I marine disaster emergency response level should be launched.
II (major disaster)	Affected by tropical cyclones or extratropical weather systems, it is expected that the high tide level of one or more representative tide gauge stations in the affected area will reach the orange warning tide level in the future, an orange storm surge warning should be issued, and level II marine disaster emergency response level should be launched.
III (relatively major disaster)	Affected by tropical cyclones or extratropical weather systems, it is expected that the high tide level of one or more representative tide gauge stations in the affected area will reach the yellow warning tide level in the future, a yellow storm surge warning should be issued, and level III marine disaster emergency response level should be launched.
IV (normal disaster)	Affected by tropical cyclones or extratropical weather systems, it is expected that the high tide level of one or more representative tide gauge stations in the affected area will reach the blue warning tide level in the future, a blue storm surge warning should be issued, and level IV marine disaster emergency response level should be launched.

123

124 The blue warning water level was determined based on HWL at the return period of 2 to 5 year of the
 125 shore section and the blue warning water level correction value. The calculation method for the blue
 126 warning water level (H_b) is shown in Eq. (4):

127

$$128 \quad H_b = H_s + \Delta h_b, \quad (4)$$

129

130 where H_s is the HWL at the return period of 2 to 5 years; Δh_b is the blue warning water level correction
 131 value. H_s was determined using the actual defense capability of the shore section. Its respective water
 132 level return period was the return period corresponding to the elevation of the top of the dike having the
 133 lowest defense capability in the shore section. The method to obtain the value is shown in Table 3. Δh_b
 134 was determined via comprehensive analysis of natural factors including wind, wave, and tide of previous
 135 storm surges, along with the actual defense capability and economic conditions of the shore section. The
 136 calculation method is shown in Eq. (5):

137

$$138 \quad \Delta h_b = h_1 + h_2 + h_3, \quad (5)$$

139

140 where h_1 is the adjusted value of wave exposure of the surge protection facilities determined by the wave
 141 run-up (R) at the return period of 2 years in front of the dike in the shore section. The method to obtain the
 142 value of h_1 is shown in Table 4 and this value is negative. h_2 is the adjusted value of the surge protection
 143 facility construction standard, which is determined based on the difference “ Δ ” between the elevation of
 144 the top of the dike and H_s . This value is low where “ Δ ” is low. The method used to obtain the value of h_2
 145 is shown in Table 5. h_3 is the adjusted value of the shore section importance level, which is determined by
 146 the socioeconomic factors of the shore section. This value is low where the shore section importance
 147 level is high. The methods used to obtain the value of h_3 and classify the shore section importance level
 148 are both shown in Table 6.

Tab. 3 H_s value corresponding to return period (unit: a)

Corresponding water level return period of the actual defense capability of the shore section	Corresponding return period of H_s
(0,50)	2
(50,100)	3
(100,200)	4
≥ 200	5

Tab. 4 h_I value (unit: cm)

Wave exposure degree	Severe	Relatively Severe	Moderate	Mild
Wave run-up occurs once in 2 years (R)	≥ 150	[100,150)	[50,100)	< 50
h_I	-15 %R	[-15 %R,-10 %R)	[-10 %R,-5 %R)	[-5 %R,0)

Table note: 1)The wave exposure degree of the storm surge protection facilities depends on the degree of wave reception of the embankment, the water depth at the bottom of the embankment and the wave height at the bottom of the embankment.
 2)R is the value of the wave run-up occurs once in 2 years. There is a certain correspondence between the wave exposure degree and R.
 3)The value of h_I can be taken as 0~15% of the R.

Tab. 5 h_2 value (unit: cm)

Breakwater	$\Delta^* \leq 1.24$ m; Sand embankment or natural flat coast	$\Delta^* = 1.25$ m to 1.99 m; Half slope stone embankment dike	$\Delta^* = 2.00$ m to 2.99 m; Stone embankment or component revetment dike	$\Delta^* > 3.0$ m; Cement dike
h_2	[-20, -10)	[-10,0)	[0,10)	[10,20]

Table note: The defense capability of storm surge protection facilities(breakwater) is closely related to the dike construction standards. “ Δ ” is the value of the difference between the elevation of the top of the dike and H_s . The value of h_2 can be taken as -20~20.

Tab. 6 h_3 value (unit: cm)

Shore section level	Definition	h_3
Particularly important	The shore section level is considered to be particularly important if it meets one of the following conditions: —Population density in the protected area ≥ 1000 persons/km ² ; —Port throughput $\geq 3 \times 10^{11}$ kg/a; —Construction investment $\geq 1.4 \times 10^9$ USD; —Economic output of the protected area $\geq 7 \times 10^5$ USD/hm ² /a; —The cargo unloading capacity of the central fishing port $\geq 8 \times 10^7$ kg/a; —Agricultural reclamation area $\geq 2 \times 10^3$ hm ² .	[-20, -10)
Important	The shore section level is considered to be important if it meets one of the following conditions: —Population density in the protected area = [400 persons/km ² , 1000 persons/km ³]; —Port throughput = [2×10^{11} kg/a, 3×10^{11} kg/a]; —Construction investment = [0.7×10^9 USD, 1.4×10^9 USD]; —Economic output of the protected area = [1.4×10^5 USD/hm ² /a, 7×10^5 USD/hm ² /a]; —The cargo unloading capacity of the first-class fishing port $\geq 4 \times 10^7$ kg/a; —Agricultural reclamation area = [6.67×10^2 hm ² , 2×10^3 hm ²].	[-10,0)

Relatively important	<p>The shore section level is considered to be important if it meets one of the following conditions:</p> <ul style="list-style-type: none"> —Population density in the protected area = [30 persons/km², 400 persons/km³]; —Port throughput = [1×10^{11} kg/a, 2×10^{11} kg/a]; —Construction investment = [0.14×10^9 USD, 0.7×10^9 USD]; —Economic output of the protected area = [0.56×10^5 USD/hm²/a, 1.4×10^5 USD/hm²/a]; —The cargo unloading capacity of the second-class fishing port $\geq 2 \times 10^7$ kg/a; —Agricultural reclamation area = [67 hm², 667 hm²]. 	[0,10]
Normal	<p>The shore section level is considered to be normal if it meets one of the following conditions:</p> <ul style="list-style-type: none"> —Population density in the protected area < 30 persons/km²; —Port throughput $< 1 \times 10^{11}$ kg/a; —Construction investment $< 0.14 \times 10^9$ USD; —Economic output of the protected area $< 0.56 \times 10^5$ USD/hm²/a; —The third-class fishing port can meet the berthing demand of local fishing boats; —Agricultural reclamation area < 67 hm². 	[10,20]

Table note: The shore section level is categorized into four grades: particularly important, important, relatively important and normal. Each grade is mainly judged from 6 criteria, as long as one of the criteria is met, the shore section importance level can be considered to be this grade. The six criterion are population density, port throughput, construction investment, economic output, cargo unloading capacity and agricultural reclamation area. The value of h_3 can be taken as -20~20.

157

158 The red warning water level was determined based on the minimum value of HWL at the return period
159 corresponding to the actual defense capability of all dikes in the shore section and the red warning water
160 level correction value. The equation used to determine the red warning water level (H_r) is shown below:

161

$$162 \quad H_r = H_d + \Delta h_r, \quad (6)$$

163

164 where H_d is the minimum value of HWL at the return period corresponding to the actual defense
165 capability of all dikes in the shore section. Δh_r is the red warning water level correction value. The
166 calculation method for Δh_r is shown in Eq. (5); the values of h_1 and h_3 were calculated by the same
167 method used to determine Δh_b . When calculating h_2 , “ Δ ” is the difference between the elevation of the
168 top of the dike and H_d .

169 The yellow and orange warning water levels were determined based on interpolation of the blue and red
170 warning water levels, respectively. The calculation methods for the yellow (H_y) and orange (H_o) warning
171 water levels are shown in Eqs. (7) and (8), respectively:

172

$$173 \quad H_y = H_b + (H_r - H_b)/3, \quad (7)$$

$$174 \quad H_o = H_b + 2(H_r - H_b)/3. \quad (8)$$

175


176 3. Results

177 3.1. Determination result of warning water level at a representative shore section

178 For warning water level determination, we selected the shore section of Zhifu District, Yantai City,
179 Shandong Province, China(Fig. 1); the representative tide gauge station for this shore section was the
180 Zhifudao tide gauge station. We considered the annual maximum HWL for 31 consecutive years at the


181 Zhifu Island tide gauge station and established a frequency distribution curve of the annual HWL using
182 the Gumbel distribution (Fig. 2). The HWL at different return periods obtained using this method are
183 presented in Table 7.

184

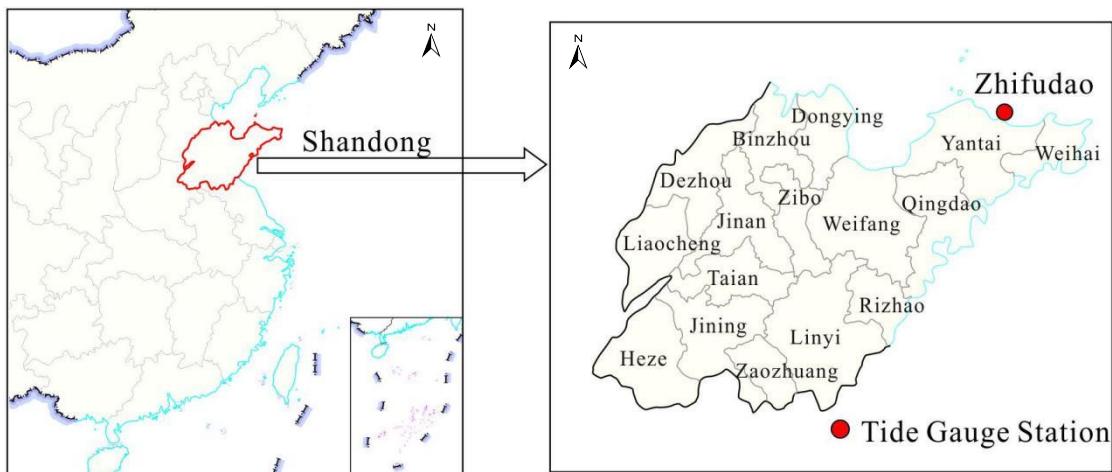

185

186 Fig. 1 The location of Zhifudao tide gauge station in Yantai City, Shandong Province, China

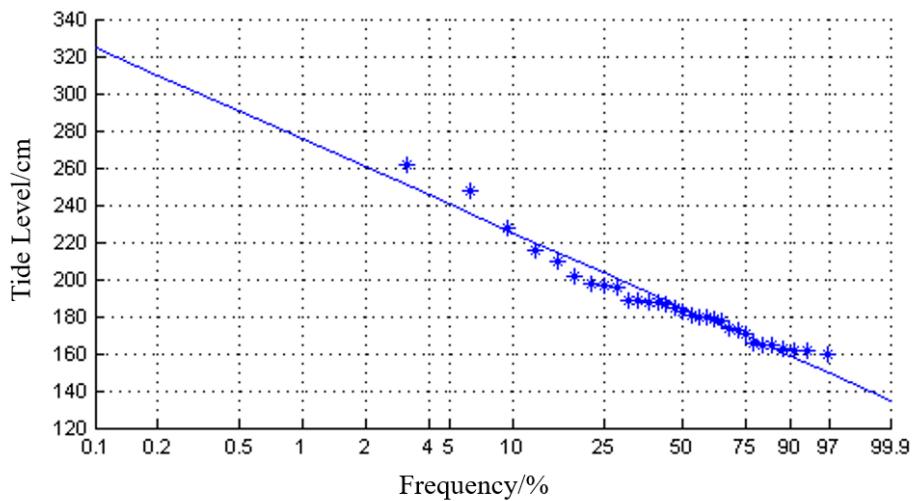

187

188 Fig. 2 Frequency distribution of the annual maximum value of the high water level at Zhifudao tide gauge
189 station

190

191 Tab. 7 The high water levels (HWL) corresponding to return period at Zhifudao tide gauge
192 station(unit: cm)

Return period	2a	5a	10a	20a	50a	100a
HWL corresponding to return period	184	209	225	240	260	275

193

194

195 The actual defense capability of the dike in this shore section corresponded to the return periods of 20 to
196 50 years. H_s indicated the corresponding HWL at the return period of 2 years, and H_s was 184 cm. The
197 wave run-up that occurs once in two years at the storm surge protection facility in this shore section was
198 1.0 m. The wave withstand degree was moderate, and $h_l = -10\% R = -10\% \times 1.0\text{ m} = -0.10\text{ m} = -10\text{ cm}$.


199 The types of coastal storm surge protection facilities in this shore section included cement dikes, and the
 200 “ Δ ” for H_b was slightly greater than 3.0 m; therefore, h_2 for H_b was 16 cm. The shore section was
 201 considered to be particularly important, thus, the adjusted value of the shore section importance level h_3
 202 was valued as -11 cm. The blue warning water level correction value of the shore section $\Delta h_b = -10 + 16$
 203 $- 11 = -5$ cm. The blue warning water level value was calculated to be $H_b = 184 - 5 = 179$ cm.
 204 H_d indicated the corresponding HWL at the return period of 20 years and was 240 cm. For this shore
 205 section, $h_1 = -10$ cm, $h_3 = -11$ cm. The “ Δ ” for H_d was approximately 2.5 m; therefore, h_2 for H_d was 9
 206 cm. The red warning water level correction value for this shore section $\Delta h_r = -10 + 9 - 11 = -12$ cm. The
 207 red warning water level was calculated to be $H_d = 240 - 12 = 228$ cm.
 208 The yellow warning water level was calculated to be $H_y = 179 + (228 - 179)/3 = 195$ cm. The orange
 209 warning water level was calculated to be $H_o = 179 + 2 \times (228 - 179)/3 = 212$ cm.
 210 The warning water level of the shore section in Zhifu District is presented in Table 8.
 211

212 Tab. 8 Warning water level value of the shore section in Zhifu District, Yantai City, Shandong
 213 Province, China (unit: cm)

Warning water level	Blue	Yellow	Orange	Red
Warning water level value	179	195	212	228

214
 215 **3.2. Spatial distribution of warning water level along the coast of China**
 216 Using the abovementioned method, the warning water levels of 259 shore sections along the coast of
 217 China were obtained. The spatial distribution maps of warning water level, shore section importance
 218 level, H_s , H_d , Δh_b and Δh_r in the coastal areas of China were drafted(Fig. 3; Fig. 4; Fig. 5; Fig. 6).
 219 The warning water level in China’s coastal areas was generally low in the northern and southern shore
 220 sections and high in the central shore sections. The maximum warning water levels appeared in the shore
 221 sections in Hangzhou, Zhejiang Province, in the central coastal area of China. The blue, yellow, orange,
 222 and red warning water levels were calculated as 700 cm, 740 cm, 780 cm, and 820 cm, respectively. The
 223 spatial distribution of shore section importance level were consistent with that of the warning water
 224 level. Among the 259 shore sections, the particularly important shore section accounted for the largest
 225 proportion(49.1%), while the other important grades shore sections accounted for 32.4%, 13.1% and
 226 5.4% respectively. The shore section importance levels of Jiangsu, Zhejiang, Fujian, and Guangdong
 227 Provinces were higher than the other shore sections, and more than 90% of the particularly important
 228 shore sections were distributed in the coastal areas of the above provinces. This is because the coastal
 229 zones of these provinces with a high population density were the main areas of economic development
 230 on a country-wide scale, with this importance also being reflected in the high shore section importance
 231 level. The spatial distribution characteristics of H_s and H_d were consistent with that of blue and red
 232 warning water levels, respectively; this can be mainly attributed to the HWL at the typical return period
 233 being the decisive factor in warning water level determination. The warning water level was high where
 234 HWL, at the typical return period, was high. The spatial distribution characteristics of Δh_b and Δh_r were
 235 similar, but opposite to that of H_s and H_d . Figure 6 shows that Δh_b and Δh_r were generally low in the

236 central shore sections and high in the northern and southern shore sections. In general, the warning water
237 level correction value Δh_b and Δh_r was low where shore defensive capability was high.

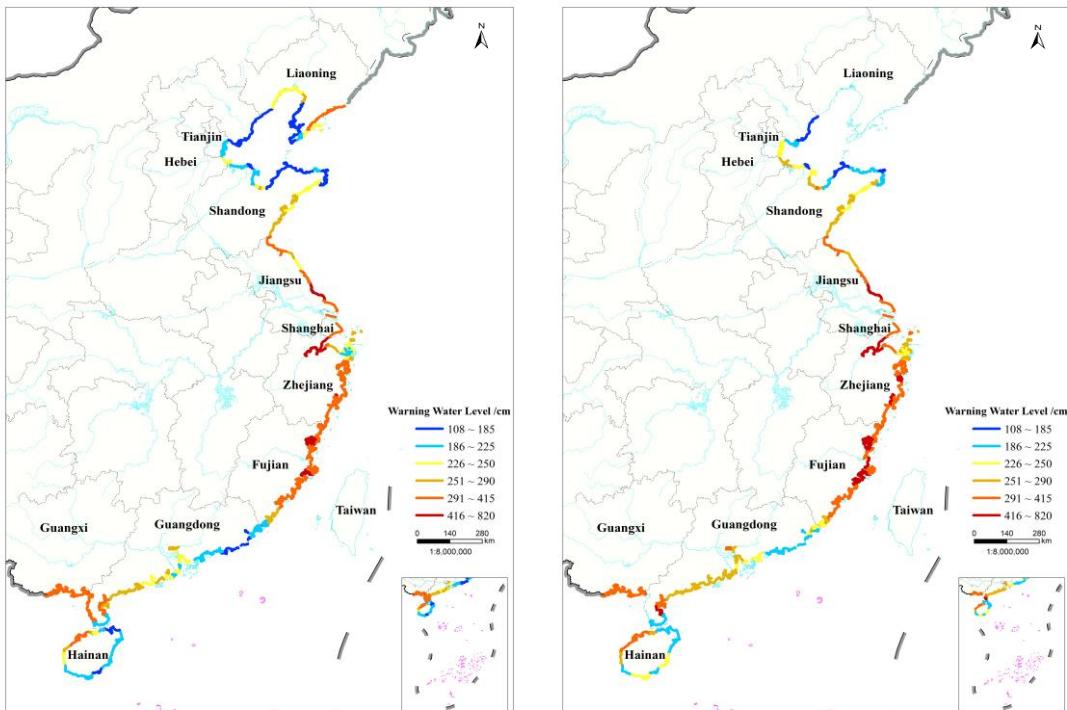


238

239

(a)

(b)

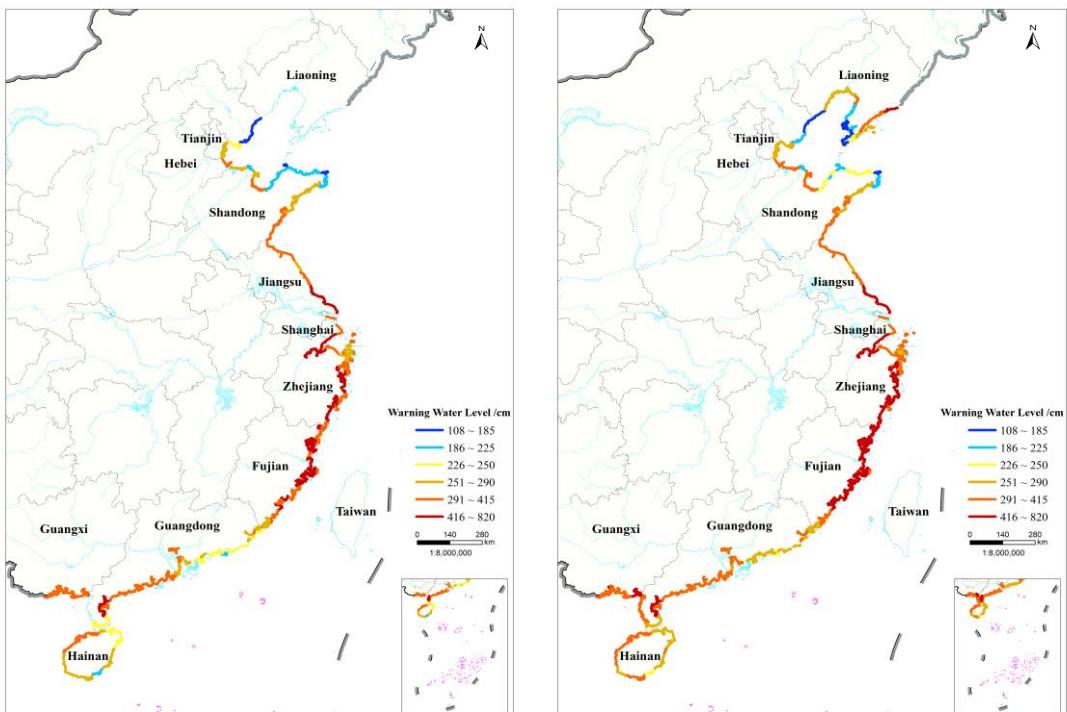

240


241

(c)

(d)


242 Fig. 3 Spatial distribution map of the four-color warning water level: a) Blue; b) Yellow; c)Orange;

243 d)Red

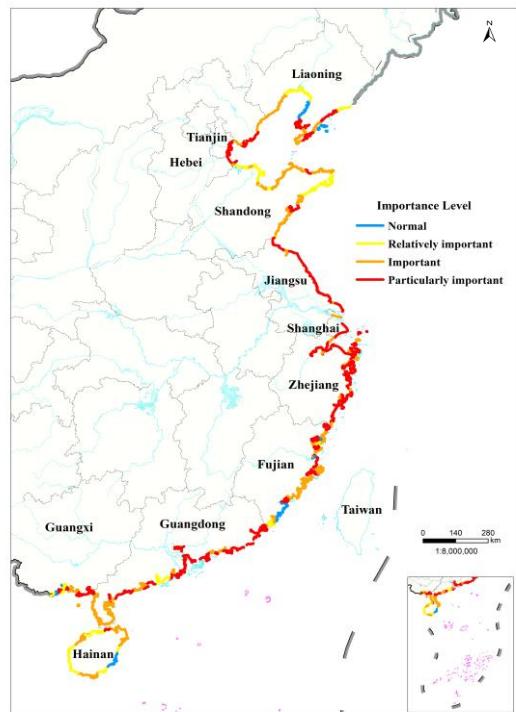

244

245 Fig. 4 Spatial distribution map of the shore section importance level

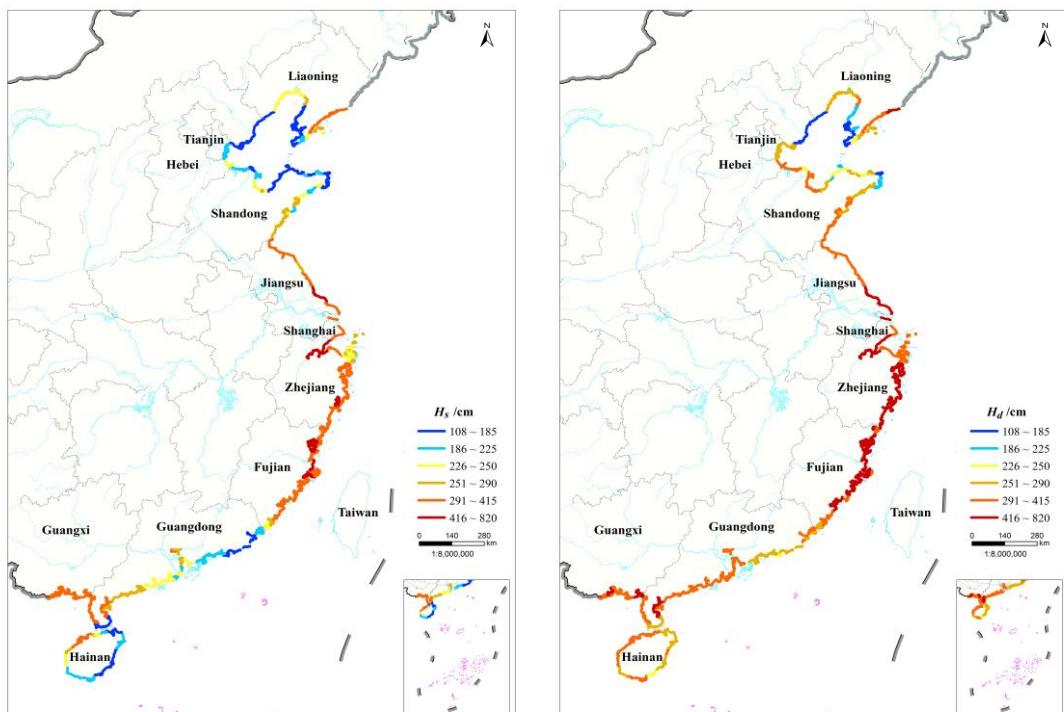

246

247

(a)

(b)

248 Fig. 5 Spatial distribution map of H_s and H_d : a) H_s ; b) H_d


249

250

251

252

253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272

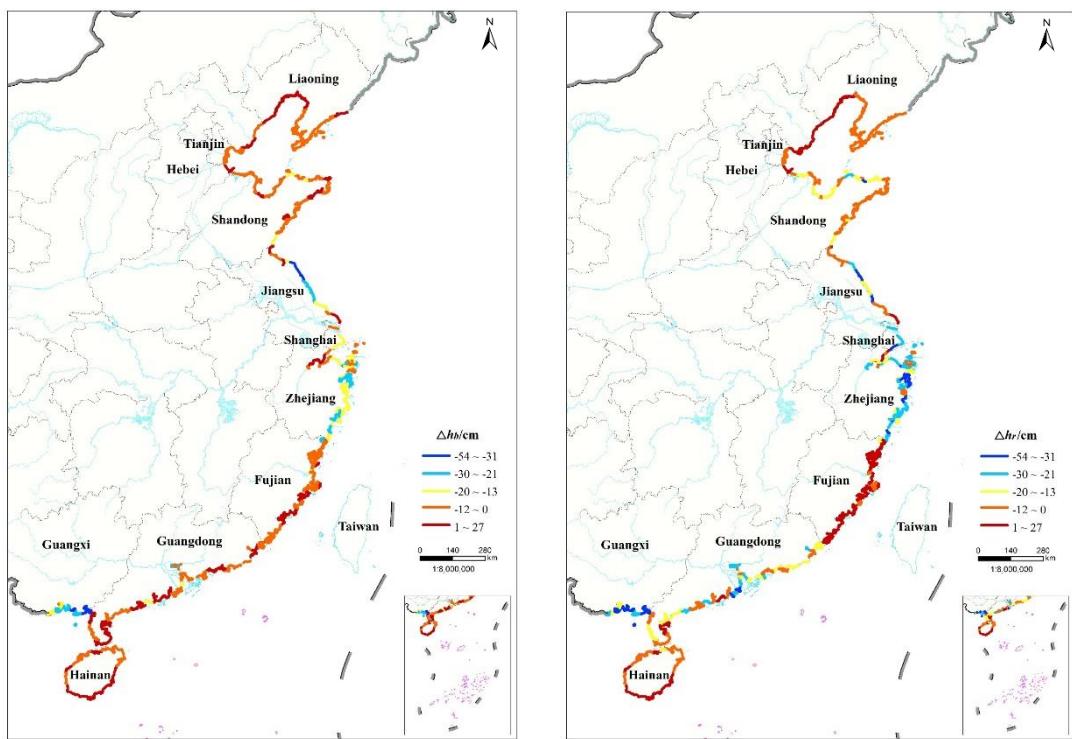

(a)

(b)

273
274 Fig. 6 Spatial distribution map of the warning water level correction value: a) Δh_b ; b) Δh_r
275

276 In the northern coastal areas, including Liaoning, Hebei, Tianjin, and Shandong Provinces, the warning
277 water level was generally low. These areas are mainly affected by storm surges typical of the temperate
278 zone, which are of relatively low frequency and intensity. Based on previous observational data, the
279 calculated water level at the typical return period of the northern coastal areas was lower, indicating the
280 lower H_s , H_d and warning water level.

281 The shore sections in the central coastal areas, including Shanghai, Zhejiang Province, and Fujian
282 Province, had higher warning water levels. These areas are mainly affected by typhoon surges of high
283 frequency and intensity. Moreover, most of the harbors in these provinces are flared or narrow, which can
284 easily induce larger storm surges, and the water level at the typical return period is greater than that of the
285 other shore sections, leading to higher H_s , H_d and warning water levels in these areas. Notably, the dike
286 defense capability in these areas is higher, especially for the shore section of Hangzhou Bay in Zhejiang
287 Province, where the large tidal range leads to an extremely high water level at the typical return period.
288 Therefore the warning water level in the shore section of Hangzhou Bay is generally higher than that of
289 other shore sections, indicating the high warning water level distribution in China's coastal areas.

290 The warning water level in the southern coastal areas, including Guangdong, Guangxi, and Hainan
291 Provinces, was generally low. Coastal areas in Guangdong and Guangxi Provinces had a lower tidal
292 range, lower water level at the typical return period, and higher shore section importance level indicating
293 lower warning water level correction value leading to lower warning water levels. Hainan Island has

294 more natural coastlines of lower shore defensive capability. This island is less affected by typhoons, and
295 thus, has a lower high water level at the typical return period, resulting in a lower warning water level.

296 **4. Discussion**

297 The warning water level is mainly used for storm surge prewarning, and it is crucial to decision-making
298 and mitigation measure design. This study proposed a newly approved quantitative method for
299 determining the four-color warning water level, which includes the calculation formula of the HWL at
300 the typical return period, the classification method of the shore section based on its importance and
301 coastal county unit, and the quantitative calculation formula of the correction value of the warning tide
302 level corresponding to wave exposure degree, surge protection facility construction standard and the
303 shore section importance level. Compared with the method used for calculating the one-single-value
304 warning water level in the mid-1990s, the method of calculating the four-color warning water level used
305 in this study is more reasonable, mainly in the following aspects: (1) It proposed the description of the
306 warning water level classification corresponding to the four levels of marine disaster emergency
307 response levels, and the determination results of the four-color warning tide level are more helpful for the
308 storm surge prewarning, in a way, the newly determined red warning tide level can more truly reflect the
309 actual defense capability of the shore section; (2) The calculation of correction values has been improved,
310 by replacing qualitative calculation method with quantitative calculation method, especially proposing
311 the method of calculating the wave run-up which is an important decisive element for the correction
312 values; (3) In the process of calculating the four-color warning water level, the verification of the
313 approved results are strengthened, to determine whether the approved warning water level is suitable
314 based on the statistical analysis of historical storm surge disasters and the corresponding tidal heights.
315 Our results about the spatial distribution of four-color warning water level, have been preliminarily
316 applied to storm surge disaster prevention and mitigation in coastal areas of China. Several studies
317 focused on the storm surge prewarning application methods for the newly approved four-color warning
318 water level, corresponding to a refined shore section (Fu et al., 2017). However, limited by the data
319 availability, it is not considered that the influence of storm surge disaster loss factors on the calculation of
320 warning water level. The Correlation between storm surge disaster losses and the highest tide water
321 exceeding the warning water level has not been established.

322 The precision of the warning water level directly affects the accuracy of the storm surge prewarning
323 results, thereby affecting the objectivity of emergency strategies and decision-making for storm surge
324 disaster mitigation. With the rapid development of China's coastal society and economy, storm surge
325 protection facilities, population density, and coastal development conditions have also been changing.
326 Therefore, the warning water level needs to be updated according to the actual conditions of the coastal
327 areas in time, when it is not compatible with the storm surge prevention and mitigation. At the same time,
328 in order to meet the needs of the increasingly refined storm surge disaster prevention and mitigation plans,
329 the scale of warning water level assessment should be changed from coastal counties to coastal towns and
330 communities.

331 Several studies highlighted that global sea-level rise would continue accelerating in the 21st century as a
332 consequence of climate change (Church and White, 2011; Hay et al., 2015). In fact, coastal flooding
333 hazard has been increasing on a global scale in recent decades, a trend expected to continue as a result of
334 climate change (Maria et al., 2022). In the past 40 years, sea level in the coastal China seas has increased
335 significantly, with the rate of 3.4 mm/a, higher than the global average from 1993-2018(3.25mm/a)
336 (Ministry of Natural Resources of China, 2021; IPCC,2021). In the IPCC Sixth Assessment Report, the
337 latest monitoring and simulation results indicate that the current rate of Global mean sea level rise from

338 2006 to 2018 is accelerating (3.7mm/a) and will continue to rise in the future, showing an irreversible
339 trend (Zhang et al., 2021; IPCC,2021). Regional relative sea level rise is an important driving factor
340 affecting extreme still water levels. The continuous rising sea level has led to an increase in extreme
341 water levels in coastal areas of China (Qi et al., 2019), which can have an impact on the determination of
342 warning water levels. Additionally, changes in storminess may have an important role in modifying the
343 frequency and magnitude of water level extremes (Lowe et al., 2010; Woodworth et al., 2011). Future
344 work about re-determining the warning water level should take these abovementioned issues into
345 consideration.

346 **5. Conclusion**

347 This study proposed an effective method for determining the four-color warning water level, and
348 introduced the application of this method by taking the determination of the warning water level at the
349 shore section of Zhifu District (Yantai City, Shandong Province, China) as an example. Observational
350 water level data from representative tide gauge stations along the 18,000 km coastline were collected and
351 used in this study. Using the method and observational data, we calculated the warning water levels of
352 259 shore sections along the coast of China and analyzed the assessment results about the spatial
353 distribution characteristics of the blue, yellow, orange, and red warning water levels.

354 The results showed that the warning water levels were lower in the shore sections of the northern and
355 southern coastal areas in China and higher in central coastal areas. In the northern coastal areas, where
356 are mainly affected by the extratropical storm surges with low intensity, the defense capability of the
357 shore sections was generally low, resulting in the lower warning water levels than the other coastal areas.
358 The maximum values of the blue, yellow, orange, and red warning water levels all appeared in Hangzhou
359 Bay (700 cm, 740 cm, 780 cm, and 820 cm, respectively) of central coastal areas in China. These areas
360 are mainly affected by the typhoon surges with high frequency and intensity, where the defense
361 capability was also high. Understanding the spatial distribution of warning water levels in China's
362 coastal areas cannot only provide important references for national and local governments to aid in the
363 decision-making process for storm surge disaster prevention and mitigation, but also offers a scientific
364 basis for coastal spatial planning, rational layout of coastal industries, and construction of major projects
365 and industrial parks.

366

367

368 **Disclosure statement**

369 The authors declare that there is no conflict of interest.

370 **Funding**

371 This study is funded by the National Natural Science Foundation of China (41701596) and high level
372 scientific and technological innovation talent project of the Ministry of Natural Resources.

373

374 **Author Contributions**

375 Shi Xianwu organized the research project and prepared the manuscript with contributions from all
376 co-authors. Specifically, Liu Shan wrote the manuscript and participated in the calculation of warning
377 water levels; Liu Qiang devised a method for calculating warning water levels; Tan Jun organized the
378 observational data from various tide gauge stations; Sun Yuxi analyzed the distribution of warning water

379 levels along the coast of China; Liu Qingrong participated in the determination of warning water levels in
380 the shore section of Zhifu District; Guo Haoshuang participated in designing and drawing the diagrams.

381

382 **Data availability statement**

383 All data used during the study are available from the corresponding author by request.

384

385 **References**

386 Church, J. A. and White, N. J.: Sea-Level Rise from the Late 19th to the Early 21st Century, *Surv. Geophys.*, 32, 585–602, <https://doi.org/10.1007/s10712-011-9119-1>, 2011.

387 Fu, X., Che, Z.M., Ding, J., Li, M.J., and Li, T. : An application approach of new warning water level in
388 storm surge forecasting and warning, *Mar. Forecasts*, 34, 1–9, 2017. (in Chinese).

389 Haixia, Z., Meng, C., and Weihua, F.: Joint probability analysis of storm surge and wave caused by
390 tropical cyclone for the estimation of protection standard: a case study on the eastern coast of the
391 Leizhou Peninsula and Hainan Island of China, *EGUphere* [preprint],
392 <https://doi.org/10.5194/egusphere-2022-847>, 2022.

393 Hay, C., Morrow, E., Kopp, R., and Mitrovica, J. X.: Probabilistic reanalysis of twentieth-century
394 sea-level rise, *Nature*, 517, 481–484, <https://doi.org/10.1038/nature14093>, 2015.

395 Herman, G., Hans, D.V., and Marc, P. : The Dutch Continental Shelf Model, *American Geophysical
396 Union (AGU)*, Netherland, 2013.

397 Huang, P.J., Chen, X.Y. : Analyses and studies on warning levels of storm surge of Shandong Coasts, *J.
398 Oceanogr. Huanghai Bohai Seas*, 13, 11–18, 1995. (in Chinese).

399 IPCC: Climate change 2021: The physical science basis. Contribution of working group I to the Sixth
400 Assessment Report of the IPCC, Cambridge University Press, Cambridge, United Kingdom and
401 New York, NY, USA, 2021.

402 Konishi, T. : An experimental storm surge prediction for the western part of the Inland Sea with
403 application to Typhoon 9119, *Pap. Met. Geophys.*, 46, 9–17, <https://doi.org/10.2467/mripapers.46.9>,
404 1995.

405 Lenstra, K.J.H., Pluis, S.R.P.M., Ridderinkhof, W., Ruessink, G., and Maarten V.D.V. : Cyclic
406 channel-shoal dynamics at the Ameland inlet: The impact on waves, tides, and sediment transport,
407 *Ocean Dyn.*, 69, 409–425, <https://doi.org/10.1007/s10236-019-01249-3>, 2019.

408 Lin, N., Emanuel, K. A., Smith, J. A., Vanmarcke E. : Risk assessment of hurricane storm surge for New
409 York City, *J. Geophys. Res.*, 115(D18), <https://doi.org/10.1029/2009JD013630>, 2010.

410 Lowe, J. A., Woodworth, P. L., Knutson, T., McDonald, R. E., McInnes, K., Woth, K., Von Storch, H.,
411 Wolf, J., Swail, V., Bernier, N., Gulev, S., Horsburgh, K., Unnikrishnan, A. S., Hunter, J., and
412 Weisse, R.: Past and future changes in extreme sea levels and waves, in: *Understanding Sea-Level
413 Rise and Variability*, edited by: Church, J. A., Woodworth, P. L., Aarup, T., and Wilson, W. S.,
414 chap. 11, 326–375, Wiley-Blackwell, <https://doi.org/10.1002/9781444323276>, 2010.

415 Maria, F.C., Marco, M.: Extreme-coastal-water-level estimation and projection: a comparison of
416 statistical methods, *Nat. Hazards Earth Syst. Sci.*, 22: 1109–1128, 2022.

418 Mercado, A. : On the use of NOAA's storm surge model, SLOSH, in managing coastal hazards—the
419 experience in Puerto Rico, *Nat. Hazards*, 10, 235–246, <https://doi.org/10.1007/BF00596144>, 1994.

420 Ministry of Natural Resources of China : 2021 Chinese Marine Disaster Bulletin, Ministry of Natural
421 Resources of China, Beijing, China, 2021. (in Chinese).

422 Ministry of Natural Resources of China: 2021 China Sea Level Bulletin, Ministry of Natural Resources
423 of China, Beijing, China, 2021. (in Chinese).

424 National Marine Hazard Mitigation Service of China : Abridged edition of warning water level value in
425 the coastal areas of China, China Ocean Press, Beijing, China, 2018. (in Chinese).

426 National Oceanic and Atmospheric Administration of USA: National Storm Surge Hazard Maps -
427 Version 2, Miami, FL, USA, <https://www.nhc.noaa.gov/nationalsurge/#intro>, 2018.

428 Qi, Q.H., Cai, R.S., Yan, X.H.: Discussion on climate change and marine disaster risk governance in the
429 coastal China seas, *Marine Science Bulletin*, 38(4), 361–367,
430 <https://doi.org/10.11840/j.issn.1001-6392.2019.04.001>, 2019.

431 Shi, X.W., Liu, S., Yang, S.N., Liu, Q., Tan, J., and Guo, Z.X. : Spatial-temporal distribution of storm
432 surge damage in the coastal areas of China, *Nat. Hazards*, 79, 237–247, <https://doi.org/10.1007/s11069-015-1838-z>, 2015.

433 Shi, X.W., Qiu, J.F., Chen, B.R., Zhang, X.J., Guo, H.S., and Wang, J. : Storm surge risk assessment
434 method for a coastal county in China: case study of Jinshan District, Shanghai, *Stoch. Environ. Res.
435 Risk Assess.*, 34, 627–640, <https://link.springer.com/article/10.1007/s00477-020-01791-3>, 2020. a

436 Shi, X.W., Yu, P.B., Guo, Z.X., Sun, Z.L., Wu, X.G., Chen, W.L., Zeng, J. : Simulation of storm surge
437 inundation under different typhoon intensity scenarios: case study of Pingyang County, China, *Nat.
438 Hazards Earth Syst. Sci.*, 20: 2777–2790, 2020. B

439 Stuart, C. : An introduction to statistical modeling of extreme values, Springer, London, UK, 2011.

440 State Oceanic Administration of China : Specification for Warning Water Level Determination: GB/T
441 17839–2011, National Standards Press of China, Beijing, China, 2012. (in Chinese).

442 State Oceanic Administration of China : Storm surge, Ocean Wave, Tsunami and Sea ice Disaster
443 Emergency Plan, State Oceanic Administration of China, Beijing.
444 http://www.gc.mnr.gov.cn/201806/t20180614_1795760.html, 2015. (in Chinese).

445 State Oceanic Administration of China : Management methods of Warning Water Level Determination,
446 State Oceanic Administration of China, Beijing, China, 2013. (in Chinese).

447 Wang, S., Mu, L., Yao, Z.F, Gao, J., Zhao, E.J., and Wang, L.Z.: Assessing and zoning of typhoon storm
448 surge risk with a geographic information system (GIS) technique: a case study of the coastal area of
449 Huizhou, *Nat. Hazards Earth Syst. Sci.*, 21, 439–462, <https://doi.org/10.5194/nhess-21-439-2021>,
450 2021.

451 Woodworth, P. L., Menéndez, M., and Roland Gehrels, W.: Evidence for Century-Timescale
452 Acceleration in Mean Sea Levels and for Recent Changes in Extreme Sea Levels, *Surv. Geophys.*,
453 32, 603–618, <https://doi.org/10.1007/s10712-011-9112-8>, 2011.

454 Yin, J., Zhao, Q., Yu, D.P., Lin, N., Kubanek, J., Ma, G., Liu, M., Pepe, A. : Long-term flood-hazard
455 modeling for coastal areas using InSAR measurements and a hydrodynamic model : the case study

456

457 of Lingang New City, Shanghai, Journal of Hydrology, 571, 593-604,
458 <https://doi.org/10.1016/j.jhydrol.2019.02.015>, 2019.

459 Yu, F.J., Fu, C.F., Guo, H.L., and Liu, Q.X. : Modern Technologies and Application in Storm Surge
460 Forecasting, Science Press, Beijing, China, 2020. (in Chinese).

461 Zhang, T., Yu, Y.Q., Xiao, C.D.: Interpretation of IPCC AR6 report: monitoring and projections of
462 global and regional sea level change, Climate Change Research, 17(6), 12–18,
463 <https://doi.org/10.12006/j.issn.1673-1719.2021.231>, 2021.(in Chinese)

464

465

466