

1 **Earthquake Vulnerability Assessment of the Built Environment in Srinagar City,**
2 **Kashmir Himalaya, Using GIS**

3 Midhat Fayaz¹, Shakil Ahmad Romshoo^{1,2,3,#}, Irfan Rashid¹ and Rakesh Chandra^{2,4}

4 ¹Department of Geoinformatics, University of Kashmir, Hazratbal Srinagar, 190006,
5 Jammu and Kashmir, India

6 ²Department of Earth Sciences, University of Kashmir, Hazratbal Srinagar, 190006,
7 Jammu and Kashmir, India

8 ³Islamic University of Science and Technology (IUST), Awantipora, 192122, Jammu and
9 Kashmir, India

10 ⁴Department of Geology, University of Ladakah, Leh

11 #Correspondence to: Shakil Ahmad Romshoo (shakilrom@kashmiruniversity.ac.in)

12 **ABSTRACT**

13 The study investigates the earthquake vulnerability of buildings in Srinagar, an urban city in
14 the Kashmir Himalaya, India. The city, covering an area of around 246 km² and divided into
15 69 municipal wards, is situated in the tectonically active and densely populated mountain
16 ecosystem. Given the haphazard development and high earthquake vulnerability of the city, it
17 is critical to assess the vulnerability of the built environment to inform policymaking for
18 developing effective earthquake risk reduction strategies. Integrating various parameters in
19 GIS using the Analytical Hierarchical Process (AHP) and Technique for Order Preference by
20 Similarity to an Ideal Solution (TOPSIS) approaches, the ward-wise vulnerability of
21 buildings revealed that a total of ~17 km² area (~7% area; 23 wards) has very high to high
22 Vulnerability; Moderate Vulnerability affects ~69 km² of the city area (28 %; 19 wards);
23 ~160 km² area (~65% area; 27 wards) has vulnerability ranging from very low to low.
24 Overall, the downtown city is most vulnerable to earthquake damage due to the high risk of
25 pounding, high building density, and narrower roads with little or no open spaces. The
26 modern uptown city, on the other hand, has lower earthquake vulnerability due to the
27 relatively wider roads and low building density. To build a safe and resilient city for its 1.5
28 million citizens, the knowledge generated in this study would inform action plans for
29 developing earthquake risk reduction measures, which should include strict implementation
30 of the building codes, retrofitting of the vulnerable buildings, and creating a disaster
31 consciousness among its citizenry.

32 **Keywords:** Earthquake, Earthquake Vulnerability, AHP, GIS, TOPSIS, Kashmir

33

34

35 1. Introduction

36 Among all the natural disasters, earthquakes are unique in the way that they occur without
37 warning (Langenbach, 2009) and are a major hindrance in the way of achieving sustainable
38 development. Cities are growing fast all over the world as a process of urbanization and more
39 than half of the world's population lives in urban areas (Ritchie and Roser, 2018).
40 Earthquakes cause immense loss of life and damage to properties, livelihoods, economic
41 infrastructures and communities, particularly in major urban centres (Kjekstad and Highland,
42 2009). Urban earthquake vulnerability has increased over the years due to the increasing
43 complexity of urban built environments (Düzgün et al., 2009; Riedel et al., 2015). The high
44 earthquake susceptibility of urban centres is also attributed to their situation in hazard-prone
45 locations (Duzgun et al., 2011; Mir et al., 2017), haphazard urbanization (Jena et al., 2020),
46 and growing population (Beck et al., 2012), and has attracted the attention of emergency
47 planners in estimating the seismic risk associated with future earthquakes (Kontoes et al.,
48 2012). Surveys have shown that collapsing buildings and other physical structures during an
49 earthquake cause huge social, economic, and human losses (Panahi, et al., 2014). The
50 dynamic interaction between different urban components and diverse forms of vulnerability
51 proves that vulnerability is inherently a spatial problem (Hashemi and Alesheikh, 2012). This
52 marks that the earthquake vulnerability of a building is an important parameter in the
53 evaluation of earthquake potential damages in urban fabrics (Amini et al., 2009). Thus,
54 assessment of earthquake vulnerability of the built environment is crucial for any city located
55 in an earthquake risk zone to better understand the inherent weakness and vulnerabilities of
56 the city against earthquakes and to help prioritize preparedness and risk mitigation activities.

57 Structural vulnerabilities to earthquakes have arisen in Kashmir in recent decades when
58 traditional construction materials and practises have been abandoned in favour of new ones
59 (Yousuf et al., 2020). The lurking threat of an earthquake had in the past a great influence on
60 the way people traditionally used to build their houses in the Kashmir valley (Langenbach,
61 2009; Ahmad et al., 2017). Traditional wood-frame structures were designed to deal with
62 earthquake threats to provide a safe and suitable built environment for the people. The
63 buildings built with wood substantially reduce the weight of buildings and provide structural
64 flexibility compared to that of other types of materials used in housing construction (Alih and
65 Vafaei, 2019). [The traditional building types such as "Taqq" and "Dhajji-Dewari" are](#)
66 [earthquake-resistant. In the Taqq type buildings, wooden runners are placed at each floor](#)
67 [level that tie the walls with the floor together whereas the Dhajji-Dewari buildings consist of](#)

68 [a braced timber frame with masonry infill that is placed diagonally in the walls. The timber](#)
69 [braced frames offer stable confinement to the infill masonry as long as it rests together](#)
70 [\(Hicyilmaz et al., 2012\). When compared to more contemporary building types, the Dhajji-](#)
71 [Dewari constructions are more earthquake-resistant because energy is dissipated between](#)
72 [mortar joints, the frame, and the infill rather than through non-linear deformations.](#) Recently,
73 the traditional ways of constructing houses have been replaced mostly by concrete types,
74 thereby increasing the vulnerability of the structures to earthquakes. [The residential buildings](#)
75 [in Srinagar are mostly built by local semi-skilled masons who don't have adequate technical](#)
76 [expertise in building earthquake resistance infrastructure and therefore these structures lack](#)
77 [the basic earthquake risk reduction features including seismic resistance features as are](#)
78 [otherwise prescribed in the building codes.](#) It is therefore very important to assess the
79 earthquake vulnerability of all the existing buildings in the Kashmir valley, comprising both
80 traditional and modern construction types, since the valley falls in Seismic Zones IV or V
81 (Ali and Ali, 2020). Despite the high vulnerability of the Kashmir valley to earthquakes, no
82 initiative has been taken by the government and scientific community to develop an
83 earthquake risk assessment strategy for the valley that would have informed urban
84 development planning to minimise the damage in the eventuality of an earthquake as has
85 been done in other vulnerable Himalayan areas of the country like Delhi, Dehradun, Kolkata,
86 etc. (Pathak, 2008; Nath, et al., 2015; Rautela et al., 2015; Sinha et al., 2016).

87 Many national and international studies have been conducted to estimate the physical
88 vulnerability of the built environment by applying various techniques, viz., MCDM (Multi-
89 Criteria Decision Making), AHP (Analytical Hierarchical Process), and ANN (Artificial
90 Neural Networking) (Jena et al., 2020; Jena and Pradhan, 2020; Lee et al., 2019; Alizadeh et
91 al., 2018). Rashed and Weeks, 2003 studied the physical vulnerability parameters for the
92 Tabriz city of Iran that are major contributors in assessing the vulnerability of buildings like
93 the age, height of the buildings, and earthquake intensity. Erden and Karaman, 2012
94 investigated the impact of systemic vulnerability parameters, such as topography, distance to
95 the epicentre, soil classification, liquefaction, and fault/focal mechanism using AHP for
96 earthquake vulnerability assessment of the Kucukekmece region of Istanbul, Turkey. Pathak,
97 2008 carried out the earthquake vulnerability assessment of Guwahati city using Rapid visual
98 screening (RVS) by taking into account demand-capacity computation and structural / non-
99 structural damage grade indexing. Nath et al., 2015 used geotechnical, seismological, and
100 geological data for assessing the seismic risk of Kolkata city. They used land use/land cover,

101 population density, building typology, age, and height for earthquake vulnerability
102 assessment. Sinha et al., 2016 used the Spatial Multi-Criteria Analysis and Ranking Tool
103 (SMART) methodology and classified the capital city of India, Delhi, as highly vulnerable to
104 earthquake disaster using different physical parameters like the number of stories, year-built
105 range, area, occupancy, and construction type. The earthquake vulnerability of Nanital and
106 Mussorie cities in Uttarakhand state, India was assessed by Rautela et al., 2015 employing
107 the RVS methodology. Ahmad et al., 2012 used experimental and analytical studies to
108 investigate Half-Dressed rubble stone (DS) masonry structures of the Himalayas using the
109 shake table method and fragility analysis of buildings. The study concluded that about 40%
110 of buildings can collapse in the eventuality of a large earthquake. The collapse percentage of
111 buildings can go as high as 80% if the epicentre of an earthquake is closer to the site. Baruah
112 et al., 2020 have assessed the seismic vulnerability of the mega-city Shillong in India using
113 RVS methodology by including parameters like building typology, local
114 geology, geomorphology, slope angle, and population suggesting that 60% of the city is
115 falling under moderate to high vulnerability zones. Jena et al., 2021 carried out an analysis of
116 the earthquake vulnerability of the Indian subcontinent using the LSTM (Long Short-Term
117 Memory) model and multi-criterion analysis, which suggested that very-high vulnerable areas
118 are situated towards the northern and eastern parts of India. The study, conducted at a coarse
119 scale, classified Jammu and Kashmir, of which the study area is a part, as a highly vulnerable
120 state with a moderate to high vulnerability index.


121 The present study addresses the knowledge gap through the assessment of high-
122 resolution earthquake vulnerability of built environment at the ward level in order to identify
123 the vulnerable areas of Srinagar city, a major rapidly growing and seismically vulnerable
124 urban centre in the Kashmir valley. [The location of earthquake epicentre is related to the
125 presence of geological structures \(faults\) in a particular area \(Sana, 2018\). The available
126 records of historical and instrumental earthquake events \(Table 1\) in the study area indicate a
127 high probability of earthquake events in the Srinagar city in the future. Dar et al., 2019 have
128 shown that the River Jhelum, running through Srinagar city itself flows along or parallel at
129 many places to a lineament or fault known as Jhelum fault in the Kashmir Valley. The city is
130 predominantly located on the Recent alluvium and Karewas with Panjal traps at minor
131 locations \(Dar et al., 2015\) and has Seismic Hazard Index \(SHI\) and Liquefaction Potential
132 Index \(LPI\) ranging from high to very high \(Sana et al., 2016; Sana, 2018; Yousuf and
133 Bukhari, 2020\). Since the vulnerability at the ward level is the primary focus of this study,
134 therefore, it is believed that in light of the high vulnerability and occurrences of past](#)

135 [earthquakes with epicentre in and around Srinagar and the least variability almost](#)
136 [homogeneous distribution of other geological, geomorphic and soil parameters, the entire city](#)
137 [wards are equally vulnerable in the eventuality of an earthquake and were therefore kept](#)
138 [constant and were disregarded in the analysis.](#) Based on a literature review, expert opinion,
139 and analyses of the available data, a set of six indicators, such as building geometry, density,
140 height, typology, pounding possibility and road network were selected in this study for
141 assessing earthquake vulnerability of the built-up environment in the city. The structural
142 vulnerability of Srinagar city, which is located in an earthquake-prone zone, will inform
143 urban planning and development strategies to create a safe and secure built environment with
144 adequate green and open spaces, as well as make the city sustainable, as envisioned under
145 UNDP Sustainable Development Goals (SDGs) 11 for sustainable cities and communities.

146 **2. Srinagar city**

147 Srinagar city, spread over an area of 246 km², lies between 74° 43′ and 74 ° 52′ E longitudes
148 and 34° 0′ and 34° 14′ N latitudes and is divided into 69 administrative wards (Fig. 1). The
149 city is situated at an elevation of 1713 m amsl along both the banks of the centrally flowing
150 Jhelum River. The city of Srinagar, home to around 1.5 million people, is an economic hub, a
151 seat of administration, and an important urban centre in the Kashmir Himalaya (Parry et al.,
152 2012). The population of the city is projected to increase to 1.83 million by 2031 (Farooq and
153 Muslim, 2014). The city is susceptible to high seismic hazards due to its peculiar geological
154 setting (Sana, 2018), urban setting (Gupta et al., 2020), demographic profile, and tectonic
155 setting (Chandra et al., 2018). The city is surrounded by Himalayan boundary faults, which
156 are capable of generating destructive earthquakes that are well documented in the historical
157 archives and recent instrumental records as well (Sana, 2018; Gupta et al., 2020). There is a
158 formidable history of earthquakes that have shaken Srinagar in the past millennium and have
159 caused huge loss of human life and property (Table 1) (Rajendran and Rajendran, 2005;
160 Langenbach, 2007; Bilham et al., 2010; Bilham, 2019; Yousuf et al., 2020). As Srinagar is an
161 old and historic city, most of the areas grew organically without following any physical plan
162 or building codes for the construction of its built infrastructure (Yousuf et al., 2020). [Post-](#)
163 [1947, Srinagar grew very fast, mostly in a haphazard manner with no proper urban planning.](#)
164 [The first Master Plan for the city was developed in 1971, followed by Master Plans for 2021](#)
165 [and 2035. However, all three plans didn't have effective implementation in the city as per the](#)
166 [Master Plan prescriptions because of problems in the planning and implementation setup,](#)
167 [including an inadequate legal framework and institutional structures.](#) Furthermore, there is

168 cultural and socio-economic inequality within the city, with lower-middle-income groups
 169 residing in the densely populated downtown wards and upper-middle class and wealthy
 170 people residing in the uptown wards of the city. In such a situation, assessing earthquake
 171 ward-wise vulnerability of the built environment is very critical for prioritizing risk reduction
 172 activities to reduce the earthquake vulnerability of the city (Mouroux et al., 2006; Mili et al.,
 173 2018).

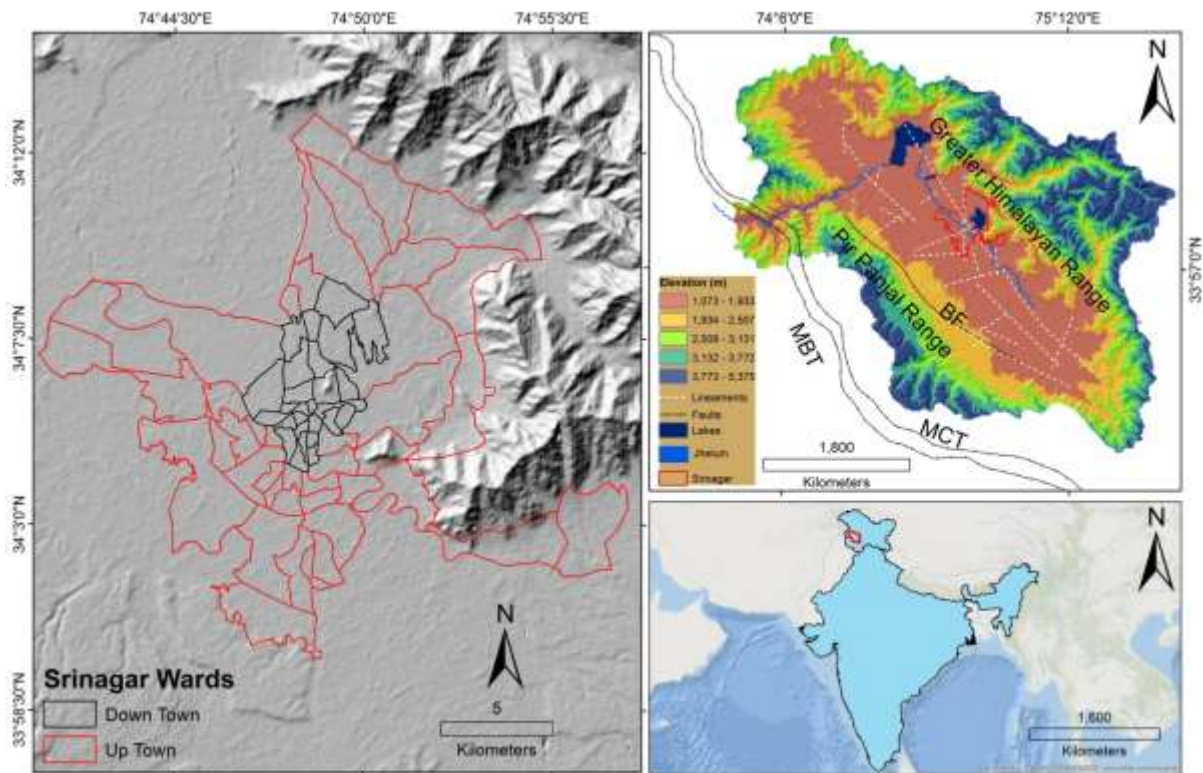

174

175 [Fig. 1. Location of the study area. Here MBT stands for Main Boundary Thrust, MCT stands](#)
 176 [for Main Central Thrust, BF stands for Balapur Fault.](#)

S. No	Date	Magnitude (M _w)	Lat (N)	Long (E)	Location	Damage	References
1	844 AD	6.5 to 7.5	34° N	74.8° E	Srinagar Kashmir	Landslide dammed Jhelum at Khadanyar near Baramulla	Stein, 1982; Stein, 1898; Bilham and Bali, 2014.
2	1123 AD	6.5 to 7.5	34° N	74.8° E	Srinagar Kashmir	Caused damage Sugandhesa Temple	Stein, 1982; Stein, 1898; Bilham and Bali, 2014; Iyengar and Sharma, 1996 ; Iyengar et al., 1999; Iyengar and Sharma, 1999
3	1501 AD	6.5 to 7	34° N	74.8° E	Srinagar Kashmir	Three months of after shocks	Bilham and Bali, 2014
4	1555 AD	7.6 to 8	34.25° N	74.8° E	Baramulla, Srinagar and	Landslide, Liquefaction and landslides in the Kashmir valley	Bilham and Bali, 2014; Iyengar and Sharma, 1996 ; Iyengar et al., 1999; Iyengar and Sharma,

					Anantnag		1999; Ambraseys and Jackson, 2003
5	1669 AD	6.5 to 7	34° N	74.8° E	Srinagar Kashmir	Mild shaking of buildings with no loss of life	Ahmad et al., 2009; Bilham and Bali, 2014
6	1678 AD	6.5 to 6.8	34° N	74.8° E	Kashmir	Continuous shaking of buildings	Ahmad et al., 2009; Bilham and Bali, 2014
7	1683 AD	6.5 to 6.8	34° N	74.8° E	Srinagar Kashmir	Long shocks and destruction of newly constructed houses	Ahmad et al., 2009; Bilham and Bali, 2014
8	1736 AD	6.5 to 7	34° N	74.8° E	Srinagar Kashmir	Large number of Building in city and adjoin areas collapsed completely	Ahmad et al., 2009
9	1779 AD	6.5 to 7.5	34° N	74.8° E	Srinagar and villages of Kashmir valley	It destroyed houses in city and villages and caused huge loss to life	Ahmad et al., 2009
10	1784 AD	6.5 to 7.5	34° N	74.8° E	Srinagar Kashmir	Terrific shocks felt in the area	Bilham, 2019
11	1828 AD	6.5 to 7.5	34° N	74.8° E	Srinagar Kashmir	About 1200 houses collapsed in this event	Vigne, 1842; Ahmad et al., 2009
12	1885 AD	7.1 to 7.5	34.5 4° N	74.68° E	Baramulla Kashmir	Terrific shock felt in the adjoining area	Ahmad et al., 2009; Lawrence, 1895
13	2005 AD	7.6	34.4 9° N	73.63° E	Kashmir	Earthquake alone left 86,000 people dead, about 69000 injured in both Indian and Pakistan side and about 25% of buildings were fully damaged in Uri and Poonch areas of J and K	Kumar et al., 2006

177 Table 1: Record of the past earthquake events in the Kashmir valley

178 3. Dataset and Methodology

179 The availability of high spatial resolution satellite images with a ground pixel size of 1 m,
180 opens up new possibilities for mapping individual features such as buildings (Li et al., 2019).
181 To accomplish this study, ortho-rectified Cartosat-2 data of 2016-17, having a spatial
182 resolution of 1 m, were utilised to extract the spatial information of the built environment in
183 Srinagar city. The very high-resolution Cartosat-2 data has the potential to map individual
184 buildings at a large scale (Sandhu et al., 2021).

185 3.1 Building inventory

186 Keeping in view the advantages of manual delineation over digital image processing, the
187 visual interpretation method was employed for delineating buildings and associated land use
188 and land cover (Rashid et al., 2017). The image interpretation elements, viz., tone, texture,
189 pattern, size, shape, etc., supplemented by Google Earth, were used to map the building
190 footprint of the city on high-resolution Cartosat-2 data at a scale of 1:1,000. All the buildings,
191 roads, water bodies, and other associated urban built-up are included in the mapped features.

192 Individual building footprints were accurately mapped, however delineating the complex
193 geometrical shape in unplanned dense and very dense built-up areas proved to be a difficult
194 task (Sandhu et al., 2021). As a result, rather than individual building footprints, building
195 blocks were digitized in the densely populated areas towards the centre of the city where the
196 edges of buildings become indistinguishable, causing difficulty in extracting individual
197 building footprints. Following evaluation in the field, these structures were segregated and
198 corrected. Furthermore, all of the city's major roads were easily identifiable, however, the
199 extraction of minor roads, particularly in the densely built-up wards was difficult to map due
200 to their narrower widths and the metallic rooftop canopy of the adjacent building concealing
201 the narrow alleys. The vector layer with the associated attributes like height, building
202 occupancy, typology, and number of floors was created by combining remote sensing data
203 and field data. The high-resolution building footprint and road network map were then
204 utilised to critically assess the ward-wise earthquake vulnerability of buildings in the city.

205 **3.2 Building vulnerability indicators**

206 The vulnerability of the built environment determines its earthquake risk. Building collapse
207 causes the majority of the damage during an earthquake. Thus, faulty building structures and
208 the use of unsafe materials are some of the major causes of damage during an earthquake
209 (Lantada et al., 2009). Assessment of the earthquake vulnerability of individual buildings and
210 neighbourhoods is a complex process (Langenbach, 2009; Agrawal and Chourasia, 2007) and
211 involves consideration of numerous parameters, which are described as follows:

212 **3.2.1 Building height:** Because of its antiquity, tradition, heritage, and significance,
213 the built environment of different wards of Srinagar city shows a remarkable diversity (Meier
214 and Will, 2008). Building height has a substantial impact on earthquake response and the
215 level of structural damage (Kircher et al., 1997; Priestley, 2000). Buildings with a lower
216 height-to-surface area ratio are more earthquake-resistant, and vice-versa (Alizadeh et al.,
217 2018). As a result, high-rise buildings with a smaller surface area are more vulnerable to
218 earthquake damage. When these types of buildings shake and swing during an earthquake,
219 they have a higher probability of pounding. Extensive ward-by-ward field surveys were
220 conducted to generate a comprehensive building height map of Srinagar city. During the field
221 surveys, the number of floors in randomly selected buildings from each ward in the city was
222 surveyed and counted. For height estimation during the field surveys, three types of buildings
223 were considered: single-story, double-story, and triple- or multiple story buildings. This field
224 data was then combined in the GIS database.

225 **3.2.2 Masonry building:** Traditional construction practices are considered
226 outmoded, insubstantial, and indicative of poverty in developing towns (Langenbach, 2009).
227 As a result, people are moving away from traditional types and methods of construction and
228 adopting modern practices and types of buildings with bricks, cement blocks, and/or stones.
229 Masonry buildings, as they are known, are extremely vulnerable to earthquakes (Alam and
230 Haque, 2018). The disappearance of traditional construction and buildings in Srinagar and the
231 rise of contemporary masonry construction practices make the city more vulnerable to
232 earthquakes. A physical survey of buildings was conducted to determine the type of buildings
233 for the physical vulnerability assessment of masonry buildings in Srinagar (Rahman et al.,
234 2015). The pattern of buildings along the main roads and link roads was surveyed during the
235 fieldwork because a majority of the buildings in the city are masonry. The presence of
236 building types other than masonry was recorded using Trimble Juno 5B handheld GPS with a
237 2-4 meter accuracy, which was then combined with GIS data to estimate the proportion of
238 various masonry building types in the city.

239 **3.2.3 Pounding Possibility:** One of the most common causes of structural damage
240 during an earthquake is pounding between neighbouring buildings (Anagnostopoulos, 1988).
241 Pounding conditions occur when two or more buildings collide during an earthquake with a
242 smaller distance between them (Alam and Haque, 2018). Every building has its natural
243 frequency and swings correspondingly during an earthquake (Lu et al., 2017; Jia et al., 2018).
244 If the separation distance between the buildings is insufficient, the buildings cannot swing
245 freely, resulting in local thrashing of the structures (Gioncu and Mazzolani, 2010). Due to the
246 location of the city in a seismically active region, it's socioeconomic setup, unplanned
247 urbanization and faulty land-use planning (Yousuf et al., 2020), Srinagar faces a significant
248 risk of structural damage from pounding during an earthquake. To determine the potential of
249 pounding in Srinagar, we employed a methodology that requires a minimum separation
250 distance between two buildings of 4% of the building height (FEMA, 1998). The pounding
251 potential was calculated using the following equation:

$$S = 0.04(h_1 + h_2) \quad (1)$$

252 Where, 'S' is the minimum separation distance between the buildings, 'h₁' and 'h₂'
253 are the heights of two adjacent buildings.

254 **3.2.4 Building Geometry:** The earthquake damage to a building also depends on its
255 geometry. Compared to regular structures, buildings having geometrical irregularities such as
256

257 a big height-to-width ratio, a large length-to-width ratio, or a large offset in plan and
258 elevation perform poorly and sustain significant damage during earthquakes (Alih and
259 Vafaei, 2019). We employed high-resolution Cartosat-2 data and validated it against the field
260 data to generate a building geometry map of the city. The remote sensing data were pre-
261 processed and the edge enhancement technique was used for highlighting the edges of
262 buildings (Somvanshi et al., 2018; Huang et al., 2019). The geometry map of the city was
263 then generated using manual digitization of the building edges, which was later validated in
264 the field.


265 **3.2.5 Road Network:** Urban roadways are a complex network that is extremely
266 vulnerable to disruption in the event of natural disasters such as earthquakes (Golla et al.,
267 2020). Roads play an important role in the post-earthquake response and recovery phase.
268 Roadblocks caused by earthquakes have a negative impact on not just post-earthquake
269 emergency services but also isolate specific areas of cities where basic amenities such as
270 hospitals, shelters, and other critical services are situated (Balijepalli and Oppong, 2014).
271 Thus, the mapping of roads is essential for assessing the vulnerability of a city. Using a
272 manual digitization technique on the high-resolution satellite data, all roads in Srinagar were
273 mapped at a scale of 1:1,000. Because the buildings in Srinagar are not built in a planned
274 manner, the majority of the roads are small and narrower and are classified into three
275 categories: less than 8 feet, 8 to 16 feet, and more than 16 feet roads (Alam and Haque,
276 2018). Roads with a width of less than 8 feet are considered particularly vulnerable.

277 **3.2.6 Building density:** In addition to the aforementioned parameters, the building
278 density of an urban area has a significant impact on its structural vulnerability (Bahadori et
279 al., 2017). The more densely built a place is, the more vulnerable it is to earthquakes (Jena
280 and Pradhan, 2020). For all the wards of Srinagar, the building density was determined as the
281 number of buildings per unit area. For building density mapping, we used 1meter high-
282 resolution Cartosat data, which we then draped onto Google Earth imagery for validation.
283 The building density was also validated during the field surveys.

284 **3.3 Field validation**

285 Comprehensive ground-truth surveys were conducted in all wards throughout the city to
286 validate the building inventory database. Because there are so many buildings and their area
287 is so large, ward-wise validation of the mapped buildings was done using a stratified random
288 sampling method. It was ensured that the validation sites are well distributed throughout a

289 ward (Han et al., 2020). For field data collection, a proforma was developed to collect data
290 such as latitude, longitude, building use, number of floors, and construction type. The
291 position of individual buildings in every ward was identified on the building inventory map
292 during field surveys through visual observation and GPS coordinates, and the locations were
293 documented (Ahmad et al., 2009). 8000 field validation points were collected throughout the
294 city (Fig. 2) and the physical attributes of each building were inspected externally to
295 determine building parameters such as building height, number of floors, and type of
296 construction. Post-field surveys, the building inventory database was updated to match the
297 ground-truth data.

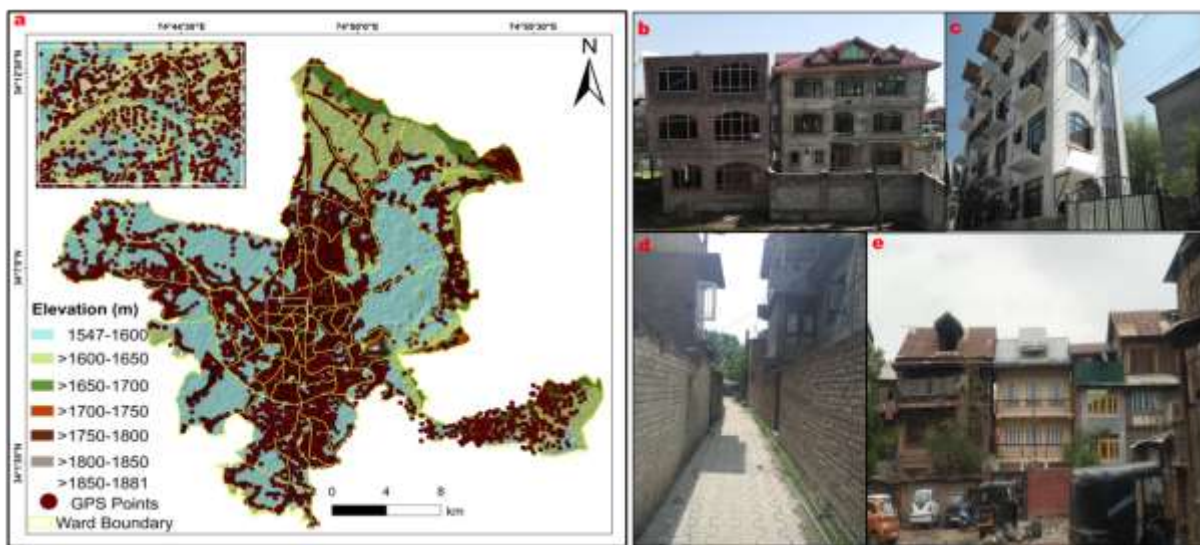

298

299 Fig. 2. a) Field validation map showing the distribution of ground samples with the inset
300 showing the density of samples. The elevation of study area are based on ASTER DEM data.
301 *Field photograph of b) modern masonry construction practice adopted in residential c)*
302 *commercial building with large windowpanes d) narrower roads in the city centre e)*
303 *buildings with the insufficient or no separation distance.*

304 **3.4 Analytical Hierarchical Process (AHP) Approach**

305 Due to its simplicity and rationality (Rezaie and Panahi, 2015; Alam and Mondal, 2019), the
306 AHP is a widely used multi-criteria decision-making method (MCDM) for vulnerability
307 assessment. It considers both qualitative and quantitative parameters to develop a hierarchical
308 solution decision-making among various alternatives and their sub-categories. The Analytical
309 Hierarchical Process (AHP) weights parameters and sub-parameters based on expert opinion,
310 ensuring transparency and consideration of local-specific conditions of a study area that
311 global indices cannot (Füssel, 2010). There are three key assessment steps in AHP. The first

312 step is to create binary comparison matrices on a scale of 1–9 (Saaty, 1980), where 1
 313 indicates that two parameters are equally important, 9 indicates that one parameter is
 314 extremely important and 1/9 indicates that the parameter is of the least importance. Table 2
 315 displays the scale of importance. The AHP was used to create indices that measured spatial
 316 variations in structural vulnerability ward-by-ward across the Srinagar city.

Decreasing Relative Intensity of Importance				Equally Important		Increasing Relative Intensity of Importance										
←						→										
1/9	1/8	1/7	1/6	1/5	1/4	1/3	1/2	1	2	3	4	5	6	7	8	9

317 Table 2: AHP scale used in this study

318 In the second step, the weights of different factors are determined from row-multiplied
 319 value (RMV), in un-normalized and normalized values using Equations (2) and (3).

320 Unnormalized value, $mi = \sqrt[n]{RMV}$ (2)

321 Normalized value = $\frac{mi}{\sum_{i=1}^n mi}$ (3)

322 Where, mi refers to the un-normalized value of the i -th parameter and n represents the total
 323 influential parameters.

324 The third and most important step of this model is to compute the consistency
 325 between judgements and weights. The consistency is calculated from the consistency index
 326 and consistency ratio employing equations (4) and (5). If the consistency ratio is <0.1 , the
 327 pairwise comparison matrix is consistent and if it is >0.1 , the pairwise comparison between
 328 indicators and sub-indicators must be iterated until a good consistency is achieved.

329 Consistency index, $CI = \frac{L-n}{n-1}$ (4)

330 Consistency Ratio, $CR = \frac{CI}{RI}$ (5)

331 Where, L represents the Eigen-value of the pairwise comparison matrix and RI is the
 332 random inconsistency index which depends on the number of vulnerability assessment
 333 parameters (n) used in the assessment. The variation of RI values for a different number of
 334 parameters is shown in Table 3.

N	1	2	3	4	5	6	7	8	9	10	11	12
RI	0	0	0.58	0.90	1.12	1.24	1.32	1.41	1.45	1.49	1.52	1.54

335 Table 3: Random inconsistency indices (RI) for n = 1, 2, . . . 12. (After Saaty, 1980)

336 The four authors were involved in determining the expert judgement process, viz., Prof.
 337 Shakil Ahmad Romshoo, Ph.D., Remote Sensing and GIS; Dr. Irfan Rashid, Ph.D.,
 338 Environmental Sciences; Dr. Rakesh Chandra, Ph.D., Geology; and Midhat Fayaz, M.Sc.
 339 (Geoinformatics), but a large body of literature was also consulted that informed the expert
 340 judgement process. Based on multiple judgments, a comparison matrix of six earthquake
 341 vulnerability factors was established in this study (Yariyan et al., 2020). The geometric mean
 342 of expert opinions was then calculated to compile all of the opinions into a single matrix
 343 (Table 4). As a result, the factors are weighted and ranked on a scale of 0 to 1. The
 344 Consistency Ratio (CR) of 1.24 was achieved, which indicates consistency in the pairwise
 345 comparison of vulnerability factors (Saaty, 1980).

Parameters	Average Floor Height	Masonry Building (%)	Pounding Possibility (%)	Irregular Building (%)	Average Road Width	Building Density	Sum	Weight
Average Floor Height (m)	0.12	0.09	0.12	0.08	0.16	0.15	0.72	0.12
Masonry Building (%)	0.28	0.23	0.22	0.23	0.22	0.22	1.40	0.23
Pounding Possibility (%)	0.28	0.32	0.31	0.31	0.27	0.31	1.80	0.30
Irregular Building (%)	0.12	0.08	0.08	0.08	0.05	0.08	0.48	0.08
Road Width (ft)	0.08	0.11	0.12	0.15	0.11	0.09	0.67	0.11
Building Density (per Ha)	0.12	0.16	0.15	0.15	0.19	0.15	0.92	0.15

346 Table 4: Pair-wise matrix showing weights for each of the factors used in the AHP model

347
 348 **3.5 Technique for Order Preference by Similarity to Ideal Solution (TOPSIS)**
 349 **Approach**

350 The TOPSIS is a multi-criteria decision-making (MCDM) method that chooses alternatives
 351 based on the distance between positive and negative ideal points (Hwang et al., 1993; Joshi

352 and Kumar, 2014). The TOPSIS model is based on the concept that the chosen alternative
 353 should be the closest to the ideal solution while being the farthest from the negative ideal
 354 solution. The important steps involved in the TOPSIS approach are listed below.

355 Step 1: Construction of normalized decision matrix using Equation (6)

$$356 \quad \text{Normalize score, } r_{ij} = x_{ij} / (\sum x_y^2) \quad (6)$$

357 Where, x_{ij} is the score of option i with respect to criterion j .

358 Step 2: Construction of weighted normalized decision matrix using Equation (7)

$$359 \quad v_{ij} = w_j * r_{ij} \quad (7)$$

360 where, w_j is the weight for each criterion.

361 Step 3: Identifying the positive and negative ideal solutions. The positive (A^+) and the
 362 negative (A') ideal solutions are defined according to the weighted decision matrix using
 363 equations (8) and (9) respectively

$$364 \quad A^+ = \{V_1^+, V_2^+, \dots, V_n^+\}$$

$$365 \quad \text{Where, } V_j^+ = \{\max(V_{ij}) \text{ if } j \in J; \min(V_{ij}) \text{ if } j \in J'\} \quad (8)$$

$$366 \quad A' = \{V_1', V_2', \dots, V_n'\}$$

$$367 \quad \text{Where, } V_j' = \{\min(V_{ij}) \text{ if } j \in J; \max(V_{ij}) \text{ if } j \in J'\} \quad (9)$$

368

369 Step 4: Calculating the separation distance of each alternative from the positive and negative
 370 ideal solution using equations (10) and (11) respectively [after Hwang et al., 1993](#).

$$371 \quad S_i^+ = \sqrt{\sum_{j=1}^n n(V_j^+ - V_{ij})^2} \quad (10)$$

372

$$373 \quad S_i^- = \sqrt{\sum_{j=1}^n n(V_j' - V_{ij})^2} \quad (11)$$

374 Where, S_i^+ is the distance from the i^{th} alternative from the positive ideal point for the
 375 j^{th} feature and S_i^- is the distance between the i^{th} alternative and the negative ideal point for

376 the j^{th} feature and $i = 1, \dots, m$. The negative and positive ideal point for each seismic
 377 vulnerability factor is shown in Table 5.

Vulnerability Parameters	Positive Ideal Point (V+)	Negative Ideal Point (V-)
Average Floor Height	0.0171	0.0112
Pounding Possibility	0.0501	0.0083
Irregular Building	0.0270	0.0004
Road Width	0.0090	0.0199
Building Density	0.0618	0.0007
Masonry Building	0.0283	0.0243

378 Table 5: Positive and negative ideal points used in the TOPSIS model

379 Step 5: Measuring the relative closeness of each parameter to the ideal solution using
 380 Equation (12).

381
$$\text{Closeness}, C_i^* = S_i^- / (S_i^- + S_i^+) \quad (12) \text{ (After Hwang et al., 1993)}$$

382 Where, C_i^* is a value between 0 and 1 and the closer the number is to 1, the closer the
 383 alternative is to the ideal condition. The positive ideal point in this study is the one with the
 384 maximum structural earthquake vulnerability, while the negative ideal point is the one with
 385 the lowest vulnerability. Furthermore, the closer an alternative value is to 1, the more
 386 vulnerable those limits are, and the closer it is to 0, the less vulnerable they are.

387 Based on expert opinions, the AHP model was used to assign weights to all the
 388 parameters. Following that, the TOPSIS model was used to rank the wards after evaluating
 389 the best alternatives using mathematical calculations. Finally, the weighted and best
 390 alternative evaluated structural vulnerability parameters from both the AHP and TOPSIS
 391 models are combined in the GIS environment to create a ward-by-ward earthquake
 392 vulnerability map of the built environment for Srinagar. [The integrative use of these two
 393 models reduces the uncertainty in the input data and improves accuracy and validity.
 394 Furthermore, decision-making based on the integrated use of the AHP and TOPSIS leads to
 395 more robust and effective outcomes for addressing complex problems \(Nyimbili et al., 2018\).
 396 Many studies have recommended the integrated use of TOPSIS with AHP for determining
 397 criteria and conducting analyses regarding complex decision-making problems \(Behzadian et
 398 al., 2012\). Additionally, the integrated use of AHP and TOPSIS helps to resolve the
 399 weighting problem by incorporating expert opinions and preferences, thereby increasing the
 400 consistency of outputs for arriving at consensus in decision-making in earthquake disaster
 401 vulnerability analyses \(Nyimbili et al., 2018\).](#)


402 [The adopted methodology has a few limitations, much like any other modelling](#)
403 [technique. In addition to the inherent flaws in Multi Criteria Decision Analysis \(MCDA\),](#)
404 [there may be some limitations, such as the fact that certain layers become more dominant](#)
405 [than others due to the weighting criteria used, which in turn depends upon the decision-](#)
406 [makers' perceptions of which vulnerability parameters have the greatest impact on modelling](#)
407 [outcomes in vulnerability analysis.](#)

408 **4. Results and discussion**


409 **4.1. Analysis of building parameters:**

410 **4.1.1. Building height:** In the city, around 2.5 lakh buildings were mapped (Fig. 3),
411 with nearly 86.4% of the buildings being residential, 7.1% being commercial, and the
412 remaining ~6.5% having various uses and purposes such as educational, religious, defence,
413 health and medical, industrial, etc. The analysis revealed that single story buildings account
414 for ~8% of all buildings, double-story buildings account for ~50% and triple-story buildings
415 account for ~42%. However, only a small number (n=307, 0.12%) of buildings have more
416 than 3 floors. 18 of the 69 wards have an average of two floors, while 51 have an average of
417 three floors.

418 The building height has a significant impact on the ward's vulnerability to
419 earthquakes. A majority of the residential buildings in Srinagar have an average floor height
420 of three meters, whereas government offices and commercial buildings typically have an
421 average floor height of 3.5 meters. The lowest ward-wise average building height of 6.33
422 meters was found in municipal ward A (BB Cant), which is primarily a cantonment area used
423 and administered for security and defence purposes. Ward number 50 (Lal Bazar) in Srinagar
424 has the highest ward-wise average building height of 9.68 meters. Figure 4 depicts the spatial
425 distribution of ward-wise average building heights with the average values provided in Table
426 6.

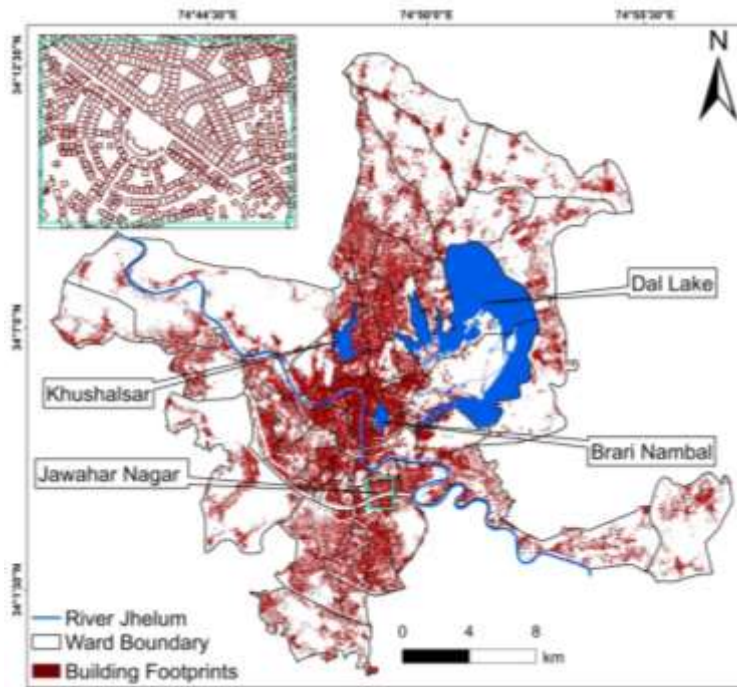

427
428 Fig. 3. Building foot print map of Srinagar city.

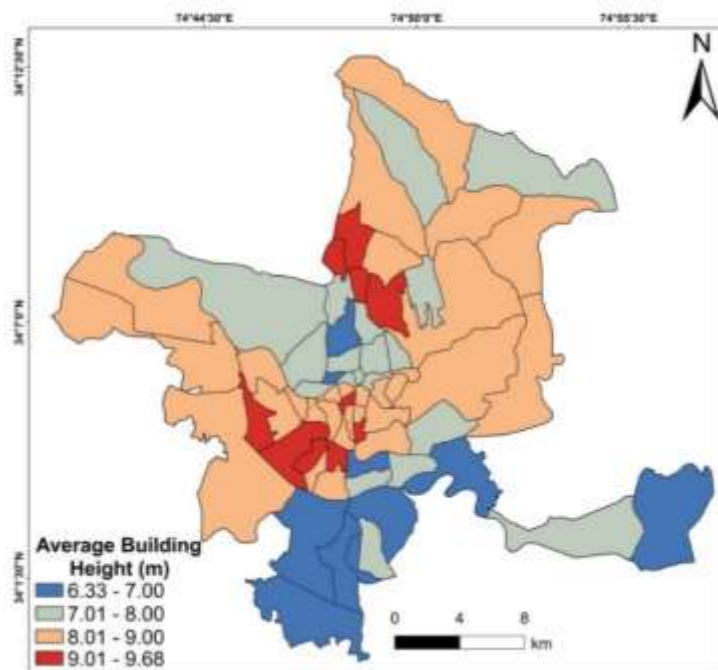

429
430 Fig. 4. Ward-wise distribution of average building height in Srinagar city.

Ward No.	Ward Names	Irregular Buildings (%)	Pounding Possibility (%)	Masonry Buildings (%)	Building Density (per Ha)	Average Height (m)	Average Plinth Area (m ²)	Average Road Width (ft)	Road Density (km/k m ²)
A	BB Cant	4.01	40.58	98.64	3.86	6.33	149.41	9.61	6.23
1	Harwan	4.81	76.71	96.57	2.82	8.86	140.19	8.78	7.55
2	Nishat	3.07	56.33	98.17	2.34	8.64	124.19	8.16	6.08
3	Dalgate	2.01	36.85	85.98	3.76	7.70	128.59	9.85	7.95


4	Lalchowk	6.50	81.07	90.06	4.06	8.24	141.67	12.14	11.61
5	Rajbagh	3.17	46.41	97.46	7.59	7.37	130.12	8.78	15.47
6	Jawahar Nagar	6.08	73.48	98.41	6.92	7.39	182.51	11.20	19.77
7	Wazir Bagh	8.76	85.58	92.29	6.05	6.64	163.73	12.02	13.93
8	Mehjoor Nagar	0.95	60.43	99.75	7.30	6.88	115.25	8.79	12.38
9	Natipora	2.21	59.55	99.48	9.12	7.00	138.15	10.12	19.53
10	Chanapora	3.25	72.44	99.61	8.71	6.79	121.89	11.33	23.71
11	Bagat-I-Barzullah	3.80	46.86	99.32	4.87	6.90	152.71	10.09	13.99
12	Rawalpura	6.03	53.65	98.66	5.37	6.92	161.29	10.88	17.20
13	Sheikh Dawood Colony	1.32	55.38	97.23	9.73	8.39	129.31	7.55	14.97
14	Batamaloo	2.95	84.64	96.97	11.05	9.41	158.01	7.94	19.85
15	Aloochoi Bagh	1.88	69.81	99.36	6.72	8.15	130.03	8.78	14.53
16	Magarmal Bagh	3.48	74.59	97.15	11.11	9.33	120.35	9.07	18.32
17	Nund Reshi Colony	3.24	79.26	97.47	4.99	9.05	184.49	10.08	12.21
18	Qamarwari	0.90	49.97	96.33	11.43	8.44	98.93	8.96	19.24
19	Parimpura	2.78	52.64	96.45	6.66	8.06	114.43	8.82	14.53
20	Zainakote	3.00	34.94	95.34	3.16	8.11	152.05	9.14	9.46
21	Bemina East	3.00	67.03	94.70	6.19	8.97	147.59	12.64	17.17
22	Bemina West	2.42	89.56	96.87	7.45	9.64	143.21	13.60	19.60
23	Shaheed Gunj	3.36	85.64	97.33	11.00	8.76	95.20	12.06	24.37
24	Karan Nagar	3.81	72.94	96.78	11.83	8.31	125.08	13.57	26.42
25	Chattabal	0.83	69.54	98.18	18.38	8.30	100.54	8.08	26.83
26	Syed Ali Akbar	0.61	87.41	87.41	24.53	8.50	87.57	6.12	35.38
27	Nawab Bazar	1.12	77.45	93.01	19.90	8.19	97.25	8.60	33.67
28	Islamyarbal	0.58	82.50	96.51	25.96	9.40	73.68	7.72	34.46
29	Aali Kadal	0.63	84.02	99.81	29.97	8.64	81.89	7.70	39.33
30	Ganpatyar	1.04	96.27	98.66	18.58	9.45	130.66	6.42	37.36
31	Bana Mohalla	0.54	72.28	99.76	21.75	8.79	103.71	6.14	40.22
32	Sathoo Barbarshah	1.46	77.23	95.05	9.21	8.05	121.44	8.69	16.15
33	Khankai Moulla	1.05	76.08	98.61	23.95	8.18	87.06	7.10	39.79
34	S R Gunj	1.56	91.10	99.69	22.65	7.86	86.02	7.20	42.29
35	Aqilmir Khanyar	1.52	93.14	99.68	22.14	8.05	94.67	8.40	28.82
36	Khawaja Bazar	1.60	97.11	99.77	24.90	7.82	73.60	9.55	27.80
37	Safa Kadal	2.90	80.12	99.36	16.43	7.82	113.22	6.86	27.27
38	Iddgah	2.05	88.71	99.53	8.38	7.74	110.69	9.19	13.15
39	Tarbal	0.56	98.27	99.65	38.89	6.96	71.17	7.91	38.42
40	Jogi Lankar	2.33	91.62	99.36	16.93	8.46	97.27	7.37	25.51

41	Zindshah Sahib	4.37	97.94	99.07	23.73	8.40	95.92	6.17	29.72
42	Hasanabad	2.98	89.68	99.78	9.79	7.85	112.3 3	7.55	20.44
43	Jamia Masjid	1.58	99.66	97.27	46.35	7.77	61.48	7.51	40.53
44	Makhdoom Sahib	2.06	86.04	99.04	8.60	7.78	104.7 4	8.73	19.49
45	Kawdara	1.16	85.52	99.23	16.67	7.02	105.5 4	7.74	26.03
46	Zadibal	0.87	42.34	99.69	7.20	6.96	108.1 3	10.1 1	12.63
47	Madin Sahib	2.57	70.85	99.59	13.82	7.46	103.5 8	11.7 5	22.59
48	Nowshera	3.86	65.95	99.56	8.59	9.56	145.2 4	8.29	20.11
49	Zoonimar	2.28	41.22	99.66	7.56	7.52	126.1 4	8.40	17.12
50	Lal Bazar	5.45	93.81	99.30	9.43	9.68	147.3 5	10.0 7	16.22
51	Umer Colony	6.65	82.78	99.77	7.86	8.54	175.9 1	9.32	15.49
52	Soura	3.24	79.14	98.01	9.39	9.62	105.2 8	9.89	17.59
53	Buchpora	2.43	47.26	99.62	8.34	9.55	147.9 4	9.70	23.36
54	Ahmad Nagar	5.24	79.42	99.58	4.04	8.77	167.2 4	8.69	9.73
55	Zakora	3.29	63.88	99.67	2.02	7.38	154.0 4	8.98	5.92
56	Hazratbal	6.15	83.01	96.86	4.50	8.01	158.5 1	11.4 1	11.89
57	Tailbal	1.19	53.49	99.25	2.86	8.54	106.3 0	8.29	7.44
58	Bud Dal	0.73	58.98	98.74	0.49	8.86	82.14	6.14	1.35
59	Locut Dal	1.02	86.53	87.24	1.80	8.76	72.43	6.75	1.79
60	New Theed	0.86	46.17	99.08	2.03	7.84	108.9 9	7.89	5.63
61	Alasteng	2.42	71.43	99.25	1.74	8.02	126.3 4	8.17	3.93
62	Palapora	0.14	28.23	99.46	1.33	7.43	83.49	8.16	2.97
63	Maloora	0.75	24.50	98.09	1.56	8.40	146.5 9	9.52	5.56
64	Lawaypora	1.49	39.23	99.03	1.64	8.51	143.0 6	9.79	4.91
65	Khumani Chowk	1.00	90.18	99.57	1.79	8.26	112.3 4	7.74	4.85
66	Humhama	2.60	22.50	99.36	3.27	6.83	131.5 1	10.4 5	9.42
67	Pantha	2.63	18.02	99.21	2.77	7.01	105.1	9.51	5.91

	Chowk						7		
68	Khonmoh	1.70	16.59	99.37	2.14	6.99	89.06	9.54	5.11

431 Table 6: Ward-wise built-up parameters used for vulnerability assessment of the Srinagar
 432 city.


433 **4.1.2 Masonry Building:** The type of construction material used in building
 434 construction determines the earthquake vulnerability of the built environment (Lang et al.,
 435 2018). The masonry buildings (those constructed of bricks, cement blocks or stone) have an
 436 extremely poor seismic performance (Alam and Haque, 2018). The strength of the buildings
 437 is mostly determined by the materials used for the walls and the type of mortar used (Lang et
 438 al., 2018). Table 6 and Fig. 5 show the ward-wise distribution of masonry buildings in
 439 Srinagar. The proportion of masonry structures in the city varies between 82% and 99.8% in
 440 different wards. Masonry buildings account for about 98% of the city’s total buildings ,
 441 making it highly vulnerable to earthquakes. Ward number 29 (Aali Kadal) has the largest
 442 number of masonry buildings (99.8%), whereas wards 3, 26, and 59 (Dalgate, Syed Ali
 443 Akbar, and Jawahar Nagar, respectively) have about 15% non-masonry buildings.

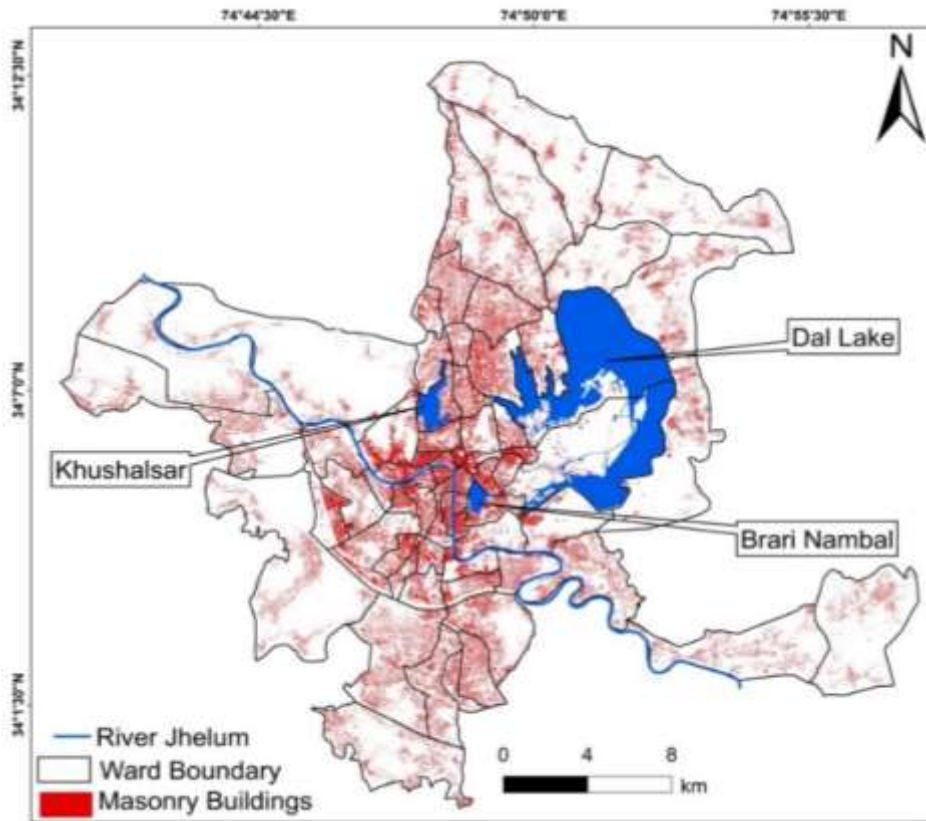

444
 445 Fig. 5. Ward-wise distribution of Masonry buildings in the city.

446 **4.1.3 Pounding possibility:** From the analysis of the estimated separation distance
 447 and height of adjacent buildings, it was found that ~ 65% of buildings in the city have a high


448 chance of pounding with neighbouring buildings, at least on one side, because the ideal offset
 449 between the buildings has not been maintained due to the haphazard building construction
 450 practices, particularly in the downtown wards of the city (Fig. 6). Table 6 provides
 451 information about the ward-by-ward pounding probability of the city. It is therefore evident
 452 from the analysis that the downtown wards of the city have the highest risk of pounding
 453 because the buildings are densely packed in most of the wards. Comparably, the uptown
 454 wards show a lower pounding possibility due to the sufficient gaps between the buildings.

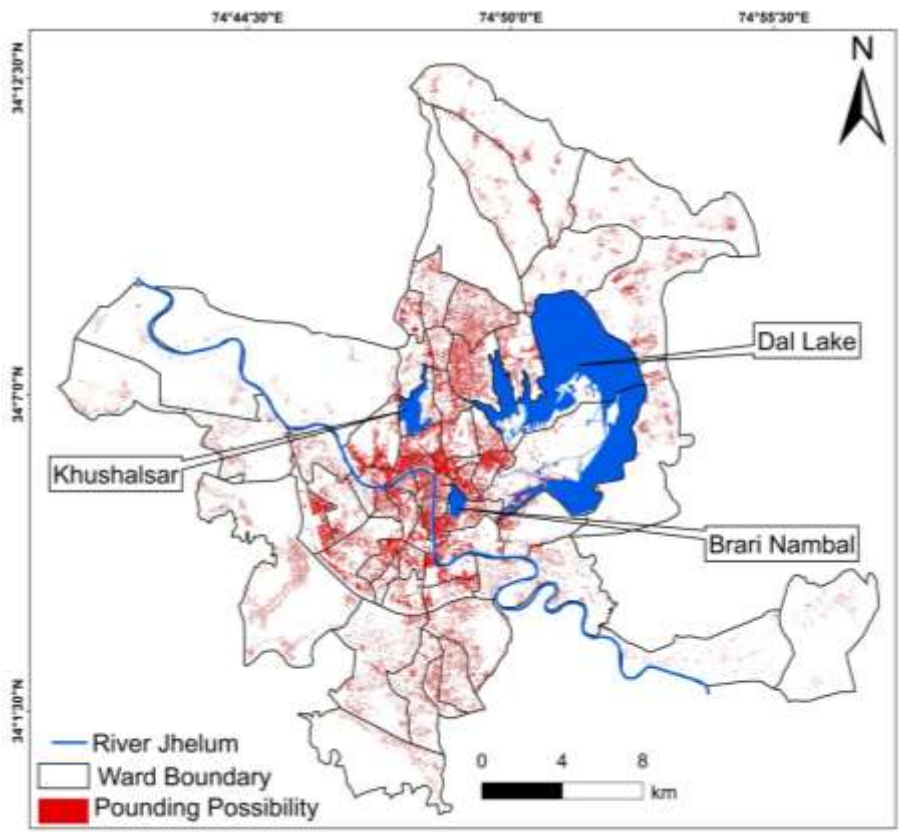

455
 456 Fig. 6. Ward-wise distribution of building pounding possibility in the city.

457 **4.1.4 Building Geometry:** Modern buildings in the city are constructed with
 458 irregular shapes and frequent offsets for aesthetic building layout and structural design. The
 459 building irregularities, either planar or vertical, make the structures vulnerable to seismic
 460 loading (Mazza, 2014; Ahirwal et al., 2019). As a result, while assessing the earthquake
 461 vulnerability of the built environment, building irregularity is an important factor to consider.
 462 It was found from the analysis of the data provided in Table 6 and Figure 7 that ~3% of the
 463 buildings in the city have irregular shapes. A fewer number of irregular buildings are found in
 464 municipal ward number 62 i.e., Palapora (n=8, 0.13%), whereas the largest number of
 465 irregular buildings are present in ward number 7 i.e., Wazir Bagh (n=158, 8.76%), increasing


466 the ward’s vulnerability in the city. The typical residential buildings usually have a
 467 conventional, regular, and rectangular shape with four sides and an average plinth area of 120
 468 m² (Table 6). Some of the schools, colleges, government offices, hospitals, and commercial
 469 complexes have irregular architectural shapes, such as the shape of the letters “O,” “L,” “U,”
 470 “T,” and “H” making them more vulnerable to earthquakes. Furthermore, most schools,
 471 colleges, and hospitals are usually made up of multiple smaller buildings with regular shapes
 472 that are close to each other, increasing the risk of pounding and making these building
 473 complexes more vulnerable to earthquake damage.

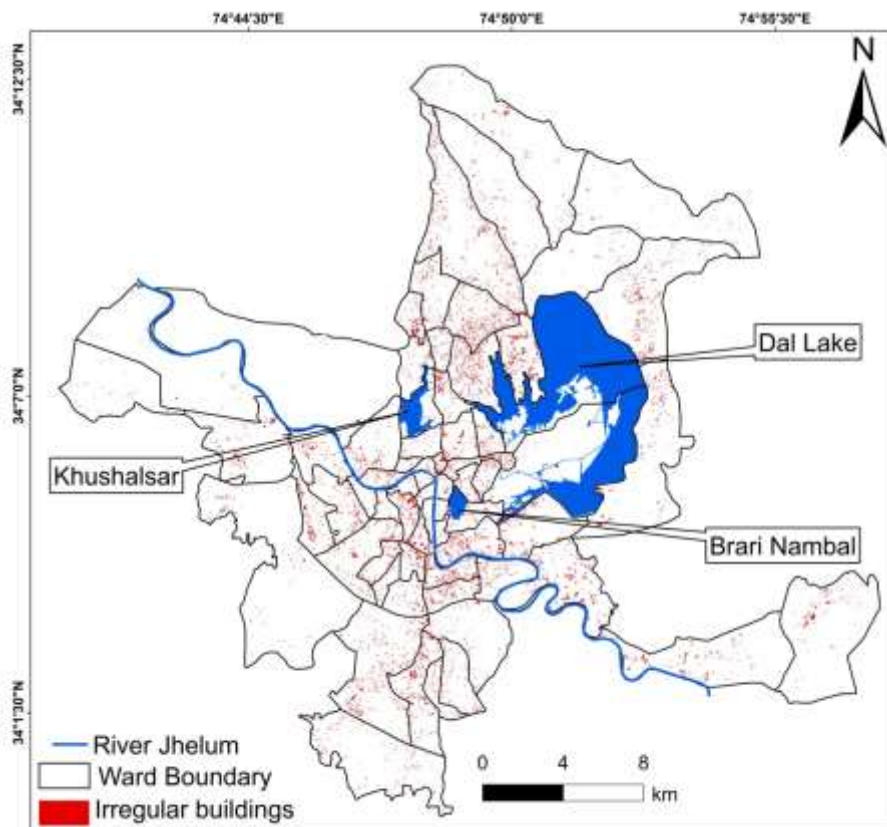

474
 475 Fig. 7. Ward-wise distribution of irregular shaped buildings in the city.

476 **4.1.5 Building Density:** The average building density of Srinagar is ten buildings
 477 per hectare (including residential and commercial buildings). However, the building density
 478 in 17 wards of the downtown city is more than 15 buildings per hectare (Table 6; Fig. 8). The
 479 highest building density of 46 buildings per hectare was observed in municipal ward number
 480 43 (Jamia Masjid), followed by wards 39 (Tarabal) and 29 (Aali Kadal), which have a
 481 building density of 39 and 30, respectively. Ward number 58 (Bud Dal) has the lowest
 482 building density, with only one building per hectare. [Srinagar is one of the largest urban](#)
 483 [centres in the Himalayan region and is experiencing considerably high rates of population](#)


484 [growth and built-up area expansion, leading to the extension of urban areas and the merging](#)
485 [of the city fringe areas into the main city \(Bhat et al., 2012\). The outer peripheral wards have](#)
486 [mostly low building density, as these are the developing areas proposed under the Srinagar](#)
487 [Master Plan 2035.](#) Knowledge about the building packing within the urban city centre is
488 crucial information for the earthquake vulnerability assessment. The current practise of
489 constructing buildings with insufficient space between them increases the congestion and
490 building density of cities (Bahadori et al., 2017). The areas with high building densities
491 (Table 6) are more vulnerable to earthquake damage than areas with low building densities
492 (Shadmaan and Islam, 2021). The high building density also leads to a small separation
493 distance between buildings and a reduction in the open space area. This reduces the amount
494 of useful space available for evacuation and shelter during post-earthquake rescue operations.
495 In order to decrease the loss and damage to human life and infrastructure caused by
496 earthquakes, it is important to regulate building density and ensure the reinforcement of old
497 structures (Jena et al., 2020). Good planning, a lower building density, and evenly spaced
498 buildings can reduce the seismic vulnerability of a city (Aghataher et al., 2018).

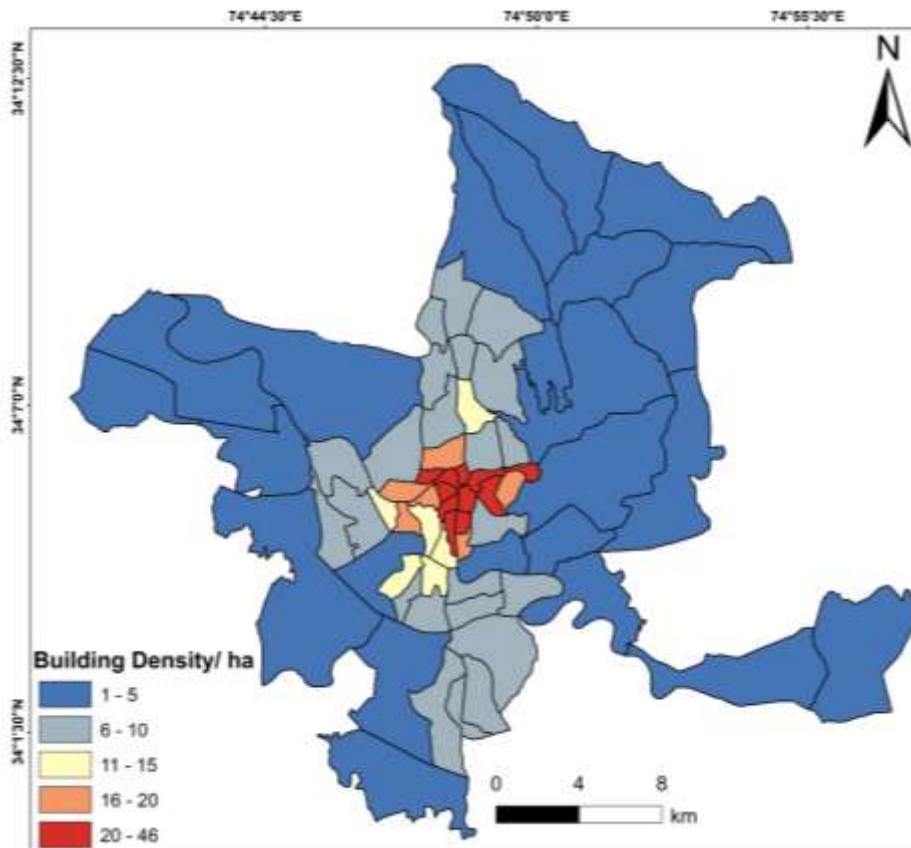

499

500 Fig. 8. Ward-wise distribution of building density in the city.

501 **4.1.6 Road Network:** Despite the high population and building density in the city,
502 the road network connectivity in the city is good, with a total road length of 2246 kilometers.
503 In the eventuality of an earthquake, the effectiveness of the urban road network decreases
504 significantly due to road damage caused by collapsed buildings and blockages (Bono and
505 Gutiérrez, 2011; Zanini et al., 2017). On the basis of their width, the roads were classified
506 into three categories: <8 ft, 8 to 16 ft, and > 16 ft (Fig. 9). The roads or streets with a width of
507 less than 8 feet are considered possible blockade sites. From the analysis of the data provided
508 in Table 6, it is evident that wards 26 (Syed Ali Akbar), 31 (Bana Mohalla), 58 (Bud Dal), 41
509 (Zind Shah Sahib), 30 (Ganpatyar), and 37 (Safa Kadal) have the smallest average road width
510 of less than 7 ft., despite having high road densities except for ward 58 (Bud Dal), which has
511 a road density of 1.35 km km⁻² due to the fact that most of the ward is covered by water (Dal
512 Lake). Ward 26 has a road density of 35.38 km km⁻², ward 31 has a road density of 40.22 km
513 km⁻², ward 41 has a road density of 29.72 km km⁻², ward 30 has a road density of 37.36 km
514 km⁻² and ward 37 has a road density of 27.27 km km⁻². Wards 24 (KaranNagar) and 22
515 (Bemina West) has the largest average road width of 13.58 ft and a road density of 26.42 and
516 19.60 km km⁻², respectively (Table 6). It is worth noting that the road network in the city is
517 relatively denser in the downtown city and as a result, the roads being narrower makes these
518 places in the city more vulnerable to earthquake damage and possibly impeding the post-
519 earthquake evacuation and rehabilitation operations. The road network in the uptown wards
520 towards the periphery of the city, on the other hand, is less dense. The roads being relatively
521 wider in the outer wards make them more suitable for evacuation and would facilitate easy
522 movement of traffic and relief during an earthquake compared to the inner city wards.

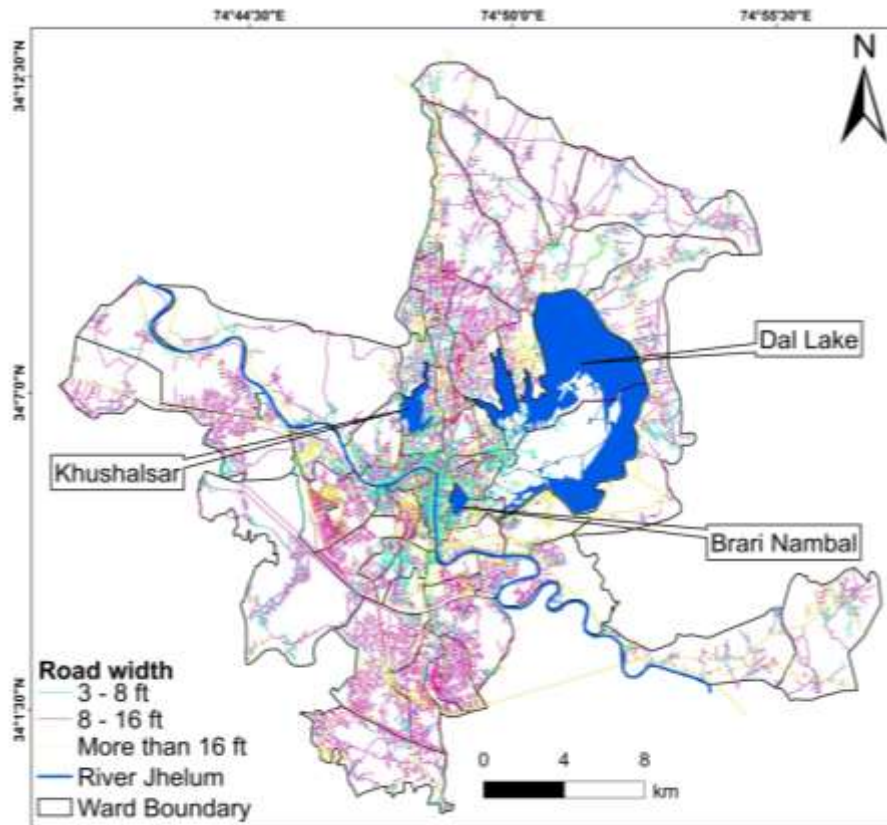


523

524 Fig. 9. Ward-wise road network in the city.

525 **4.2 Earthquake vulnerability Analysis:**

526 Earthquake events are common in the Kashmir valley and they are characterised by high
 527 exposure to social and economic consequences that can be severe (Oliveira, 2003).
 528 Earthquake vulnerability assessment aids pre-earthquake planning and post-earthquake
 529 emergency operations by providing vital information that informs earthquake risk reduction
 530 measures (Saputra et al., 2017). The GIS-based analysis of the earthquake vulnerability of the
 531 built environment in Srinagar, using the coupled model of AHP and TOPSIS was carried out
 532 to highlight the ward-wise vulnerability in the event of an earthquake. Because all of the
 533 structural vulnerability parameters have different importance and impacts the structural
 534 vulnerability of the city cannot be achieved by relying on a single parameter (Panahi et al.,
 535 2014). Therefore, all six important parameters were considered in this study to produce a
 536 good earthquake vulnerability assessment of the city. This study classified 69 municipal
 537 wards of the city into five earthquake vulnerability classes: very high, high, moderate, low,
 538 and very low earthquake vulnerability. The results showed that 9 municipal wards in the city
 539 are very highly vulnerable, 14 wards are highly vulnerable, 19 wards are moderately
 540 vulnerable, 17 wards are low vulnerable, and 10 wards fall in the very low vulnerable
 541 category (Fig. 10). The vulnerability map reveals that wards categorised under the same

542 vulnerability class are contagious to one another, indicating a clear pattern of earthquake
 543 vulnerability in Srinagar. The city centre, which also happens to be the site of ancient urban
 544 settlements including several heritage buildings and shrines, has a very high level of
 545 structural vulnerability, and as we move towards the outer peripheral wards the vulnerability
 546 changes from moderate to low. The probability of masonry buildings collapsing in the event
 547 of an earthquake is higher (Bhosale et al., 2018), and the city has a large percentage of such
 548 buildings, making it more vulnerable to earthquake disasters. Buildings with regular
 549 geometry, uniform mass distribution and rigidity in plan and elevation are more resistant to
 550 earthquakes than buildings with irregular geometry and hence variable mass distribution
 551 (Stein, 1982). As the findings of this study show, a good number of buildings in a few wards
 552 of the city have irregular geometry, making them more vulnerable to earthquakes. The high
 553 building density, maximal pounding potential and narrower road network near the city centre
 554 part make these wards particularly vulnerable when compared to the other wards located in
 555 the periphery of the city.

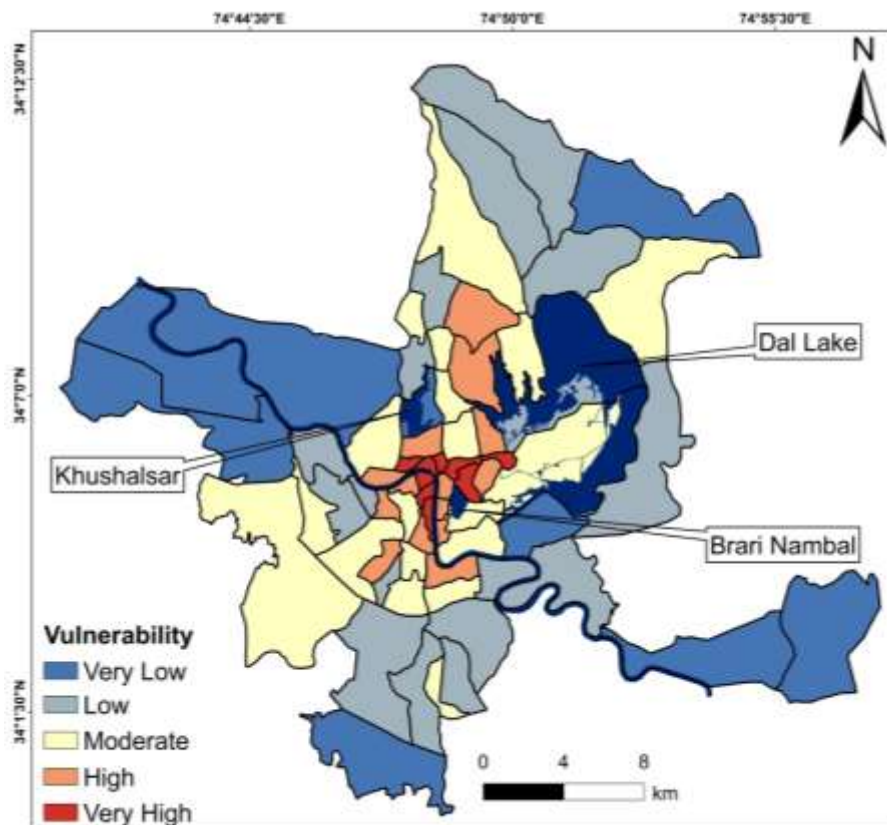

556
 557 Fig. 10. Structural vulnerability of Srinagar city.

558 Since because the majority of the built-up in the city is non-engineered, highly dense,
 559 irregular and masonry based, the results indicate that infrastructure development of any type

560 in the very high and high vulnerable zones of the city must adhere to the prescribed building
561 codes and bylaws to achieve the resilience to earthquakes. However, the continued
562 construction of both government and residential buildings in the wetlands and marshy areas
563 of Srinagar city, particularly towards the south of the city, is worrisome because it makes the
564 city more vulnerable to earthquake damage. It is pertinent to mention here that wetlands and
565 marshlands were masked in this study and hence not used in the analysis.

566 The socio-economic conditions of an area play an important role in determining the
567 vulnerability of an area to earthquake hazards. Srinagar has witnessed a population explosion,
568 with the population increasing from 0.25 million in 1961 to 1.5 million in 2011. The city also
569 has a high proportion of female and child residents (59%) and a population density of 4000
570 people per square kilometer. Migration from rural areas and population growth are the
571 primary drivers of this enhanced population expansion (Nengroo et al., 2018). The city has
572 been under pressure to expand its built-up area in order to cater to the population boom,
573 which has also led to excessive resource depletion, widening wealth and poverty gaps, and
574 detrimental environmental and socioeconomic concerns (Mitsovaa et al., 2010; Kamat and
575 Mahasur, 1997). With the mounting demand for new housing, the quality and condition of
576 houses have received negligible attention. These concerns about accelerated population
577 progression, along with high urbanization, have increased the socio-economic vulnerability of
578 the built environment in Srinagar to earthquakes. Furthermore, in the event of a major
579 earthquake, the lack of critical amenities such as trauma hospitals, shelters, etc., as well as
580 poor road conditions in several wards of Srinagar city, could result in significant loss of life
581 and property.

582 Earthquake vulnerability assessment of the built-up environment in Srinagar, if
583 followed by retrofitting, restoration, and rehabilitation initiatives in the most vulnerable
584 wards of the city, will help to reduce damage during earthquakes. This study can assist city
585 planners in choosing safe, low-density areas and even guide to propose new infrastructural
586 development envisaged under the master plan, as well as identify densely populated areas that
587 are particularly vulnerable to earthquakes and where no further infrastructural development
588 should be permitted other than the development of open and green spaces. In very high and
589 high vulnerable zones, provision for emergency services such as firefighters, shelters,
590 specialized medical facilities and so on must be made to minimize the loss of life and
591 property in the event of an earthquake. Pre- and post-earthquake disaster mitigation and
592 capacity-building initiatives are critical for transforming Srinagar into a safe, sustainable, and
593 earthquake-resistant city. The challenges surrounding the earthquake threat to Srinagar and

594 the city's preparedness thereof necessitate the adoption of new scientific and innovative
595 urban development planning and inexpensive measures aimed at inculcating a culture of
596 earthquake consciousness among its citizenry. The establishment of a culture of earthquake-
597 resistant and safe construction will undoubtedly make the city safer and reduce the adverse
598 consequences of earthquakes.

599 **5. Conclusions**

600 Understanding the structural vulnerability of a city situated in an earthquake-prone zone at a
601 ward scale is critical for deciding on appropriate urban planning and development strategies
602 to build and promote a safe, inclusive, sustainable, and earthquake-resilient living
603 environment as contemplated under SDG 11. The current study, which is the first of its kind
604 for Srinagar, reveals the micro-level structural vulnerability of the built-up environment in
605 the city. The vulnerability zonation map generated for the city reveals that around 32% of the
606 city has very low vulnerability, which covers 10 municipality wards. The low earthquake
607 vulnerability zone encompasses around 33% of the city, which includes 17 wards; the
608 moderate vulnerability zone covers around 28% of the city and 19 wards; the high
609 vulnerability zone covers 5.7 % of the city and 14 wards; and the very high vulnerability zone
610 covers 1.28 % of the city and 9 municipality wards. Overall, about 7% of the city, covering
611 1/3rd of the city municipal wards (n=23) are falling into either high or very high vulnerability
612 zones. The downtown wards in the city's central area are the most vulnerable to earthquakes
613 due to the high pounding potential, high building density, and narrower streets with little or
614 no open and green areas. [Reducing infrastructure development in these neighbourhoods by
615 relocating residents and services to less congested areas is an intervention that must be
616 undertaken.](#) Since green and open spaces are used as evacuation places, it is strongly advised
617 that new construction in these areas, as well as the development of these spaces, be avoided.
618 The study underlines the importance of developing emergency action plans that outline how
619 to prevent casualties by allowing for the rapid, selective and effective utilisation of resources
620 as well as retrofitting schemes and capacity-building programs to safeguard human life and
621 the economy in the city. [The current study is in accordance with the 2030 Agenda for
622 Sustainable Development Goals, which recognises and reiterates the urgent need to lower the
623 risk of disasters. The study will help to reduce the exposure and vulnerability of people to
624 disasters and build resilient infrastructure. The findings of this study will support sensible
625 urban planning, which calls for the construction of resilient infrastructure to reduce
626 vulnerability to natural disasters, as well as sustainable development in line with SDG 11 and](#)

627 [SDG 9, which demand manageable densities, user-friendly public spaces, and mixed-use](#)
628 [urban development.](#) These findings are consistent with the posteriori knowledge of the study
629 area's vulnerability and they will help the urban planners and policymakers in developing any
630 future land use planning and strategies. The socio-economic vulnerability of the city was not
631 analysed in this study, but it would be included in future research to produce a more accurate
632 and holistic assessment of the earthquake vulnerability to better inform policymaking for
633 developing earthquake risk reduction strategies in the city.

634 **Author contributions:**

635 **Shakil Ahmad Romshoo:** Conceptualization, Methodology, Supervision. Manuscript
636 preparation with inputs from **MF, Midhat Fayaz:** Data generation, Methodology, Formal
637 analysis, Field surveys, Investigation, Manuscript editing **Irfan Rashid:** Review and Editing,
638 **Rakesh Chandra:** Investigation, Review and Editing.

639 **Competing interests:** "The authors declare that they have no conflict of interest."

640 **Funding:**

641 The work was funded by Ministry of Earth Sciences (MoES), Govt. of India, New Delhi,
642 under the award number MoES/P.O. (Geosci)/16/ 2013. The financial assistance received
643 from the sponsors under the project is thankfully acknowledged.

644 **Acknowledgement:**

645 The research work was conducted under the Ministry of Earth Sciences sponsored research
646 project titled "Geological characterization of the Kashmir valley with the objective of
647 quantifying probabilistic hazard and risk in high risk areas of the valley using a logically
648 integrated set of geoscientific investigations". The financial assistance received from the
649 sponsors under the project is thankfully acknowledged.

650 **REFERENCES**

- 651 Aghataher, R., Delavar, M. R., Nami, M. H., and Samnay, N.: A fuzzy-AHP decision support
652 system for evaluation of cities vulnerability against earthquakes, *World Appl Sci*
653 *J*, 3(1), 66-72, 2008.
- 654 Agrawal, S. K., and Chourasia, A.: Estimation of seismic vulnerability of building of delhi
655 municipal area, *Journal of Disaster and Development*, 1(2), 169-185, 2007.
- 656 Ahirwal, A., Gupta, K., and Singh, V.: Effect of irregular plan on seismic vulnerability of
657 reinforced concrete buildings, In *AIP Conference Proceedings* (Vol. 2158, No. 1, p.
658 020012), AIP Publishing LLC, <https://doi.org/10.1063/1.5127136>, 2019.

- 659 Ahmad, B., Alam, A., Bhat, M. S., Ahmad, S., Shafi, M., and Rasool, R.: Seismic risk
660 reduction through indigenous architecture in Kashmir Valley, *International journal of*
661 *disaster risk reduction*, 21, 110-117, <https://doi.org/10.1016/j.ijdr.2016.11.005>, 2017.
- 662 Ahmad, B., Bhat, M. I., and Bali, B. S.: Historical record of earthquakes in the Kashmir
663 Valley, *Himalayan Geology*, 30(1), 75-84, 2009.
- 664 Ahmad, Naveed, Qaisar Ali, M. Ashraf, B. Alam, and A. Naeem.: Seismic vulnerability of
665 the Himalayan half-dressed rubble stone masonry structures, experimental and
666 analytical studies, *Natural Hazards and Earth System Sciences*, 12(11), 3441-3454,
667 <https://doi.org/10.5194/nhess-12-3441-2012>, 2012.
- 668 Alam, M. S., and Haque, S. M.: Assessment of urban physical seismic vulnerability using the
669 combination of AHP and TOPSIS models: A case study of residential neighborhoods of
670 Mymensingh city, Bangladesh, *Journal of Geoscience and Environment*
671 *Protection*, 6(02), 165, [10.4236/gep.2018.62011](https://doi.org/10.4236/gep.2018.62011), 2018.
- 672 Alam, M. S., and Mondal, M.: Assessment of sanitation service quality in urban slums of
673 Khulna city based on SERVQUAL and AHP model: A case study of railway slum,
674 Khulna, Bangladesh, *Journal of Urban Management*, 8(1), 20-27,
675 <https://doi.org/10.1016/j.jum.2018.08.002>, 2019.
- 676 Ali, U., and Ali, S. A.: Comparative response of Kashmir Basin and its surroundings to the
677 earthquake shaking based on various site effects, *Soil Dynamics and Earthquake*
678 *Engineering*, 132, 106046, <https://doi.org/10.1016/j.soildyn.2020.106046>, 2020.
- 679 Alih, S. C., and Vafaei, M.: Performance of reinforced concrete buildings and wooden
680 structures during the 2015 Mw 6.0 Sabah earthquake in Malaysia, *Engineering Failure*
681 *Analysis*, 102, 351-368, <https://doi.org/10.1016/j.engfailanal.2019.04.056>, 2019.
- 682 Alizadeh, M., Ngah, I., Hashim, M., Pradhan, B., and Pour, A. B.: A hybrid analytic network
683 process and artificial neural network (ANP-ANN) model for urban earthquake
684 vulnerability assessment, *Remote Sensing*, 10(6), 975,
685 <https://doi.org/10.3390/rs10060975>, 2018.
- 686 Ambraseys, N., and Jackson, D.: A note on early earthquakes in northern India and southern
687 Tibet, *Current Science*, 570-582, 2003.
- 688 Amini, H. K., Hosseini, M., Jafari, M. K., and Hosseinioun, S.: Recognition of vulnerable
689 urban fabrics in earthquake zones: a case study of the Tehran metropolitan area, 2009.
- 690 Anagnostopoulos, S. A.: Pounding of buildings in series during earthquakes, *Earthquake*
691 *engineering and structural dynamics*, 16(3), 443-456,
692 <https://doi.org/10.1002/eqe.4290160311>, 1988.
- 693 Bahadori, H., Hasheminezhad, A., and Karimi, A.: Development of an integrated model for
694 seismic vulnerability assessment of residential buildings: Application to Mahabad City,

- 695 Iran, Journal of Building Engineering, 12, 118-131,
696 <https://doi.org/10.1016/j.jobe.2017.05.014>, 2017.
- 697 Balijepalli, C., and Oppong, O.: Measuring vulnerability of road network considering the
698 extent of serviceability of critical road links in urban areas, Journal of Transport
699 Geography, 39, 145-155, <https://doi.org/10.1016/j.jtrangeo.2014.06.025>, 2014.
- 700 Baruah, S., Boruah, G. K., Sharma, S., Hoque, W. A., Chetia, T., Dey, C., ... and Choudhury,
701 S.: Seismic vulnerability assessment of earthquake-prone mega-city Shillong, India
702 using geophysical mapping and remote sensing, Georisk: Assessment and Management
703 of Risk for Engineered Systems and Geohazards, 14(2), 112-127,
704 <https://doi.org/10.1080/17499518.2019.1598560>, 2020.
- 705 Beck, E., André-Poyaud, I., Davoine, P. A., Chardonnel, S., and Lutoff, C.: Risk perception
706 and social vulnerability to earthquakes in Grenoble (French Alps), Journal of Risk
707 Research, 15(10), 1245-1260, <https://doi.org/10.1080/13669877.2011.652649>, 2012.
- 708 [Behzadian, M., Otaghsara, S. K., Yazdani, M., Ignatius, J.: A state-of the-art survey of
709 TOPSIS applications, Expert Systems with Application, 39\(17\):13051–13069
710 <https://doi.org/10.1016/j.eswa.2012.05.056>, 2012.](https://doi.org/10.1016/j.eswa.2012.05.056)
- 711 [Bhat, S., Ahmad, A., Bhat, M. S., Zahoor, A. N., Kuchay N. A., Bhat, M. S., Mayer A. I., and
712 Sabar, M.: Analysis and simulation of urban expansion of Srinagar city, Sciences, 2249,
713 2224-5766. <https://doi.org/10.5897/IJPC2015.0314>, 2012.](https://doi.org/10.5897/IJPC2015.0314)
- 714 Bhosale, A., Davis, R., and Sarkar, P.: New seismic vulnerability index for vertically
715 irregular buildings. ASCE-ASME Journal of Risk and Uncertainty in Engineering
716 Systems, Part A: Civil Engineering, 4(3), 04018022,
717 <https://doi.org/10.1061/AJRUA6.0000973>, 2018.
- 718 Bilham, R., and Bali, B. S.: A ninth century earthquake-induced landslide and flood in the
719 Kashmir Valley, and earthquake damage to Kashmir's Medieval temples, Bulletin of
720 Earthquake Engineering, 12(1), 79-109, <https://doi.org/10.1007/s10518-013-9504-x>,
721 2014.
- 722 Bilham, R., Bali, B. S., Bhat, M. I., and Hough, S.: Historical earthquakes in Srinagar,
723 Kashmir: clues from the Shiva temple at Pandrethan, Ancient earthquakes, 471, 110-
724 117, 2010.
- 725 Bilham, R.: Himalayan earthquakes: a review of historical seismicity and early 21st century
726 slip potential, Geological Society, London, Special Publications, 483(1), 423-482,
727 <https://doi.org/10.1144/SP483.16>, 2019.
- 728 Bono, F., and Gutiérrez, E.: A network-based analysis of the impact of structural damage on
729 urban accessibility following a disaster: the case of the seismically damaged Port Au
730 Prince and Carrefour urban road networks, Journal of Transport Geography, 19(6),
731 1443-1455, <https://doi.org/10.1016/j.jtrangeo.2011.08.002>, 2011.

- 732 Chandra, R., Dar, J. A., Romshoo, S. A., Rashid, I., Parvez, I. A., Mir, S. A., and Fayaz, M.:
733 Seismic hazard and probability assessment of Kashmir valley, northwest Himalaya,
734 India, *Natural Hazards*, 93(3), 1451-1477, <https://doi.org/10.1007/s11069-018-3362-4>,
735 2018.
- 736 [Dar, R. A., Mir, S. A., and Romshoo, S. A.: Influence of geomorphic and anthropogenic](#)
737 [activities on channel morphology of River Jhelum in Kashmir Valley, NW Himalayas,](#)
738 [Quaternary International](#), 507, 333-341, <https://doi.org/10.1016/j.quaint.2018.12.014>,
739 2019.
- 740 Duzgun, H. S. B., Yucemen, M. S., Kalaycioglu, H. S., Celik, K. E. Z. B. A. N., Kemec, S.,
741 Ertugay, K., and Deniz, A.: An integrated earthquake vulnerability assessment
742 framework for urban areas, *Natural hazards*, 59(2), 917-947,
743 <https://doi.org/10.1007/s11069-011-9808-6>, 2011.
- 744 Düzgün, H. S., Yüçemen, M. S., and Kalaycioglu, H. S.: An Integrated Approach for Urban
745 Earthquake Vulnerability Analyses, In EGU General Assembly Conference
746 Abstracts (p. 6661), <http://meetings.copernicus.org/egu2009>, 2009.
- 747 Erden, T., and Karaman, H.: Analysis of earthquake parameters to generate hazard maps by
748 integrating AHP and GIS for Küçükçekmece region, *Natural Hazards and Earth System*
749 *Sciences*, 12(2), 475-483, <https://doi.org/10.5194/nhess-12-475-2012>, 2012.
- 750 Farooq, M., and Muslim, M.: Dynamics and forecasting of population growth and urban
751 expansion in Srinagar City-A Geospatial Approach, *International Archives of*
752 *Photogrammetry, Remote Sensing and Spatial Information Sciences*, 40(8), 709, 2014.
- 753 Federal Emergency Management Agency 1998 FEMA 310 Handbook for the Seismic
754 Evaluation of Buildings: A Prestandard (Washington, DC: Federal Emergency
755 Management Agency)
- 756 Füssel, H. M.: Review and quantitative analysis of indices of climate change exposure,
757 adaptive capacity, sensitivity, and impacts, <http://hdl.handle.net/10986/9193>, 2010.
- 758 Gioncu, V., and Mazzolani, F.: Earthquake engineering for structural design, CRC Press,
759 2010.
- 760 Golla, A. P. S., Bhattacharya, S. P., and Gupta, S.: The accessibility of urban neighborhoods
761 when buildings collapse due to an earthquake, *Transportation research part D: transport*
762 *and environment*, 86, 102439, <https://doi.org/10.1016/j.trd.2020.102439>, 2020.
- 763 Gupta, S. V., Parvez, I. A., and Khan, P. K.: Imaging subsurface geological complexity
764 (2D/3D) beneath the Greater Srinagar region of the Kashmir basin, Northwest
765 Himalaya, *Near Surface Geophysics*, 20(1), 94-114, <https://doi.org/10.1002/nsg.12186>,
766 2022.

- 767 Gupta, S. V., Parvez, I. A., Ankit, Khan, P. K., and Chandra, R.: Site effects investigation in
768 Srinagar city of Kashmir basin using microtremor and its inversion, Journal of
769 Earthquake Engineering, 1-22, <https://doi.org/10.1080/13632469.2020.1816232>, 2020.
- 770 Han, J., Kim, J., Park, S., Son, S., and Ryu, M.: Seismic vulnerability assessment and
771 mapping of Gyeongju, South Korea using frequency ratio, decision tree, and random
772 forest, Sustainability, 12(18), 7787, <https://doi.org/10.3390/su12187787>, 2020.
- 773 Hashemi, M., and Alesheikh, A. A.: Development and implementation of a GIS-based tool
774 for spatial modeling of seismic vulnerability of Tehran, Natural Hazards and Earth
775 System Sciences, 12(12), 3659-3670. <https://doi.org/10.5194/nhess-12-3659-2012>,
776 2012.
- 777 [Hicyilmaz, K. M. O., Wilcock, T., Izatt, C., Da Silva, J., and Langenbach, R.: Seismic
778 performance of dhajji dewari, In 15th World Conference on Earthquake Engineering,
779 Lisbon 24-28, 2012.](https://doi.org/10.5194/nhess-12-3659-2012)
- 780 Huang, F., Yu, Y., and Feng, T.: Automatic building change image quality assessment in high
781 resolution remote sensing based on deep learning, Journal of Visual Communication
782 and Image Representation, 63, 102585, <https://doi.org/10.1016/j.jvcir.2019.102585>,
783 2019.
- 784 Hwang, C. L., Lai, Y. J., and Liu, T. Y.: A new approach for multiple objective decision
785 making, Computers and operations research, 20(8), 889-899,
786 [https://doi.org/10.1016/0305-0548\(93\)90109-V](https://doi.org/10.1016/0305-0548(93)90109-V), 1993.
- 787 Iyengar, R. N., and Sharma, D.: Some earthquakes of Kashmir from historical
788 sources, Current Science, 71(4), 330-331, 1996.
- 789 Iyengar, R. N., Sharma, D., and Siddiqui, J. M.: Earthquake history of India in medieval
790 times, Indian Journal of history of science, 34, 181-238, 1999.
- 791 Iyengar, R. N., Sharma, D., and Siddiqui, J. M.: Earthquake history of India in medieval
792 times, Indian Journal of history of science, 34, 181-238, 1999.
- 793 Jena, R., and Pradhan, B.: Integrated ANN-cross-validation and AHP-TOPSIS model to
794 improve earthquake risk assessment, International Journal of Disaster Risk
795 Reduction, 50, 101723, <https://doi.org/10.1016/j.ijdr.2020.101723>, 2020.
- 796 Jena, R., Naik, S. P., Pradhan, B., Beydoun, G., Park, H. J., and Alamri, A.: Earthquake
797 vulnerability assessment for the Indian subcontinent using the Long Short-Term
798 Memory model (LSTM), International Journal of Disaster Risk Reduction, 66, 102642,
799 <https://doi.org/10.1016/j.ijdr.2021.102642>, 2021.
- 800 Jena, R., Pradhan, B., and Beydoun, G.: Earthquake vulnerability assessment in Northern
801 Sumatra province by using a multi-criteria decision-making model, International
802 journal of disaster risk reduction, 46, 101518.
803 <https://doi.org/10.1016/j.ijdr.2020.101518>, 2020.

- 804 Jia, L. J., Xiang, P., Wu, M., and Nishitani, A.: Swing story–lateral force resisting system
805 connected with dampers: Novel seismic vibration control system for building
806 structures, *Journal of Engineering Mechanics*, 144(2), 04017159,
807 [https://doi.org/10.1061/\(ASCE\)EM.1943-7889.0001390](https://doi.org/10.1061/(ASCE)EM.1943-7889.0001390), 2018.
- 808 Joshi, D., and Kumar, S.: Intuitionistic fuzzy entropy and distance measure based TOPSIS
809 method for multi-criteria decision making, *Egyptian informatics journal*, 15(2), 97-104,
810 <https://doi.org/10.1016/j.eij.2014.03.002>, 2014.
- 811 [Kamat, S. R., and Mahasur, A. A.: Air pollution: slow poisoning Chennai, The Hindu Survey](#)
812 [of Environment, 1997.](#)
- 813 Kircher, C. A., Nassar, A. A., Kustu, O., and Holmes, W. T.: Development of building
814 damage functions for earthquake loss estimation, *Earthquake spectra*, 13(4), 663-682.
815 <https://doi.org/10.1193%2F1.1585974>, 1997.
- 816 Kjekstad, O., and Highland, L.: Economic and social impacts of landslides, In *Landslides–*
817 *disaster risk reduction* (pp. 573-587), Springer, Berlin, Heidelberg, 2009.
- 818 Kontoes, C., Herekakis, T., Ieronymidi, E., Keramitsoglou, I., Fokaefs, A., Papadopoulos, G.
819 A., ... and Kiranoudis, C. T.: Mapping seismic vulnerability and risk of cities: the
820 MASSIVE project, *Journal of Earth Science and Engineering*, 2(8), 496, 2012.
- 821 Kumar, K. V., Martha, T. R., and Roy, P. S.: Mapping damage in the Jammu and Kashmir
822 caused by 8 October 2005 Mw 7.3 earthquake from the Cartosat–1 and Resourcesat–1
823 imagery, *International Journal of Remote Sensing*, 27(20), 4449-4459,
824 <https://doi.org/10.1080/01431160600702376>, 2006.
- 825 Lang, D. H., Kumar, A., Sulaymanov, S., and Meslem, A.: Building typology classification
826 and earthquake vulnerability scale of Central and South Asian building stock, *Journal*
827 *of Building Engineering*, 15, 261-277, <https://doi.org/10.1016/j.jobe.2017.11.022>,
828 2018.
- 829 Langenbach, R.: Don't tear it down: preserving the earthquake resistant vernacular
830 architecture of Kashmir, 2009.
- 831 Langenbach, R.: From “Opus Craticium” to the “Chicago Frame”: earthquake-resistant
832 traditional construction, *International Journal of Architectural Heritage*, 1(1), 29-59,
833 <https://doi.org/10.1080/15583050601125998>, 2007.
- 834 Lantada, N., Pujades, L. G., and Barbat, A. H.: Vulnerability index and capacity spectrum
835 based methods for urban seismic risk evaluation, A comparison. *Natural hazards*, 51(3),
836 501-524, <https://doi.org/10.1007/s11069-007-9212-4>, 2009.
- 837 Lawrence, W. R.: *The valley of Kashmir*. H. Frowde, 1895.
- 838 Lee, S., Panahi, M., Pourghasemi, H. R., Shahabi, H., Alizadeh, M., Shirzadi, A., ... and Bin
839 Ahmad, B.: Sevucas: A novel gis-based machine learning software for seismic

- 840 vulnerability assessment, Applied Sciences, 9(17), 3495.
841 <https://doi.org/10.3390/app9173495>, 2019.
- 842 Li, W., He, C., Fang, J., Zheng, J., Fu, H., and Yu, L.: Semantic segmentation-based building
843 footprint extraction using very high-resolution satellite images and multi-source GIS
844 data, Remote Sensing, 11(4), 403, <http://dx.doi.org/10.3390/rs11040403>, 2019.
- 845 Lu, X., Zhang, Q., Weng, D., Zhou, Z., Wang, S., Mahin, S. A., ... and Qian, F.: Improving
846 performance of a super tall building using a new eddy-current tuned mass
847 damper, Structural Control and Health Monitoring, 24(3), e1882,
848 <https://doi.org/10.1002/stc.1882>, 2017.
- 849 Mazza, F.: Modelling and nonlinear static analysis of reinforced concrete framed buildings
850 irregular in plan, Engineering structures, 80, 98-108,
851 <https://doi.org/10.1016/j.engstruct.2014.08.026>, 2014.
- 852 Meier, H. R., and Will, T.: Cultural heritage and natural disasters: risk preparedness and the
853 limits of prevention Kulturerbe und Naturkatastrophen: Möglichkeiten und Grenzen der
854 Prävention, 2008.
- 855 Mili, R. R., Hosseini, K. A., and Izadkhah, Y. O.: Developing a holistic model for earthquake
856 risk assessment and disaster management interventions in urban fabrics, International
857 journal of disaster risk reduction, 27, 355-365,
858 <https://doi.org/10.1016/j.ijdrr.2017.10.022>, 2018.
- 859 Mir, R. R., Parvez, I. A., Gaur, V. K., Chandra, R., and Romshoo, S. A.: Crustal structure
860 beneath the Kashmir basin adjoining the Western Himalayan syntaxis, Bulletin of the
861 Seismological Society of America, 107(5), 2443-2458.
862 <https://doi.org/10.1785/0120150334>, 2017.
- 863 [Mitsova, D., Shuster, W., and Wang, X.: A cellular automata model of land cover change to
864 integrate urban growth with open space conservation, Landscape and urban
865 planning, 99\(2\), 141-153. https://doi.org/10.1016/j.landurbplan.2010.10.001, 2011.](https://doi.org/10.1016/j.landurbplan.2010.10.001)
- 866 Mouroux, P., and Brun, B. L.: Presentation of RISK-UE project, Bulletin of Earthquake
867 Engineering, 4(4), 323-339, <https://doi.org/10.1007/s10518-006-9020-3>, 2006.
- 868 Nath, S. K., Adhikari, M. D., Devaraj, N., and Maiti, S. K.: Seismic vulnerability and risk
869 assessment of Kolkata City, India, Natural Hazards and Earth System Sciences, 15(6),
870 1103-1121, <https://doi.org/10.5194/nhess-15-1103-2015>, 2015.
- 871 [Nengroo, Z. A., Bhat, M. S., and Kuchay, N. A.: Measuring urban sprawl of Srinagar city,
872 Jammu and Kashmir, India, Journal of Urban Management, 6\(2\), 45-55.
873 https://doi.org/10.1016/j.jum.2017.08.001, 2017.](https://doi.org/10.1016/j.jum.2017.08.001)
- 874 [Nyimbili, P. H., Erden, T., and Karaman, H.: Integration of GIS, AHP and TOPSIS for
875 earthquake hazard analysis, Natural hazards, 92\(3\), 1523-1546.
876 https://doi.org/10.1007/s11069-018-3262-7, 2018.](https://doi.org/10.1007/s11069-018-3262-7)

- 877 Oliveira, C. S.: Seismic vulnerability of historical constructions: a contribution, *Bulletin of*
878 *Earthquake Engineering*, 1(1), 37-82, <https://doi.org/10.1023/A:1024805410454>, 2003.
- 879 Panahi, M., Rezaie, F., and Meshkani, S. A.: Seismic vulnerability assessment of school
880 buildings in Tehran city based on AHP and GIS, *Natural Hazards and Earth System*
881 *Sciences*, 14(4), 969-979, <https://doi.org/10.5194/nhess-14-969-2014>, 2014.
- 882 Parry, J. A., Ganaie, S. A., Nengroo, Z. A., and Bhat, M. S.: Spatial Analysis on the provision
883 of Urban Amenities and their Deficiencies-A Case Study of Srinagar City, Jammu and
884 Kashmir, India. *Research on Humanities and Social Sciences*, 2(6), 192-218, 2012.
- 885 Pathak, J.: Earthquake vulnerability assessment of Guwahati urban centre, In *Proceedings of*
886 *the 14th World Conference on Earthquake Engineering*, (WCEE'2008).
- 887 Priestley, M. J. N.: Performance based seismic design, *Bulletin of the New Zealand society*
888 *for earthquake engineering*, 33(3), 325-346, [https://doi.org/10.5459/bnzsee.33.3.325-](https://doi.org/10.5459/bnzsee.33.3.325-346)
889 [346](https://doi.org/10.5459/bnzsee.33.3.325-346), 2000.
- 890 Rahman, N., Ansary, M. A., and Islam, I.: GIS based mapping of vulnerability to earthquake
891 and fire hazard in Dhaka city, Bangladesh, *International journal of disaster risk*
892 *reduction*, 13, 291-300, <https://doi.org/10.1016/j.ijdr.2015.07.003>, 2015.
- 893 Rajendran, C. P., and Rajendran, K.: The status of central seismic gap: a perspective based on
894 the spatial and temporal aspects of the large Himalayan
895 earthquakes, *Tectonophysics*, 395(1-2), 19-
896 39, <https://doi.org/10.1016/j.tecto.2004.09.009>, 2005.
- 897 Rashed, T., and Weeks, J.: Assessing vulnerability to earthquake hazards through spatial
898 multicriteria analysis of urban areas, *International Journal of Geographical Information*
899 *Science*, 17(6), 547-576, <https://doi.org/10.1080/1365881031000114071>, 2003.
- 900 Rashid, I., Romshoo, S. A., and Abdullah, T.: The recent deglaciation of Kolahoi valley in
901 Kashmir Himalaya, India in response to the changing climate, *Journal of Asian Earth*
902 *Sciences*, 138, 38-50, <https://doi.org/10.1016/j.jseaes.2017.02.002>, 2017.
- 903 Rautela, P., Joshi, G. C., Bhaisora, B., Dhyani, C., Ghildiyal, S., and Rawat, A.: Seismic
904 vulnerability of Nainital and Mussoorie, two major Lesser Himalayan tourist
905 destinations of India, *International journal of disaster risk reduction*, 13, 400-408.
906 <https://doi.org/10.1016/j.ijdr.2015.08.008>, 2015.
- 907 Rezaie, F., and Panahi, M.: GIS modeling of seismic vulnerability of residential fabrics
908 considering geotechnical, structural, social and physical distance indicators in Tehran
909 using multi-criteria decision-making techniques, *Natural Hazards and Earth System*
910 *Sciences*, 15(3), 461-474, <https://doi.org/10.5194/nhess-15-461-2015>, 2015.
- 911 Riedel, I., Guéguen, P., Dalla Mura, M., Pathier, E., Leduc, T., and Chanussot, J.: Seismic
912 vulnerability assessment of urban environments in moderate-to-low seismic hazard

- 913 regions using association rule learning and support vector machine methods, *Natural*
914 *hazards*, 76(2), 1111-1141. <https://doi.org/10.1007/s11069-014-1538-0>, 2015.
- 915 Ritchie, H., and Roser, M.: *Urbanization, Our world in data*, 2018.
- 916 Saaty, T. L.: *The Analytic Hierarchy Process* McGraw Hill, New York (1980) 324.
- 917 [Sana, H., and Nath, S. K.: Liquefaction potential analysis of the Kashmir valley alluvium,](https://doi.org/10.1016/j.soildyn.2016.03.009)
918 [NW Himalaya, *Soil Dynamics and Earthquake Engineering*, 85, 11-18.](https://doi.org/10.1016/j.soildyn.2016.03.009)
919 <https://doi.org/10.1016/j.soildyn.2016.03.009> 2016.
- 920 Sana, H.: Seismic microzonation of Srinagar city, Jammu and Kashmir, *Soil Dynamics and*
921 *Earthquake Engineering*, 115, 578-588, <https://doi.org/10.1016/j.soildyn.2018.09.028>,
922 2018.
- 923 Sandhu, S., Gupta, K., Khatriker, S., Bhardwaj, A., and Kumar, P.: Evaluation of Cartosat-2E
924 Data for Large-Scale Urban Mapping, *Journal of the Indian Society of Remote*
925 *Sensing*, 49(7), 1593-1602, <https://doi.org/10.1007/s12524-021-01337-2>, 2021.
- 926 Saputra, A., Rahardianto, T., Revindo, M. D., Delikostidis, I., Hadmoko, D. S., Sartohadi, J.,
927 and Gomez, C.: Seismic vulnerability assessment of residential buildings using logistic
928 regression and geographic information system (GIS) in Pleret Sub District (Yogyakarta,
929 Indonesia), *Geoenvironmental Disasters*, 4(1), 1-33, [https://doi.org/10.1186/s40677-](https://doi.org/10.1186/s40677-017-0075-z)
930 [017-0075-z](https://doi.org/10.1186/s40677-017-0075-z), 2017.
- 931 Shadmaan, M. S., and Islam, M. A. I.: Estimation of earthquake vulnerability by using
932 analytical hierarchy process, *Natural Hazards Research*,
933 <https://doi.org/10.1016/j.nhres.2021.10.005>, 2021.
- 934 Sinha, N., Priyanka, N., and Joshi, P. K.: Using spatial multi-criteria analysis and ranking
935 tool (SMART) in earthquake risk assessment: A case study of Delhi region,
936 *India, Geomatics, Natural Hazards and Risk*, 7(2), 680-701.
937 <https://doi.org/10.1080/19475705.2014.945100>, 2016.
- 938 Somvanshi, S. S., Kunwar, P., Tomar, S., and Singh, M.: Comparative statistical analysis of
939 the quality of image enhancement techniques, *International Journal of Image and Data*
940 *Fusion*, 9(2), 131-151, <https://doi.org/10.1080/19479832.2017.1355336>, 2018.
- 941 Stein, A. S.: *Kalhana's Rajatarangini: A Chronicle of the Kings of Kashmir*, Constable and
942 Co, Calcutta 2 (1898), 555.
- 943 Stein, S. A.: *Kalhana's Rājatarāṅgiṇī, or Chronicle of the Kings of Kashmir*. Education
944 Society's Press, 1982.
- 945 Vigne, G. T.: *Travels in Kashmir, Ladak, Iskardo, the countries adjoining the mountain-*
946 *course of the Indus, and the Himalaya, north of the Panjab (Vol. 1)*. H. Colburn, 1842

- 947 Yariyan, P., Avand, M., Soltani, F., Ghorbanzadeh, O., and Blaschke, T.: Earthquake
948 vulnerability mapping using different hybrid models, *Symmetry*, 12(3), 405,
949 <https://doi.org/10.3390/sym12030405>, 2020.
- 950 Yousuf, M., Bukhari, S. K., Bhat, G. R., and Ali, A.: Understanding and managing
951 earthquake hazard visa viz disaster mitigation strategies in Kashmir valley, NW
952 Himalaya, *Progress in Disaster Science*, 5, 100064,
953 <https://doi.org/10.1016/j.pdisas.2020.100064>, 2020.
- 954 Zanini, M. A., Faleschini, F., Zampieri, P., Pellegrino, C., Gecchele, G., Gastaldi, M., and
955 Rossi, R.: Post-quake urban road network functionality assessment for seismic
956 emergency management in historical centres, *Structure and Infrastructure
957 Engineering*, 13(9), 1117-1129, <https://doi.org/10.1080/15732479.2016.1244211>, 2017.