

Sensitivity analysis of a built environment exposed to debris flow impacts with 3-D numerical simulations

Xun Huang^{1,2}, Zhijian Zhang¹, Guoping Xiang^{3,4}

¹Geography and Tourism College, Chongqing Normal University, Chongqing, 401331, China

5 ²Chongqing Key Laboratory of Surface Process and Environment Remote Sensing in the Three Gorges Reservoir Area, Chongqing Normal University, Chongqing, 401331, China

³405 Geological Brigade of Sichuan Bureau of Geology & Mineral Resources, Dujiangyan, 611830, China

⁴State Key Laboratory of Geohazard Prevention and Geoenvironment Protection, Chengdu University of Technology, Chengdu, 610059, China

10 *Correspondence to:* Xun Huang (huangxun@cqnu.edu.cn)

Abstract. The characteristics of exposed built environments have a significant effect on debris flow impacts on buildings, but knowledge about their interactions is still limited. This paper presents a sensitivity analysis on the peak impact forces on a whole building resulting from the built environment parameters, including the orientation, opening scale of the target building, and azimuthal angle and distance of surrounding buildings. The impact forces were obtained using the FLOW-3D model, a computational fluid dynamics approach, verified through the physical modeling results. The results show that the surrounding buildings' properties have significant roles in determining the peak impact forces. A shielding effect or canalization effect, which reduce or increase impact forces, respectively, can be produced by changing the azimuth angle. A deflection wall for building protection is recommended according to the shielding effect. A narrowed flow path, determined by both the azimuth angle and distance, has a significant effect on the variation in impact forces. In addition, it is concluded that a splitting wedge should be designed following a criterion of avoiding the highest flow velocity - the smallest approaching angle - appearing near the longest wall element. The protruding parts caused by changing the building's orientation contribute to increasing impact loads within a shielding area. A limited opening effect is observed on the whole building if there is sufficient time for material intrusion. The insights gained contribute to a better understanding of building vulnerability indicators and local migration design against debris flow hazard.

25 1 Introduction

In mountain environments, buildings are the elements of greatest concern with regard to debris flow hazard risks (Zeng et al., 2015; Fuchs et al., 2019; Luo et al., 2020). Compared to strong structures such as railway bridges, common residential buildings are more easily damaged by debris flows (Hu et al., 2012; Huang and Tang, 2014). Furthermore, the damage to buildings has been demonstrated to contribute greatly to casualties and property loss based on a large number of catastrophic debris flow events (Tang et al., 2011; Zhang et al., 2018; Chen et al., 2021). In recent decades, the understanding, assessment

and eventual reduction in building exposure and vulnerability have been brought into focus in mountain hazard mitigation (Holub and Fuchs, 2009; Fuchs et al., 2015, 2017).

In the classical S-shaped vulnerability curves, a quantitative assessment approach based on interactions between process intensities and building damage, considerable ranges in the loss ratio were found for moderate process intensities (Fuchs et al., 2012). This is in good agreement with the fact that two buildings located exactly at the same place, despite experiencing the same process intensity, do not always suffer the same degree of loss (Papathoma-Köhle, 2016; Papathoma-Köhle et al., 2017). Process intensity is not decisive in terms of building damage, and some building characteristics of the building itself and its surroundings play critical roles in the degree of damage induced by debris flow. This understanding has also been confirmed by the spatial distribution of building damage ratios in the debris flow torrents of the Austrian Alps (Fuchs et al., 2012).

Currently, the characteristics of an exposed building, including the orientation, openings and surrounding environments, have been reported to be important to the impact forces of torrential hazards (Jakob et al., 2012; Sturm et al., 2018a). As far as building orientation is concerned, it is commonly recommended to individually analyze wall elements of different orientations. It is widely accepted that walls with faces perpendicular to the stream are generally exposed to higher dynamic pressures due to the larger effective contact area (Mead et al., 2017; Manawasekara et al., 2016). However, limited studies to date have examined the impact performance of a whole building. In terms of building openings such as windows, doors and light shafts, it is well established that the impact forces on the building envelope tend to decrease once the flow penetrates openings (Mazzorana et al., 2014; Gems et al., 2016). However, this process is regarded to be at the expense of greater building loss due to the higher impact forces on interior walls and greater indoor property losses (Totschnig et al., 2011; Mead et al., 2017). Recent developments regarding the surroundings of built environments have attracted much attention. The existence of surrounding buildings definitely reduces the impact forces on a particular building due to the deflection of the flow and the shielding of the element at risk; however, this may also increase the impact forces by redirecting or canalizing the flow and forcing the flow to impact the building (Gao et al., 2017; Sturm et al., 2018b). Therefore, it remains difficult to make a general statement regarding whether the effect of surrounding buildings is negative or positive (Sturm et al., 2018a).

Although considerable efforts have been devoted to the relationships between building characteristics and debris flow impacts, only some simple trends, rather than quantitative results about the effects of factors, have been determined. Knowledge regarding the interactions between the built environment parameters and impact loads is still limited, and considerable research gaps still exist regarding (1) the identification of the built environment parameters with the greatest influence on debris flow impacts; (2) detailed explanations of each built environment factor; and (3) the interrelations between these parameters.

Because field measurement of debris flow impacts is nearly impossible, laboratory experiments and numerical modeling are regarded as feasible alternatives for capturing interactions, and they may provide insights into the impact of debris flows in the interior and against the exterior of buildings (Gems et al., 2016; Papathoma-Köhle, 2016). In this study, a sensitivity

65 analysis was conducted based on 3-D numerical simulation, and the effects of various built environment factors on the
impact forces of debris flows were quantitatively analyzed and compared. Debris flow numerical simulations were
conducted using the FLOW-3D model, a commercial Computational Fluid Dynamics (CFD) program. Kim et al. (2021)
conducted a sensitivity analysis of five parameters for fine sediment trapping and energy reduction with a debris flow slit-
type barrier via a FLOW-3D numerical model and metamodels. These kinds of methods offer opportunities for performing a
70 sensitivity analysis with limited data (Kim et al., 2019, Kim et al., 2021). These results can be applied to determine the
indicators and to improve weightings for reliable building vulnerability assessment and to enhance the knowledge about built
environment improvement and local migration design.

In the following, the reliability of the numerical model was first confirmed by comparison with a physical dam-break
experiment. A sensitivity analysis was then performed using metamodels and global sensitivity analysis (GSA). The built
75 environment parameters considered in this study were the orientation (*Or*) and opening scale (*Op*) of the target building and
the azimuthal angle (*A*) and distance (*D*) of the surrounding buildings. Finally, the effects of each parameter and their
interactions on the peak impact forces of the overall building were explained in detail.

2 Numerical modeling of debris flow

2.1 Model description

80 The identification of complex geometry and three-dimensional flow tracking are the key steps in the process-response
simulation between buildings and debris flows. However, the current numerical codes used for debris flow simulations
consider the flow depth to be small relative to the tangential length scale and simplify this factor to represent shallow water
flow. They have only second-order accuracy in space, as the effects of complex three-dimensional topography and the
vertical mobility of debris flows are not considered (Zhang et al., 2021b). To avoid the above-mentioned limitations, it is
85 necessary to use an efficient 3-D numerical approach to accurately capture the debris flow behaviors considering the
influences of building geometry.

FLOW-3D, a three-dimensional finite-volume-based CFD model, is considered one of the most efficient tools for predicting
hydraulic phenomena with strong turbulent components and inconsistent free water surfaces. FLOW-3D was designed to
address the Reynolds-Averaged Navier–Stokes equations (RANS) (Jones and Launder, 1972), implementing the Volume of
90 Fluid (VOF) methods (Hirt and Nichols, 1981) and Fractional Area/Volume Obstacle Representation (FAVOR) (Hirt and
Sicilian, 1985). The advanced Tru-VOF method can be used to precisely track the three-dimensional transient free fluid
surface. Its unique FAVOR mesh processing technology can define independent and complex geometry within the structured
mesh and avoid the shortcomings of the traditional finite difference method in complex boundary fitting (Zhang et al.,
2021b). As a result of a robust capacity to deal with the data in both the fluid and solid phases, the FLOW-3D code is
95 considered to be appropriate for analyzing the interactions between debris flows and exposed buildings.

In this study, the renormalized group (RNG) model-based k- ϵ turbulence model and the general moving objects (GMO) model are applied to build fluid-solid coupled model of the debris flow impact. The RNG k- ϵ model is a modification of the standard k- ϵ model, which takes the turbulent vortex into account and provides an analytic formula for Prandtl number, as well as an analytic formula for low Reynolds number flow viscosity (Franco et al., 2021). These features make the RNG model more reliable and accurate for a broader flow than the standard k- ϵ model (Yin et al. 2015). In recent years, the RNG model has been applied in simulations of landslide surges (Yin et al., 2015; Hu et al., 2020), the entrainment effects of debris avalanches (Hu et al., 2019), dam-break floods (Zhuang et al. 2020), and the runout characteristics of debris flows (Zhang et al., 2021b), with good results.

The two transport equations of RNG k- ϵ model in FLOW-3D are as following:

$$\frac{\partial k_T}{\partial t} + \frac{1}{V_F} \left\{ uA_x \frac{\partial k_T}{\partial x} + vA_y \frac{\partial k_T}{\partial y} + wA_z \frac{\partial k_T}{\partial z} \right\} = P_T + G_T + Diff_{k_T} - \epsilon_T \quad (1)$$

$$\frac{\partial \epsilon_T}{\partial t} + \frac{1}{V_F} \left\{ uA_x \frac{\partial \epsilon_T}{\partial x} + vA_y \frac{\partial \epsilon_T}{\partial y} + wA_z \frac{\partial \epsilon_T}{\partial z} \right\} = \frac{CDIS1 \cdot \epsilon_T}{k_T} (P_T + CDIS3 \cdot G_T) + Diff_{\epsilon} - CDIS2 \frac{\epsilon_T^2}{k_T} \quad (2)$$

where k_T is the turbulent kinetic energy, V_F is the fractional volume open to flow, A_x , A_y and A_z are the fractional area open to flow in the x, y and z directions, respectively. P_T is the turbulent kinetic energy production term, G_T is the buoyancy production term, $Diff$ is the diffusion term, and ϵ_T is the turbulence dissipation term. In the RNG model of FLOW-3D, $CDIS1$ and $CDIS3$ are dimensionless user-adjustable parameters that have defaults of 1.42 and 0.2, respectively, and $CDIS2$ is determined from k_T and P_T (Flow Science, Inc., 2014).

In this study, a series of debris flow simulations based on the RNG model with various building characteristics were executed. From the characteristics of RNG k- ϵ model, the type of debris flow involved in this study was determined as mudflow or viscous debris flow, in which a single-phase fluid was assumed and solid particles were treated as suspension and mixed with the fluid phase well. The division between solid and fluid was assumed to be difficult, therefore, the granular deposition was not considered in this study.

With the help of GMO model in FLOW-3D, the combined hydraulic force due to normal pressure and shear stress can be calculated in the space system. The normal pressure and shear force of an impacted object in x, y and z directions can be gained at each time step. Due to the complex geometry and variable built environments, the impacted elements of target building were changing in the different scenarios. In this study, therefore, the target building was treated as a whole bearing structure to keep consistency of analysis. All over the grids covering building surface would be calculated when contacting with the flow. The GMO model can simulate the rigid body motion, which is either user prescribed or dynamically coupled with fluid flow. In this study, the target building and surrounding buildings were all prescribed to be the fixed and non-deformable rigid models. The raw impact force data was collected at interval of 0.001 s from the numerical code. To reduce the uncertainty, a simple data noise reduction approach, that the peak impact forces were obtained from the average values over 10 points in the timeline (0.01 s), was executed (Song et al., 2021).

2.2 Model validation

The interaction between a dam-break and the structure has become a classic benchmark for the validation of fluid-structure interaction (Liu et al., 2021). The accuracy of the model will be validated by means of the experimental setup previously used in Gomez-Gesteira and Dalrymple (2004). This experiment has been referred as a “bore in a box”, where it was a dam-break and structure-impact problem confined within a rectangular box. The geometric dimensions of the experimental model are shown in Fig. 1. The rectangular tank is 1.60 m long, 0.61 m wide and 0.75 m high. The volume of water initially contained behind a thin gate at one end of the box is 0.4 m long, 0.61 m wide and 0.3 m high. An initial layer of water (approximately 1 cm deep) existed on the bottom of the tank. The obstacle, which is 0.12 m \times 0.12 m \times 0.75 m in size, is placed 0.5 m downstream of the gate and 0.24 m from the nearest sidewall of the tank. The time history of the impact force on the structure was measured with a load cell.

In the numerical simulation, the analysis domain was discretized into a grid with a cell size of 0.01 m, which was equal to a cube of 0.01 m side in 3-D model. The fluid properties were set to be the density of 1000 kg m⁻³ and viscosity of 0.001 Pa·s. The motion of fluid was computed by means of RNG k- ϵ model in FLOW-3D. The obstacle and gate were controlled by the GMO module, specifically this obstacle was set as a fixed and non-deformable rigid body, and the gate was prescribed to be lifted 0.3 m along the z^+ direction. The time history of impact forces and the corresponding dynamic processes were selected to validate the accuracy of the numerical simulation. The direction of the force was considered positive when exerted in the y^+ direction.

Fig. 2a shows the agreement of numerical forces obtained by means of the RNG and GMO coupled model with experimental data, particularly the positions of both peaks, which correspond to the wave hitting the front and the back of the structure and were reproduced perfectly by the numerical model. Fig. 2b shows the evolution of the wave generated by the dam-break and the initial layer of water on the bottom. At $t = 0.32$ s, the wave is colliding with the front of the obstacle. At $t = 0.58$ s, the wave is wrapping around the structure, colliding together and continues moving toward the tank wall. At $t = 1.44$ s, the reflected wave is hitting the back of the obstacle.


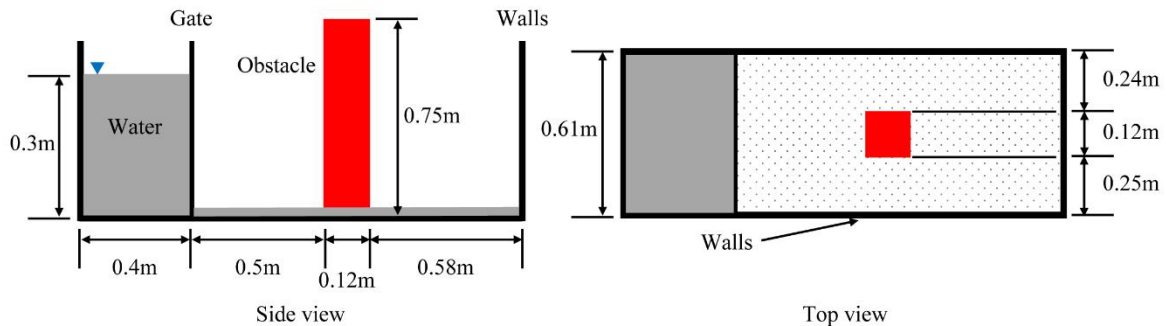


Figure 1. The geometric dimensions of the experimental dam-break model

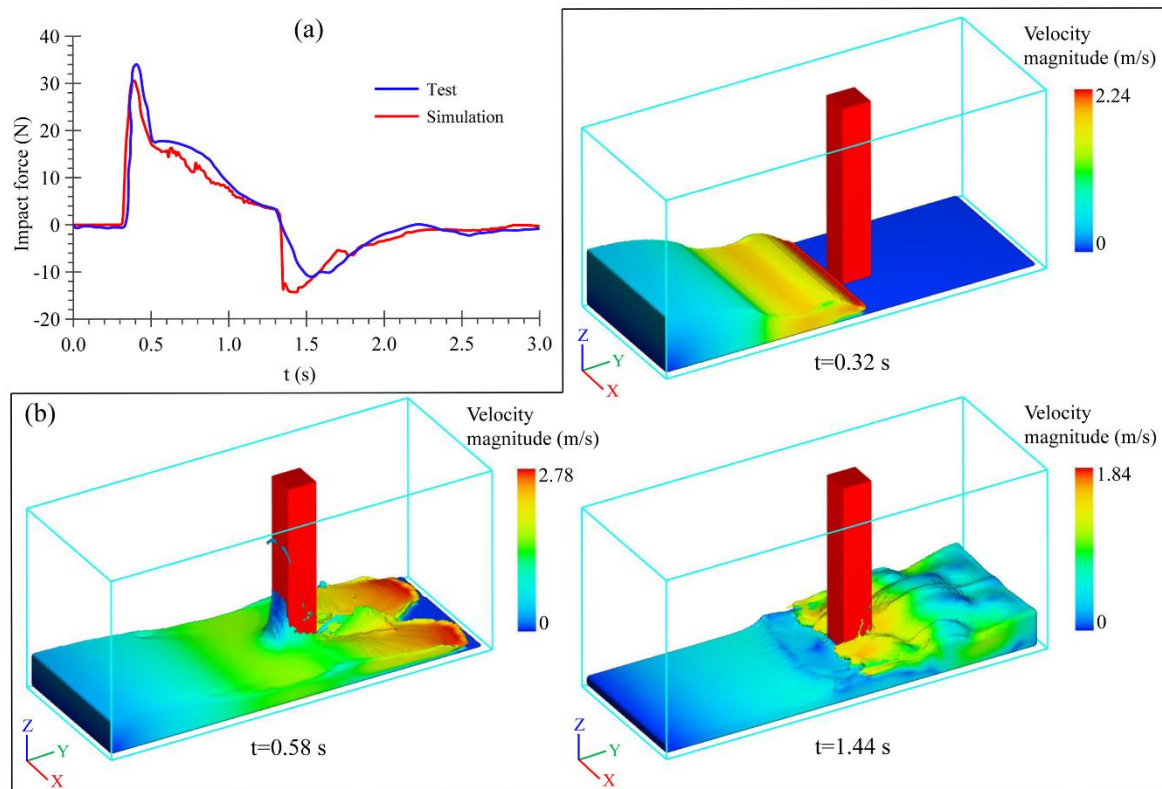

155 **Figure 2. The dam-break simulation (a) comparison between numerical (red line) and experimental values (blue line) of the force exerted on the structure; (b) wave evolution (t = 0.32 s) the wave colliding with the front of the obstacle; (t = 0.58 s) the wave wrapping around the structure, colliding together and continues moving toward the tank wall; (t = 1.44 s) the reflected wave hitting the back of the obstacle.**

2.3 Numerical model set up


160 As shown in Fig. 3, a depositional fan model with a length of 120 m, width of 120 m and monogradient of 5° was numerically constructed. This deposition fan was treated as a rigid bed model, therefore, the bed material scour would not happen in this study. To sum up, the bed variation induced by sediment transport processes, including sediment deposition and bed scour, was not considered. The surface roughness (k) of 0.05 m was set, meaning that the deposition fan surface was roughened with 5 cm diameter particles, for the representation of the natural environment surrounding mountainous buildings.

165 The realistic debris flow inflow discharge and duration are essential for a truthful analysis of impact forces. A 3-D numerical simulation with a realistic hydrograph, however, needs a large number of computer memory and processing time. It is much hardly acceptable for the sensitivity analysis, in which the sufficient experimental groups are required. In this study, an inflow with a time-invariance discharge of $500 \text{ m}^3 \text{ s}^{-1}$ and an initial velocity of 10 m s^{-1} , which can be of some interest for a large magnitude of debris flow, was set at the top center of the deposition fan. The inflow profile was rectangular, with a channel base width of 20 m, flow depth of 2.5 m and inclination angle of 5° . A computation time of 10 s was set for the

170

FLOW-3D modelling, that was 10 s after the debris flow was released from the inflow point. During this time, the debris flow head was ensured to move to the edge of deposition fan and the target building was fully exposed. It is important to emphasize that, therefore, the peak impact force involved in this study was the maximum value limited in the computation time of 10 s under a fixed discharge of $500 \text{ m}^3 \text{ s}^{-1}$. In order to compare with some realistic building damage cases, for example the Qipan gully and Zhouqu debris flows in the west of China, the rheological properties of numerical model was set as the viscous debris flow. Therefore, the debris flow density was set as 2000 kg m^{-3} and viscosity was empirically $1.0 \text{ Pa}\cdot\text{s}$ (Takahashi, 2007).

The target and surrounding building models, with a length of 15 m, width of 10 m, height of 6 m (equal to 2 floors) and wall thickness of 0.35 m, were designed in accordance with representative buildings in the mountainous areas of the western China. To maintain a balance between the computational accuracy and time cost, the whole computation domain was discretized at intervals of 0.5 m. The planar center of the target building was set 80 m downstream of the debris flow inflow, as shown in Fig. 3. The embedded domain of target building should be refined further following two principles: (1) its cell size must be less than the wall thickness of 0.35 m. This is because the computation grids can not rotate following the changing orientations of target building. Once the building rotating, some lacks of building surface will be produced, due to the half of a single cell can not be covered by the wall element. (2) the boundaries of the embedded and external meshes must be overlapped for the computation stability, that is the external cell size is a multiple of embedded cell size. To sum up, the cell size of target building domain was determined as 0.25 m. The total number of computational cells was 1,645,600 and the computer memory of a single simulation was about 11 GB.

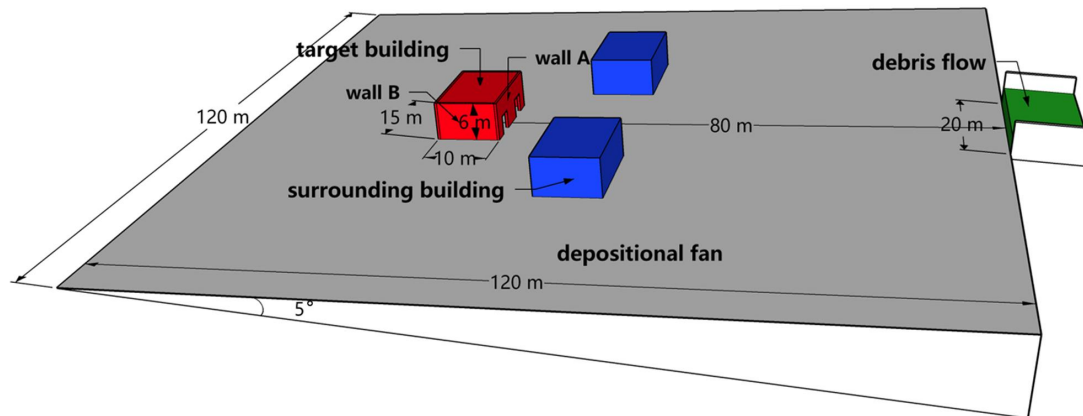


190 **Figure 3. Overview on the components of three-dimensional deposition fan model for debris flow impact simulation on buildings.**

Because the sensitivity analysis requires extensive simulation results to consider the combinations of all the factors, the representative factors that could be adjusted in the FLOW-3D simulation were chosen (Kim et al., 2021). The orientation (*Or*) and opening scale (*Op*) of the target building and the azimuthal angle (*A*) and distance (*D*) of the surrounding buildings with respect to the target building were considered to be the key built environment parameters for debris flow impact loads.

195 In this study, the orientation (Or) of the target building was defined as the angle between the building's long axis and the debris flow's main flow path, as shown in red and green in Fig. 4a and ranged from 0° to 90° . An orientation of 0° meant that the long axis of the building was parallel to the debris flow path, and the perpendicular case was represented by an orientation of 90° . As far as building openings are concerned, it is well known that several features of openings are of great importance in terms of building damage, such as which wall they are located on and their size, height and structure (Gems et al., 2016; Faisal et al., 2018; Papatoma-Köhle et al., 2019). However, it remains challenging to analyze these parameters with a single model. In this study, the size of the opening was only selected to be analyzed to reduce computing costs. As shown in Fig. 4b, two symmetrical openings with a constant height of 3 m were placed in wall A. Therefore, the opening scale (Op) was defined as the proportion of the total opening width (double w) to the length of wall A.

205 The azimuthal angle (A) of the surrounding buildings was defined as the angle between the line of the geometric center of buildings (e.g., line B-B' in Fig. 4c) and the main flow path (green line in Fig. 4c). There were no surrounding buildings downstream of the target building. Except for the scenario of azimuthal angle 0° , two surrounding buildings were placed symmetrically on both sides of the target building. The distance (D) between the surrounding building and target building was defined as the straight-line distance between two points located on the overlap between the line of the buildings' geometric centers and building envelope, as shown by the orange line C-C' in Fig. 4c.

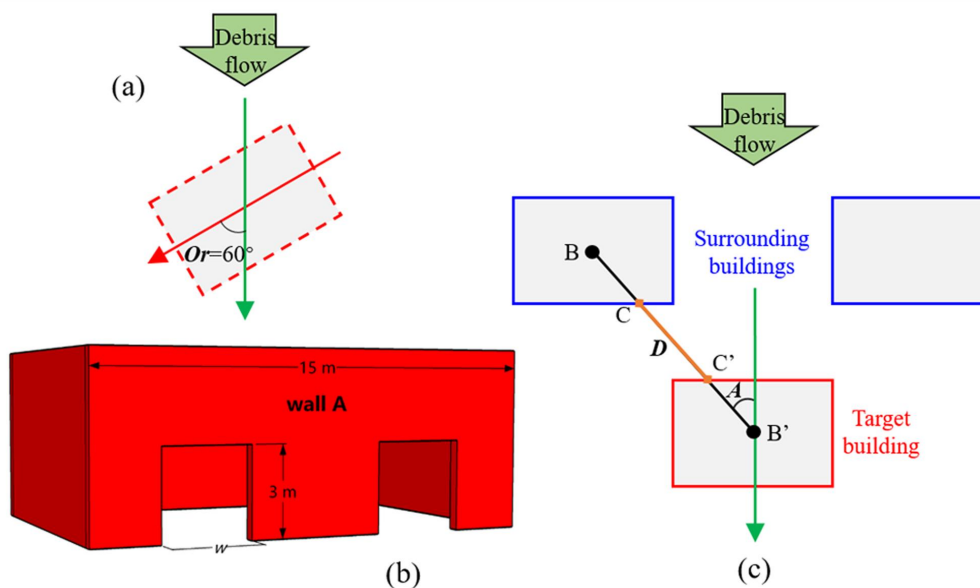

210

Figure 4. The schematic drawings of the target building and surrounding buildings: (a) orientation of target building (Or); (b) opening scale of the target building (Op); and (c) azimuth angle (A) and distance (D) of surrounding building with respect to the target building.

3 Sensitivity analysis

215 3.1 Metamodel modeling

Abundant simulation results are required for assessing the effect of built environment parameters on the debris flow impact force. Due to the considerable time consumed and computational cost, a mathematical metamodel was constructed using a small fraction of the simulation results. A metamodel, referred to as a surrogate model, is a ‘model of a model’, a simplified model of an actual model using mathematical construction. Numerous accurate simulation results can be generated based on the metamodel relation or algorithm between input and output (Booker et al., 1999; Hoffman et al., 2003). Of the various metamodel modeling methods, the Kriging model - or Gaussian process (GP) - is considered to be the most suitable for the unbiased prediction of a deterministic model and is also fitted to simulation I/O data obtained for global experimental areas (Kleijnen, 2016). In this study, the GP was selected and executed through JMP® Pro 16.0.0, a commercial statistical software designed by SAS Institute Inc.

225 In this study, the metamodels representing the objective function were created using the 160 samples shown in Table 2. In the metamodel modeling, the variation range of the orientation (*Or*) was from 0° to 90°, the opening scale (*Op*) was from 0 to 0.8, the azimuthal angle (*A*) was 0° to 90° and the distance (*D*) was from 5 m to 30 m. The coefficient of determination (R^2) of regression analysis in the GP model was 0.86. At this accuracy, a total of 10,000 new simulation results were obtained from random values in the specified ranges of the four input variables for use in the subsequent sensitivity analysis.

230 **Table 2. Simulation conditions.**

Group	Number of cases	Target building's properties		Surrounding buildings' properties	
		Orientation (<i>Or</i> , °)	Opening scale (<i>Op</i>)	Azimuth angle (<i>A</i> , °)	Distance (<i>D</i> , m)
A1 ^a	5	0, 30, 45, 60, 90	0.4	45	15
A2	25	0	0.4	0, 30, 45, 60, 90	5, 10, 15, 20, 30
A3	25	30	0.4	0, 30, 45, 60, 90	5, 10, 15, 20, 30
A4	25	60	0.4	0, 30, 45, 60, 90	5, 10, 15, 20, 30
A5	5	90	0, 0.2, 0.4, 0.6, 0.8	45	15
A6	25	90	0.2	0, 30, 45, 60, 90	5, 10, 15, 20, 30
A7	25	90	0.4	0, 30, 45, 60, 90	5, 10, 15, 20, 30
A8	25	90	0.6	0, 30, 45, 60, 90	5, 10, 15, 20, 30
B1 ^b	5	0, 30, 45, 60, 90	0	null	null
B2	3	45	0.4	0	5, 10, 15
B3	5	90	0, 0.2, 0.4, 0.6, 0.8	null	null

^a Simulations group ‘A’ were designed for the metamodel modeling.

^b Simulations group ‘B’ were designed for the detailed interpretations of sensitivity analysis results.

3.2 Sensitivity analysis

Sensitivity analysis aims to understand the relative importance of uncertain input variables to the model response (Zhang et al., 2021a). As opposed to local sensitivity analysis, GSA can be performed by an all-at-a-time method, where output

variations are induced by varying all input factors simultaneously, and thus, the sensitivity of each factor considers the direct influence of the factor as well as the joint influence caused by the factor interactions (Kim et al., 2019). GSA allows a ranking among the input parameters to be established according to their influence on the variability of the output. In this study, GSA was conducted to simultaneously consider both the main and interaction effects of input parameters on debris flow impact. A variance-based GSA (VBSA), also referred to as Sobol's indices, is usually recommended. This method is applicable over the whole space of random input data and can also deal with nonlinear responses and measure the effect of interactions in nonadditive systems (Saltelli et al., 2010). The basic principle of Sobol's indices is that the variance of model output is decomposed into fractions within a probabilistic framework that can be attributed to inputs and sets of inputs (Sobol, 1993):

$$V = \text{Var}[f(x)] = \sum_{i=1}^d V_i + \sum_{1 \leq i < j \leq d} V_{ij} + \dots + V_{1,2,\dots,d} \quad (3)$$

where the partial variances are calculated as follows:

$$V_{i_1, \dots, i_s} = \int f_{i_1, \dots, i_s}^2(x_{i_1}, \dots, x_{i_s}) p(x_{i_1}, \dots, x_{i_s}) dx_{i_1}, \dots, x_{i_s}, \quad s = 1, \dots, d \quad (4)$$

Sobol's indices are defined as the relative contribution of the partial variances to the total variance following the decomposition in Eq. (1)

$$S_{i_1, \dots, i_s} = \frac{V_{i_1, \dots, i_s}}{V} = \frac{V_{i_1, \dots, i_s}}{\sum_{i=1}^d V_i + \sum_{1 \leq i < j \leq d} V_{ij} + \dots + V_{1,2,\dots,d}} \quad (5)$$

such that:

$$\sum_{i=1}^d S_i + \sum_{1 \leq i < j \leq d} S_{ij} + \dots + S_{1,2,\dots,d} = 1 \quad (6)$$

where the index S_i measures the separate contribution of each variable x_i to the output variance without interaction with any other inputs; hence, S_i is commonly referred to as the first-order effect index or the main effect index. The higher-order indices in Eq. (4) measure the interactive contribution to the total variance. Using S_i , S_{ij} and higher-order indices, we can therefore infer the impacts of each input variable and the interaction of variables on the output variance (Zhang et al., 2021a). In this study, only the second-order effect index, reflecting the interaction between every two factors, was considered. The total contribution of variable i is as follows:

$$S_i^T = \sum_{\{j\} \subset \{i_1, \dots, i_s\}} \frac{V_{i_1, \dots, i_s}}{V} \quad (7)$$

which measures the contributions of variable x_i and its interactions to the output variance. If the input x_i has a $S_i^T=0.5$, then it contributes 50% of the overall variance of output. In Sobol sensitivity analysis, the input factors with a sensitivity index below 0.01 are usually considered noninfluential to the output (Sarrazin et al., 2016). Unlike the first-order indices,

$$\sum_{i=1}^d S_i^T \geq 1 \quad (8)$$

because the interaction effect between, for example, x_i and x_j is included in both S_i^T and S_j^T . The sum of S_i^T is equal to 1 if and only if the model is purely additive without any interaction effects.

In this study, Sobol's global sensitivity indices were calculated using the SobolGSA model, a general purpose GUI-driven GSA software developed by Kucherenko and Zaccheus (<https://www.imperial.ac.uk/process-systems->

engineering/research/free-software/sobolgsa-software/). SobolGSA evaluates the effect of a factor while all other factors are varied as well, and thus, it accounts for interactions between variables and does not depend on the choice of a nominal point like local sensitivity analysis methods. The set of available GSA techniques includes screening method- (the Morris measure), variance- (Sobol' indices, FAST) and derivative-based sensitivity measures. All techniques implemented in SobolGSA make use of either quasi-Monte Carlo sampling based on Sobol sequences or standard Monte Carlo sampling (Sobol et al., 2011; Kucherenko et al., 2015).

4 Results and discussion

4.1 Results of global sensitivity analysis

Global sensitivity indices and total sensitivity indices for debris flow impacts are listed in Table 3, and the main and total effects of each parameter are expressed in Fig. 5. From the main effect indices, the peak impact force is most sensitive to the azimuth angle, with a maximum value of 0.5144, which represents 51.44% of the overall variance in the debris flow peak impact loads. The most influential second-order effect index, with a value of 0.1861, was obtained for the interaction between the azimuth angle and the distance of the surrounding buildings. This result also highlights the importance of the surrounding buildings' azimuth angle to the debris flow impact over the distance's main effect index of 0.0213. The sums of all main effect and second-order effect indices are 0.7072 and 0.2928, respectively, indicating that single built environment parameters have a more significant effect on the debris flow impact on a building.

Table 3. Global sensitivity indices and total sensitivity indices.

Input variables	<i>Or</i>	<i>Op</i>	<i>A</i>	<i>D</i>
<i>Or</i>	0.1647	0.0079	0.0797	0.0083
<i>Op</i>	0.0079	0.0068	0.0092	0.0016
<i>A</i>	0.0797	0.0092	0.5144	0.1861
<i>D</i>	0.0083	0.0016	0.1861	0.0213
Total effects	0.2606	0.0255	0.7894	0.2173

285

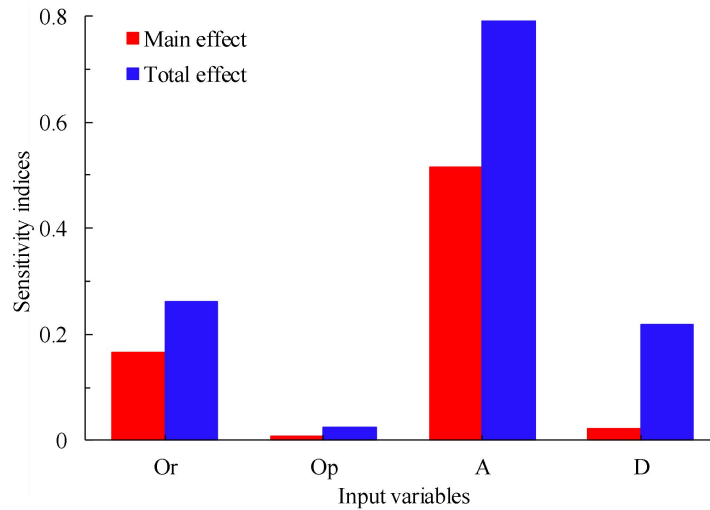


Figure 5. Main and total effects of parameters for debris flow peak impact forces.

From the total effect indices, on the other hand, the importance of the built environment parameters to the debris flow impact responses are ranked as follows: azimuth angle (*A*) > orientation (*Or*) > distance (*D*) > opening scale (*Op*), and their total effect indices are 0.7894, 0.2606, 0.2173 and 0.0255, respectively. The sum of the main effects of the target building's properties (*Or* + *Op*) is 0.152, and that of the surrounding buildings' properties (*A* + *D*) is 0.531, indicating that the surrounding buildings' properties are more significant than the target building's properties on the peak impact forces.

Finally, it is concluded that the azimuth angle and distance of the surrounding buildings and the target building's orientation are the key factors and must be carefully considered in the assessment of building vulnerability to debris flow impacts. It is highly recommended to further study the effect of the surrounding buildings' azimuth angles. Furthermore, although the scale of building openings indeed has a nonsignificant effect on debris flow impacts in this study, the other features of building openings, such as their location, height and structure, should be discussed in more depth.

4.2 Effect of the surrounding buildings' azimuthal angles


As shown in Fig. 6, the peak impact forces of the debris flow change with increasing azimuth angle in the simulation scenarios at an orientation of 90°, an opening scale of 0.4 and a distance of 5 m (*Or90-Op0.4-Ax-D5*, where x represents a variable). The variations in the peak impact forces are calculated with the background value of 3694 kN from the scenario with an orientation of 90°, opening scale of 0.4 and no surrounding buildings (*Or90-Op0.4-Anull-Dnull*, where null means the value is not relevant). The azimuth angles have different kinds of effects on debris flow impacts, as shown in the different colored zones in Fig. 6:

(1) Shielding effect: In the cases of azimuth angles of 0° (*Or90-Op0.4-A0-D5*) and 30° (*Or90-Op0.4-A30-D5*), the peak impact forces are only 1156 kN and 1352 kN, and the corresponding variations (ΔF) are -68.71% and -63.40%, respectively, which are located in the blue region ($\Delta F < -10\%$) in Fig. 6. It is indicated that the target building is protected effectively in a

shielding area produced by the surrounding buildings. This result is consistent with previous case studies wherein some representative catastrophic debris flow events were observed. In the Zhouqu debris flow event shown in Fig. 7, which occurred in Gansu Province of northwestern China, on 7 August 2010, building B, next to the extensively damaged building A, suffered no damage apart from its first story being buried (Hu et al., 2012). Similarly, in the Qipan gully debris flow case (Zeng et al., 2015), which occurred in Wenchuan city of southwestern China during rainstorms on 11 July 2013, building B, shielding protected from the completely damaged building A, was exposed to only slight damage, as shown in region I of Fig. 8. As shown in Fig. 9, a deflection wall was designed following the principles of the shielding effect and can be repeatedly used to protect an entire building ensemble from gravitational mass movements, such as the snow avalanches, in the mountain areas of Austria (Holub et al., 2012). This design of local protection can provide an effective reference for debris flow mitigation.


(2) Canalization effect: As reported by Sturm et al. (2018a) through flume tests, the existence of surrounding buildings may narrow the flow path and even redirect debris flows, leading to an increasing process intensity toward other buildings (Gao et al., 2017). In these numerical simulations, the azimuth angle of 45° (*Or90-Op0.4-A45-D5*) has the most significant canalization effect on the target building and produces the steepest rise in the peak impact force, with 48.40% growth to a maximum value of 5482 kN, as shown in the orange region ($\Delta F > 10\%$) of Fig. 6. As shown in region IV of Fig. 8, building I was exposed to extensive damage in the Qipan gully debris flow partly because of the canalization effect induced by surrounding building J.

(3) Noneffect: The peak impact forces in cases of azimuth angles of 60° (*Or90-Op0.4-A60-D5*) and 90° (*Or90-Op0.4-A90-D5*) are 3662 kN and 3676 kN, respectively, close to the background value (3694 kN), and the corresponding variations are also close to 0, located in the green region ($-10\% \leq \Delta F \leq 10\%$) of Fig. 6. This indicates that there are very small or even negligible effects on the impact loads of the target building. It is important to highlight that the shielding effect has the greatest influence on debris flow impact loads because this effect yields the maximum variation in peak impact forces.

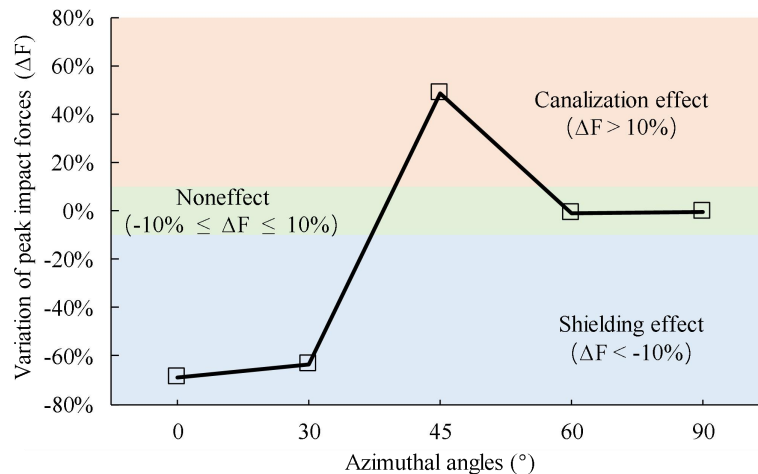

330

Figure 6. Variations of peak impact forces with increasing azimuth angles in scenarios of orientation 90° , opening scale 0.4 and distance 5 m (*Or90-Op0.4-Ax-D5*).

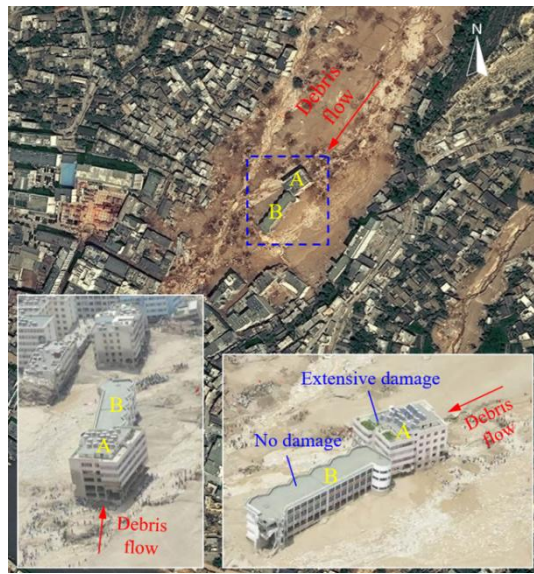

335 Figure 7. Distribution of damaged-buildings in Zhouqu debris flow event. Orthophoto map is from Digital Globe's WorldView-2 satellite on 22 October 2010 published by NASA (ref: <https://earthobservatory.nasa.gov/images/45329/landslide-in-zhouqu-china>); Aerial photo is referred from website of http://slide.news.sina.com.cn/c/slide_1_5039_12703.html (Tang et al., 2011).



Figure 8. Distribution of damaged-buildings in Qipan gully debris flow event. Orthophoto map is from the Basic Geographic Information Center of Sichuan Province, China, 21 July 2013.




340

Figure 9. A deflection wall used to protect an entire building ensemble from the impact of medium magnitude events (Galtur Tschafein, Austria) (Holub et al., 2012).

4.3 Effect of the distance to the surrounding buildings

As shown in Fig. 10, the variations in peak impact forces change with the surrounding buildings' distances in conjunction with the influences of azimuth angles. The scenario of the orientation of 90° and opening of 0.4 ($Or90-Op0.4-Ax-Dx$) is taken as an example, and the background value ($Or90-Op0.4-A_{null}-D_{null}$) is still 3694 kN. According to the results of the sensitivity analysis, the most significant second-order effect comes from the interaction between the azimuth angle and distance, which can be divided into an amplification of the shielding effect or a reduction in the canalization effect, as shown in Fig. 10.


345

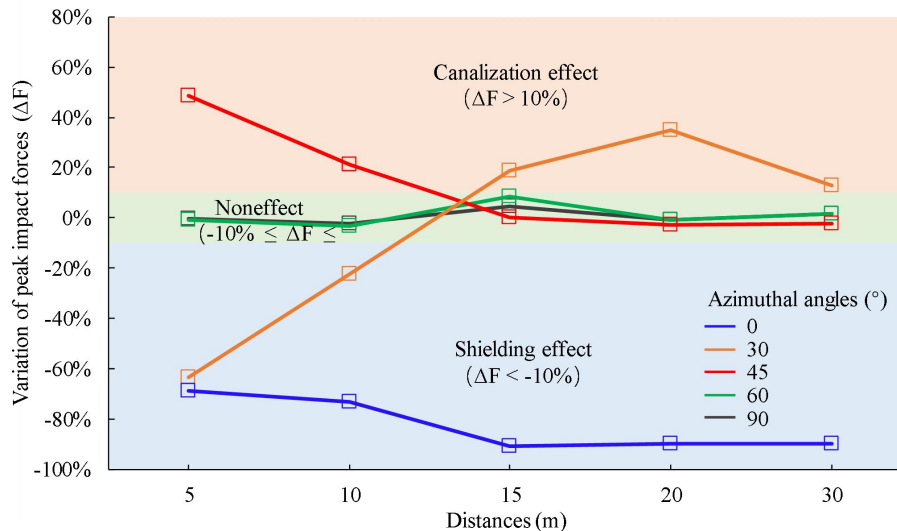

350

Figure 10. Peak impact forces change with the surroundings' distances under influence of azimuth angles in the scenarios of orientation 90° and opening scale 0.4 ($Or90-Op0.4-Ax-Dx$).

(1) Amplification of the shielding effect: The peak impact forces are found to be reduced gradually with increasing surrounding building distance in the case of an azimuth angle of 0° (*Or90-Op0.4-A0-Dx*), with a 5 m distance yielding 1156 kN and a 30 m distance yielding 372 kN, and the corresponding variations in peak impact forces are approximately -68.71% and -89.93%. The shielding effects at an azimuth angle of 0° are amplified with increasing surrounding distance. This process occurs because there is a broader shielding area further downstream of the surrounding building when the debris flow path is separated by an obstacle at a fixed angle of spread, as shown in Fig. 11. Furthermore, there is likely a small-scale debris flow conflux zone close to the surrounding building, as shown in the red zone of Fig. 11. Buildings upstream, therefore, may suffer from a higher impact load in the same debris flow shielding area. As shown in region III of Fig. 8, the lower a buildings' damage degree, the further away the completely damaged building D is in the back shielding area. Building E, next to building D, is exposed to moderate damage, and other shielding-protected buildings, such as buildings F, G and H, experience only slight damage from lateral abrasion and accumulation. However, the amplified shielding effect inevitably disappears further downstream due to the confluence of debris flow run-off. The range of the shielding area mainly depends on the debris flow properties, especially the friction coefficient and dynamic viscosity (Liang et al., 2021). Further investigation of the effective shielding-protection area is needed.

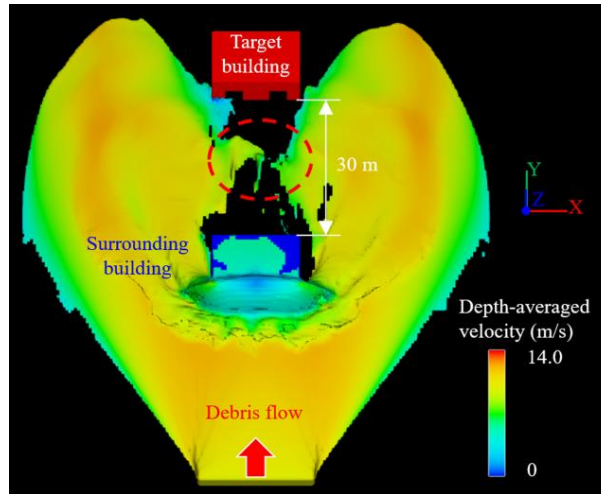


370 **Figure 11. There is the lower debris flow intensities further away surrounding building within a shielding area, in scenario of *Or90-Op0.4-A0-D30* at simulation time of 8.0 s. The local debris flow conflux is delineated with red dotted line (The snapshot is rotating 30° counterclockwise about the X axis based on plan view, similarly hereinafter).**


(2) Reduction in the canalization effect: The canalization effect mainly occurs under a surrounding building azimuth angle of 45° , as mentioned above; however, this kind of effect could be lessened under the influence of the surrounding buildings' distances. As shown by the red line in Fig. 10, the maximum peak impact force under an azimuth angle 45° , with a value of 5482 kN, appears with a distance 5 m (*Or90-Op0.4-A45-D5*). Then, the peak impact forces decrease rapidly with greater distances, especially in the distance range of less than 15 m. The peak impact force at a distance of 15 m (*Or90-Op0.4-A45-D15*) is reduced to 3692 kN, which is very close to the background value (3694 kN). It is indicated that the canalization

effect under an azimuth angle of 45° may have vanished completely at this point. As shown in the computational results at 8.0 s in Fig. 12, the increase in flow velocity in the narrowed flow paths due to building blockage decreases with increasing surrounding building distances. The increased-velocity debris flows, on the other hand, tend to flow away from the target building in the cases of greater surrounding building distances. Therefore, the variations in peak impact forces are close to 0 due to the lower flow velocity and fewer intruding materials in the scenarios of surrounding building distances beyond 15 m. In general, a greater distance results in a lower impact force.

A smaller surrounding building distance, however, does not necessarily indicate a larger impact force. With surrounding building distances of 5 m and 10 m, impact force shielding effects occur under the condition of an azimuth angle of 30° (*Or90-Op0.4-A30-D5* and *Or90-Op0.4-A30-D10*), as shown in Fig. 13, and the corresponding variations in peak impact loads are -63.40% and -22.58%, respectively. The width of the narrowed flow path, which is determined by the factors of the azimuth angle and surrounding building distance, could account for this fact. The flow paths are so narrow, with widths of 1.6 m and 6.6 m, respectively, like bottlenecks, that not much flow passes through them, as shown in Fig. 13a and Fig. 13b. Thereafter, the canalization effect occurs at distances beyond 15 m and reduces and even disappears gradually with increasing surrounding building distance and the corresponding wider flow paths. It is found that the ratio of the width of the narrowed flow path to the length of the target building has a significant effect on the increase in impact force. The largest peak impact force is most likely to be found under a ratio of approximately one, for example, the ratios of 0.8 in the case of *Or90-Op0.4-A45-D5* (Fig. 12a) and 1.1 of *Or90-Op0.4-A30-D20* (Fig. 13d).

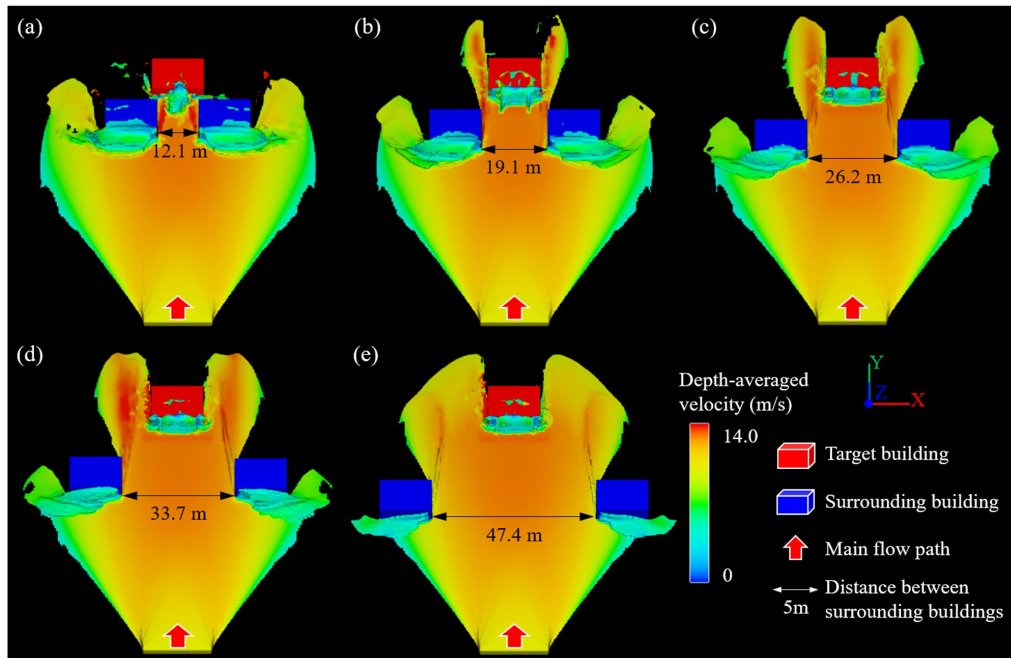

395 **Figure 12.** Snapshots for debris flow intensities in scenarios of *Or90-Op0.4-A45-Dx* at simulation time of 8.0 s. (a) is case of *Or90-Op0.4-A45-D5*; (b) is case of *Or90-Op0.4-A45-D10*; (c) is case of *Or90-Op0.4-A45-D15*; (d) is case of *Or90-Op0.4-A45-D20*; and (e) is case of *Or90-Op0.4-A45-D30*.

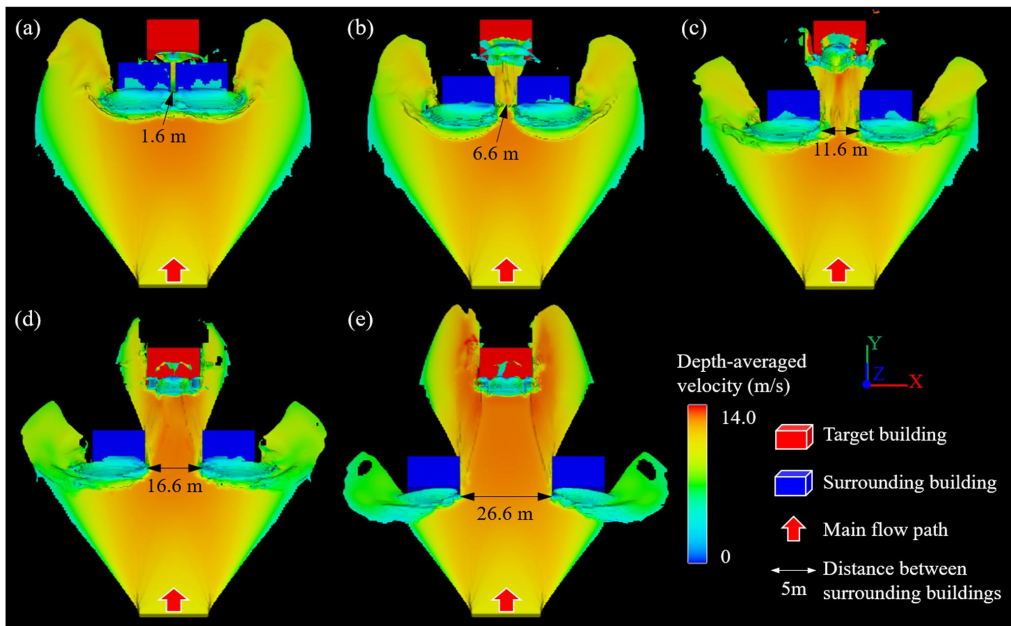


400 **Figure 13.** Snapshots for debris flow intensities in the scenarios of *Or90-Op0.4-A30-Dx* at simulation time of 8.0 s. (a) is case of *Or90-Op0.4-A30-D5*; (b) is case of *Or90-Op0.4-A30-D10*; (c) is case of *Or90-Op0.4-A30-D15*; (d) is case of *Or90-Op0.4-A30-D20*; and (e) is case of *Or90-Op0.4-A30-D30*.

4.4 Effect of the orientation

4.4.1 Single-factor analysis of orientation

405 As shown in Fig. 14, the peak impact forces of debris flows are ordered as follows: $Or90 > Or60 > Or0 > Or45 \approx Or30$, and the corresponding values are 3563, 2617, 2366, 1982 and 1959 kN, respectively, when only the target building's orientation is considered (*Orx-Op0-Anull-Dnull*). It is generally accepted that the impact load of a debris flow is a comprehensive outcome from many characteristic parameters, including the debris flow density, velocity, impact contact area and approaching angle (Liu et al., 2021). It is assumed that the debris flow density is constant in the computational process of impact forces in the FLOW-3D model.

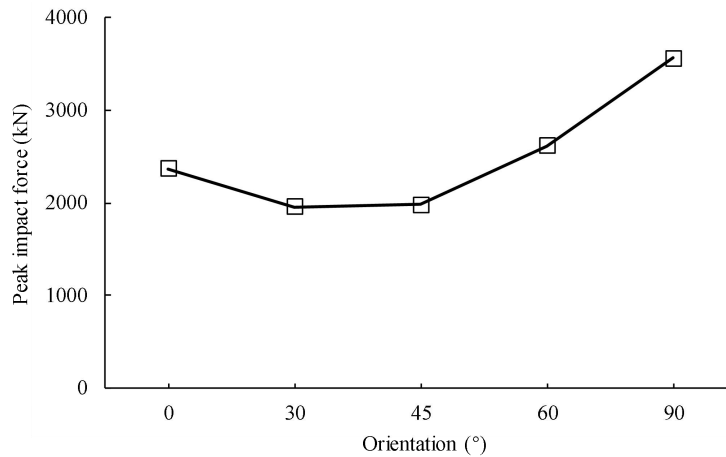

410

Figure 14. Peak impact forces change with target building's orientations in the scenarios of no openings and no surroundings (*Orx-Op0-Anull-Dnull*).


The impact contact area, a product of the wall length and effective height, where the latter is the minimum value between the wall height and flow depth, can be used to explain the debris flow impact responses in the case of orientations of 0° (*Or0-Op0-Anull-Dnull*) and 90° (*Or90-Op0-Anull-Dnull*). In the simulations shown in Fig. 15a and Fig. 15e, the single wall element, wall B or wall A, is vertically impacted by debris flows, and the surging flows go beyond the wall height. The length of the impacted wall elements, therefore, should contribute to the difference in the peak impact pressures. The mainly impacted wall element in the orientation of 90° - Wall A of 15 m - is obviously longer than that of orientation 0°, wall B of 10 m. A larger contact area results in a greater impact force.

420 Walls A and B are simultaneously exposed to debris flows and only differ by their orientations 0° and 90°, as shown in Fig. 15b-d. In these cases, the debris flow impact loads, to a large extent, are dominated by the approaching angle, which is defined here as the general, temporally independent angle of the wall element to the main flow path, with a range of 0° (parallel) to 90° (vertical). Generally, there are higher flow velocities and lower surge flow depths in the cases of smaller approaching angles, and vice versa. The highest flow velocity occurs in the neighborhood of wall A, the longest wall of the target building, in the scenario with an orientation 60° (*Or60-Op0-Anull-Dnull*), as shown in Fig. 15d. In contrast, the lowest flow velocity appears near wall A, with an orientation of 30° (*Or30-Op0-Anull-Dnull*), as shown in Fig. 15b. This could be the main reason why the target building with a 60° orientation is under stronger strain than that with a 30° orientation, and that with a 45° orientation is between them. However, even so, better migration performances, such as lower impact loads and larger shielding areas, are produced in these cases than in the case with an orientation of 90°. Similar to this idea, a

430 splitting wedge, with a triangular shape and two downslope-directed sides, was constructed at the process-oriented side of an exposed building to protect against snow avalanches in the Swiss Alps, as shown in Fig. 16. It was confirmed that splitting wedges, with this very distinctive shape, were considerably effective in maintaining its stability and offering a larger protected zone for the other neighboring buildings. It also provides a good model for building protection design in debris

435 flow prone areas. The main criterion for the effective operation of such a structure is avoiding the highest flow velocity - the smallest approaching angle - appearing near the longest wall element.


Last but not least, flip-through impacts, caused by the backwater effect, which is a special phenomenon when debris flow hits a barrier wall, runs up, bounces backward, blocks and converges with the remaining debris (Takahashi, 2007; Song et al., 2021), contribute greatly to the peak impact forces of orientations 0° (*Or0-Op0-Anull-Dnull*) and 90° (*Or90-Op0-Anull-Dnull*), as shown in Fig. 17. The impact forces with an orientation of 0° reach their peak when the debris flow first collides with the wall and runs up. The peak impact load with an orientation of 90° comes from the secondary waves overtaking the flow front, after the flow bounces off the wall, collides and converges with the flow approaching from behind (Iverson et al., 2010; Choi et al., 2018).

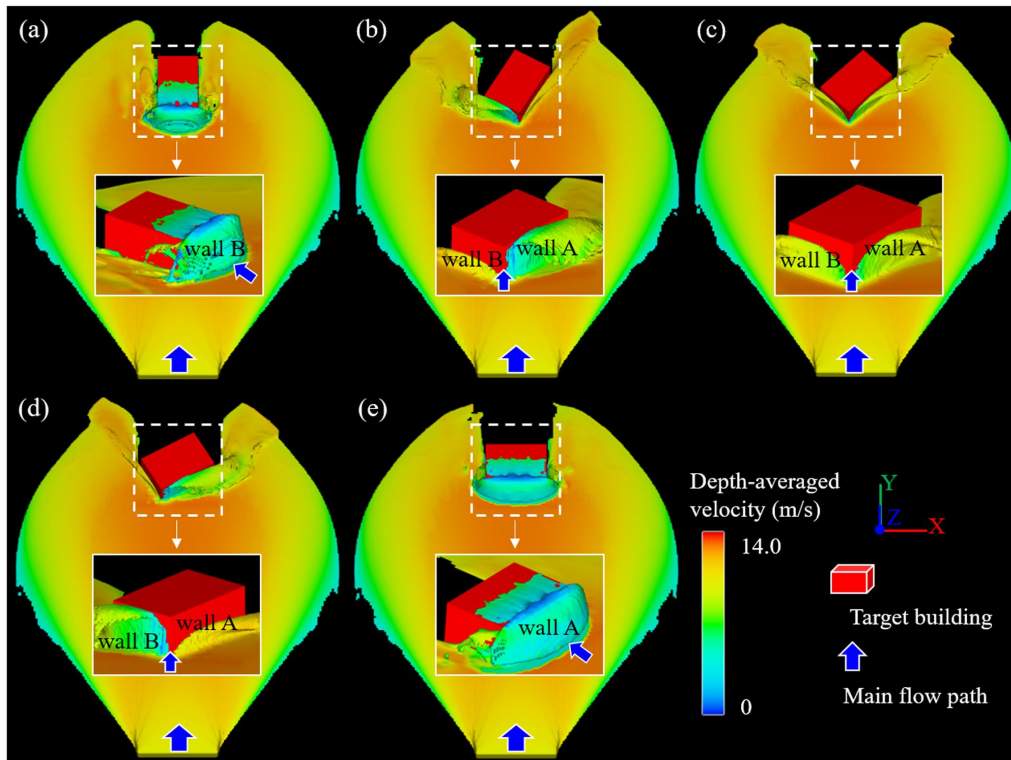

445 Figure 15. Snapshots for debris flow intensities in scenarios of *Orx-Op0-Anull-Dnull* at simulation time of 8.0 s. (a) is case of *Or0-Op0-Anull-Dnull*; (b) is case of *Or30-Op0-Anull-Dnull*; (c) is case of *Or45-Op0-Anull-Dnull*; (d) is case of *Or60-Op0-Anull-Dnull*; and (e) is case of *Or90-Op0-Anull-Dnull*.



Figure 16. Splitting wedge directly connected to the exposed object (Davos Frauenkirch, Switzerland) (Holub et al., 2012).

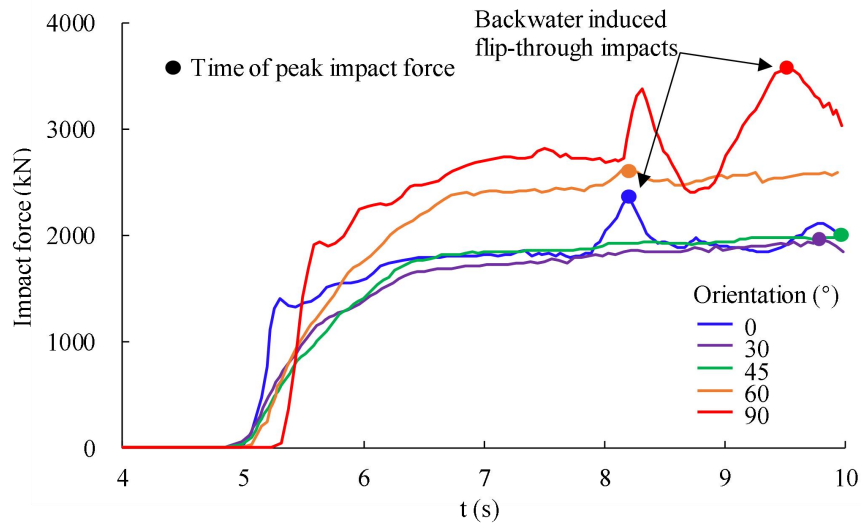


450 Figure 17. Impact forces time history with changing orientations in the scenarios of *Orx-Op0-Anull-Dnull* after simulation time of 4.0 s. The time of peak impact force are marked with dot.


4.4.2 Interaction between orientation and surroundings

The single-factor analysis of orientation explained why the buildings with orientations of 30°, 45° and 60° have better migration effects. This knowledge has to be reconsidered, however, when the effect overlaps with the surrounding buildings' shielding effects. It is found that buildings with orientations of 30°, 45° and 60° are more likely to be damaged by debris flows within a shielding area. For instance, the maximum peak impact forces with surrounding buildings' distances of 5 m (*Or60-Op0.4-A0-D5*) and 10 m (*Or60-Op0.4-A0-D10*) and an orientation of 60°, as shown in Fig. 18, are different from those of the single-factor analysis of orientation. The protruding parts of the target building caused by the changing orientations and building rotations significantly contribute to the increase in impact forces (Hu et al., 2012; Zeng et al., 2015).

460 A larger protruding portion of a building results in a greater probability of being exposed and corresponding larger impact forces. The largest protruding areas are exposed to debris flows at an orientation of 60° , as shown in Fig. 19d-1 and Fig. 19d-2). This can be confirmed by Fig. 8d. Although the main structure of building E is in the shielding area of building D, its protruding part is still completely destroyed by debris flows.

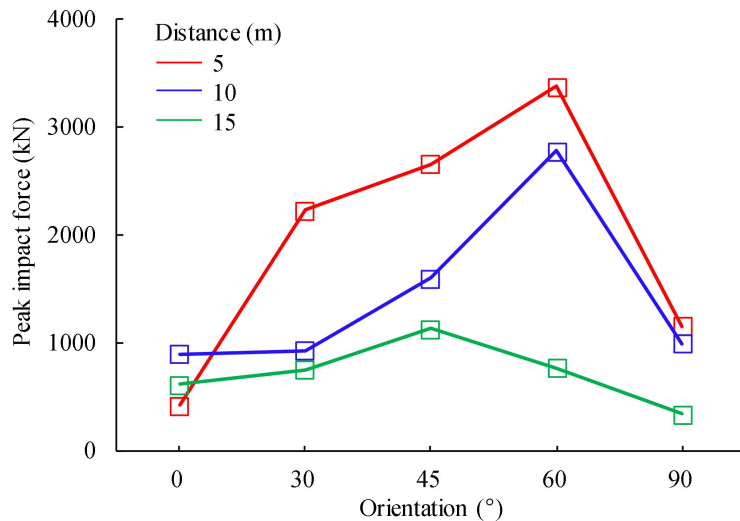


465 Figure 18. Peak impact forces change with target building's orientations under the shielding effect. Red line shows the case of *Orx-Op0.4-A0-D5*; Blue line shows the case of *Orx-Op0.4-A0-D10*; Red line shows the case of *Orx-Op0.4-A0-D15*.

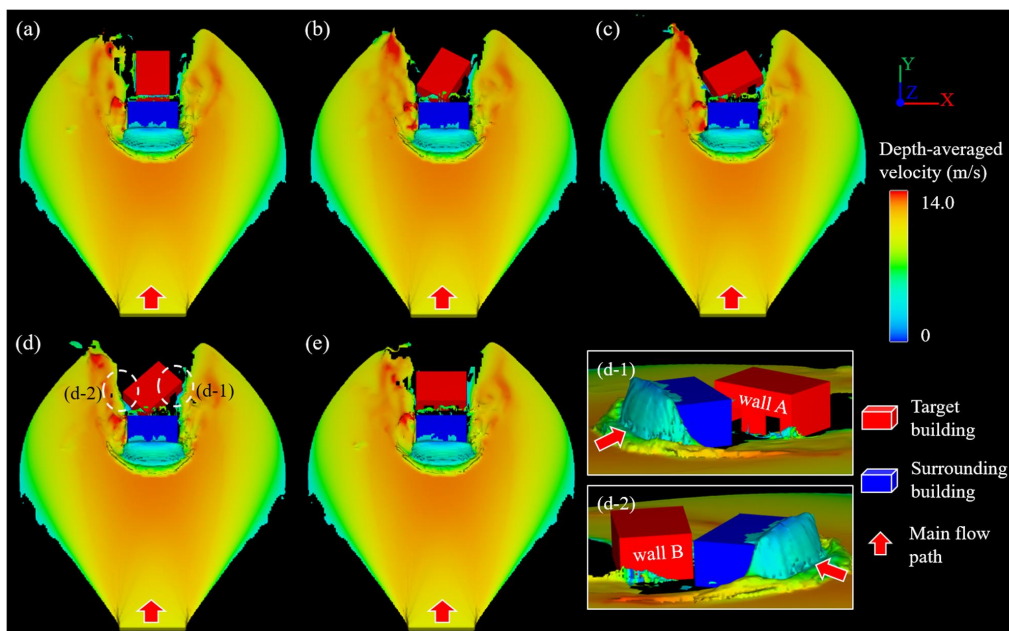

470 Figure 19. Snapshots for debris flow intensities in scenarios of *Orx-Op0.4-A0-D5* at simulation time of 8.0 s. (a) is case of *Or0-Op0.4-A0-D5*; (b) is case of *Or30-Op0.4-A0-D5*; (c) is case of *Or45-Op0.4-A0-D5*; (d) is case of *Or60-Op0.4-A0-D5*; (e) is case of *Or90-Op0.4-A0-D5*; (d-1) and (d-2) show that the protruding portions of target building are exposed to debris flow in details.

4.5 Effect of the opening scale

According to the sensitivity analysis results, the opening scale is the least important factor for debris flow impacts, as it yields the minimum first-order effect index, 0.0068, and the minimum total effect index, 0.0255. From the results with an orientation 90° and no surrounding buildings (*Or90-Op_x-Anull-Dnull*), shown in Fig. 20, the peak impact forces of the target building change very slightly with increasing opening scale. There is a maximum peak impact force of 3991 kN in the case of openings with a scale of 0.8 (*Or90-Op_{0.8}-Anull-Dnull*), which is approximately 15.8% larger than the 3446 kN of openings with a scale of 0.2 (*Or90-Op_{0.2}-Anull-Dnull*). Interestingly, the impact responses of the target building are different with different opening scales. Specifically, there are smaller impact forces in the cases of larger opening scales when only wall A of the target building is impacted, that is, in the early stage of debris flow impact from 5.2 s to 6.2 s, as shown in Fig. 21. In this stage, the maximum impact pressure of 791 kN of opening scale 0.8 is approximately half of the 1557 kN of opening scale 0.2; this is due to the difference in the effective impacted areas. From this perspective, the mitigation performance of single wall elements with more openings is proven (Mazzorana et al., 2014; Gems et al., 2016). Thereafter, the impact load of the overall building increases rapidly following the abundant intrusion of materials through openings after 6.2 s, as shown in Fig. 21. Due to the greater accessibility and higher flow velocity, there is faster growth in impact pressure in the scenarios with the larger opening scales. Finally, after the two above-described impact stages are combined, there are only slight differences between multiple scales of openings in terms of peak impact forces. This indicates that the mitigation function of openings for the whole building is very limited if the time for materials intrusion is sufficient.

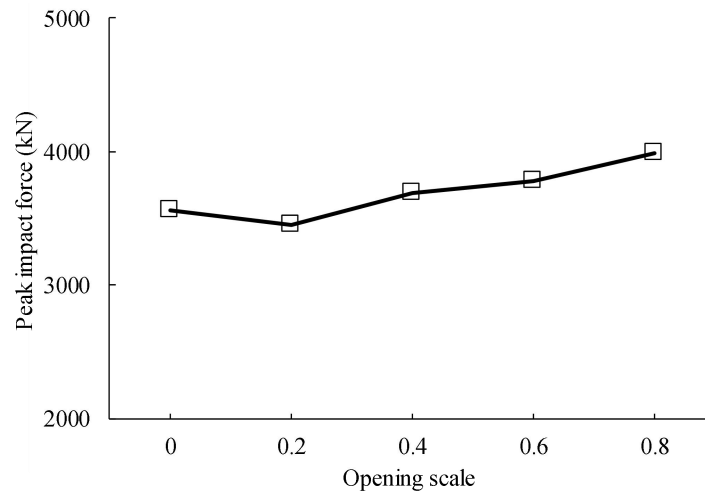

490 **Figure 20. Peak impact forces change with target building's opening scale in the scenarios of *Or90-Op_x-Anull-Dnull*.**

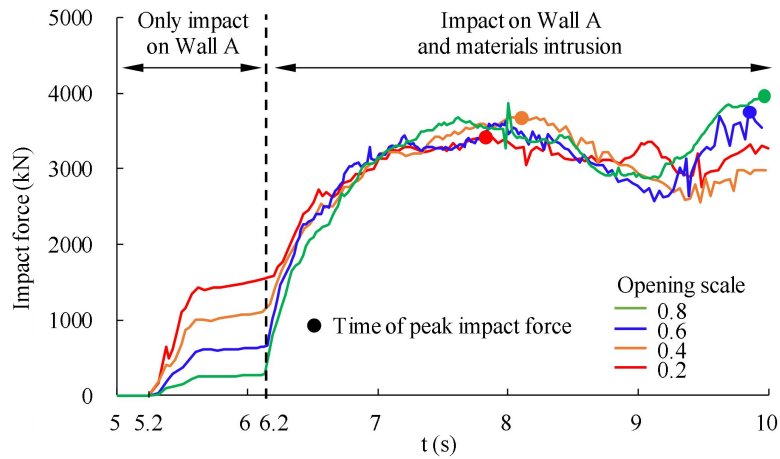


Figure 21. Impact forces time history with changing opening scales in the scenarios of $Or90-Op_x-Anull-Dnull$ after simulation time of 5.0 s. The time of peak impact force are marked with dot.

5 Conclusions and outlook

495 The effects of representative built environment parameters on the debris flow impacts on a whole building were explored through FLOW-3D simulations after validation with a published dam-break experiment. Four parameters influencing the impact responses of the whole building induced by debris flows were considered in this study: the orientation and opening scale of the target building and the azimuthal angle and distance of the surrounding buildings. The debris flow impact performance was evaluated using the measurable indicator of the peak impact force acting on the overall building. It is
 500 important to stress that the presented study and results were subject to a number of assumptions and limitations: (1) the type of debris flow was limited as mudflow or viscous debris flow, the solid was assumed to be mixed with the fluid phase well, and the sediment deposition was not considered; (2) the deposition fan was simplified for the modelling, for example the drainage channel and bed scour had been ignored; (3) the inflow discharge of debris flow simulation was fixed, different with the realistic hydrograph, and the impact force was treated as the maximum value within a limited computation time
 505 under a presupposed discharge. Finally, the main outcomes of the study may be outlined as follows:

(1) The GSA based on metamodels with 160 cases reveals that the ranking of the importance of the built environment parameters on debris flow impacts from the results of total effect indices is as follows: azimuth angle (A) > orientation (Or) > distance (D) > opening scale (Op). The azimuth angle of the surrounding buildings alone contributes to 51.44% of the overall variance of the debris flow peak impact load. The properties of the surrounding buildings, including the azimuth
 510 angle and distance, are found to have a more significant influence on the peak impact forces.

(2) The azimuth angle has a shielding or canalization effect on debris flow impacts. The shielding effect, a form of reducing impact pressures, mainly appears in the scenarios with a surrounding building azimuth angle of 0° . The canalization effect, caused by narrowing and redirecting of the flow path, is a form of increasing impact forces and occurs at an azimuth angle of 45° . A deflection wall for building protection is recommended, as this provides a shielding effect. The interaction between

515 the azimuth angle and distance can be divided into the amplification of the shielding effect and the reduction in the
canalization effect. The former is where buildings are less impacted with a limited increase in distance within a shielding
area. Further investigation on the effective area of shielding protection is needed. The latter is where the peak impact force
induced by the canalization effect decreases rapidly with a greater distance. The ratio of the width of the narrowed flow path
to the length of the target building has a significant effect on the variation in the impact forces, and the maximum peak
520 impact pressure appears at a ratio of approximately one.

(3) These parameters involving the building's impact response, including the impact contact area, approaching angle and
flip-through impact, contribute to the debris flow impact forces when only the orientation factor is considered. A splitting
wedge is recommended for an effective design mitigating the threat of debris flow, and the main criterion is avoiding the
highest flow velocity - the smallest approaching angle - appearing near the longest wall element. The buildings with
525 orientations of 30°, 45° and 60° are more likely to be impacted by debris flows in a shielding area due to the exposed
protruding parts produced by the building's rotations. As far as openings are concerned, although the mitigation performance
of this single wall element has been proven, a limited effect on the whole building is observed when there is enough time for
material intrusion.

It is obvious that the quantitative descriptions about the interactions between the built environment and impact forces can be
530 useful to the built environment improvement and local adaptation measures for the impact force reduction, which are
assumed as the low-cost and efficient approach for mitigating the building's structural damages. And more significantly, the
present paper has extended the knowledge about the influence factors on debris flow intensity. It is demonstrated that some
artificial building factors can not be ignored, except for the natural environments, in deciding the spatial pattern of the
process intensity. The further research about their relative importance with the 3-D numerical simulation and sensitivity
535 analysis can promote the relative intensity evaluation of the building, especially in terms of the indicator selection and
weighting, which may open a future topic of the debris flow hazard assessment. For the building vulnerability assessment,
the indicators can be mainly divided into two kinds: the exterior process intensity and interior building resistance. The
process intensity, for example the flow depth, velocity, impact force or the other proxy, was assumed absolutely necessary,
either in the curve based approach or the indicator based approach (Martinez-Carvajal et al., 2018). From the current
540 literature, however, there are some confusions in selecting the surroundings factors and process intensity indicator. To be
specific, some surroundings factors or also called protection factors, including the Surrounding buildings, Building row,
Wall around building, Natural barriers and so on, were still selected when the debris flow intensity had been indirectly
considered (Dall'Osso et al., 2009; Dall'Osso et al., 2016; Papathoma-Köhle et al., 2019). These indicators should be
independent each other theoretically. From the views of the present paper, the functions of all over the surroundings factors
545 are the influences on the process intensity around building. Therefore, the process intensity should be exclusive with the
surroundings factors. The building features factors are mainly considered to be acted on the building resistance, including the
Material, Structure, Number of stories, Foundation strength and so on. However, It is not hard to find that some building
indicators, for example the Orientation, Shape and Openings, can rebuild the process intensity. As a result, the effect of the

representative building features indicators on the building vulnerability needs an in-depth discussion in future. The last but
550 not least, a more universal, robust index may be developed using the numerical simulation approach, which can improve the
locality limits resulting from the empirical data, to some extent.

Author contribution. XH and ZZ contributed to the original idea and study design. XH, ZZ and GX participated in field
survey. XH and ZZ conducted the simulation and analyse. XH wrote the original manuscript, and ZZ and GX provided
comments and revised the manuscript. All the co-authors contributed to scientific interpretations of the results.

555 *Competing interests.* The authors declare that they have no conflict of interest.

Financial support. This research has been supported by the National Natural Science Foundation of China (grant No.
41907396), the Science and Technology Research Program of Chongqing Municipal Education Commission (grant No.
KJQN201900535), the Chongqing Normal University Founding Program (grant No. 21XWB007), the Chongqing Normal
University Postgraduate Research and Innovation Project (grant No. YKC21047) and the Scientific Research Project of
560 Department of Natural Resources of Sichuan Province (grant No. KJ-2021-14).

References

- Booker, A. J., Dennis, J. E., Rank, P. D., Serafini, D. B., Torczon, V., and Trosset, M. W. A rigorous framework for
optimization of expensive functions by surrogates, *Structural Optimization*, 17, 1-13, <https://doi.org/10.1007/BF01197708>,
1999.
- 565 Chen, M., Tang, C., Zhang, X., Xiong, J., and Li, M.: Quantitative assessment of physical fragility of buildings to the debris
flow on 20 August 2019 in the Cutou gully, Wenchuan, southwestern China, *Engineering Geology*, 293, 106319,
<https://doi.org/10.1016/j.enggeo.2021.106319>, 2021.
- Choi, S. K., Lee, J. M., and Kwon, T. H.: Effect of slit-type barrier on characteristics of water-dominant debris flows: small-
scale physical modeling, *Landslides*, 15, 111-122, <https://doi.org/10.1007/s10346-017-0853-4>, 2018.
- 570 Dall’Osso, F., Dominey-Howes, D., Tarbotton, C., Summerhayes, S., Withycombe, G.: Revision and improvement of the
PTVA-3 model for assessing tsunami building vulnerability using “international expert judgment”: introducing the PTVA-4
model, *Nat Hazards*, 83, 1229-1256, <https://doi.org/10.1007/s11069-016-2387-9>, 2016.
- 575 Dall’Osso, F., Gonella, M., Gabbianelli, G., Withycombe, G., Dominey-Howes, D.: A revised (PTVA) model for assessing
the vulnerability of buildings to tsunami damage, *Nat. Hazards Earth Syst. Sci.*, 9, 1557-1565,
<https://doi.org/10.5194/NHESS-9-1557-2009>, 2009.
- Faisal, N. A. A., Ghani, A., and Salim, N.: The ability of wall openings to reduce flood induced forces on residential
building, *International Journal of GEOMATE*, 14, 63-69, <https://doi.org/10.21660/2018.46.7306>, 2018.
- Flow Science, Inc.: FLOW-3D v11.0.3 user manual, 2014.
- 580 Franco, A., Moernaut, J., Schneider-Muntau, B., Strasser, M., Gerns, B.: Triggers and consequences of landslide-induced
impulse waves-3D dynamic reconstruction of the Taan Fiord 2015 tsunami event, *Engineering Geology*, 294, 106384,
<https://doi.org/10.1016/j.enggeo.2021.106384>, 2021.
- Fuchs, S., Keiler, M., and Zischg, A. P.: A spatiotemporal multi-hazard exposure assessment based on property data. *Nat.
Hazards Earth Syst. Sci.*, 15, 2127-2142, <https://doi.org/10.5194/nhess-15-2127-2015>, 2015.

- 585 Fuchs, S., Keiler, M., Ortlepp, R., Schinke, R., and Papatoma-Köhle, M.: Recent advances in vulnerability assessment for the built environment exposed to torrential hazards: Challenges and the way forward, *Journal of Hydrology*, 575, 587-595, <https://doi.org/10.1016/j.jhydrol.2019.05.067>, 2019.
- Fuchs, S., Ornetmüller, C., Totschnig, R.: Spatial scan statistics in vulnerability assessment: an application to mountain hazards, *Nat Hazards*, 64, 2129-2151, <https://doi.org/10.1007/s11069-011-0081-5>, 2012.
- 590 Fuchs, S., Röthlisberger, V., Thaler, T., Zischg, A., and Keiler, M.: Natural hazard management from a coevolutionary perspective: Exposure and policy response in the European Alps, *Annals of the American Association of Geographers*, 107, 382-392, <https://doi.org/10.1080/24694452.2016.1235494>, 2017.
- Gao, L., Zhang, L. M., and Chen, H. X.: Two-dimensional simulation of debris flow impact pressures on buildings, *Engineering Geology*, 226, 236-244, <https://doi.org/10.1016/j.enggeo.2017.06.012>, 2017.
- 595 Gems, B., Mazzorana, B., Hofer, T., Sturm, M., Gabl, R., and Aufleger, M.: 3-D hydrodynamic modelling of flood impacts on a building and indoor flooding processes, *Nat. Hazards Earth Syst. Sci.*, 16, 1351-1368, <https://doi.org/10.5194/nhess-16-1351-2016>, 2016.
- Gomez-Gesteira, M., Dalrymple, R. A.: Using a three-dimensional smoothed particle hydrodynamics method for wave impact on a tall structure. *J Waterw Port Coast*, 130, 63-69, [https://doi.org/10.1061/\(ASCE\)0733-950X\(2004\)130:2\(63\)](https://doi.org/10.1061/(ASCE)0733-950X(2004)130:2(63)), 2004.
- 600 Hirt, C. W., Nichols, B. D.: Volume of fluid (VOF) method for the dynamics of free boundaries, *J. Comput. Phys.*, 39, 201-225, [https://doi.org/10.1016/0021-9991\(81\)90145-5](https://doi.org/10.1016/0021-9991(81)90145-5), 1981.
- Hirt, C.W., Sicilian, J. M.: A porosity technique for the definition of obstacles in rectangular cell meshes, 4th International Conference on Numerical Ship Hydrodynamics. <https://trid.trb.org/view/394627>, 1985.
- Hoffman, R. M., Sudjianto, A., Du, X., and Stout, J.: Robust piston design and optimization using piston secondary motion analysis (No. 2003-01-0148) (SAE Technical Paper), <https://doi.org/10.4271/2003-01-0148>, 2003.
- 605 Holub, M., and Fuchs, S.: Mitigating mountain hazards in Austria - legislation, risk transfer, and awareness building, *Nat. Hazards Earth Syst. Sci.*, 9, 523-537, <https://doi.org/10.5194/nhess-9-523-2009>, 2009.
- Holub, M., Suda, J., and Fuchs, S.: Mountain hazards: reducing vulnerability by adapted building design, *Environ Earth Sci*, 66, 1853-1870, <https://doi.org/10.1007/s12665-011-1410-4>, 2012.
- 610 Hu, K. H., Cui, P., and Zhang, J. Q.: Characteristics of damage to buildings by debris flows on 7 august 2010 in zhouqu, western china, *Nat. Hazards Earth Syst. Sci.*, 12, 2209-2217, <https://doi.org/10.5194/nhess-12-2209-2012>, 2012.
- Hu, Y., Chen, M., and Zhou, J.: Numerical simulation of the entrainment effect during mass movement in high-speed debris avalanches, *Arabian Journal of Geosciences*, 12, 14, <https://doi.org/10.1007/s12517-018-4199-6>, 2019.
- 615 Hu, Y., Yu, Z., and Zhou, J.: Numerical simulation of landslide-generated waves during the 11 October 2018 Baige landslide at the Jinsha River, *Landslides*, 17, 2317-2328, <https://doi.org/10.1007/s10346-020-01382-x>, 2020.
- Huang, X., and Tang, C.: Formation and activation of catastrophic debris flows in Baishui River basin, Sichuan Province, China, *Landslides*, 11, 955-967, <https://doi.org/10.1007/s10346-014-0465-1>, 2014.
- Iverson, R. M., Logan, M., Lahusen, R. G., and Berti, M.: The perfect debris flow? Aggregated results from 28 large-scale experiments, *Journal of Geophysical Research Earth Surface*, 115, F03005, <https://doi.org/10.1029/2009JF001514>, 2010.
- 620 Jakob, M., Stein, D., and Ulmi M.: Vulnerability of buildings to debris flow impact, *Nat Hazards*, 60, 241-261, <http://doi.org/10.1007/s11069-011-0007-2>, 2012.
- Jones, W. P., and Launder, B. E.: The prediction of laminarization with a two-equation model of turbulence, *Int. J.Heat Mass Tran.*, 15, 301- 314, [https://doi.org/10.116/0017-9310\(72\)90076-2](https://doi.org/10.116/0017-9310(72)90076-2), 1972.

- 625 Kim, M. J., Lee, S. R., Jeon, J. S., and Yoon, S.: Sensitivity analysis of bentonite buffer peak temperature in a high-level waste repository, *Annals of Nuclear Energy*, 123, 190-199, <https://doi.org/10.1016/j.anucene.2018.09.020>, 2019.
- Kim, M., Lee, S., Kwon, T., Choi, S., and Jeon, J.: Sensitivity analysis of influencing parameters on slit-type barrier performance against debris flow using 3D-based numerical approach, *International Journal of Sediment Research*, 36, 50-62, <https://doi.org/10.1016/j.ijsrc.2020.04.005>, 2021.
- 630 Kleijnen, J. P. C.: Regression and Kriging metamodels with their experimental designs in simulation: A review[J]. *European Journal of Operational Research*, 256, 1-16, <http://dx.doi.org/10.1016/j.ejor.2016.06.041>, 2016.
- Kucherenko, S., Albrecht, D., and Saltelli, A.: Exploring multi-dimensional spaces: a Comparison of Latin Hypercube and Quasi Monte Carlo Sampling Techniques. <https://doi.org/10.48550/arXiv.1505.02350>, 2015.
- 635 Liang, H., Li, J., Liu, F., Zhang, L., Gang, F., Li, M., and He, S.: Simulation of debris flow impacting bridge pier tests based on smooth particle hydromechanics method, *Rock and soil mechanics*, 42, 1473-1484, <https://doi.org/10.16285/j.rsm.2020.1107>, 2021 (in Chinese with English abstract).
- Liu, C., Yu, Z., and Zhao, S.: A coupled SPH-DEM-FEM model for fluid-particle-structure interaction and a case study of Wenjia gully debris flow impact estimation, *Landslides*, 18, 2403-2425, <https://doi.org/10.1007/s10346-021-01640-6>, 2021.
- Luo, H. Y., Fan, R. L., Wang, H. J., and Zhang, L. M.: Physics of building vulnerability to debris flows, floods and earth flows, *Engineering Geology*, <https://doi.org/10.1016/j.enggeo.2020.105611>, 2020.
- 640 Manawasekara, C., Mizutani, N., and Aoki, S.: Influence of openings and orientation on tsunami generated forces on buildings, *Journal of Disaster Research*, 11, 670-679, <https://doi.org/10.20965/jdr.2016.p0670>, 2016.
- Martinez-Carvajal, H. E., de Moraes Guimaraes Silva, M. T., Garcia-Aristizabal, E. F., Aristizabal-Giraldo, E. V., Larios-Benavides, M. A.: A mathematical approach for assessing landslide vulnerability. *Earth Sciences Research Journal*, 22, 251-273. <https://doi.org/10.15446/esrj.v22n4.68553>, 2018.
- 645 Mazzorana, B., Simoni, S., Scherer, C., Gems, B., and Keiler, M.: A physical approach on flood risk vulnerability of buildings, *Hydrol. Earth Syst. Sci.*, 18, 3817-3836, <https://doi.org/10.5194/hessd-11-1411-2014>, 2014.
- Mead, S. R., Magill, C., Lemiale, V., Thouret, J. C., Prakash, M.: Examining the impact of lahars on buildings using numerical modelling, *Nat. Hazards Earth Syst. Sci.*, 17, 703-719, <https://doi.org/10.5194/nhess-17-703-2017>, 2017.
- 650 Papathoma-Köhle, M., Gems, B., Sturm, M., and Fuchs, S.: Matrices, curves and indicators: A review of approaches to assess physical vulnerability to debris flows, *Earth-Science Reviews*, 171, 272-288, <http://doi.org/10.1016/j.earscirev.2017.06.007>, 2017.
- Papathoma-Köhle, M., Schlögl, M., and Fuchs, S.: Vulnerability indicators for natural hazards: an innovative selection and weighting approach, *Scientific Reports*, 9, 15026, <https://doi.org/10.1038/s41598-019-50257-2>, 2019.
- 655 Papathoma-Köhle, M.: Vulnerability curves vs. vulnerability indicators: application of an indicator-based methodology for debris-flow hazards, *Nat. Hazards Earth Syst. Sci.*, 16, 1771-1790, <https://doi.org/10.5194/nhess-16-1771-2016>, 2016.
- Saltelli, A., Annoni, P., Azzini, I., Campolongo, F., and Tarantola, S.: Variance based sensitivity analysis of model output. Design and estimator for the total sensitivity index, *Computer Physics Communications*, 181, 259-270, <https://doi.org/10.1016/j.cpc.2009.09.018>, 2010.
- 660 Sarrazin, F., Pianosi, F., and Wagener, T.: Global sensitivity analysis of environmental models: Convergence and validation, *Environmental Modelling and Software*, 79, 135-152, <https://doi.org/10.1016/j.envsoft.2016.02.005>, 2016.
- Sobol, I. M., Asotsky, D., Kreinin, A., and Kucherenko, S.: Construction and comparison of high-dimensional Sobol' generators, *Wilmott*, 2011, 64-79, <https://doi.org/10.1002/wilm.10056>, 2011.
- Sobol, I. M.: Sensitivity estimates for nonlinear mathematical models, *Mathematical modelling and computational experiments*, 1, 407-414, 1993.

- 665 Song, D., Chen, X., Zhou, G. G. D., Lu, X., Cheng, G., Chen, Q.: Impact dynamics of debris flow against rigid obstacle in laboratory experiments, *Engineering Geology*, 291, 106211, <https://doi.org/10.1016/j.enggeo.2021.106211>, 2021.
- Sturm, M., Gems, B., Keller, F., Mazzorana, B., Fuchs, S., Papathoma-Köhle, M., and Aufleger, M.: Understanding impact dynamics on buildings caused by fluvial sediment transport, *Geomorphology*, 321, 45-59, <https://doi.org/10.1016/j.geomorph.2018.08.016>, 2018a.
- 670 Sturm, M., Gems, B., Keller, F., Mazzorana, B., Fuchs, S., Papathoma-Köhle, M., Aufleger, M.: Experimental analyses of impact forces on buildings exposed to fluvial hazards, *Journal of Hydrology*, 565, 1-13, <https://doi.org/10.1016/j.jhydrol.2018.07.070>, 2018b.
- Takahashi, T.: *Debris Flow Mechanics, Prediction and Countermeasures*, Taylor & Francis Group, London, UK, 2007.
- Tang, C., Rengers, N., Asch, T. V., Yang, Y. H., and Wang, G. F.: Triggering conditions and depositional characteristics of a disastrous debris flow event in Zhouqu city, Gansu Province, northwestern China. *Nat. Hazards Earth Syst. Sci.*, 11, 2903-2912, <https://doi.org/10.5194/nhess-11-2903-2011>, 2011.
- 675 Totschnig, R., Sedlacek, W., Fuchs, S.: A quantitative vulnerability function for fluvial sediment transport, *Nat Hazards*, 58, 681-703, <https://doi.org/10.1007/s11069-010-9623-5>, 2011.
- Yin, Y. P., Huang, B., Chen, X., Liu, G., and Wang, S.: Numerical analysis on wave generated by the Qianjiangping landslide in Three Gorges Reservoir, China. *Landslides*, 12, 355-364, <https://doi.org/10.1007/s10346-015-0564-7>, 2015.
- 680 Zeng, C., Cui, P., Su, Z., Lei, Y., and Chen, R.: Failure modes of reinforced concrete columns of buildings under debris flow impact, *Landslides*, 12, 561-571, <https://doi.org/10.1007/s10346-014-0490-0>, 2015.
- Zhang, J., Termaath, S., and Shields M. D.: Imprecise global sensitivity analysis using bayesian multimodel inference and importance sampling. *Mechanical Systems and Signal Processing*, 148, 107162, <https://doi.org/10.1016/j.ymsp.2020.107162>, 2021a.
- 685 Zhang, S., Zhang, L., Li, X., and Xu, Q.: Physical vulnerability models for assessing building damage by debris flows, *Engineering Geology*, 247, 145-158, <https://doi.org/10.1016/j.enggeo.2018.10.017>, 2018.
- Zhang, Y., Chen, J., Tan, C., Bao, Y., Han, X., Yan, J., Mehmood, Q.: A novel approach to simulating debris flow runout via a three-dimensional CFD code: a case study of Xiaojia Gully, *Bulletin of Engineering Geology and the Environment*, 80, 5293-5313, <https://doi.org/10.1007/s10064-021-02270-x>, 2021b.
- 690 Zhuang, Y., Yin, Y., Xing, A., and Jin, K.: Combined numerical investigation of the Yigong rock slide-debris avalanche and subsequent dam-break flood propagation in Tibet, China, *Landslides*, 17, 2217-2229, <https://doi.org/10.1007/s10346-020-01449-9>, 2020.