

# Seismic Background Noise Levels in Italian Strong Motion Network

Simone Francesco Fornasari<sup>1</sup>, Deniz Ertuncay<sup>1</sup>, and Giovanni Costa<sup>1</sup>

<sup>1</sup>SeisRaM Working Group, Department of Mathematics and Geosciences, University of Trieste, Via Eduardo Weiss 4, 34128 Trieste, Italy

**Correspondence:** Simone Francesco Fornasari (simonefrancesco.fornasari@phd.units.it)

**Abstract.** Italian strong motion network monitors the seismic activity of Italy and its surrounding with more than 700 stations. Thanks to the upgrade of the stations with continuous data acquisition, it is possible to measure the noise level of the strong motion network. In this study, we used the ~~recorded~~-background noise to estimate the variations in the noise levels of the network. Data recorded in ~~2019 and 1st of January to 30th of April 2022~~ 2019 and in the first quarter of 2022 are used to understand the noise level of the stations and data from the COVID-19 lockdown period are used to ~~see~~-study the effect of the anthropogenic sources on the background noise. To do that, power spectrum density is calculated for the continuous stations. It is found that more than half of the stations exceed the background noise model designed for strong motion stations by Cauzzi and Clinton (2013) in at least one of the calculated periods. Considering the characteristics of the instrumentation at the stations and their deployment often near urban areas, we focused on relatively short periods ( $\leq 5$ s), ~~interested by anthropic as they are~~ affected by anthropogenic noises. Stations can be noisier during the day, up to 14 decibels and during the weekday, up to 5 decibels in short periods. Noise level differences between day - night decrease with an increasing period as the human-related high - frequency effects of humans are attenuated. As expected, the noisiest stations are located in densely populated areas such as the center of Naples, whereas the quietest stations are located far away from cities. The swell, sea, and wind effects, on the other hand, are not observed ~~in at RAN~~ stations. During the COVID-19 lockdown, noise levels dropped ~~to by~~ 6.5 decibels in the daytime and 12.5 decibels on weekdays. Noise levels are reduced by around 2 decibels in 0.1s, in which cultural noise is predominant. Furthermore, we found that the vehicles have ~~measurable~~-significant effects on noise levels.

## 1 Introduction

Seismic stations record the vibration of the ground that is given by the superposition of multiple sources. The definition of seismic noise varies based on the target of each specific study. Since most of the seismic networks are ~~created~~-established to detect seismic events (i.e., earthquakes, volcanic activities, quarry blasts, ~~nuclear explosions and so on,~~ and nuclear explosions) all other vibrations are ~~considered~~-referred to as (ambient) noise. On the other hand, ~~noise can be used~~ ambient noise itself has been object of specific studies (e.g., for the characterization of layers of the earth (Shapiro et al., 2005), Moon (Larose et al., 2005), and Mars (Schimmel et al., 2021)). Noises can also be sub-categorized based on their source such as; i) seismic recorder (Ringler and Hutt, 2010), ii) temperature changes (~~Doody et al., 2018~~)(Stutzmann et al., 2000; Doody et al., 2018), iii) ocean ~~& and~~ sea waves (Webb, 1998; McNamara and Buland, 2004; Bonnefoy-Claudet et al., 2006; Cauzzi and Clinton, 2013; D'Alessandro et al., 2021; Anthony et al., 2022), iv) gravity-gradient noise (Harms et al., 2009), v) wind (Mucciarelli et al.,

2005; Bonnefoy-Claudet et al., 2006; D'Alessandro et al., 2021; Anthony et al., 2022), ~~v)-anthropic-vi~~ human activities (McNamara and Buland, 2004; Bonnefoy-Claudet et al., 2006; Cauzzi and Clinton, 2013; Vassallo et al., 2019; D'Alessandro et al., 2021; Anthony et al., 2022) (Figure 1). This work is focused on the study of the background seismic noise levels.

30 The level of noise affects the quality of the seismic signals, hence the ability to detect seismic events. To be able to monitor the seismic sources, seismic networks ~~need-to-have-require~~ knowledge about the noise content of the networks. To characterize the noise at a given station, the frequency content of the noise is calculated via power spectrum density (PSD). The above-mentioned noise sources can be seen in different frequency bands of the PSD (D'Alessandro et al., 2021). Various models ~~are~~ have been created to interpret the noise levels. The model of Peterson (1993) is widely used to define the lower ~~and-upper~~ bounds of the recorded noise as a baseline. In that study, low (New Low Noise Model, NLNM) and high-upper (New High Noise Model, NNNM) ~~levels-of-noise-models-are~~ bounds of the recorded noise as a baseline, developed using a worldwide catalogue from a wide variety of seismic stations. Cauzzi and Clinton (2013) developed the accelerometer low-noise (ALNM) and high-noise (AHNM) models using accelerometric data from the Swiss Seismological Service (Clinton et al., 2011) and very broad-band along with accelerometric data from Southern California Seismic Network (California Institute of Technology and United States Geological Survey Pasadena, 1926). The ~~ALNM-AHNM~~ is computed as the lower boundary of 5-percentile PSD amplitudes observed on rock sites while the AHNM-ALNM is computed as a particular combination of accelerometric sensors with a given gain and response with dataloggers. In ALNM, instrument and data logger noise are dominant at all frequencies, whereas in AHNM, urban noise, microseismic activities, and data logger systems dominate the short periods, mid-range periods, and long periods, respectively. This model is widely used as the baseline model for strong motion sensors (Ringler et al., 2015, 2020).

~~To reduce the recorded noise, Even though to optimize the quality of the recordings~~ seismic stations should be installed away from ~~anthropogenic noises such as any source of noise (e.g., roads, major cities, factories etc. However, not all seismic stations are placed in quiet locations since other factors weigh in and factories),~~ the selection of the ~~"optimal" locations; even though human activity increases the noise level, the installation in buildings and infrastructure provides information about potential damages occurring during seismic events.~~ "optimal" location to install a seismic station weights multiple parameters depending on the purpose of the specific network. The National Accelerometric Network (RAN), owned and managed by the Italian Civil Protection Department (DPC) operates the integrated Italian Strong Motion Network (RAN, Rete Accelerometrica Nazionale in Italian, Gorini et al. 2010; Costa et al. 2022) (Presidency of Council of Ministers - Civil Protection Department, 1972; Gorini et al., 2010; is established to monitor strong motions at a national level. The integrated RAN is the result of cooperation between the Italian government, regions, and local authorities that has been carried out for more than 25 years combination of RAN with the following networks; i) the Friuli Venezia Giulia Accelerometric Network (RAF, Rete Accelerometrica Friuli Venezia Giulia in Italian, University of Trieste 1993; Costa et al. 2010) in the North-East Italy, owned and managed by the University of Trieste (UniTS) ii) Irpinia Seismic Network (ISNet, Weber et al. 2007) in the South of Italy, owned and managed by Analysis and Monitoring of Environmental Risk Society (AMRA). Thereinafter, RAN will refer to the integrated RAN.

60 In this paper, we focus on the background noise in RAN ~~accelerometric network. To do that, we analyze by analyzing~~ the data coming from ~~528-532~~ continuous stations between 2019 and 2022. To ~~see the effect of the COVID-19 pandemic,~~

~~we compare the 2019 and 2022 noise data with the one from the Italian nationwide lockdown in March 2020. Starting do that we focused, in general, on the short periods ( $< 5$  s) since they carry more relevant information related to parameters useful for civil defence purposes (e.g., PGA, PSA0.3, PSA1.0, and PSA3.0). The progressive conversion of data acquisition from triggered to continuous recording starting from the end of 2021, a vast amount of RAN stations are changed with new generation recorders. Furthermore, they have been converted from triggered to continuous recording, enabling us to study the nationwide noise levels of the accelerometric network for the first time thanks to continuous data. 2020 increased the number of stations available to study noise levels on a national scale.~~ In Section 2, we explain the properties of ~~the RAN network RAN~~ and the time coverage of the data. In Section 3~~section~~, the data preprocessing and PSD ~~calculation features processing workflow~~ are explained. Background noise levels are presented in Section 4 and the possible noise sources are discussed in Section 5. ~~During the covid~~ To see the effect of the COVID-19 pandemic on the anthropogenic noise, we compare the 2019 and 2022 noise data with the one from the Italian nationwide lockdown. Numerous studies showed that during the pandemic, background noise levels are decreased due to the lockdown measures forced on a national scale all around the globe (Lecocq et al., 2020; Poli et al., 2020; Piccinini et al., 2020). During the COVID-19 lockdown the opportunity is raised to see the noise level changes due to human activity and how 'silent' the stations can be. Variations in the noise levels during the COVID-19 and non-COVID-19 time periods, along with several noise sources that we can clearly identify, are interpreted, and the overall background noise of ~~the RAN network RAN~~ is presented in Section 6. ~~For simplicity COVID-19 lockdown period is called lockdown period and non-COVID-19 time period is called no-lockdown.~~

## 2 Data

~~The integrated National Accelerometric Network (RAN, Costa et al. 2022) comprises RAN consists of more than 700 stations managed by cooperating Italian governmental bodies and regional and local authorities. The network is the combination of 3 accelerometric networks namely, the RAN, owned and managed by the DPC (Gorini et al., 2010; Zambonelli et al., 2011; Costa et al., 2022); the Friuli Venezia Giulia Accelerometric Network (RAF, Rete Accelerometrica Friuli Venezia Giulia in Italian, Costa et al. 2010) in the North-East, owned and managed by the University of Trieste (UniTS); and the Irpinia Seismic Network (ISNet, Weber et al. 2007) in the South, owned and managed by Analysis and Monitoring of Environmental Risk society (AMRA). However, some of them are triggered stations and it is not possible to calculate noise levels. Hence we have 528 stations that of which 532 provided continuous data in the time range that we are interested in. RAN stations have generally a standardized installation near urban areas (see Table 1) in free-field conditions, with instruments placed on an isolated pillar anchored on rock or put inside of the sediments. Since 2020, the network transitioned from triggered to continuous recording thanks to improvements/updates in the recording instrumentation.~~

Data from 2019 are used to characterise background noise information from ~~the RAN network RAN~~ along with seasonal, daily, and hourly changes. Data collected during the ~~2020 COVID-19~~ lockdown (9 March - 4 May 2020) provide information about the noise levels when the anthropogenic sources nationwide were ~~minimal~~ reduced in many places. Data from 2022 (1

January - 30 April 2022) are used to study the post-lockdown noise level and, thanks to the great increase in the number of  
95 continuous stations, provide better coverage of the Italian territory.

Thereinafter the combined data from 2019 and 2022 will be referred to as non-lockdown data, as opposed to the data from 9  
March - 4 May 2020 which will be addressed as lockdown data. The location and data availability for each station is presented  
in Figure 2.

### 3 Method

100 The method introduced by McNamara and Buland (2004) represents the de facto standard for the evaluation of PSDs. This  
method was originally developed as a tool for monitoring the status of seismic stations: as such, the original parameters used  
for the computation of the PSDs and the use of smoothing and averaging provide a way to reduce the storage and computation  
costs involved, but can be limiting when the method is extended to scientific uses, as shown by Anthony et al. (2020).

The method implemented to compute the PSDs partially mirrors the one by Anthony et al. (2022), which in turn is an adap-  
105 tation of McNamara and Buland (2004). Each daily recording is divided into 90 min windows with 50 % overlap, each one  
subsequently divided into 15 min subwindows with 75 % overlap: as pointed out by Anthony et al. (2020), the window length  
becomes less relevant for higher frequencies and noisier stations, which are the conditions of the present study. Data complete-  
ness above 90 % is required for each 90 min window. Transient signal, consisting also of earthquakes, are not removed from the  
seismic traces since they are low-probability occurrences with respect to ambient seismic noise (McNamara and Buland, 2004)  
110 : Anthony et al. (2020) showed that while the presence of earthquakes in the recordings can skew the median ambient-noise  
estimates for longer periods (10 s-50 s), no significant effects have been observed for short periods. During preprocessing, ~~the~~  
data are linearly detrended, the gaps are linearly interpolated, and a Hann window is applied to limit spectral leakage (Peterson,  
1993; Anthony et al., 2022). For each 15 min subwindow the PSD is computed using Welch's method (Welch, 1967), the results  
for all the subwindows within each 90 min window are averaged, and the instrument response is then removed from the PSD.  
115 No binning and smoothing are performed during the PSDs computation. ~~Similarly-Similar~~ to Anthony et al. (2022), we per-  
formed a one-third octave average over the PSDs: the averaging bandwidth can be assumed as a reasonable trade-off between  
the obtained spectral resolution and the accuracy in the broadband noise sources characterization in each band. The parameters  
used for the evaluation of the PSDs in our study, along with the ones used in ~~McNamara and Buland (2004); D'Alessandro et al. (2021); An~~  
McNamara and Buland (2004), D'Alessandro et al. (2021), and Anthony et al. (2022) are reported in Table 2.

120 To study specific patterns in the noise levels over time, the PSDs are studied by grouping them over different time ranges.  
To study the effects of ~~anthropic-anthropogenic~~ noise it is a common practice to consider the variations between day (08:00 -  
18:00) and night (20:00 - 07:00) and between weekday (Monday - Friday) and weekend (Saturday - Sunday). Similarly,  
the variations between summer and winter are analysed to check seasonal variations of the noise levels. To study seasonal  
variations we limited our analysis to 2019 being the only ~~currently available~~-year-long dataset analysed in this study with  
125 continuous recordings unaffected by lockdown measures. Stations with more than 50% of data for both summer and winter

time periods are selected to analyze seasonal effects. The statistics related to these variations are computed over the daily difference of the medians of each group.

## 4 Results

The results obtained for 20 randomly selected stations applying the method introduced in the described in Section 3 are shown in Figure 3 for ~~a few selected stations and for some the~~ periods of interest, namely 0.1 s, 0.25 s, 0.5 s, 1 s, 2 s, and 5 s (Figure 4).

: this provide an overview of the behaviour of the noise at different timescales for different periods, as described in details afterwards (see Figure 1). The overall background noise levels for all stations in RAN are presented in Figure 4. The period-wise median of the PSDs for each station is computed and interpreted as the representative noise level. Since ~~the RAN network~~ RAN is a strong motion network, we are mainly interested in periods less than 5 s. Anthropogenic sources can have a major role in the noise content of short periods (Table 1) which also ~~provide vital are essential~~ provide vital are essential information for seismic parameters estimation, seismic engineering and building monitoring. ~~The quietest and noisiest Noise level statistics of~~ Noise level statistics of RAN stations for each period of interest are reported in Table S1 with the related noise level and the station placement (~~in the Supplement each station is described along with an explanation about the possible noise source in the nearby area~~).

~~The RAN network RAN~~ RAN has relatively high noise levels in high frequencies short periods. Numerous stations exceed the levels defined by Cauzzi and Clinton (2013). The median noise at each station, presented in Figure 4, and the AHNM have been compared and the results are reported in Table 3. 1 s is the period for which we have the highest rate of ~~exceedence~~ exceedance of the AHNM level with 34.4 % of the stations ~~exceeding the AHNM level~~. The probability density function calculated over the median PSD of all stations can be seen in Figure 5. The median values for 0.1 s, 0.25 s, 0.5 s, 1 s, 2 s, and 5 s are -112.59 dB, -119.09 dB, -120.35 dB, -119.98 dB, -118.07 dB, and -115.98 dB, respectively. The median values are always below the AHNM model for the frequency period range of interest. Between 0.1 s and 2 s, stations located in the Po valley and the area from Ischia Island to Naples have relatively high noise levels. Stations around Naples and Ischia Island have the same trend in higher periods.

Under the common assumption that the ~~anthropic~~ anthropogenic noise decreases during the night hours and during the weekend, we characterised the contribution of human activities to the ambient noise levels. ~~At~~ Considering the data from 2019 and 2022, at 98.2 % of the stations ~~, nighttime has lower noise levels on average there is a reduction in noise levels at nighttime~~ with respect to the average noise during daytime (Figure 6). Daytime-nighttime noise level change reduces with increasing periods at 0.1 s, 0.25 s, 0.5 s, 1 s, and 2 s with median values of 6.14 dB, 1.37 dB, 0.30 dB, 0.8 dB, and 0.8 dB, respectively. Among these periods 529, 512, 498, 433, 405, and 485 stations are noisier during the daytime.

~~Another common assumption is that the noise levels are lower during the weekends due to the reduction in working activities. Considering the data from 2019 and 2022 are used we~~ We also studied the changes in the noise levels between weekdays and weekends and the general trend of noisier weekdays are observed (Figure 7), consistently with the assumption of a reduction in human activities during the weekends. Median changes between weekdays and weekends are smaller with respect to the

160 daytime-nighttime changes with the same trend of decreasing differences with increasing periods. Weekday-weekend median differences are 0.95 dB, 0.38 dB, 0.11 dB, 0.02 dB, 0 dB, and -0.07 dB for 0.1 s, 0.25 s, 0.5 s, 1 s, 2 s, and 5 s, respectively. General trend of noisier weekdays can be followed between 0.1 s to 1 s with 487, 484, 457, and 353 stations in the periods of interest.

165 ~~We have analyzed Data from 2019 are further used to study~~ the seasonal variation of very long period noises ( $\geq 5$  s), as shown in Figure 8. The results show that winters are noisier than ~~the~~ summers as suggested by ~~Anthony et al. (2022); D'Alessandro et al. (2021)~~  
170 ~~, however there is no significant variation among long periods even though main noise sources for each period are different previous studies (Stutzmann et al., 2000; McNamara and Buland, 2004; Anthony et al., 2022; D'Alessandro et al., 2021) with the number of stations that are noisier during winters with respect to summer can go up to 121 in 16 s with median noise level change up to 1.55 dB. Despite the difference in noise sources potentially contributing in the long periods (Figure 1), no significant variations have been noticed among different periods and no particular effect related to any specific source has been found.~~

#### 4.1 COVID-19 Lockdown

In the early periods of the COVID-19 pandemic, Italy introduced a full lockdown in the ~~country, whole country~~ which limited the daily activity of the general public. ~~Lockdown is as well as a wide range of industrial activities. Lockdown~~ started on the 9th of March 2020 (8th of March in Northern Italy) and ended on the 4th of May 2020. ~~After Following~~ the nationwide  
175 ~~lockdownnew, different containment~~ measures were set ~~region-wise to decrease the spread of the virus which is harder to track since the measures have changed over time. Because of that, we only analyze the full lockdown between March and May 2020. To do that, results from the 2019 and 2022 are compared with the lockdown period. on a more local scale and at different times.~~

To observe the noise level changes during the lockdown, 309 stations that were continuously recording during ~~2019 and/or~~  
180 ~~2022 and the lockdown period both the lockdown and the non-lockdown periods~~ are selected. ~~We presented the noise differences in~~ For short periods general trend of quieter stations during the lockdown than the non-lockdown dates can be noticed (Figure 9), with 303, 277, 255, 237, 280, and 259 stations being quieter at periods of 0.1 s, 0.25 s, 0.5 s, 1.0 s, 2.0 s, and 5.0 s for the common stations (Figure 9), respectively. In all of the periods lockdown dates are quieter than the non-lockdown dates. During the lockdown 303, 277, 255, 237, 280, and 259 stations are quieter. Furthermore, hour and day ~~→~~ specific results  
185 are also presented in daytime - nighttime (Figure 10). During the both daytime and nighttime of lockdown dates stations are quieter with respect to non-lockdown dates. Median daytime changes vary between 2.27 dB and 0.13 dB whereas nighttime changes are between 1.19 dB and 0.12 dB. Weekday-weekend differences ~~are also calculated but results,~~ not presented in the paper for the sake of simplicity. ~~The figures can be seen in Supplement, but reported~~ Figure S2. Median weekday noise level changes goes up to 4.12 dB and weekend changes goes up to 0.39 dB in 0.1 s. Majority of the stations are noisier in weekday  
190 ( $\geq 75\%$ ) and weekends ( $\geq 60\%$ ) of non lockdown period.

## 5 Discussion

In Table 1, it is shown that shows the distribution of the stations according to the classification proposed by Istituto Superiore per la Protezione e il Risparmio Ambientale. Even though most of the stations are located in urban areas, in which the cultural noise ( $\leq 1$  s) is increased due to human activity. Even though there are several stations and potentially subjected to high levels of anthropogenic noise, this classification is too reductive (e.g., DST2) that are located in the settlement zones, they are slightly far away from the densely populated areas. Nevertheless, the source of the high frequency noises can be linked to the human activity in most cases (see Section 5.2) not considering the population density and the presence or making a distinction between residential and industrial areas) to be associated to specific noise levels.

The interpretation of the background noise in Italian strong motion network can be done in three different ranges that are low periods ( $< 1$  s), medium range periods ( $\geq 1$  s,  $\leq$  between 1 s and 5 s), and long periods, ( $> 5$  s). As mentioned before, in the lower periods, human activities are the main source of the background noise. In 273 stations of 525 noise levels exceed 273 of 532 stations have noise levels exceeding the AHNM developed by Cauzzi and Clinton 2013, as reported in Table 3 considering the results for different periods. In Table 3, the highest percentage number of stations exceeds the AHNM is at 1 s. This can be due to the specific datalogger systems used by RAN, as discussed by Cauzzi and Clinton (2013), that shift the background noise levels up and cause network-wide high level noise (Figure 4) at this specific period.

As shown in Table 3, 51.3% of all stations exceed the AHNM for at least one period. However, by comparing with the P-wave corner frequencies by Brune (1970), even the 10 noisiest stations theoretically detect the P wave arrival of magnitude 2.7 event starting from 1 km epicentral distance (Figure S3). Since the purpose of RAN is to record peak amplitudes, those stations are useful even for earthquakes with smaller magnitudes and longer epicentral distances.

The effect of the human activity on noise levels can be seen by comparing daytime noise to nighttime noise, for which the human activity is assumed to be reduced. As seen in Figure 6, the majority of the stations are noisier during the day for periods less than 1 s. The noise difference between day and night decreases with increasing periods, but the nationwide trend of days being noisier is valid for 0.1 s, 0.25 s, and 0.5 s. The same pattern can be seen in broadband stations located in Italy (D'Alessandro et al., 2021).

In the weekday - weekend variations, the same trend pattern can be followed in short periods. Figure 7 shows that weekdays were noisier with respect to weekends in almost all stations. Depending on the settlement's characteristics, noise level change can have large or small values on the weekend. If a station is located in a settlement where on the weekend human related noises are not changing (e.g. touristic areas), the power change between weekday and weekend will be small. The same logic applies to the stations located on the outskirts of the settlements, since the high-frequency noises attenuate rapidly with distance. The noise level changes are consistent with the changes in weekly human activities.

In the medium range periods, there are multiple noise sources that have been identified by previous studies (Figure 1). Cauzzi and Clinton (2013) stretches the cultural noise up to 3 s whereas D'Alessandro et al. (2021) indicates that wind and swell related noises are dominant between 1 s to 10 s. Consequently, variations in the noise sources in 2 s and 5 s can be found by analyzing the daily, weekly and seasonal changes.

225 Day and night differences follow the trend that is seen in shorter periods in most of the network. However, in 1 s the day and night differences are nulled ~~in central Italy, whereas stations located at~~ at most stations with the notable exception of the stations located in the Po valley, on Ischia island, and ~~Naples continue to be in~~ Naples which remain noisier during the day. The majority of the stations exceed the AHNM threshold in 1 s, and the noise levels do not change during the night, which means that the anthropogenic effects are not the dominant source. Even though in 2 s and 5 s there is a general trend of having higher  
230 noise levels during the ~~day-time~~ daytime, the power change is very small ~~-We believe that~~ (0.11 dB and 0.22 dB, respectively). Moreover, the effects of sea, swell, and/or wind at our stations have not been identified and thus, do not have a significant role on the noise levels. There is no clear correlation between the noise level at ~~our~~ RAN stations and their distance to the coastline, as also shown in Figure 4.

~~On the weekdays and weekends, stations start being~~ Considering weekly variations, stations become noisier on weekends with decreasing power change with increasing periods. In the Po valley, the general trend of a high noise level diminishes starting from 2 s in average and in the same periods, unlike the day and night difference, weekends follow the same trend.

In long periods, the effects of wind, swell, sea, pressure, and instrumental noises are ~~in action~~ addressed in literature as the main sources of the noise (Figure 1). The difference between the noise levels in the winter and summer periods of 2019 can be seen in Figure 8. ~~There is almost no change in terms of noise level changes within periods. Moreover, there is no change in noise levels from shores to inland and from high altitudes (Alps, Apennines) to low altitudes (Po valley). We believe that the main source of the noise in long periods is the instrumental noise, as indicated by Cauzzi and Clinton (2013), in which accelerometric stations are used, as in our study.~~

~~In~~ Unlike in the study of D'Alessandro et al. (2021) ~~;-in which~~ it is stated that in periods between 0.83 s and 8.33 s noises are higher in coastal areas with respect to the inland. However, in our study, there is, we found no evidence of such a pattern  
245 ~~for RAN stations. This is consistent with the instrumental noise of the stations being the main source of long period noise associated with accelerometric recordings, as indicated by Cauzzi and Clinton (2013).~~

In Figure 4, there are some areas that follow the pattern found by D'Alessandro et al. (2021), such as in Naples, noise levels are higher than in the stations that are East of Naples inland. In 1 s only the stations in Naples are in agreement with D'Alessandro et al. (2021) and in our study noise levels are much higher in other parts of Italy. The same trend can be seen in  
250 longer periods (>5 s). There are numerous stations located in the Po valley with high noise levels even though they are far away from the sea, and several stations located in the Alps in North West Italy. In 0.1 s, we have noisy stations in Po valley, Puglia, and the eastern part of Sicily, where our stations are noisier than the ones analyzed in D'Alessandro et al. (2021). However, in short periods our results are in agreement with the study of D'Alessandro et al. (2021) in other parts of Italy. ~~Human-made~~ We can conclude that human-made activities dominate the low ~~period~~ periods of the ~~noises~~ noise content and high noise levels  
255 can be linked to the activities that are occurring in the area where ~~anthropic~~ anthropogenic sources are present. Reduction in human activity can be seen in Figure 6 in which almost all stations have lower noise levels at night with respect to their daytime counterparts.

## 5.1 COVID-19 Lockdown

Previous studies showed that during the COVID-19 lockdown there was decrease in noise levels due to the reduction of human-related activities, and as recorded by both broadband (Poli et al., 2020; Xiao et al., 2020; Lecocq et al., 2020; Somala, 2020; 260 Dias et al., 2020; Roy et al., 2021; Grecu et al., 2021; Cannata et al., 2021) and strong motion (Yabe et al., 2020; Łukasz Ścisło et al., 2021) stations. ~~These activities were affecting our stations more~~ Yabe et al. (2020) found a clear noise level drop in Tokyo metropolitan area in Japan in periods between 0.05 s and 1 s. Cannata et al. (2021) found that in Sicily (Italy) 0.1 s and lower periods have the most noise level reduction in COVID-19 pandemic. Lecocq et al. (2020) found that background 265 noise levels of numerous seismic stations all around the globe reduced up 50 % during COVID-19 lockdown with respect to the average background noise of the previous weeks before the lockdown. It affected not only the densely populated cities such as London and Paris but also relatively less populated areas such as Barbados and Faroe Islands.

Human-related activities affect RAN stations significantly since several of ~~the RAN stations them~~ are located inside or near ~~to the~~ public buildings.

270 ~~Human activity was~~ These activities were reduced during the lockdown period of the COVID-19 pandemic, since individuals were only allowed to move ~~up to 500 m diameter within 500 m~~ from their homes and only essential workers were exempt from the distance restrictions. Many public institutes worked remotely in most of their units, which also reduced ~~the~~ human activity in ~~the public buildings where some of our stations are located. This leads~~ public buildings. This led to the reduction in noise levels ~~in~~ (shown in Table 4). In the 0.1 s, there is almost 2 dB noise reduction between the median noise difference between 275 lockdown and no - lockdown time periods at the stations (Figure 9a). The difference has the lowest reduction in 1 s but the noise levels are higher during this period with respect to AHNM (Figure 4). In Apennines there are numerous ~~station in which~~ stations whose noise levels between 0.5 s to 2 s have not been affected by the lockdown (Figure 9c-e). ~~Being the instrument self noise~~ Since for periods greater than 5 s the instrument self-noise is the dominant source ~~in the long periods, as previously described,~~ we limited ~~out our~~ analysis of the effect of the lockdown to periods up to 5 s. For all the periods considered, the 280 lockdown period is on average quieter during daytime than the 2019 - 2022, with an average noise level reduction of 1.0 dB.

The change between daytime and nighttime are visible especially on shorter periods ( $\leq 0.5$  s, Figure 10a,c,e). Changes in the daytime are more significant than the changes in the nighttime between the lockdown and no-lockdown time span. ~~In the shorter periods, both more stations are noisier during the daytime in the no - lockdown period and the power change is almost always greater in the daytime, with respect to the nighttime difference.~~ All stations are noisier both during the daytime and 285 nighttime in periods shorter than 0.5 s, whereas, in periods of 1 s and 2 s, stations in ~~The the~~ Apennines have similar power change in both daytime and nighttime. There is a clear trend of noisier day and ~~nights night~~ in Southern Italy in 2 s and it can be partially traced in 5 s. Even though numerous stations have relatively high noise levels in 2 s (Figure 4e), there is no particular pattern in this period with respect to other parts of Italy.

## 5.2 Case Study: Stations ~~located~~ Located in Trieste

290 To show the significant effects that the nearby surrounding of a station can have on its noise level we considered two RAF stations. CARC (latitude: ~~45.65260~~45.652, longitude: ~~13.77000~~13.770) and DST2 (latitude: ~~45.65890~~45.658, longitude: ~~13.80130~~13.801) ~~stations are part of the RAF network and are~~ located in Trieste, (in North-East Italy. Even though the distance between these two stations are less than 3 km, there is a significant difference in noise levels among them-), that despite their proximity (<3 km) show significant differences. The selection of these two particular stations is further supported  
295 by the extensive knowledge of their spatial and administrative information.

DST2 station is located at in the basement of one of the Mathematics and Geosciences Department buildings of the ~~University of Trieste UniTS~~ University of Trieste UniTS that sits on a deep Flysh deposits (Figure 11). CARC station is located on the ground floor of the Palazzo Carciotti which is located in the city center of Trieste and was built in the early 19th century. It crosses with one of the main major roads in the city center and the building is surrounded by multistory residential buildings. Historically, this area was a salina (Figure 12) and the area is filled with ~~the a~~ 27 m depth material layer (Fitzko et al., 2007) to cover up the salina to expand  
300 the city in the 18th century.

In Figure 13, median of lockdown and no-lockdown ~~dates-periods~~ are presented. In order to see the hourly changes in noise levels, 90 min PSDs are plotted, separately. In the lower periods (<1 s) where anthropogenic noises ~~are more dominant~~ prevail, CARC station is noisier in both time ranges. In the daytime noise levels ~~surpass~~ exceed the upper limit of Cauzzi and Clinton  
305 (2013) model, whereas in nighttime they are close to the upper limit. During the lockdown, both stations have lower amplitudes in ~~high frequencies~~ low periods that can be associated with the reduction in the human activities. At CARC station, there is significant decrease in noise between 20:00 and midnight. Between ~~1 Hz and 50 Hz~~ 0.08 s and 1 s, median noise levels are decreased 8.68 dB and 2.36 dB for DST2 and CARC stations, respectively.

It is worth to consider that ~~even though the noise levels are dropped in CARC station, it is not as significant as DST2. In the lockdown period human activity was limited but it was not fully halted. On the other hand, in the San Giovanni Campus of University of Trieste San Giovanni campus of the UniTS,~~ where DST2 is located, is an isolated area within the city where almost all human activity is ceased. The university campus was already quieter than the city center and the closest residential zone is around 100 m away from the station. On top of that, the library of the department which is located on the ground floor of the building was closed activities ceased during the lockdown. On the other hand, being located near one of the city road  
315 artery, CARC was still affected by the limited human activity present during the lockdown, hence the minor reduction in the noise levels.

### 5.3 Vehicle Noise

As mentioned before in Section 1 some of the seismic stations are positioned in public buildings ~~that are near the main roads. This caused relatively noisy stations and one of the major source for the noise is cars. Various schools, municipality, and governmental buildings are used as a shelter for the seismic stations and these building are tend to positioned,~~ located in urban  
320 areas ~~with~~ and connected by convenient transportation infrastructure. Consequently, these stations provide relatively noisy recordings with cars being one of the main noise sources.

To demonstrate the effect of the cars in seismic noise measures, PLTA (latitude: ~~41.88640~~41.886, longitude: ~~14.78930~~14.789) station is chosen (Figure 14). ~~PLTA-The~~ station is located next to the municipality building of Palata in Central Italy, which has 2 intersections ~~50 m away from it~~within 50 m. Cars are detected ~~manually in seismic trace~~ in 13 days of 2019 by ~~hand~~visually analyzing the data. In total, 7289 ~~car-related~~car-related signals with time duration between 5 s and 20 s are chosen for further analysis in which Fast Fourier transforms (FFTs) are calculated (Figure 14). In Figure 15, it can be seen that the frequency ~~information of the cars~~content of the analyzed car-related signals and peaks in PSD ~~are overlapping~~overlap which means that in the period range between ~~9.5 s and 50 s~~0.95 s and 0.06 s, cars can be considered as the main source of the noise.

## 330 6 Conclusions

~~In this study, the noise levels of RAN network are analyzed. To do that, continuous stations of the network are selected for~~ The recent modernization of RAN stations allowed us to study their noise levels on a nationwide scale. The analysis is performed by computing PSDs over 90 min windows of signals using continuous recordings acquired between 2019 and 2022. ~~Thanks to the modernization of the stations, for the first time noise level of the Italian strong motion can be analyzed in its full scale.~~ Recently, noise levels of Italian broadband network is available (D'Alessandro et al., 2021) and our study completes the strong motion noise levels of the Italian territory. To make the analysis, PSDs over 90 min windows of signals are processed The results of this study improve the overall seismic background noise information of Italy, complementing the previous work by D'Alessandro et al. (2021) for the Italian broadband network. It is found that a significant number of stations (up to 51.3 % of all stations) ~~in relatively short periods ( $\leq 1$  s)~~ have higher noise levels than the AHNM that is defined for accelerometers in ~~Switzerland and California~~ by Cauzzi and Clinton (2013).

As presented in Section 4 ~~RAN network have,~~ RAN has several very noisy stations located ~~in the city centers~~within cities. We must stress ~~out that that the~~ fundamental duty of ~~the RAN network~~ RAN is to provide ground motions of the locations where civil ~~defense~~ defence may need to provide assistance in post-disaster (~~eg. e.g.,~~ strong earthquake) situations. Even though some of these stations are noisy (~~eg. e.g.,~~ CSA7), they are well capable of providing the true nature of the ground motion if there is a strong earthquake nearby, hence they are able to serve ~~for~~ their purpose (Costa et al., 2022). ~~On the other hand, there are large number of stations with low noise levels. These stations not only capture the amplitudes of large magnitude events but also the small ones. Hence, they can be used in a wider portion of observational seismology related studies. The median noise levels~~ Depending on the nature of the future station installations and studies, noise levels of RAN (Figure 4) provide an overview of the background noise of the network and they can be used as a station selection criterion depending on the nature of the future research. may give an insight into the capabilities of the stations.

~~Some of the stations in the RAN network are positioned inside or just outside the governmental buildings such as schools, municipalities (528 of the stations are installed in settlements) whereas some of them are located away from settlements. As a result of this, stations such as CARC have high~~ The surrounding conditions for RAN stations within settlements are variable and have noticeable effects on the noise levels. ~~CARC also has higher noise levels than~~ The comparison of CARC and DST2 station, which is stations, located less than 3 km ~~away from it but inside the building with relatively scarce human activity~~

(Figure 13). Another problem of being inside the settled areas is the vehicle noise. It is found that vehicles can dominate the background noise in short periods ~~apart, clearly describes this situation. It also highlights another common problem for stations installed in settled areas which is the presence of vehicle noise that is dominant in the short period range~~ (Figure 15). On the other hand, it shows that installing a station slightly away from the city center, if possible, may increase the data quality significantly without losing much information about the area of interest. Having the example of the CARC and DST2 stations, network operators can reconsider relocating the seismic stations away from the city center. We are well aware of the fact that it is not always an easy task due to various factors (eg. logistics, agreements among network operators and local authorities) ~~From the comparison we can conclude that by carefully considering the surrounding conditions for the station placement is possible to record high quality data without compromising the coverage of the area of interest.~~

360 ~~To see the daily variation~~ The daily variations of the noise levels of the station, ~~noise levels between the hours of obtained comparing the~~ daytime (08:00 - 18:00) and nighttime (20:00 - 07:00) ~~are compared. It is found results, show~~ that in short periods where human - made activities dominate the seismic records, daytime is noisier than nighttime. This trend can be seen in some stations also in longer periods, but it cannot be generalized ~~for all stations to the whole network.~~

In the longer periods ( $\geq 1$  s), ~~various studies showed that wind, swell, sea, pressure, and instrumental noises are the dominant sources. However, in our study there is no clear pattern of~~ unlike various previous studies, our analysis has not found any evidence of the swell and sea effect on noise levels (between 1 s and 40 s) ~~can be followed by analyzing the results from the stations located near the seaside and away from the coastal line with no clear pattern arising considering stations at different distance to the coastline~~ (Figure 4). ~~For instance, stations in the Alps can be noisier than the stations in Genoa, which is a city located on the coast of the Tyrrhenian Sea. There is also~~ Additionally, no seasonal pattern ~~seen has been found~~ in very long periods ( $\geq 5$  s, Figure 8). In periods between 2 s to 5 s, winter is noisier as expected from previous studies (D'Alessandro et al., 2021); but in longer periods it is reversed and the median noise ~~difference differences~~ between winter and summer are generally constant ~~with increasing period. This leads us to interpret the main source of the noise in these periods to be the network-wise with values increasing with periods. These results are consistent with the~~ instrumental noise ~~as Cauzzi and Clinton (2013) indicated being the main noise source at long periods, as indicated by Cauzzi and Clinton (2013).~~

375 ~~During the COVID-19 lockdown in Italy that is applied between March and May 2020, (from March to May 2020)~~ noise levels are reduced due to several measures that limited the human activity. Its effect can be seen for all the considered periods with an average reduction in the noise level of 1.0 dB (and up to 2.9 dB at 0.0625 s) during the daytime. The effect of the lockdown also affected the weekday and weekend variations of the noise levels.

Thanks to the continuous data acquisition in RAN, further studies related with background noise can be carried out in future.  
385 The high density of RAN stations can be leveraged to perform local and regional studies of noise level variations. Moreover, national level background noise models can be developed similar to D'Alessandro et al. (2021).

*Code and data availability.* The analysis has been performed using the data and metadata from the Italian Strong Motion Network (RAN, Gorini et al. 2010; Costa et al. 2022). Data and materials along with the developed models can be found in a dedicated GitHub repository.

390 *Author contributions.* Conceptualisation, all authors.; methodology, S.F.F.; software, S.F.F.; data curation, all authors; writing—original draft preparation, D.E. and S.F.F.; writing—review and editing, all authors; visualisation, S.F.F. and D.E.; supervision, G.C.; project administration, G.C.; funding acquisition, G.C. All authors have read and agreed to the published version of the manuscript.



*Competing interests.* The contact author has declared that none of the authors has any competing interests.

*Acknowledgements.* This study received financial support from the Italian Civil Protection - Presidency of the Council of Ministers.


- Anthony, R. E., Ringler, A. T., Wilson, D. C., Bahavar, M., and Koper, K. D.: How processing methodologies can distort and bias power spectral density estimates of seismic background noise, *Seismological Research Letters*, 91, 1694–1706, 2020.
- Anthony, R. E., Ringler, A. T., and Wilson, D. C.: Seismic background noise levels across the Continental United States from USArray transportable array: The influence of geology and geography, *Bulletin of the Seismological Society of America*, 112, 646–668, 2022.
- 400 Bonnefoy-Claudet, S., Cornou, C., Bard, P.-Y., Cotton, F., Moczo, P., Kristek, J., and Fäh, D.: H/V ratio: A tool for site effects evaluation. Results from 1-D noise simulations, *Geophysical Journal International*, 167, 827–837, 2006.
- Brune, J. N.: Tectonic stress and the spectra of seismic shear waves from earthquakes, *Journal of Geophysical Research (1896-1977)*, 75, 4997–5009, <https://doi.org/https://doi.org/10.1029/JB075i026p04997>, 1970.
- California Institute of Technology and United States Geological Survey Pasadena: Southern California Seismic Network,  
405 <https://doi.org/10.7914/SN/CI>, 1926.
- Cannata, A., Cannavò, F., Di Grazia, G., Aliotta, M., Cassisi, C., De Plaen, R. S., Gresta, S., Lecocq, T., Montalto, P., and Sciotto, M.: Seismic evidence of the COVID-19 lockdown measures: a case study from eastern Sicily (Italy), *Solid Earth*, 12, 299–317, 2021.
- Cauzzi, C. and Clinton, J.: A high-and low-noise model for high-quality strong-motion accelerometer stations, *Earthquake Spectra*, 29, 85–102, 2013.
- 410 Clinton, J., Cauzzi, C., Fäh, D., Michel, C., Zweifel, P., Olivieri, M., Cua, G., Haslinger, F., and Giardini, D.: The current state of strong motion monitoring in Switzerland, in: *Earthquake Data in Engineering Seismology*, pp. 219–233, Springer, 2011.
- Costa, G., Moratto, L., and Suhadolc, P.: The Friuli Venezia Giulia Accelerometric Network: RAF, *Bulletin of Earthquake Engineering*, 8, 1141–1157, <https://doi.org/https://doi.org/10.1007/s10518-009-9157-y>, 2010.
- Costa, G., Brondi, P., Cataldi, L., Cirilli, S., Ertuncay, D., Falconer, P., Filippi, L., Fornasari, S. F., Pazzi, V., and Turpaud, P.: Near-Real-Time  
415 Strong Motion Acquisition at National Scale and Automatic Analysis, *Sensors*, 22, 5699, 2022.
- Cucchi, F., Piano, C., Fanucci, F., Pugliese, N., Tunis, G., Zini, L., Covelli, S., Fanzutti, G. P., Ponton, M., and Fontana, A.: *Carta geologica del Carso Classico*, 2013.
- Dias, F. L., Assumpção, M., Peixoto, P. S., Bianchi, M. B., Collaço, B., and Calhau, J.: Using seismic noise levels to monitor social isolation: An example from Rio de Janeiro, Brazil, *Geophysical Research Letters*, 47, e2020GL088748, 2020.
- 420 Doody, C., Ringler, A. T., Anthony, R. E., Wilson, D. C., Holland, A. A., Hutt, C. R., and Sandoval, L. D.: Effects of thermal variability on broadband seismometers: Controlled experiments, observations, and implications, *Bulletin of the Seismological Society of America*, 108, 493–502, 2018.
- D’Alessandro, A., Greco, L., Scudero, S., and Lauciani, V.: Spectral characterization and spatiotemporal variability of the background seismic noise in Italy, *Earth and Space Science*, 8, e2020EA001579, 2021.
- 425 Fitzko, F., Costa, G., Delise, A., and Suhadolc, P.: Site effects analyses in the old city center of Trieste (NE Italy) using accelerometric data, *Journal of Earthquake Engineering*, 11, 33–48, 2007.
- Gorini, A., Nicoletti, M., Marsan, P., Bianconi, R., de Nardis, R., Filippi, L., Marcucci, S., Palma, F., and Zambonelli, E.: The Italian strong motion network, *Bulletin of Earthquake Engineering*, 8, 1075–1090, <https://doi.org/https://doi.org/10.1007/s10518-009-9141-6>, 2010.
- Greco, B., Borleanu, F., Tiganescu, A., Poiata, N., Dinescu, R., and Tataru, D.: The effect of 2020 COVID-19 lockdown measures on seismic  
430 noise recorded in Romania, *Solid Earth*, 12, 2351–2368, 2021.

- Harms, J., Sajeve, A., Trancynger, T., DeSalvo, R., Mandic, V., and Collaboration, L. S.: Seismic studies at the Homestake mine in Lead, South Dakota, LIGO document, pp. T0900 112–v1, 2009.
- Istituto Superiore per la Protezione e la Ricerca Ambientale: Carta Nazionale di Copertura del Suolo, <https://www.isprambiente.gov.it/attivita/suolo-e-territorio/suolo/copertura-del-suolo/carta-nazionale-di-copertura-del-suolo>, 2022.
- 435 Larose, E., Khan, A., Nakamura, Y., and Campillo, M.: Lunar subsurface investigated from correlation of seismic noise, *Geophysical Research Letters*, 32, <https://doi.org/https://doi.org/10.1029/2005GL023518>, 2005.
- Lecocq, T., Hicks, S. P., Noten, K. V., van Wijk, K., Koelemeijer, P., Plaen, R. S. M. D., Massin, F., Hillers, G., Anthony, R. E., Apoloner, M.-T., Arroyo-Solórzano, M., Assink, J. D., Büyükkapınar, P., Cannata, A., Cannavo, F., Carrasco, S., Caudron, C., Chaves, E. J., Cornwell, D. G., Craig, D., den Ouden, O. F. C., Diaz, J., Donner, S., Evangelidis, C. P., Evers, L., Fauville, B., Fernandez, G. A., Giannopoulos, D., Gibbons, S. J., Girona, T., Grecu, B., Grunberg, M., Hetényi, G., Horleston, A., Inza, A., Irving, J. C. E., Jamalreghani, M., Kafka, A., Koymans, M. R., Labeledz, C. R., Larose, E., Lindsey, N. J., McKinnon, M., Megies, T., Miller, M. S., Minarik, W., Moresi, L., Márquez-Ramírez, V. H., Möllhoff, M., Nesbitt, I. M., Niyogi, S., Ojeda, J., Oth, A., Proud, S., Pulli, J., Retailleau, L., Rintamäki, A. E., Satriano, C., Savage, M. K., Shani-Kadmiel, S., Sleeman, R., Sokos, E., Stammner, K., Stott, A. E., Subedi, S., Sørensen, M. B., Taira, T., Tapia, M., Turhan, F., van der Pluijm, B., Vanstone, M., Vergne, J., Vuorinen, T. A. T., Warren, T., Wassermann, J., and
- 440 Xiao, H.: Global quieting of high-frequency seismic noise due to COVID-19 pandemic lockdown measures, *Science*, 369, 1338–1343, <https://doi.org/10.1126/science.abd2438>, 2020.
- McNamara, D. E. and Buland, R. P.: Ambient Noise Levels in the Continental United States, *Bulletin of the Seismological Society of America*, 94, 1517–1527, <https://doi.org/10.1785/012003001>, 2004.
- Mucciarelli, M., Gallipoli, M. R., Di Giacomo, D., Di Nota, F., and Nino, E.: The influence of wind on measurements of seismic noise,
- 450 *Geophysical Journal International*, 161, 303–308, 2005.
- Peterson, J. R.: Observations and modeling of seismic background noise, Tech. rep., US Geological Survey, 1993.
- Piccinini, D., Giunchi, C., Olivieri, M., Frattini, F., Di Giovanni, M., Prodi, G., and Chiarabba, C.: COVID-19 lockdown and its latency in Northern Italy: seismic evidence and socio-economic interpretation, *Scientific reports*, 10, 1–10, 2020.
- Poli, P., Boaga, J., Molinari, I., Cascone, V., and Boschi, L.: The 2020 coronavirus lockdown and seismic monitoring of anthropic activities
- 455 in Northern Italy, *Scientific Reports*, 10, 1–8, 2020.
- Presidency of Council of Ministers - Civil Protection Department : Italian Strong Motion Network, <https://doi.org/10.7914/SN/IT>, 1972.
- Ringler, A. and Hutt, C.: Self-noise models of seismic instruments, *Seismological research letters*, 81, 972–983, 2010.
- Ringler, A. T., Evans, J. R., and Hutt, C. R.: Self-noise models of five commercial strong-motion accelerometers, *Seismological Research Letters*, 86, 1143–1147, 2015.
- 460 Ringler, A. T., Steim, J., Wilson, D. C., Widmer-Schmidrig, R., and Anthony, R. E.: Improvements in seismic resolution and current limitations in the Global Seismographic Network, *Geophysical Journal International*, 220, 508–521, 2020.
- Roy, K. S., Sharma, J., Kumar, S., and Kumar, M. R.: Effect of coronavirus lockdowns on the ambient seismic noise levels in Gujarat, northwest India, *Scientific reports*, 11, 1–13, 2021.
- Schimmel, M., Stutzmann, E., Lognonné, P., Compaire, N., Davis, P., Drilleau, M., Garcia, R., Kim, D., Knapmeyer-Endrun, B., Lekic, V.,
- 465 Margerin, L., Panning, M., Schmerr, N., Scholz, J. R., Spiga, A., Tauzin, B., and Banerdt, B.: Seismic Noise Autocorrelations on Mars, *Earth and Space Science*, 8, e2021EA001755, <https://doi.org/https://doi.org/10.1029/2021EA001755>, e2021EA001755 2021EA001755, 2021.


- Shapiro, N. M., Campillo, M., Stehly, L., and Ritzwoller, M. H.: High-resolution surface-wave tomography from ambient seismic noise, *Science*, 307, 1615–1618, 2005.
- 470 Somala, S. N.: Seismic noise changes during COVID-19 pandemic: a case study of Shillong, India, *Natural Hazards*, 103, 1623–1628, 2020.
- Stutzmann, E., Roult, G., and Astiz, L.: GEOSCOPE Station Noise Levels, *Bulletin of the Seismological Society of America*, 90, 690–701, <https://doi.org/10.1785/0119990025>, 2000.
- University of Trieste: Friuli Venezia Giulia Accelerometric Network, <https://doi.org/10.7914/SN/RF>, 1993.
- Vassallo, M., De Matteis, R., Bobbio, A., Di Giulio, G., Adinolfi, G. M., Cantore, L., Cogliano, R., Fodarella, A., Maresca, R., Pucillo, S., et al.: Seismic noise cross-correlation in the urban area of Benevento city (Southern Italy), *Geophysical Journal International*, 217, 1524–1542, 2019.
- 475 Webb, S. C.: Broadband seismology and noise under the ocean, *Reviews of Geophysics*, 36, 105–142, 1998.
- Weber, E., Convertito, V., Iannaccone, G., Zollo, A., Bobbio, A., Cantore, L., Corciulo, M., Crosta, M. D., Elia, L., Martino, C., Romeo, A., and Satriano, C.: An advanced seismic network in the Southern Apennines Italy for seismicity investigations and experimentation with
- 480 earthquake early warning, *Seismological Research Letters*, 78, 622–634, 2007.
- Welch, P.: The use of fast Fourier transform for the estimation of power spectra: a method based on time averaging over short, modified periodograms, *IEEE Transactions on audio and electroacoustics*, 15, 70–73, 1967.
- Xiao, H., Eilon, Z. C., Ji, C., and Tanimoto, T.: COVID-19 societal response captured by seismic noise in China and Italy, *Seismological Society of America*, 91, 2757–2768, 2020.
- 485 Yabe, S., Imanishi, K., and Nishida, K.: Two-step seismic noise reduction caused by COVID-19 induced reduction in social activity in metropolitan Tokyo, Japan, *Earth, Planets and Space*, 72, 1–11, 2020.
- Zambonelli, E., de Nardis, R., Filippi, L., Nicoletti, M., and Dolce, M.: Performance of the Italian strong motion network during the 2009, L’Aquila seismic sequence (central Italy), *Bulletin of Earthquake Engineering*, 9, 39–65, <https://doi.org/10.1007/s10518-010-9218-2>, 2011.
- 490 Łukasz Ścisło, Łukasz Łacny, and Guinchar, M.: COVID-19 lockdown impact on CERN seismic station ambient noise levels, *Open Engineering*, 11, 1233–1240, <https://doi.org/doi:10.1515/eng-2021-0124>, 2021.

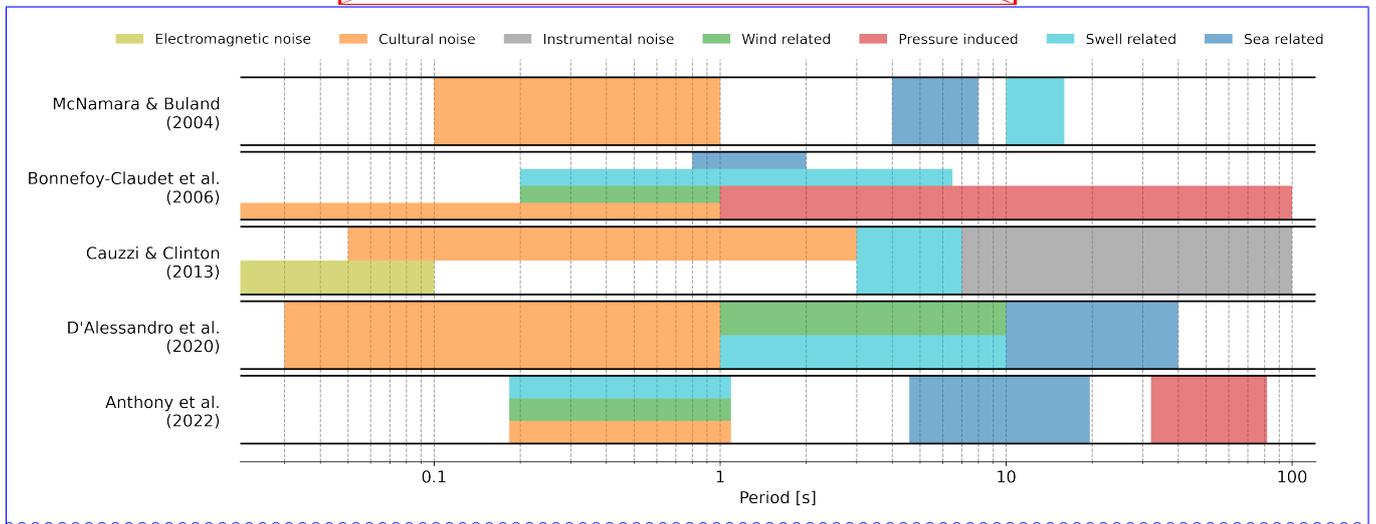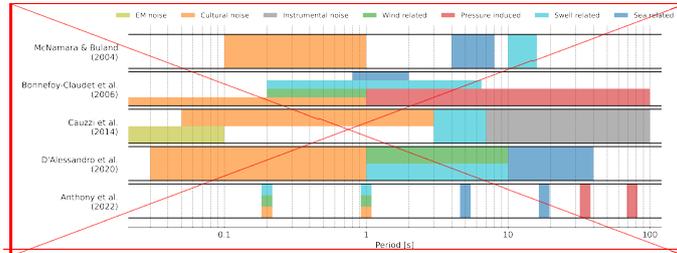


**Figure 1.** Main noise sources for different period bands from the studies of McNamara and Buland (2004); Bonnefoy-Claudet et al. (2006); Cauzzi and Clinton (2013); D'Alessandro et al. (2021); Anthony et al. (2022)

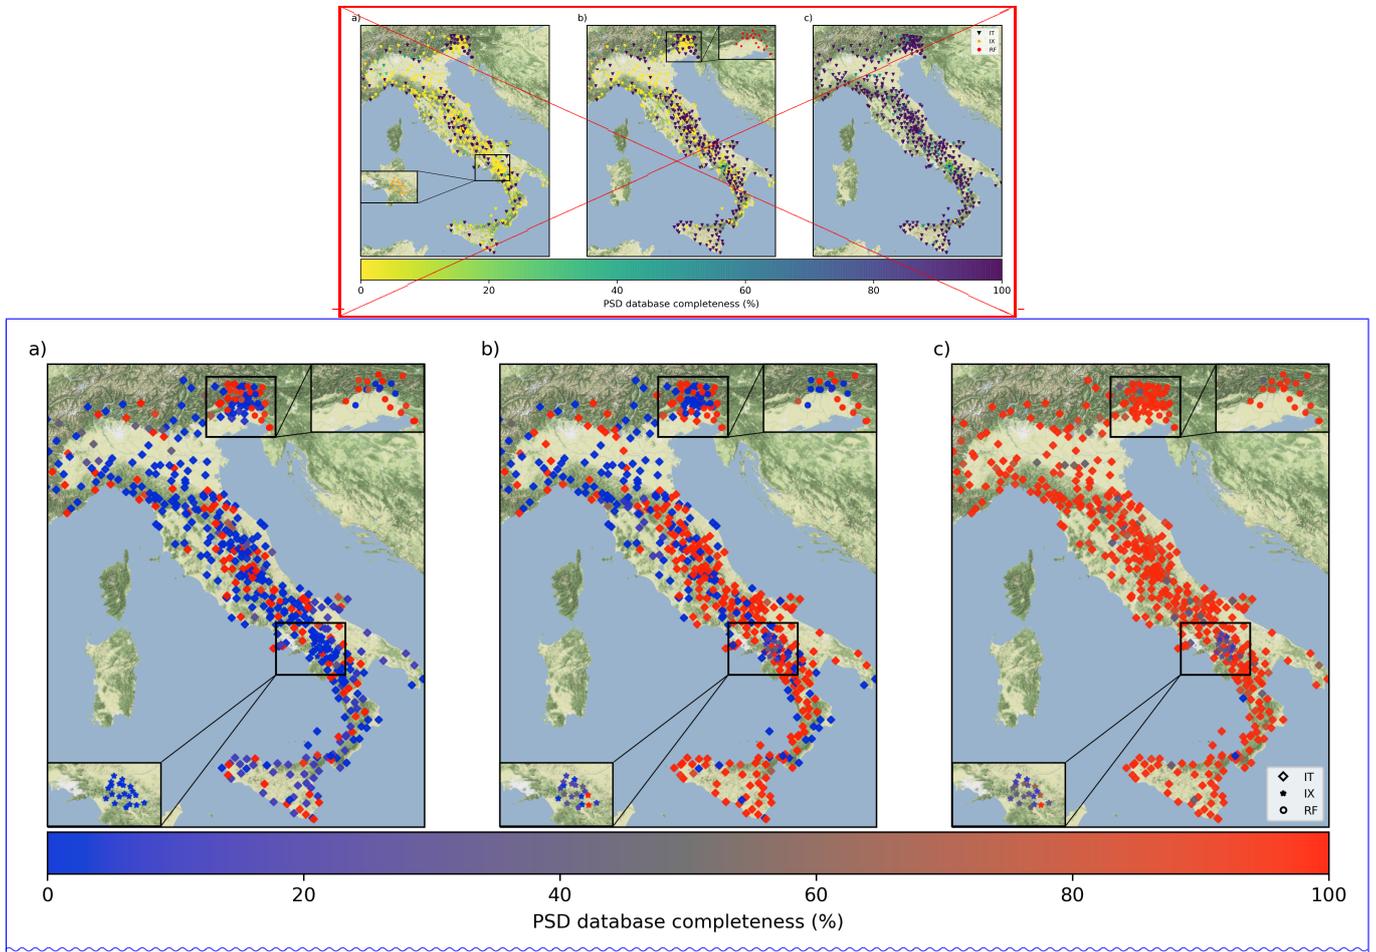


**Figure 2.** Data availability of the stations in a) 2019, b) lockdown period, and c) 2022. In a) the close up box highlights boxes in lower left and upper right highlight ISNet (IX) and in b) the close up box highlights RAF (RF), respectively. Basemap data are retrieved from © Stamen Design.

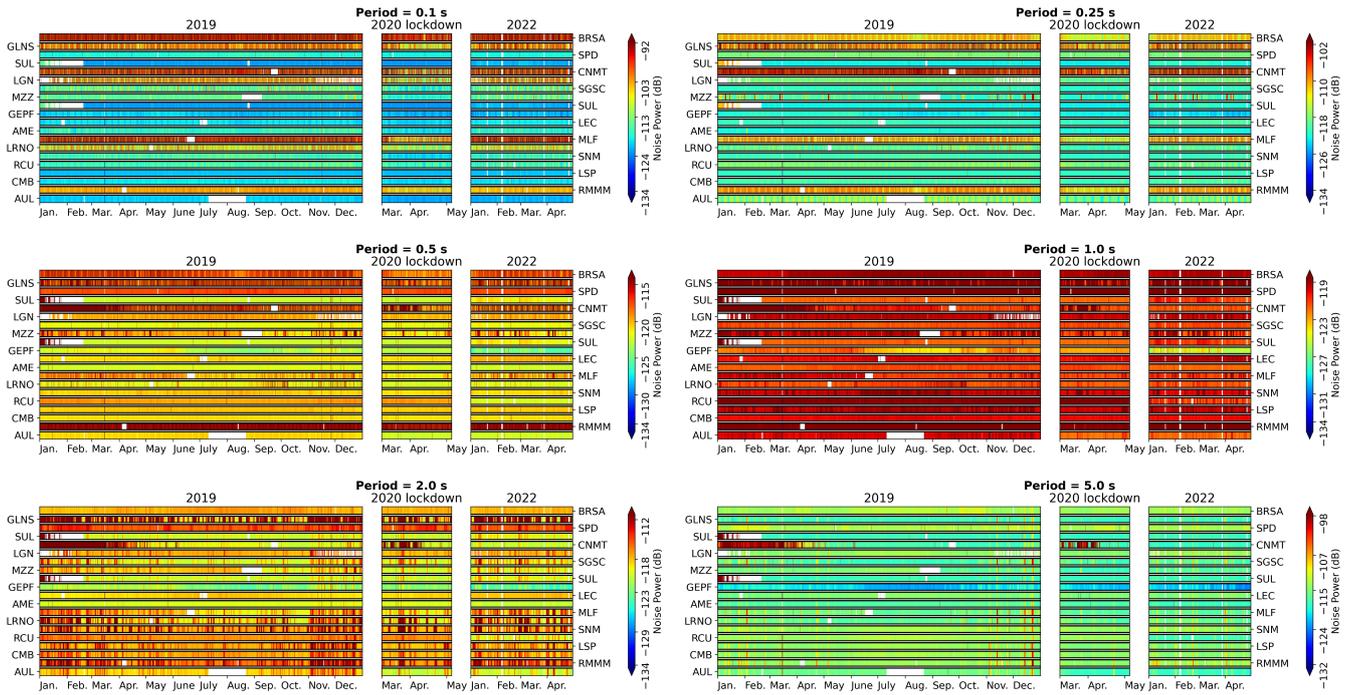


**Figure 3.** PSD timeseries for several randomly selected 20 stations in periods of 0.1 s, 0.25 s, 0.5 s, 1 s, 2 s, and 5 s. The limits of the color scale are based on the models by Cauzzi and Clinton (2013).

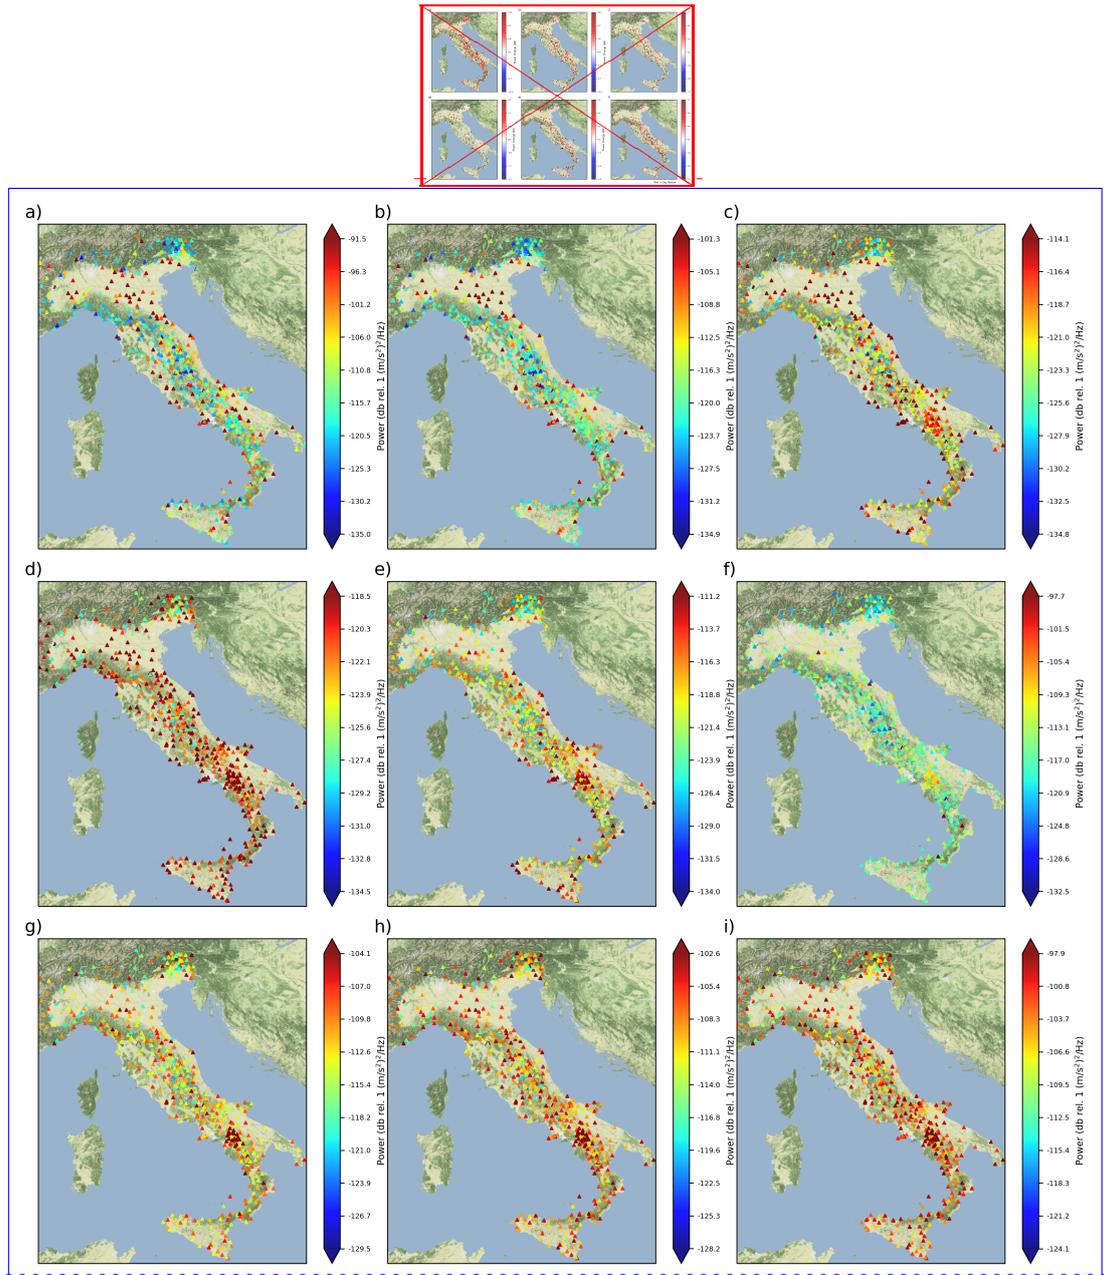


**Figure 4.** Median vertical component noise maps in one-third octave bands around a-g) 0.1 s, 0.25 s, 0.5 s, 1 s, 2 s, 5 s, 16 s, 32 s, and 80.6 s. Upper and lower limits of the color bar are defined by the model developed by Cauzzi and Clinton (2013). Vertical components are presented in the following figures and Electronic Supplement. Background noise levels of all calculated periods can be found in Figure S1. [Basemap data are retrieved from © Stamen Design.](#)

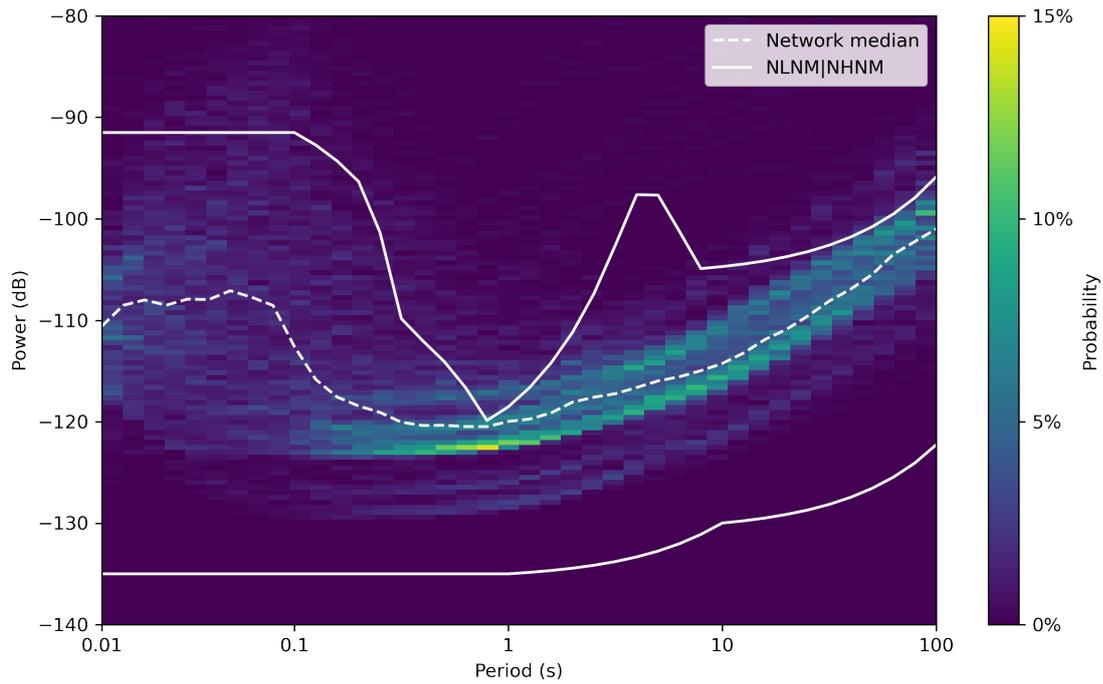


**Figure 5.** Probability density function of medians of PSDs of all stations. Dashed white line represent the median of the network and solid white lines represent NLNM and NHNM defined by Cauzzi and Clinton (2013).

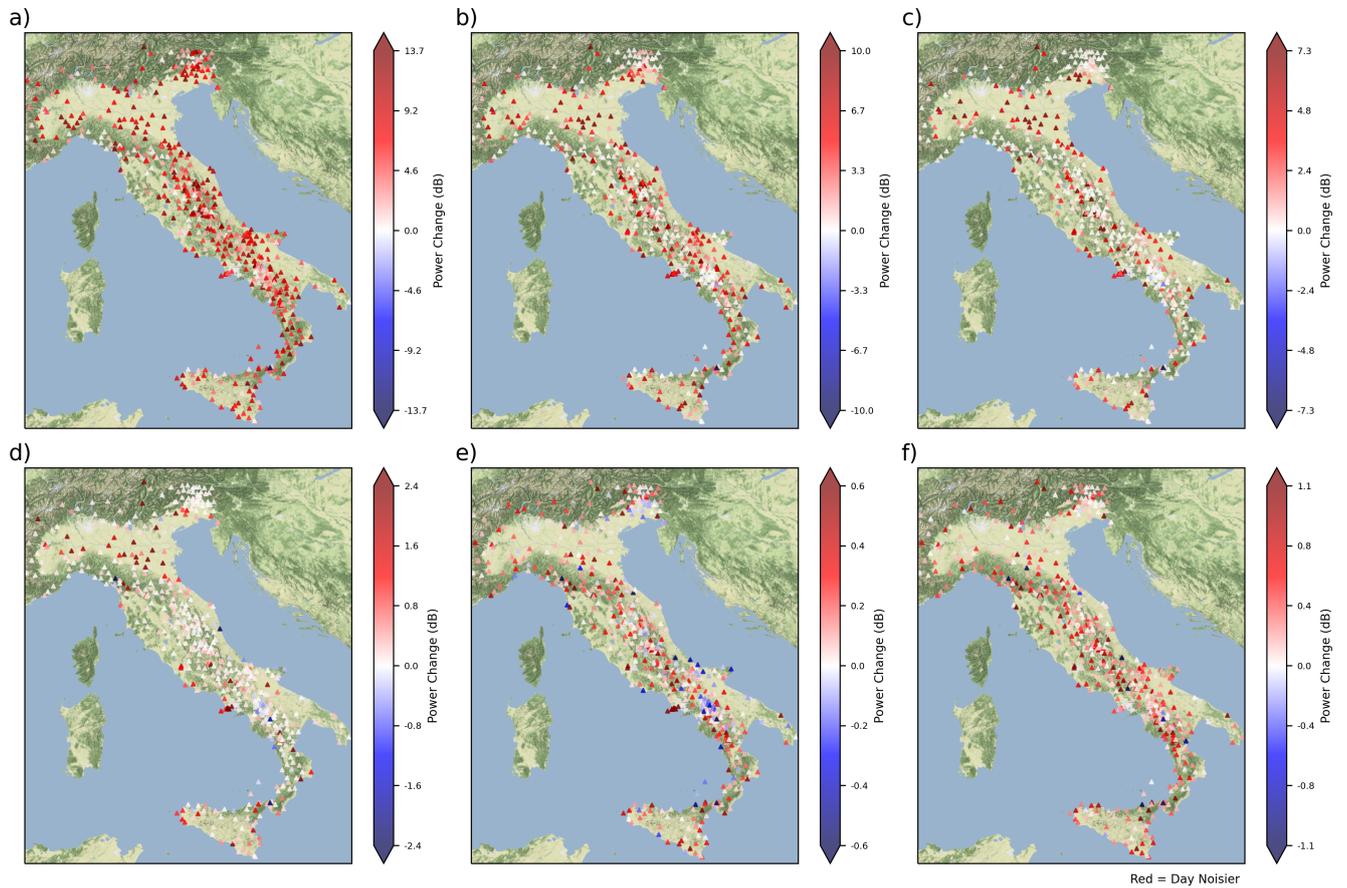


**Figure 6.** Median noise levels in dB for daytime and nighttime for the periods of 0.1 s, 0.25 s, 0.5 s, 1.0 s, 2.0 s, and 5.0 s. Red color means day is noisier than night. [Basemap data are retrieved from © Stamen Design.](#)

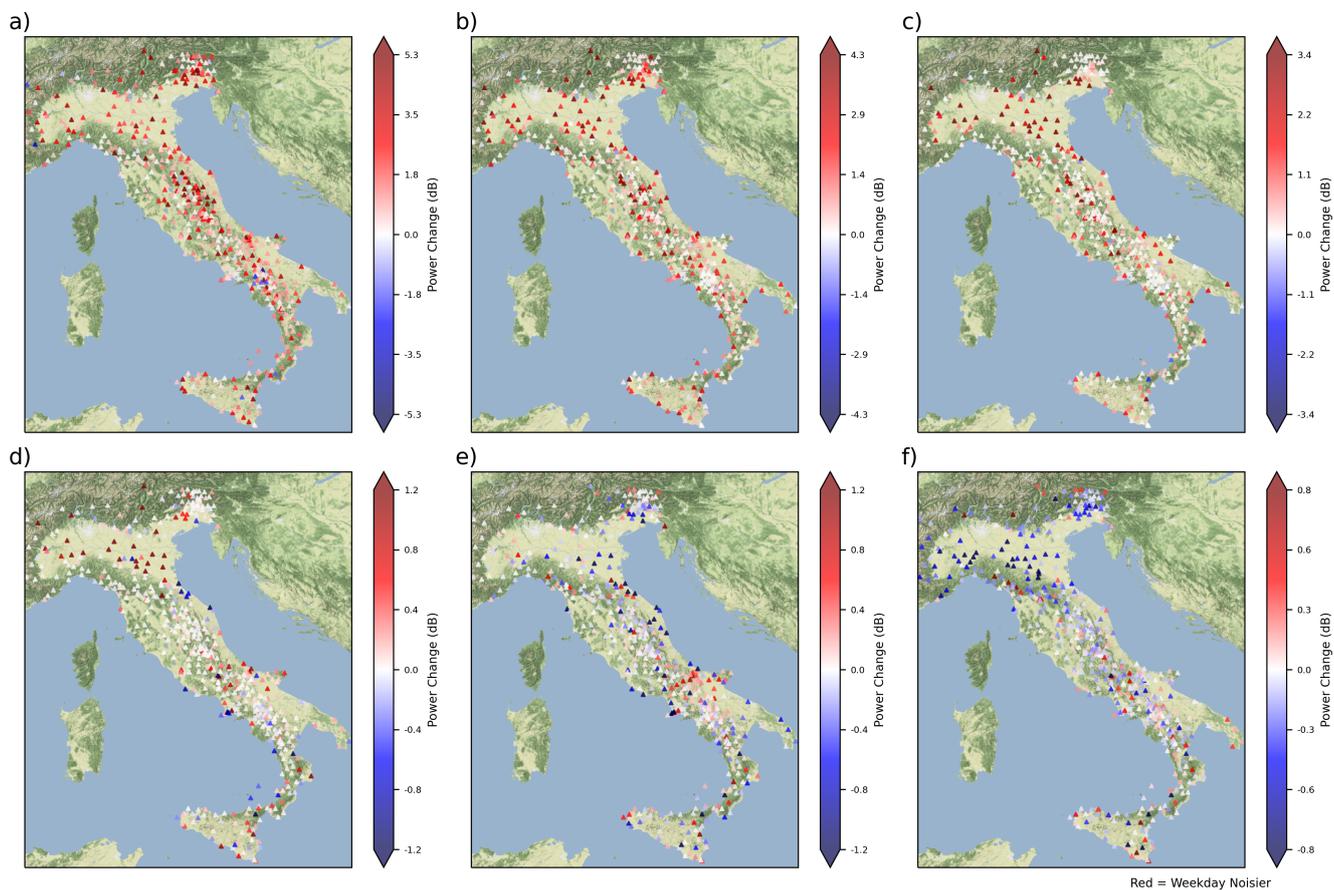


**Figure 7.** Median noise levels in dB for weekday and weekend time for the periods of 0.1 s, 0.25 s, 0.5 s, 1.0 s, 2.0 s, and 5.0 s. Red color means weekday is noisier than weekend. [Basemap data are retrieved from © Stamen Design.](#)

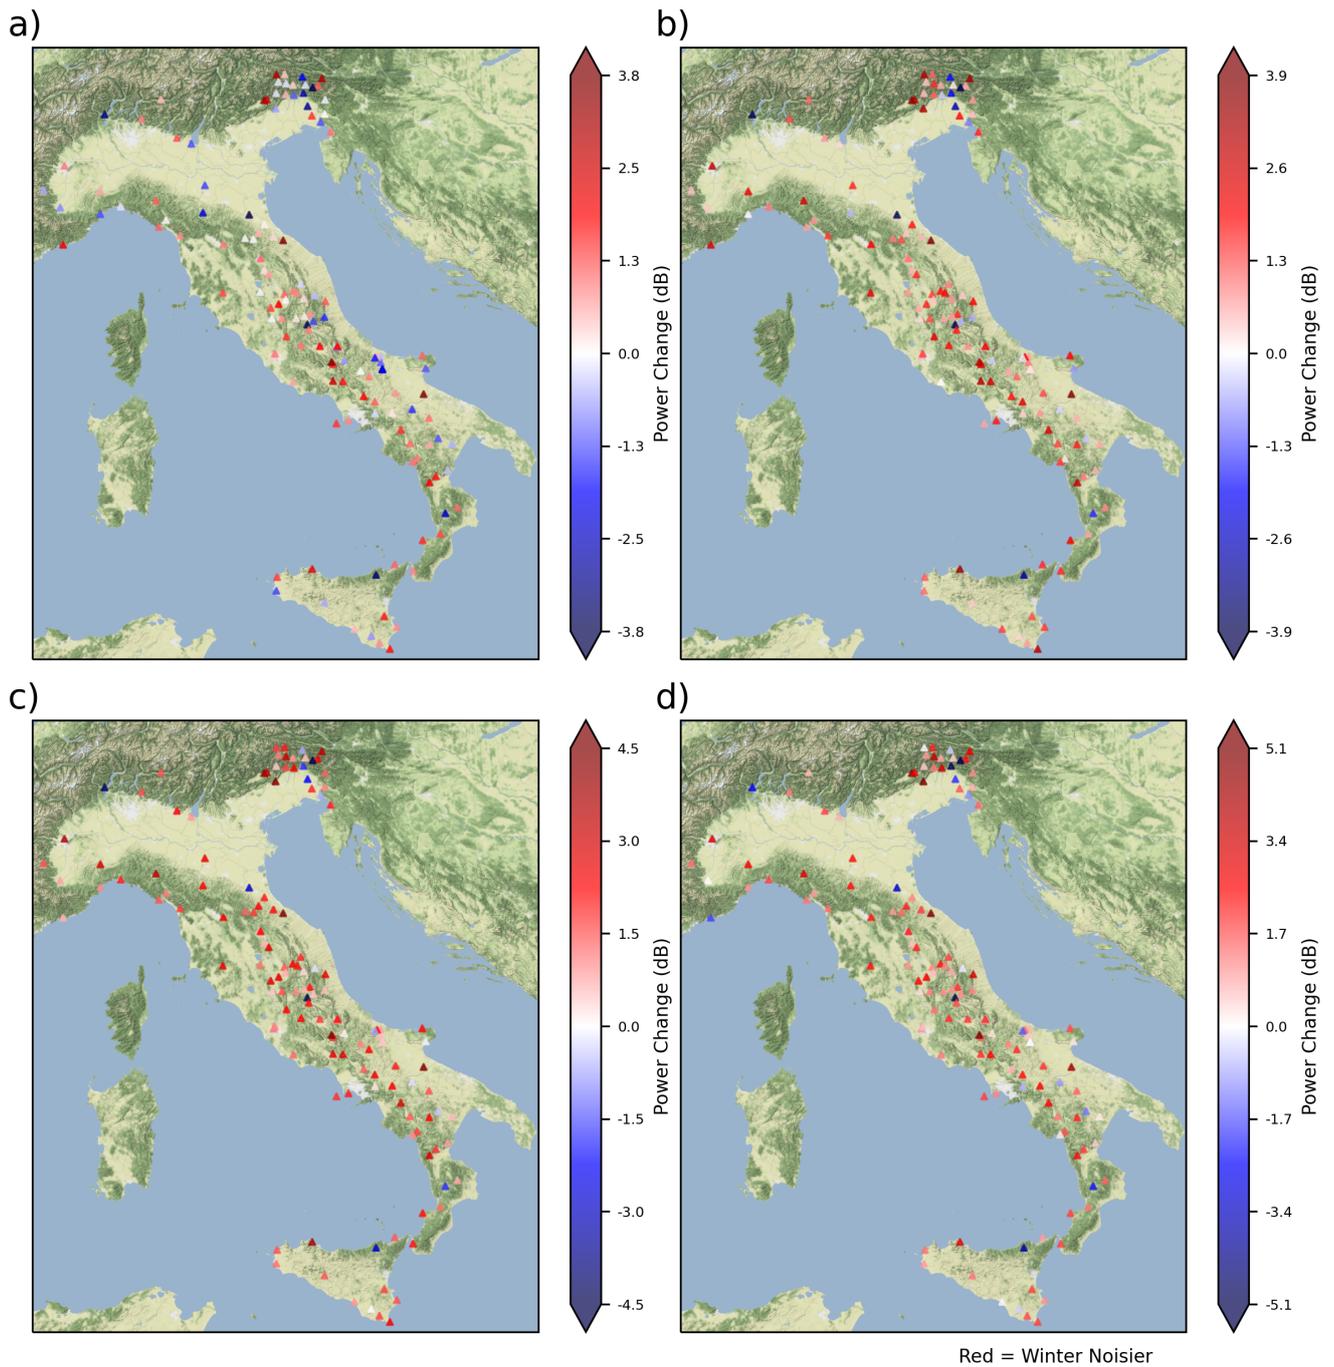

**Figure 8.** Difference between noise levels in 5 s, 8 s, 16 s, and 32 s between the winter and summer of 2019. Red color means summers are noisier than winters. [Basemap data are retrieved from © Stamen Design.](#)

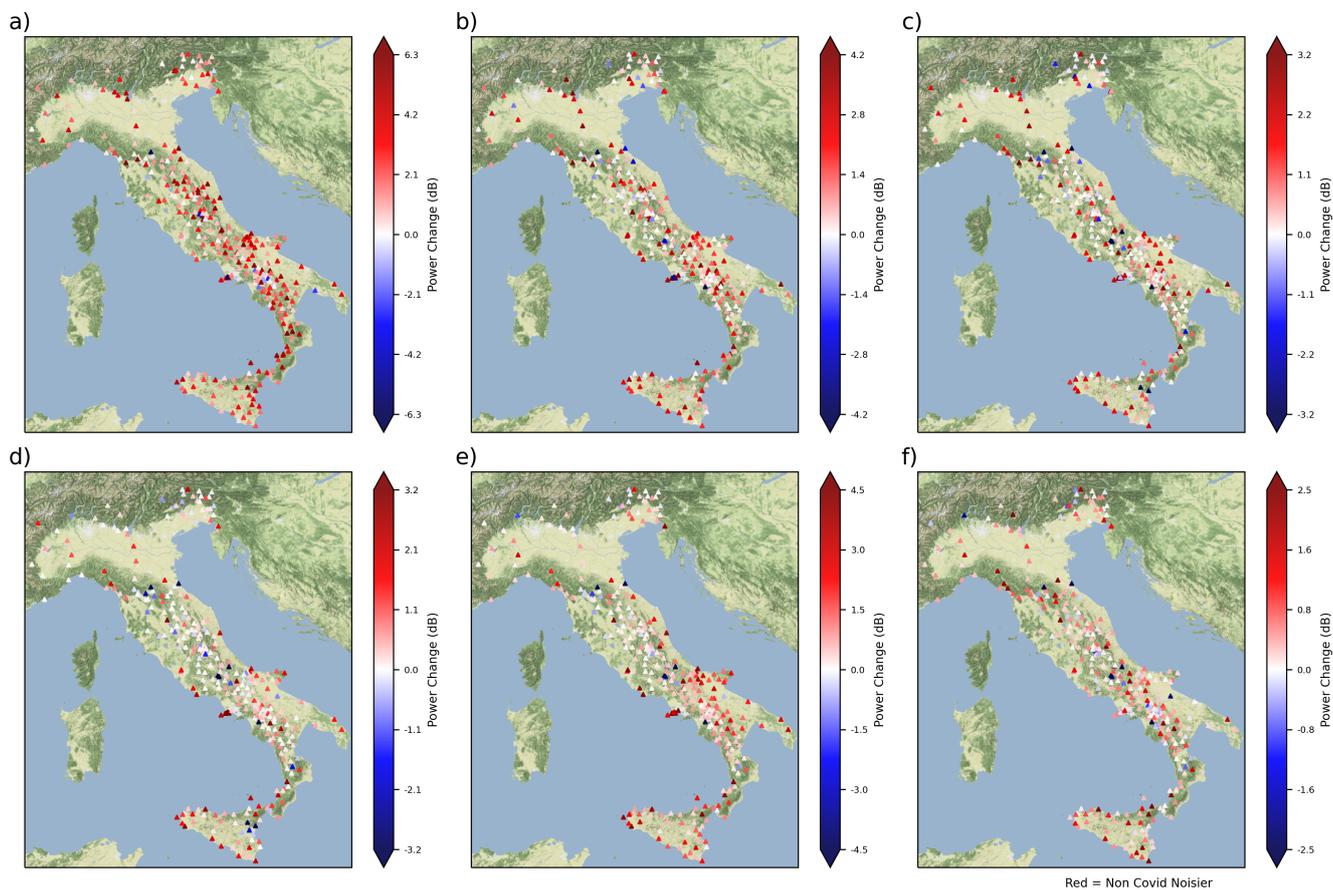


**Figure 9.** Difference between noise levels in 0.1 s, 0.25 s, 0.5 s, 1.0 s, 2.0 s, and 5.0 s between 2019 - 2022 and lockdown. Red color means 2019 and 2022 are noisier than lockdown period. [Basemap data are retrieved from © Stamen Design.](#)

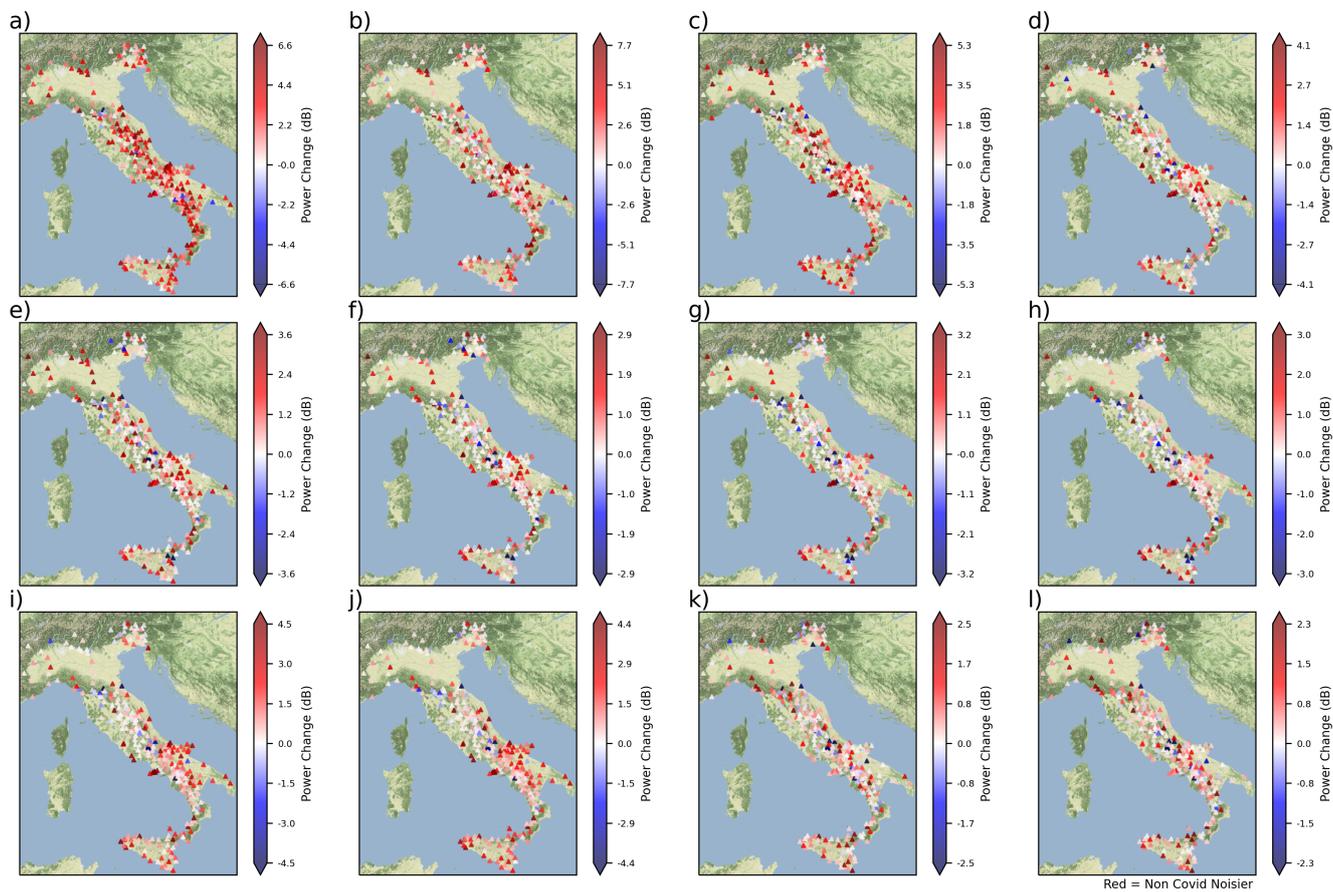


**Figure 10.** Difference between noise levels in 0.1 s, 0.25 s, 0.5 s, 1.0 s, 2.0 s, and 5.0 s between 2019 - 2022 and lockdown in a, c, e, g, i, k) daytime, b, d, f, h, j, l) nighttime. [Basemap data are retrieved from © Stamen Design.](#)




**Figure 11.** Geological Map of Trieste (grey, orange, and yellow colors indicate anthropic, ubiquitous deposit units, and flysch of Trieste, respectively), modified from Cucchi et al. (2013).

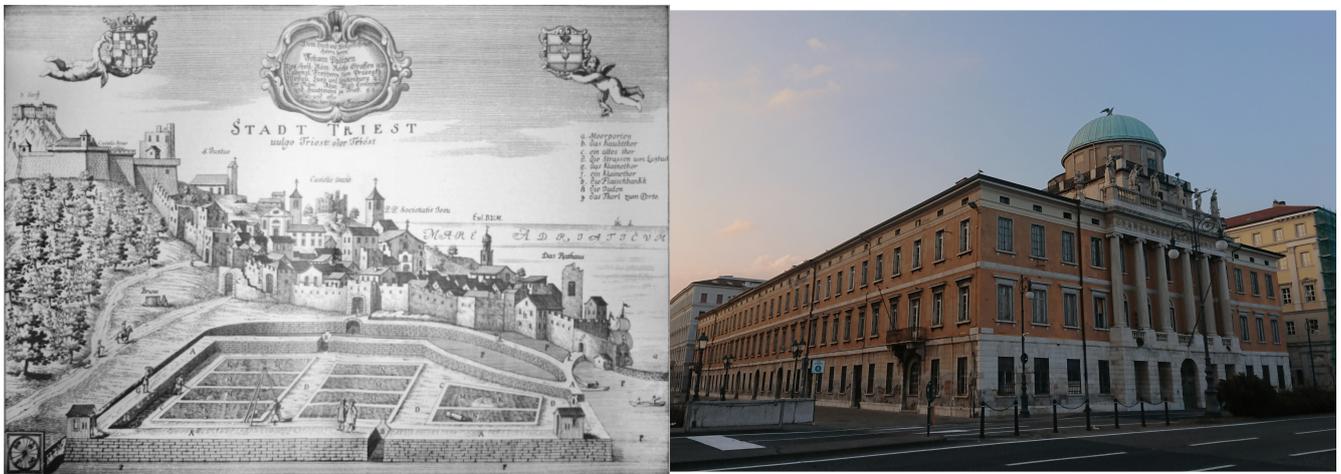


**Figure 12.** left) Drawing of the salina part of the city of Trieste by Johann Weikhard von Valvasor in 1689 [taken from](https://upload.wikimedia.org/wikipedia/commons/6/67/Mesto_Trst-Valvasor-2.jpg) © [Wikipedia](https://upload.wikimedia.org/wikipedia/commons/6/67/Mesto_Trst-Valvasor-2.jpg) (https://upload.wikimedia.org/wikipedia/commons/6/67/Mesto\_Trst-Valvasor-2.jpg, last access: 7 November 2022), right) Palazzo Carciotti.

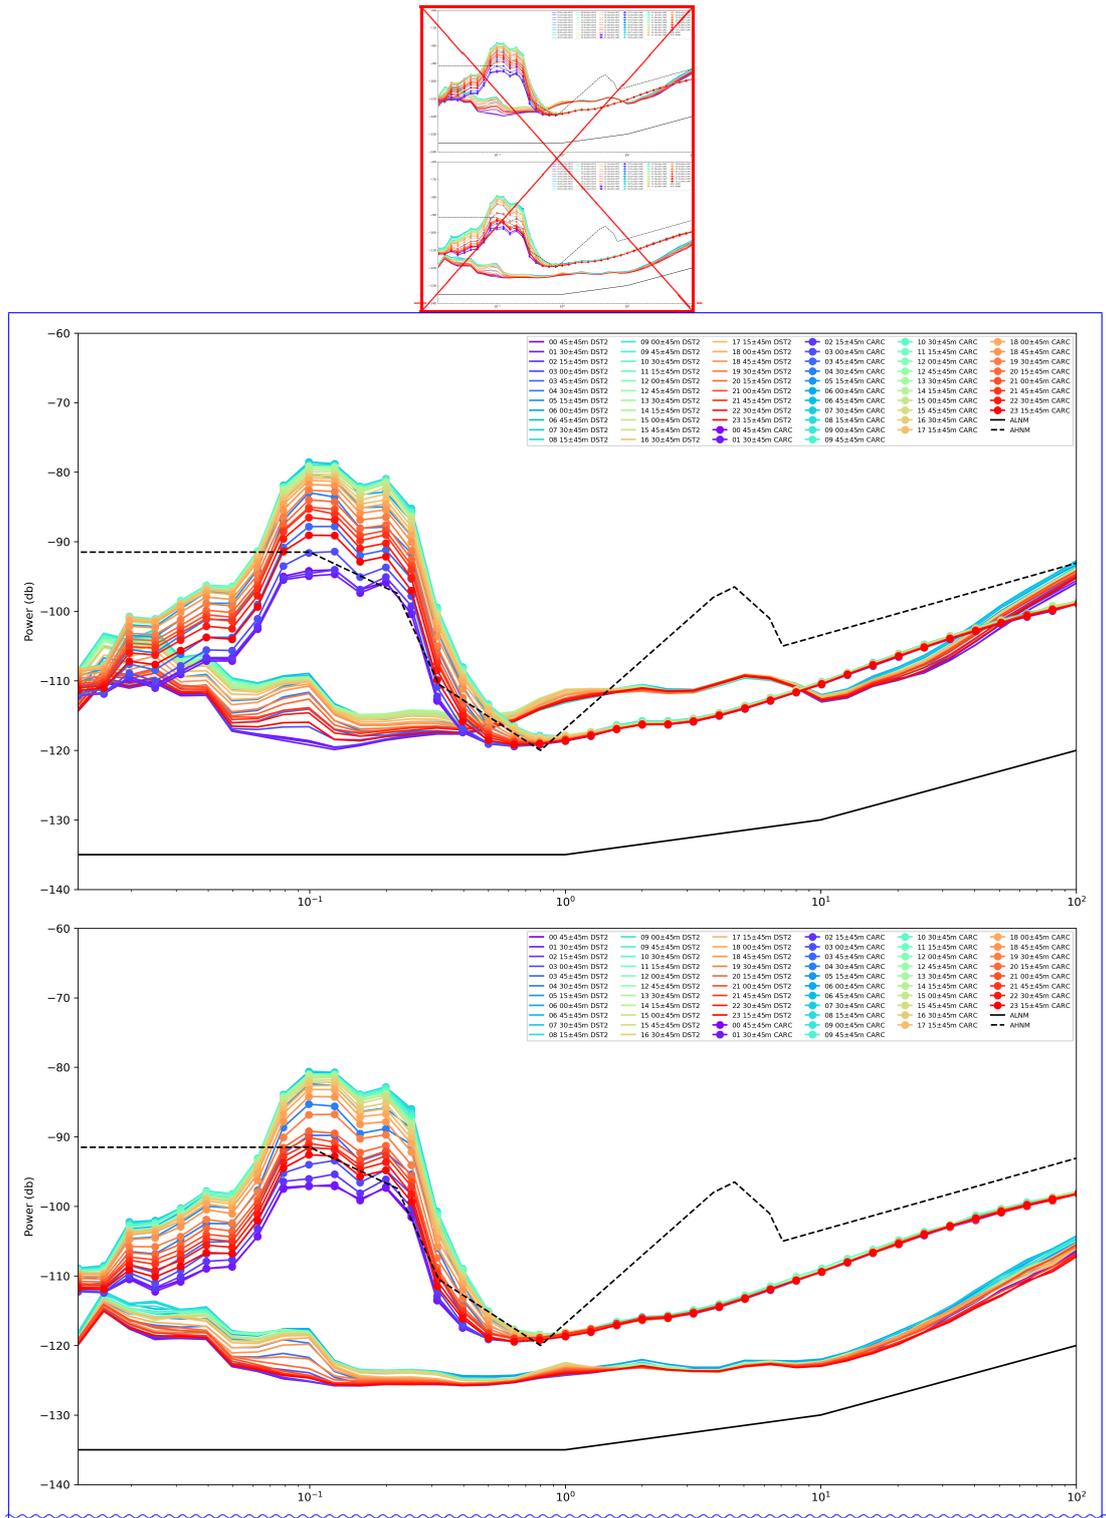

**Figure 13.** Hourly average plots of noise levels of DST2 (line) and CARC (line with dots) for no-lockdown (top) and lockdown (bottom) dates. ALNM and AHNM introduced by Cauzzi and Clinton (2013) are black line and dashed line, respectively.

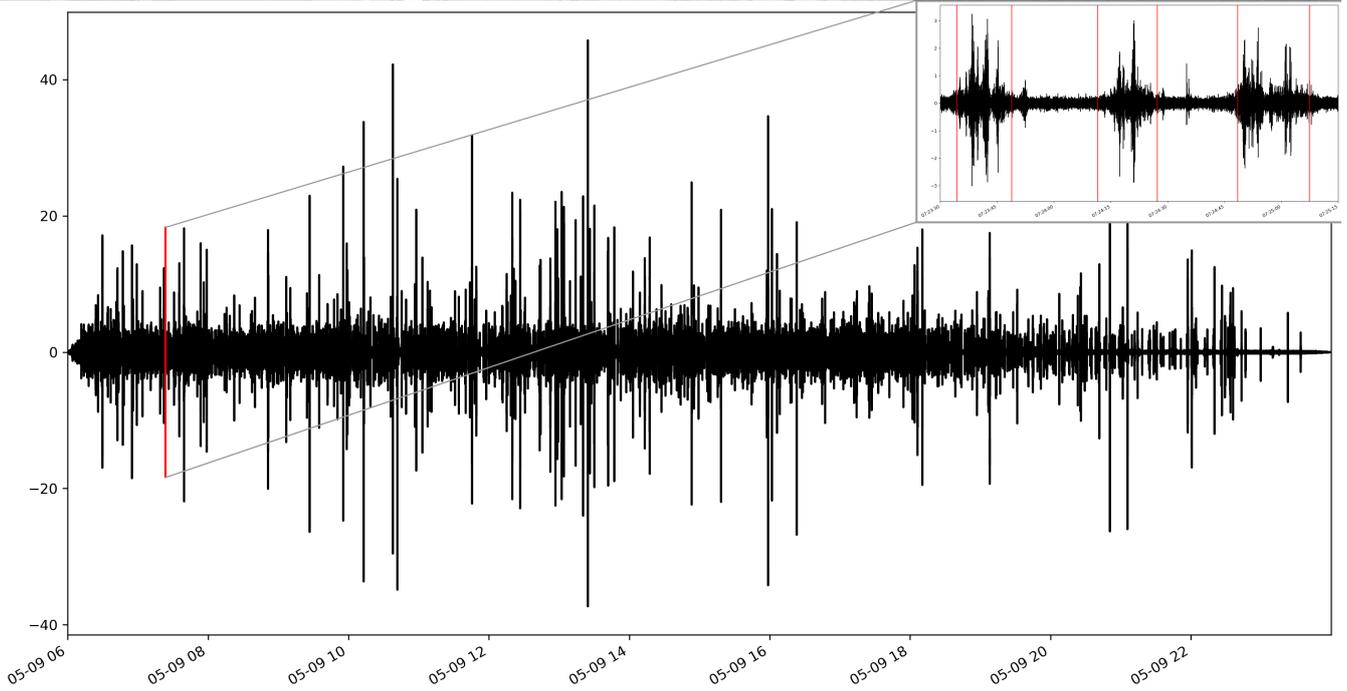

**Figure 14.** top) Satellite image of the Palata. PLTA station is demonstrated with (red triangle) (latitude: 41.88, longitude: 14.78) station which is located in Palata municipality building in Central Italy (the image is generated by © Google Earth). bottom). Seismic record registered on 9th of May 2019. Three detected cars are presented in the upper right with red vertical lines presenting the initiation and termination position of the car signals.

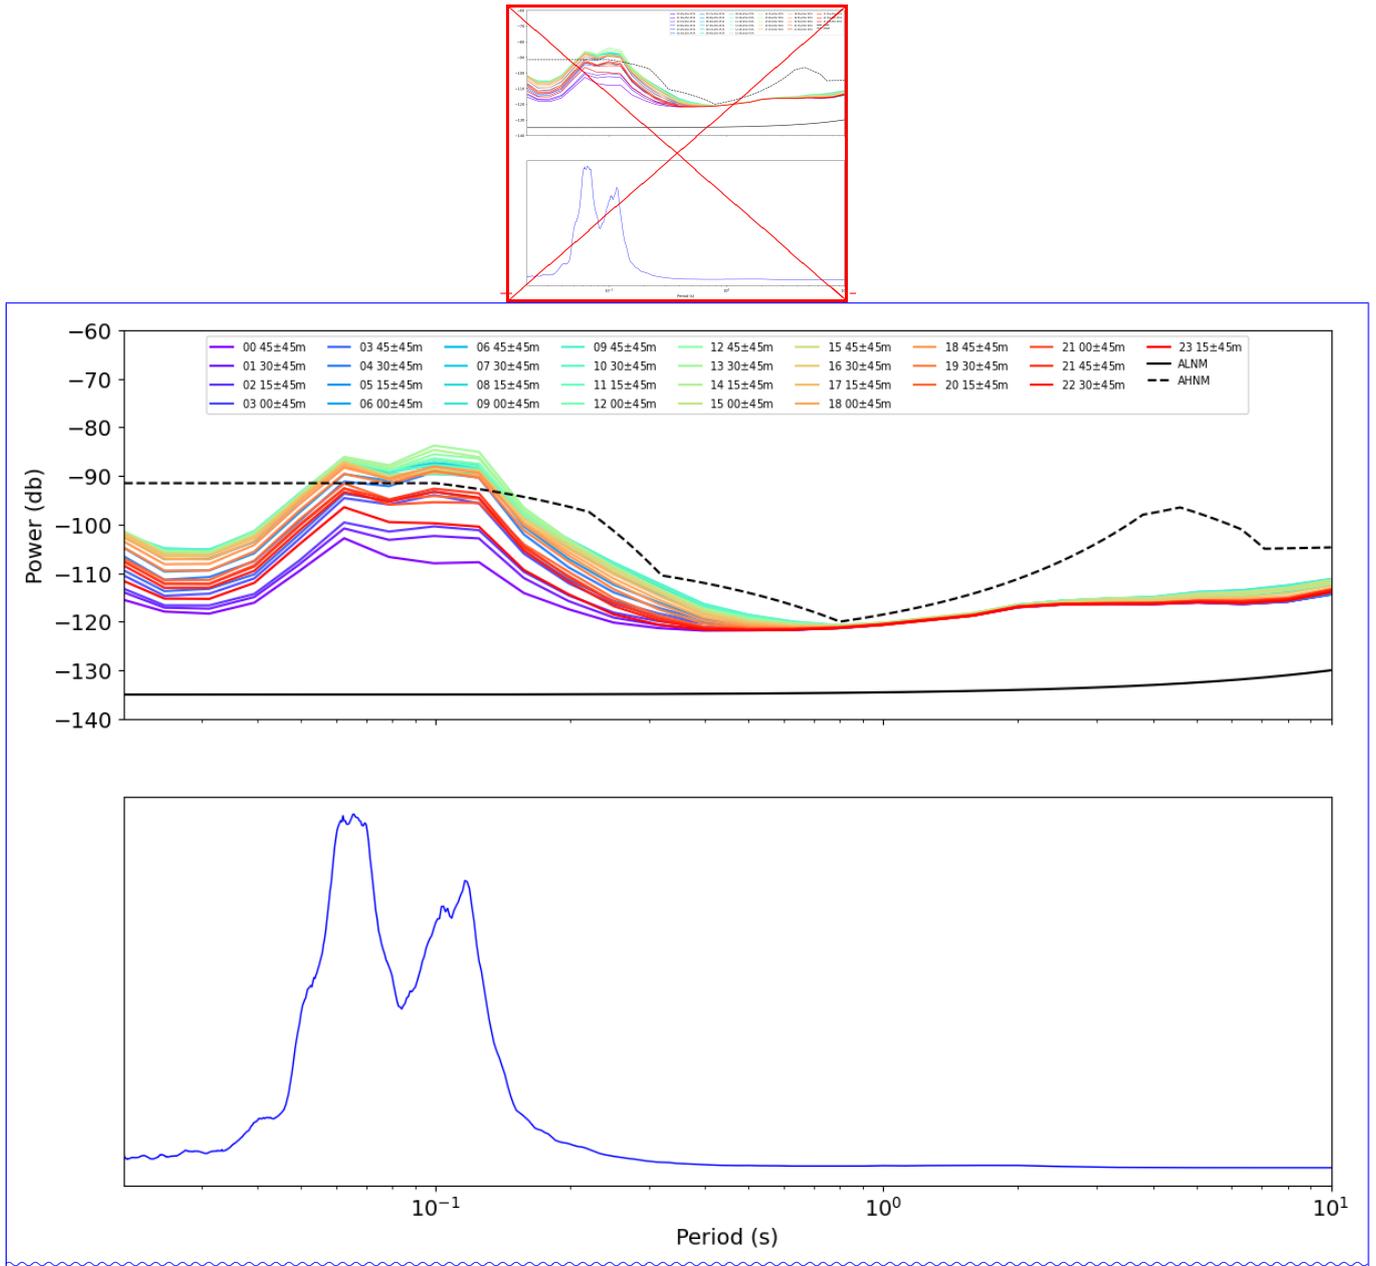

**Figure 15.** top) Hourly average plot of noise levels of PLTA, and bottom) Average of FFT of the detected cars in PLTA in 2019.

Land Usage	Code	Stations
Settlements	SL	<del>528</del> -388
Annual Cropland	ACL	<del>61</del> -48
Permanent Cropland	PCL	<del>20</del> -12
Grassland	GL	<del>46</del> -39
Forest	FL	<del>52</del> -38
Other land	OL	<del>8</del> -7
Wetland	WL	0
Water	WT	0

**Table 1.** Land usage at the RAN stations (Istituto Superiore per la Protezione e la Ricerca Ambientale, 2022).

Parameter	McNamara and Buland (2004)	Anthony et al. (2022)	Present work
	D'Alessandro et al. (2021)		
Window	60min	60min	90min
Window overlap	50%	50%	50%
Completeness	-	>90%	>90%
Sub-window	900s	819.2s	900s
Sub-window overlap	75%	75%	75%
Detrend	Linear	Linear	Linear
Gaps	Removed	Zero-pad	Linear interpolation
Window type	10% cosine	Hann	Hann
Binning/smoothing	Yes	None	None
Average	Overlapped 1 octave	1/3 octave	1/3 octave

**Table 2.** Data processing parameters for the evaluation of the PSDs of our study along with the studies of McNamara and Buland (2004), D'Alessandro et al. (2021), and Anthony et al. (2022).

Period (s)	AHNM Threshold	No. of station <u>Exceeding stations</u>	Percentage of network (%)
0.10	-91.50	58	10.90
0.25	-101.34	43	8.08
0.50	-114.06	88	16.54
1.00	-118.53	183	34.40
2.00	-111.20	41	7.71
5.04	-97.66	8	1.50
8.00	-104.91	12	2.26
16.00	-104.14	40	7.52
32.00	-102.60	51	9.59
64.00	-99.53	67	12.59
80.60	-97.93	64	12.03
Any	-	273	51.32

**Table 3.** Stations with higher than AHNM in the network.

	Period (s)					
	0.1	0.25	0.5	1	2	5
db	1.937	0.515	0.210	0.155	0.490	0.300

**Table 4.** Median noise level changes between 0.1 s and 5 s seconds. Positive values mean noise levels are higher during no - lockdown time span.