

1 **Design and [Application](#) of a Multi-**
2 **Hazard Risk Rapid Assessment Questionnaire for Hill Communities**
3 **in the Indian Himalayan Region**

4 Shivani Chouhan^{1*}, Mahua Mukherjee²

5 ¹Research Scholar, Centre of Excellence in Disaster Mitigation and Management, Indian
6 Institute of Technology Roorkee, Roorkee, India

7 ²Professor, Centre of Excellence in Disaster Mitigation and Management, Indian Institute of
8 Technology Roorkee, Roorkee, India

9
10 *Corresponding Author: Shivani Chouhan (s_chouhan@dm.iitr.ac.in)

11 ***Corresponding Author:**

12 Name: Ms. Shivani Chouhan,

13 **Email:** s_chouhan@dm.iitr.ac.in,

14 Telephone: +91-9675457229

15 Postal Address: 1/21 Dhatpatti, west Rajpur Road, near GRD College, Dehradun, Uttarakhand, India
16

17 **ABSTRACT**

18 The Indian Himalayan Region (IHR) is prone to multiple-hazards and suffers great loss of life
19 and damage to infrastructure and property every year. Poor engineering construction,
20 unplanned and unregulated development, and relatively low awareness and capacity in
21 communities for supporting disaster risk mitigation is directly and indirectly contributing to the
22 risk and severity of disasters.

23 A comprehensive review of various existing survey forms for Risk assessment has found that
24 the survey questionnaires themselves have not been designed or optimised, specifically, for
25 hill communities. Hill communities are distinctly different from low-land communities, with
26 distinct characteristics and susceptibility to specific hazard and risk scenarios. Previous
27 studies have, on the whole, underrepresented the specific characteristics of hill communities,
28 and the increasing threat of natural disasters in the IHR creates an imperative to design hill-
29 specific questionnaires for multi-hazards risk assessment.

30 The main objective of this study is to design and [apply](#) a hill-specific risk assessment survey
31 form that contains more accurate information for hill communities and hill-based infrastructure
32 and allows for the surveys to be completed efficiently and in less time. The [proposed](#) survey
33 form is described herein and is validated through a pilot survey at several locations in the hills
34 of Uttarakhand, India. The survey form covers data related to vulnerability from Earthquake
35 (Rapid Visual Screening), Flood, Landslide, High Wind, Industrial etc. The proposed form is
36 self-explanatory, pictorial with easy terminologies, and is divided into various sections for
37 better understanding of the surveyor etc.

38 The [application](#) process confirmed that the survey questionnaire performed well and met
39 expectations in its application. The form is readily transferrable to other locations in the IHR
40 and could be internationalised and used throughout the Himalaya.

41 **Keywords:** Survey, Questionnaire Design, Multi-Hazard, Rapid Visual Screening, Himalaya

42 **1 Introduction**

43 [The Indian Himalayan is considered a significant part of the world's mountain ecosystems](#)
44 [\(Singh et al., 2005\)](#). [The Himalayas are geologically active, delicate, and vulnerable to both](#)
45 [natural and human-made processes due to their structural instability and maturity \(Kala, 2014\)](#).
46 Numerous hazards interact at most locations, resulting in cascading or synergetic effects
47 [\(Sanam et al., 2020\)](#). The Indian Himalayan Region (IHR) being prone to multiple hazards
48 suffers great loss of life and damage to infrastructure and properties every year [\(Chouhan et](#)
49 [al.,2022a\)](#). Multi-hazard frequency has risen in recent decades, resulting in massive socio-
50 economic losses. There has been a constant rise in the number of deaths, property losses,
51 and damage to infrastructure and facilities [\(Chandel and Brar, 2010\)](#).

52 Poor engineering and construction, reckless development, human intervention, unrecognized
53 practices, irresponsible development initiatives, and a lack of knowledge are directly and
54 indirectly contributing to the risk and severity of disasters [\(Chouhan et al., 2022b\)](#). [Many](#)
55 [natural disasters have become human-made phenomena as a result of the spread of](#)
56 [irresponsible construction practices. Such disasters have a devastating socio-economic](#)
57 [impact on the country's economy, putting even more strain on an already stressed economy](#)
58 [\(Disasters, 2007\)](#).

59 Various research work, disaster risk assessment studies and, implementation projects are
60 being executed by national and international organizations for disaster risk reduction in the
61 Himalayas. The data collection for any risk assessment in this difficult terrain is a crucial task,
62 as correct information documentation has played major significant role that directly or indirectly
63 lead to an influence in correct assessment of the risk factor [\(Chouhan et al.2022b\)](#).

64 Surveys using a well-crafted questionnaire is a proven method in the research fraternity.
65 Questionnaires are the backbone of every survey when it comes to data collection. Using data,
66 one can gain a detailed understanding of a community's hazard profile, vulnerability
67 interactions and their contribution to risk reduction [\(Buck and Summers, 2020\)](#). The survey
68 information is required to be coherent for data analysis since they lead to critical decisions at
69 many levels, represent the site's vital characters and society's expectations and requirements
70 too. All of these outcomes hinge, of course, on the creation of a robust site-specific survey
71 form. A well designed and executed MHRA can lead to more robust strategies for disaster risk

72 reduction (Kala, 2014; Sekhri et al., 2020) and can facilitate by prioritizing development
73 planning decisions.

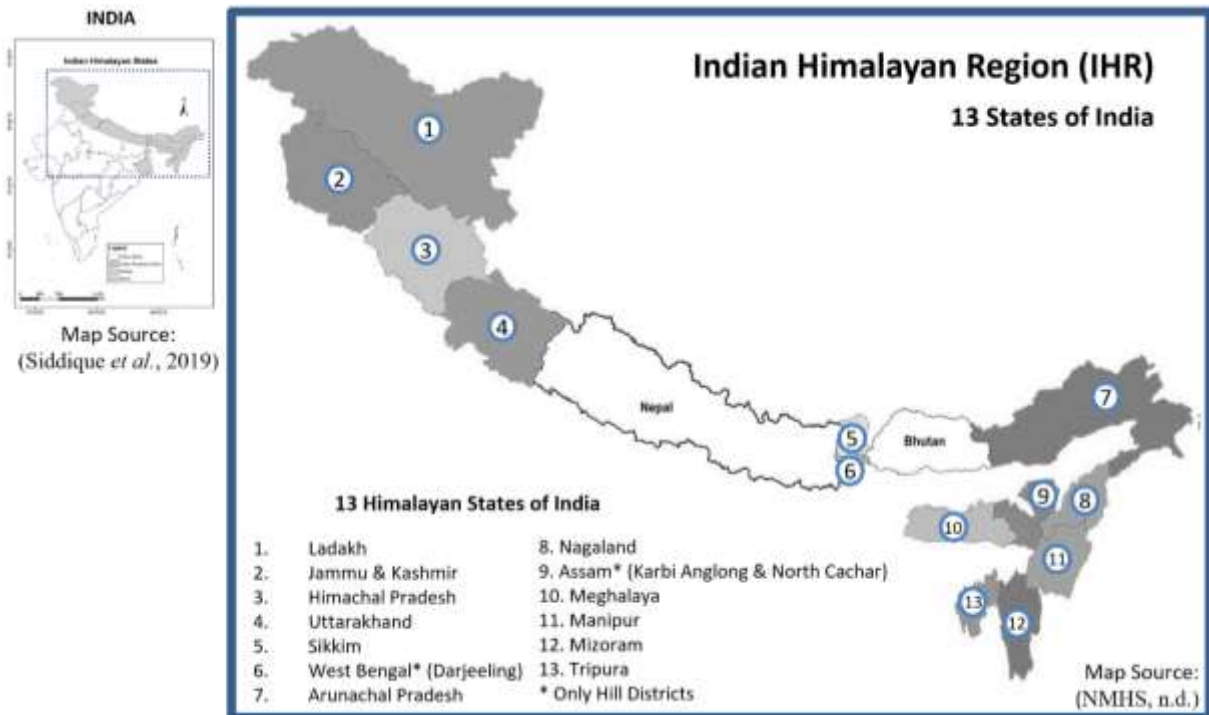
74 After studying existing survey forms and practical field survey at various location in Indian
75 Himalayas, author finds that the existing MHRA survey forms used in India have some
76 lacuna from hills point of views as Himalayas have different geography, cultural, development
77 practices, hazard profile etc. (Chouhan et. al., 2022b). A close evaluation of the existing survey
78 questionnaires reveals that there is a need for the IHR-specific survey questionnaire form to
79 facilitate a MHRA, which should be easy to understand, pictorial, and that creates a two-way
80 disaster sensitization of giving and getting information from the community.

81 In this research paper, the journey to design and application of the proposed Hill specific
82 MHRA survey form has been describe. The pilot survey using the proposed survey form has
83 been conducted at 10 schools in Uttarakhand state of India and its results identify various risk
84 indicators in a building as well as school campus.

85 **2 Background**

86 *2.1 Defining the Indian Himalayan Region*

87 The Indian Himalayan Region (IHR) straddles the northern latitudes of 26 20' and 35 40', and
88 the eastern latitudes of 74 50' and 95 40'. In India, it comprises 16.2% of all the geographical
89 land and is home to 76 million people. Natural resources, biodiversity, and ethnic variety are
90 abundant in IHR. (Goodrich et al., 2019; Sekhri et al., 2020). It stretches from the Indus River
91 to the Brahmaputra River in the east. (Srivastava et al., 2015). There are a total of 12 Indian
92 Himalayan states and 1 Union territory as shown in Figure 1, which has 109 administrative
93 districts (Kala, 2014). The region is socially and economically underprivileged, with 171
94 schedule tribes accounting for almost 30% of India's total tribal population and a high literacy
95 rate of 79 percent. The population is growing exponentially, putting a strain on the region's
96 resources (COI, 2011). Tourism is a lucrative business in IHR (Gaur and Kotru, 2018) and it
97 contributes to support a lot of construction projects like dams across the region (Kala, 2014).
98 Agriculture is a profitable venture for Himalayan people, and it is mainly rain-nourished.
99 Furthermore, climate change is hazardous to the region's progress and hinders socio-
100 economic development (Sekhri et al., 2020).



101

102 *Figure 1: Indian Himalayan Region, Source: (NMHS, n.d.)(Siddique et al., 2019)*

103 The IHR represents a significant role in the world's mountain ecosystems (Singh, 2005). IHR
 104 attracts tourists worldwide because of its natural richness, unique biodiversity, and cultural
 105 diversity (Gaur and Kotru, 2018). The number of pilgrims has risen dramatically in prominent
 106 pilgrim centres across the Himalayas over the ages (Kala, 2014), putting extra stress on these
 107 resources and posing a danger of socioeconomic loss.

108 2.2 Multi Hazards in IHR

109 Being geologically young and expanding (Wester et al., 2019), the IHR is vulnerable to natural
 110 disasters (Gautam et al., 2013). The Himalaya, the world's highest mountain range is
 111 geologically active, fragile, and susceptible to natural and man-made processes (Kala, 2014).
 112 Indian geography, climate, topography, and population growth all contribute to its high risk and
 113 vulnerability (Sharma et al., 2017). Mountain hazards are widespread, and hills characteristics
 114 are fragility, restricted accessibility, marginality, and heterogeneity (Gerlitz et al., 2016) may
 115 turn a hazard into a catastrophe, transforming mountains into high-risk zones. Furthermore,
 116 mountains need a long time to recover from disruptions (Sekhri et al., 2020).

117 Multi-Hazard Frequency has risen in recent decades, resulting in massive socio-economic
 118 losses (Rehman et al., 2022). Unrecognized practices, irresponsible development initiatives,
 119 and a lack of knowledge contribute to disasters having a more significant effect. One of the
 120 most challenging aspects of natural hazards risk assessment is determining how to estimate
 121 the risk of several hazards in the same region and how they interact (Hackl et al., 2015).

122 In the recent decade, severe earthquakes, floods, and landslides have devastated IHR,
 123 including the M 7.6 Kashmir earthquake in 2005, the Malpa Landslide in 2009, the M 6.8
 124 Sikkim earthquake in 2011, the 2013 Uttarakhand flash flood, and others, affecting
 125 approximately thousands of deaths and property losses (MHA, 2011)(BMTPC, 2019)(Kumar
 126 et al., 2016). Table 1 illustrate and describe the major hazard events that have occurred
 127 historically in the Indian Himalayan region.

128 *Table 1: Major Disaster Events in IHR, Source: adapted from (BMTPC, 2019), (Kumar et al., 2016).*

SN	Date	Location	Place	Indian Himalayan State	Hazard/ Magnitude	Casualties	Source
1	1869, Jan 10	(25.00, 93.00)	Near Cachar	Assam	Earthquake 7.5 Mw	Unknown	Kumar et al., 2016
2	1885 May 30	(34.10, 74.60)	Sopor	Jammu & Kashmir	Earthquake 7.0 Mw	Unknown	Kumar et al., 2017
3	1897 Jun 12	(26.00, 91.00)	Shillong plateau	Meghalaya	Earthquake 8.7 Mw	1500	Kumar et al., 2018
4	1905 Apr 04	(32.30, 76.30)	Kangra	Himachal Pradesh	Earthquake 8.0 Mw	19,000	Kumar et al., 2019
5	1918 Jul 08	(24.50, 91.00)	Srimangal	Assam	Earthquake 7.6 Mw	Unknown	Kumar et al., 2020
6	1930 Jul 02	(25.80, 90.20)	Dhubri	Assam	Earthquake 7.1 Mw	Unknown	Kumar et al., 2021
7	1943 Oct 23	(26.80, 94.00)	Assam	Assam	Earthquake 7.2 Mw	Unknown	Kumar et al., 2022
8	1950 Aug 15	(28.50, 96.70)	Arunachal Pradesh–China Border	Arunachal Pradesh	Earthquake 8.5 Mw	1526	Kumar et al., 2023
9	1975 Jan 19	(32.38, 78.49)	Kinnaur	Himachal Pradesh	Earthquake 6.2 Mw	Unknown	Kumar et al., 2024
10	1988 Aug 06	(25.13, 95.15)	Manipur–Myanmar border	Manipur	Earthquake 6.6 Mw	1000	Kumar et al., 2025
11	1991 Oct 20	(30.75, 78.86)	Uttarkashi, UP	Uttarakhand (now)	Earthquake 6.6 Mw	2000	Kumar et al., 2026
12	1998 Aug 18	(30.01, 80.04)	Malpa, Pithoragarh district	Uttarakhand (now)	Landslide	380	Kumar et al., 2027
13	1999 Mar 29th	(30.41, 79.42)	Chamoli District, UP	Uttarakhand (now)	Earthquake 6.8 Mw	100	Kumar et al., 2028
14	2005 Oct 08th	(34.48, 73.61)	Kashmir	Jammu & Kashmir	Earthquake 7.6 Mw	74,500	Kumar et al., 2029
15	2006 Feb 14th	(27.37, 88.36)	Sikkim	Sikkim	Earthquake 5.7 Mw	0	BMTPC, 2019
16	2010 Aug 06th	(34.15, 77.57)	Leh	Ladakh (now)	Cloudburst	257	BMTPC, 2019
17	2011 Sep 18th	(27.7, 88.2)	Sikkim Nepal border	Sikkim	Earthquake 6.8 Mw	60	Kumar et al., 2016
18	2012 July-Aug	(26.20, 92.93)	Assam	Assam	Floods	91	BMTPC, 2019
19	2012 Aug-Sep	(30.72, 78.43), (30.28, 78.98), (29.84, 79.76)	Uttarkashi, Rudraprayag & Bageshwar	Uttarakhand	Floods	52	BMTPC, 2019
20	2013 June 16th	(30.06, 79.01)	Uttaranchal	Uttarakhand (now)	Flood, Landslide, Cloud Burst	5748	Kumar et al., 2016
21	2014 Sep	(33.27, 75.34)	Jammu & Kashmir	Jammu & Kashmir	Flood, Cloud Burst	277	Kumar et al., 2016
22	2016 Jan 04th	(24.81, 93.93)	Imphal, Manipur	Manipur	Earthquake 6.7 Mw	8	BMTPC, 2019

130 The Himalayan region is among the most seismically active in the world due to the collision of
131 the Indian and Eurasian plates. A series of four major earthquakes has occurred within a short
132 span of 53 years (Srivastava et al., 2015); namely Shillong (1897), Kangra (1905), Bihar-Nepal
133 (1934) and Assam-Tibet (1950). Tectonic activities on the mountains constantly threaten the
134 stability of the mountains, being an active region. One of the most frequent natural disasters
135 in the Himalayas occurs when large landslides occur, destroying infrastructures, destroying
136 trees, and killing people. Landslides cause huge social and economic losses to mountain-
137 dwelling populations.(Sarkar et al., 2015). An area of near the River valley has witnessed a
138 large number of mass movements during recent years (Srivastava et al., 2010). A recent flash
139 flood, along with a debris flow at Kedarnath on 16-17 June 2013, which claimed over a
140 thousand lives, was caused by cloudbursts and landslides breaching temporary dams along
141 river valleys (Allen, 2015). More than 82 percent of the world's population lived on land affected
142 by floods between 1985 and 2003 (Mouri *et al.*, 2013). There is an increase in forest fire
143 frequency globally, especially in Asia. There are major environmental and ecological impacts
144 caused by wildfires, which can result in the fatalities of tens of thousands of people and
145 massive property losses (Parajuli et al., 2020).

146 2.3 *Need of Study*

147 Without a comprehensive evaluation of multi-hazards, it is impossible to develop any concrete
148 policy measures to combat the potential risk posed by multiple hazards.(Sekhri et al., 2020)
149 IHR being prone to Multi Hazards (Kala, 2014), Risk Resilient Development planning is the
150 only way to prepare Himalayan community from upcoming disasters.

151 It is well known that the Himalayas are a high-risk area for multi-hazards (Pathak et al., 2019),
152 although fewer risk assessments have been conducted in the IHR region. An assessment of
153 hazards generally focuses on a single threat, such as landslides, earthquakes, or flooding. As
154 a result, physical processes are considered in isolation. In most areas of the Himalayas,
155 hazards are interrelated and generate cascading effects or synergies which make the entire
156 region vulnerable (Sekhri et al., 2020). Probabilistic risk frameworks have been proposed, but
157 as a result of a lack of quality and quantity of data, these approaches are seldom feasible in
158 developing countries (Sanam et al., 2020). Furthermore, the existing risk assessment
159 models/tools for a specific hazard in the region has limited application and effectiveness from
160 a policy standpoint (Sekhri et al., 2020).

161 Researchers are involved in a number of research projects in IHR in the field of assessing the
162 risk of disasters in India, though there have been very few assessments of hazards associated
163 with the IHR region, none of which incorporate multi-hazards (Wester et al., 2019) In addition,

164 risk resulting from a single hazard is not applicable and cannot be considered effectively in
 165 policy analysis in the region (Sekhri et al., 2020).

166 The comparative study of some of the most used survey form to assess risk in India in shown
 167 in the table 2. Every survey form has its own unique features. In some cases, the focus is
 168 largely on one particular hazard and the other hazards are minor. The detail of all the
 169 mentioned survey form will be explain later in table 4 in this paper. It has been observed from
 170 the table 2 that none of the forms (SN 1 to 6) are focusing on Multi Hazard Risk
 171 calculation/identification as per IHR Scenarios, which is not only prone to earthquakes, but
 172 also prone to floods, landslides, high winds, industrial hazards and at building level falling
 173 hazard (Non-Structural Hazard), fire and electrical hazards etc.

174 Table 2: Comparison between survey forms used in India to assess Risk

Comparative Study between some survey forms used in India								
SN		1	2	3	4	5	6	7
Developed by/for		ARY A	FEMA	NDMA	IIT-B	HPSDM A	BMTPC	MH-RVS (Proposed)
Source: adapted from		Arya, 2006	FEMA, 2015	NDMA, 2020	Sinha & Goyal, 2001	Kumar et al., 2016	BMTPC, 2019	Author
Understanding	Pictorial					<input type="checkbox"/>		<input type="checkbox"/>
IHR is prone to Multi Hazard	Earthquake	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	Flood			<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	High Wind						<input type="checkbox"/>	<input type="checkbox"/>
	Landslide	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	Fire and Electrical					<input type="checkbox"/>		<input type="checkbox"/>
	Industrial							<input type="checkbox"/>
	Climate Change							<input type="checkbox"/>
	Non-Structural /Falling Hazard	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>

175
 176 Furthermore, while working with data collection teams on the ground during DRR Projects, the
 177 Author has observed that surveyors face several problems, such as the technical advance
 178 language of the existing survey form, which requires trained technical personnel to fill out, and
 179 this leads to costly human resources. Secondly, no graphical explanation of the form leads to
 180 little understanding, which further leads to incorrect data collection. Thirdly, Surveyors are not
 181 able to convey correct objective to the respondent, that creates no interest to response to reply
 182 further. Fourthly, most of the above-mentioned forms are not hill specific and many more.
 183 MHRA survey forms need to be made easy, simple, informative, with simple language or/and

184 visual explanation, for surveyors as well as respondents to get connected to it for giving and
185 receiving information.

186 Indian Himalayan Region is also the point of attraction for tourists and pilgrims globally, and
187 tourism plays an imperative role in enhancing the economy of the Himalayan state. Thus,
188 safety is the immense need of the government at various levels.

189 There is no such survey form for comprehensive database for the IHR Region for informed
190 decision-making, related to multi hazard and other aspects of sustainable hill development.
191 Considering the IHR scenarios, there is immense need for a Hill specific survey form, that can
192 help to gather important information from the field and help in Risk assessment for further
193 decision making, to prepare the hill community from future disasters.

194 **3 Multi Hazard Survey Framework**

195 *3.1 Survey Form design methodology*

196 The survey methodologies start with few recommendations for designing a good survey like
197 the survey form should satisfy the objectives of the research, there should dictate length of
198 questionnaires covering all essential parts, questions should convey single thought at a time, its
199 language should be simple and easy to understand by the surveyors as well as the
200 respondent, Multiple choice questions are mostly preferred to increase response rate, reduce
201 time and patterned the responses, As much as possible-be concrete and conform to the
202 respondent's perspective, the use of unclear words should be avoided and at last it should meet
203 the Survey logic i.e. There is no further progress or possibility of further correspondence from the
204 respondent, if the logic is flawed. It takes practice and verification to ensure that when considering an
205 option only the next logical question comes to mind (Roopa and Rani, 2012).

206 *3.2 Methodology Adopted*

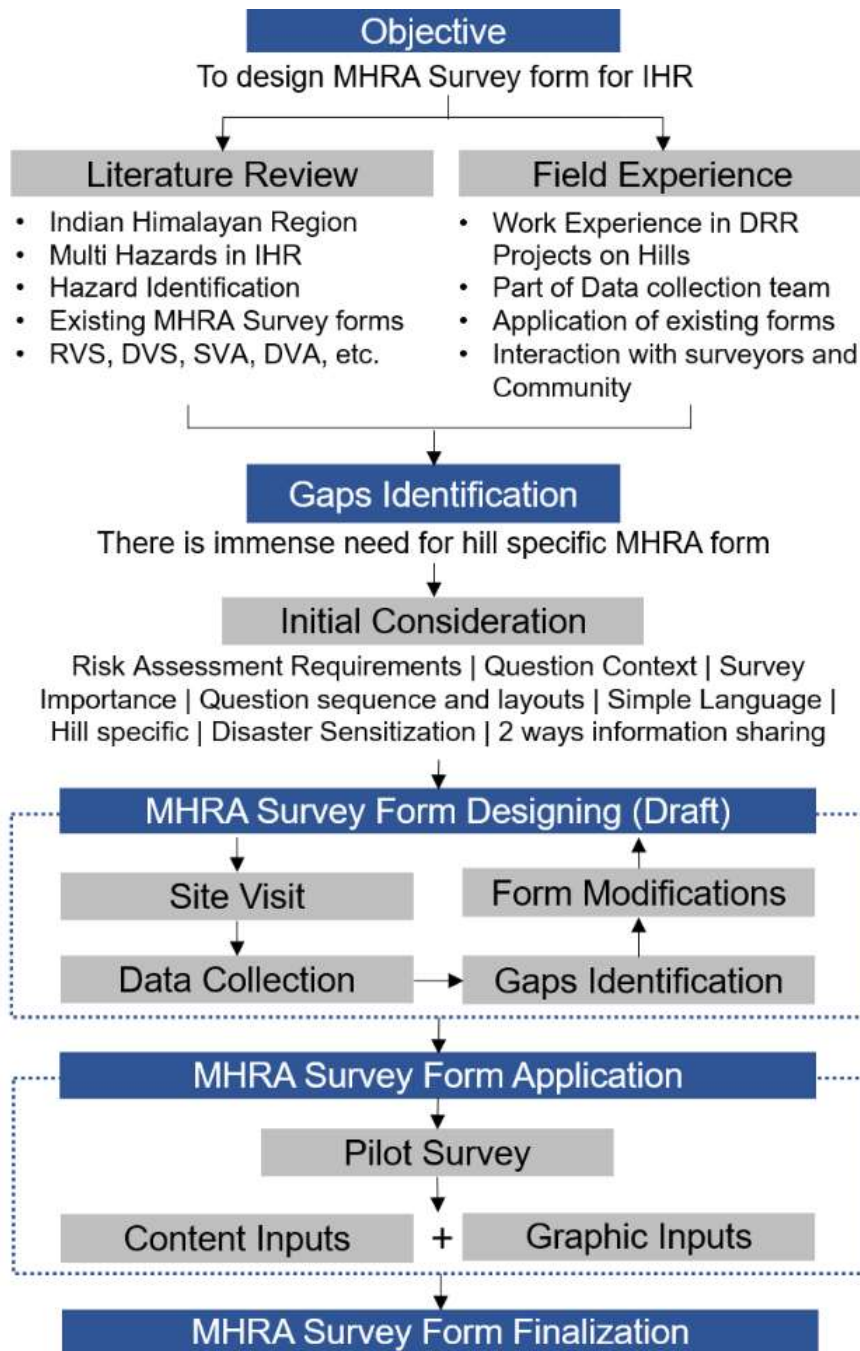
207 To gather beneficial and appropriate information related to multi-hazards in the Himalayan
208 region, careful attention must be given to the design of the questionnaire that covers all the
209 important contributing factors from various identified hazards and fulfils all the gaps identified
210 from the existing survey form and field experience. Designing an effective questionnaire, it
211 takes time, effort, and a variety of stages. The methodology to prepare the Multi-Hazard
212 Survey form for Indian Himalayan Region is shown in figure 2.

213 A number of Disaster Risk Reduction projects conducted in Indian Himalayan Region provided
214 Author 1 with a rare opportunity to be part of a Data Collection team. As a result of these
215 projects, author has been able to interact on the ground with hill communities and surveyors
216 and learned that there are several gaps in the existing survey forms (Section 3.4) from both a
217 Himalayan and surveyor perspective. MHRA Survey form contains all the gist of data collection

218 experience. This research paper is based on a comprehensive literature review (Section 3.3)
219 as well as field experience.

220 To ensure that the survey form was designed in accordance with Disaster Risk Assessment
221 requirements, Hill specific hazards, important components, question sequence and layout,
222 simple language, disaster sensitization, and two-way information sharing (giving and
223 receiving), some initial considerations were taken into account.

224 We have designed a draft MHRA survey form (Section 4.1) and applied it to some of the
225 buildings in five villages in Uttarakhand (figure 5). An initial pilot survey has been conducted
226 at 10 schools (section 4.2) using the proposed survey form with content and graphical inputs.
227 The results and observations relating to the Pilot survey are discussed in sections 4.2 and 4.5
228 of this paper.



229

230

Figure 2: Methodology adopted

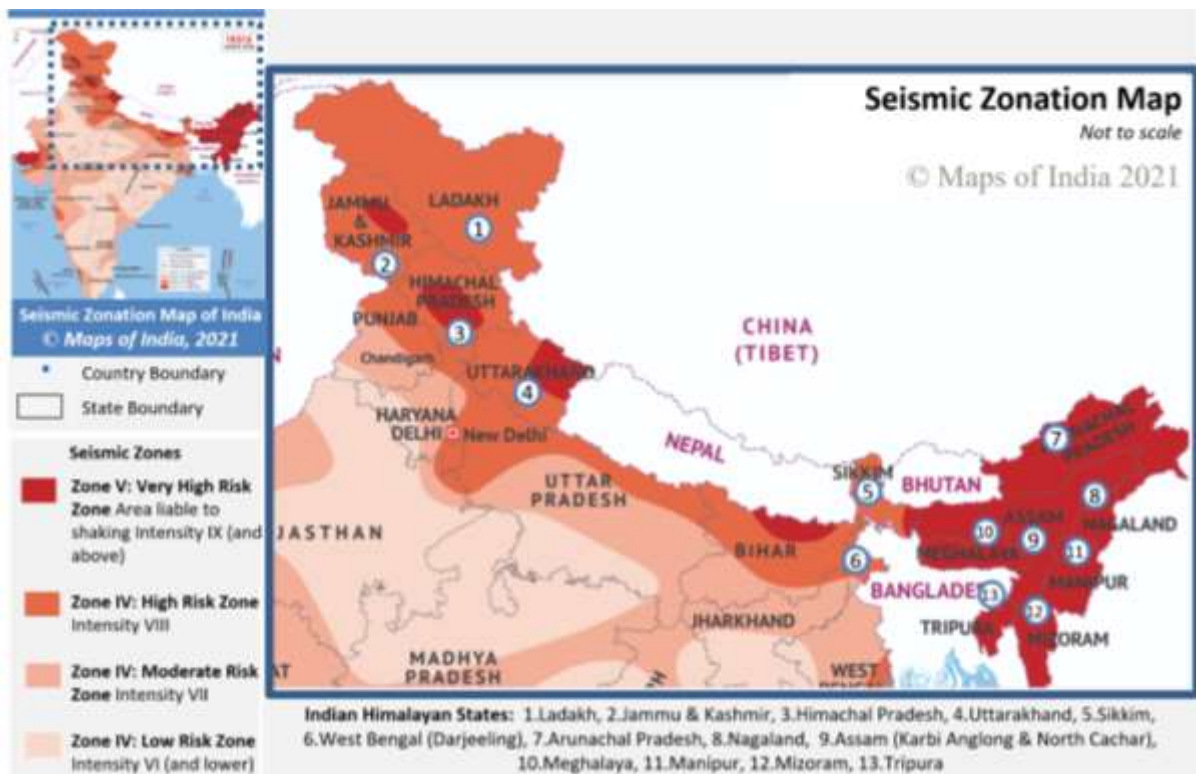
231 3.3 Existing Multi Hazard Risk Assessment (MHRA) Survey Forms

232 The spread of non-engineering construction, unrecognized construction and planning
 233 practices, reckless developmental activities, and a lack of awareness increase the impact of
 234 disasters. IHR being seismically active, as shown in the seismic zonation map of India, creates
 235 the importance of Risk assessment of existing buildings. Earthquakes are feared because
 236 they are so unpredictable. Yet, as we often hear, "Earthquakes don't kill, Buildings do"
 237 (attributed to Francesca Valli, Change Management Thought-Leader), and as the detailed
 238 assessment is limited to the number of homes and the cost, one of the considering approaches

239 is Rapid Visual Screening (RVS) that is used for seismic vulnerability assessment. Using this
240 methodology, a risk assessment has been conducted for areas subjected to earthquakes
241 (Kumar et al., 2016).

242 3.3.1 Seismic Zonation Map of India

243 The first seismic zoning map of India was published in 1935 by the Geological Survey of India
244 (G. S. I.) (Figure 3). Based on the damage earthquakes caused in various parts of India, this
245 map has undergone numerous modifications since its original creation. India is divided into
246 four distinct earthquake risk zones shown here by colour (Dunbar, 2003) in figure 3 below:



247

248 *Figure 3: Seismic Zonation Map of India, Source: (India, n.d., p. Map of India)*

249 3.3.2 About RVS

250 Applied Technology Council (ATC) developed the RVS method in the late 1980s and
251 published it in the FEMA: 154 in 1988. In later versions, it was revised in FEMA: 178-1989,
252 1992 (revised), FEMA: 310-1998, and FEMA: 154-1988, 2002 (revised), for rapid visual
253 screening of buildings. (Kumar et al., 2016)

254 Rapid Visual Screening (RVS) avoids the need for structural calculations by using a visual
255 method. An evaluator determines damageability grade by identifying (a) the primary structural
256 lateral load resisting system as well as (b) the structural features of the building that can impact
257 seismic performance in combination with that system. The process of inspecting, gathering

258 data, and deciding on the next course of action occurs on site and may last several hours,
259 depending on the size of the building (Arya, 2006).

260 3.3.2.1 *Uses of RVS Results:*

261 The foremost uses of this technique concerning seismic advancement of existing buildings are
262 to assess a building's seismic vulnerability to categorize it further. It is used to determine the
263 structural vulnerability (damageability) of buildings and determine the seismic rehabilitation
264 requirements. In cases where further assessments are not considered necessary or are not
265 feasible, retrofitting requirements are simplified (to a collapse prevention level) (Arya, 2006).

266 3.3.3 **Uses of the Four Levels of Earthquake Safety Assessments**

267 3.3.3.1 *Level 1: Rapid Visual Screening (RVS)*

268 Rapid Visual Screening (RVS) is a method to estimate the seismic vulnerability of building that
269 determines the correlations between the buildings' predicted seismic performance and structural
270 typology, material, design methods used, and other details (Shah et al., 2016). The method does
271 not require any structural calculations to be performed. For the purpose of identifying the main
272 structural members that resist lateral loads and the characteristics of buildings that modify
273 their performance during earthquakes, the evaluator applies a scoring system. On average,
274 each building inspection, data collection, and decision-making takes about 30 minutes
275 (NDMA, 2020).

276 3.3.3.2 *Level 2: Detailed Visual Study (DVS)*

277 Detailed Visual Study is a method used to assess a house as a first-level exercise before
278 performing a detailed retrofitting, and to assess the performance and safety of a house of a
279 certain type (NDMA, 2020).

280 3.3.3.3 *Level 3: Simplified Vulnerability Assessment (SVA)*

281 A simplified vulnerability assessment is a complex method that uses engineering information,
282 such as the size and strength of lateral load resisting members, along with ground motion
283 data, to estimate the building drift using an extremely simplified breakdown, which allows for
284 the analysis and quantification of potential seismic hazards. In comparison to RVS, the
285 simplified vulnerability assessment (SVA) is more complex and therefore more precise
286 (NDMA, 2020).

287 3.3.3.4 *Level 4: Detailed Vulnerability Assessment (DVA)*

288 Detailed Vulnerability assessment is the detailed engineering analysis that access the
289 vulnerability of the building using non-linear behaviour of structural components and the
290 potential impact of ground motions. This procedure requires a very high level of engineering
291 knowledge, skills, and experience (NDMA, 2020).

292 **3.3.4 Multi Hazard Risk Assessment used in India**

293 *3.3.4.1 RVS Methodology Proposed by Prof. Anand S Arya for Masonry Buildings*

294 RVS procedure that was designed for the Indian context, follows a grading system where the
295 screener identifies the primary load-resisting system of the building and determines
296 parameters that may be modified to improve seismic performance of the structure (NDMA,
297 2020)

298 Rapid Visual Screening form of Masonry Buildings developed by Prof. Anand S Arya consist
299 of zoning, according to Indian conditions, and buildings with importance are given
300 consideration. Also, special hazards (liquefiable area, landslide prone area, plan irregularities,
301 and vertical irregularities) and falling hazards are taken into account. Finally, a grading system
302 was performed in the buildings. Refer (Arya, 2006) for detail RVS survey forms for masonry
303 buildings prepared by Prof. A.S. Arya.

304 *3.3.4.2 RVS Methodology Proposed by Prof. Anand S Arya for RC frame or Steel Frame*

305 The Rapid Visual Screening form of Reinforced Concrete frame and Steel Frame for Seismic
306 Hazards developed by Prof. Anand S Arya has 6 components (i) general information (ii)
307 Building typology based on foundation type, roof, floor, etc. (iii) Structural frame type (iv)
308 Special Hazard (v) Non-Structural building components (vi) Damageable Grades (Arya, 2006).

309 Seismic safety features of RC Frame Buildings consist of parameters like Frame Action,
310 Presence of Soft Storey, Short Column Effect, Concept of Weak Beam Strong Column,
311 Pounding of Buildings, Building Distress and Other important features, Water Seepage,
312 Corrosion of Reinforcement, Quality of Construction, Quality of Concrete and non-structural
313 falling hazards. Refer (Arya, 2006) for detailed RVS Survey form for RC and steel buildings
314 prepared by Prof. A.S. Arya.

315 *3.3.4.3 RVS Procedure developed by Dr. Sudhir K Jain*

316 In this method, a checklist for pre-screened buildings is prepared based on Indian conditions.
317 It is one of the first methodologies in India featuring a points system. Performance scores are
318 calculated based on factors such as zone, architectural considerations, structural parameters,
319 and geotechnical characteristics. In India, this method is used in many locations, with the first
320 applications being in Gujarat after the Bhuj earthquake (Jain et al., 2010).

321 *3.3.4.4 RVS form developed by NDMA 2020*

322 In the Disaster Management Act of 2005, a paradigm shift from Relief-centric approach to
323 Mitigation- and Preparedness-centric approach is sought, with continued emphasis on
324 proactive, holistic and integrated Response. With this Act in mind, NDMA initiated a series of

325 discrete, comprehensive, and integrated initiatives. Among the recommended actions was
326 assessing earthquake risk within the existing built environment.

327 NDMA developed this report to make end users aware of RVS's outcomes by presenting RVS
328 in clear and tangible terms. On the basis of discussions with the relevant domain experts,
329 NDMA have developed recommended forms for Pre-Earthquake and Post-Earthquake Level
330 1 Assessments of 7 building typologies (i. Reinforced Concrete Building, ii. Burnt Clay Bricks
331 Building, iii. Confined Masonry Building, iv. Random Rubble Masonry Building, v. Mud House,
332 vi. Dhajji Dewari, vii. Ekra House). A form is developed to categorize the different building
333 attributes into three categories: Red (High Risk), Yellow (Moderate Risk), and Green (Low
334 Risk). Refer (NDMA, 2020) for detailed survey form.

335 *3.3.4.5 Seismic Vulnerability Assessment by Prof. Ravi Sinha and Prof. Alok Goyal*

336 Prof. Ravi Sinha and Prof. Alok Goyal from Indian Institute of Technology Bombay (IIT-B)
337 prepared a "National Policy for Seismic Vulnerability Assessment of Buildings and Procedure
338 for Rapid Visual Screening of Buildings for Potential Seismic Vulnerability". A key feature of
339 this procedure is that it allows a trained evaluator to conduct a walkthrough of the building to
340 determine vulnerability. It is compatible with GIS-based city databases, and can also be used
341 for a variety of other planning and mitigation tasks.

342 RVS analysed 10 different types of building, based on the materials and construction types
343 most commonly found in urban areas. There were both engineered and non-engineered
344 constructions (built according to specifications) in this category. Refer (Sinha and Goyal, 2001)
345 for detailed survey form.

346 *3.3.4.6 Building Vulnerability form developed by HPSDMA & TARU*

347 A form originally prepared by TARU consultancy and the Himachal Pradesh State Disaster
348 Management Authority (HPSDMA) is shown in the paper titled Rapid visual screening of
349 different housing types in Himachal Pradesh, India. A building is visually examined by an
350 experienced screener as part of RVS to identify features that contribute to seismic
351 performance. This method is known as a 'sidewalk survey.' In this side walk survey, checklists
352 are provided for each of the five types of buildings *i.e.*, RC frames, brick masonry, stone
353 masonry, Rammed Earth, and hybrid (Kumar et al., 2016). Refer (Kumar et.at. 2016) for
354 Building Vulnerability form developed by HPSDMA & TARU.

355 *3.3.4.7 Vulnerability Atlas of India developed by BMTPC*

356 Building Materials and Technology Promotion Council (BMTPC) published the Vulnerability
357 Atlas of India as its first edition in 1997. It was hailed as "useful tool for policy planning on
358 natural disaster prevention and preparedness, especially for housing and related

359 infrastructures". First of its kind, it provided a means for assessing not only district-level
 360 hazards, but also the vulnerability and risks of housing stock. It was greatly utilized by State
 361 Governments and their agencies in order to develop micro-level action plans on how to reduce
 362 the impact of natural disasters since buildings and housing are commonly damaged or
 363 destroyed due to natural disasters, resulting in life losses and disruptions to socio-economic
 364 activities.

365 The revised Atlas 2019 reflects advances in scientific & technical knowledge, addition of new
 366 datasets, results of disasters caused by earthquakes and cyclones, possible damage from
 367 landslides, floods, thunderstorms, failures of roads and trains during disasters, changes in the
 368 political map of the country, and new statistics on walling and roofing data of houses. (BMTPC,
 369 2019). Table 3 and Figure 4 shows different Housing categories based on wall and roof type
 370 and material identified in India and also their Damage risk under various hazard intensities.

371 *Table 3: Damage Risk to various Housing Category identified by BMTPC (BMTPC, 2019)*

Damage Risk to Housing under various Hazard Intensities

Category (Type of Wall and Roof)	EQ Intensity MSK				Wind Velocity m/s				Flood Prone
	≥IX	VIII	VII	≤VI	55 & 50	47	44 & 39	33	
A1. Mud wall (All roofs)	VH	H	M	L	VH	H	M	L	VH
A2.a. Unburned Brick Wall (Sloping roofs)	VH	H	M	L	VH	H	M	L	VH
A2.b. Unburned Brick Wall (Flat roofs)	VH	H	M	L	VH	H	M	L	VH
A3.a. Stone Wall (Sloping roofs)	VH	H	M	L	VH	H	M	L	VH
A3.b. Stone Wall (Flat roofs)	VH	H	M	L	H	M	L	L	VH
B.a. Burned Brick Wall (Sloping roofs)	H	M	L	VL	H	M	M	L	H
B.b. Burned Brick Wall (Flat roofs)	H	M	L	VL	M	L	L	VL	H
C1.a. Concrete Wall (Sloping roofs)	M	L	VL	NIL	H	M	M	L	L
C1.b. Concrete Wall (Flat roofs)	M	L	VL	NIL	L	VL	VL	VL	L
C2. Wood Wall (All roofs)	M	L	VL	NIL	VH	H	M	L	H
C3. Ekra wall (All roofs)	M	L	VL	NIL	VH	H	M	L	H
X1 Gi and other metal sheets (All roofs)	M	VL	NIL	NIL	VH	H	M	L	H
X2 Bamboo, Thatch, Grass, Leaves, etc. (All roofs)	M	VL	NIL	NIL	VH	VH	H	L	VH

372

Housing Category : Wall Types

- Category - A** : Buildings in field-stone, rural structures, unburnt brick houses, clay houses
- Category - B** : Ordinary brick building; buildings of the large block & prefabricated type, half-timbered structures, building in natural hewn stone
- Category - C** : Reinforced building, well built wooden structures
- Category - X** : Other materials not covered in A,B,C. These are generally light.

- Notes** : 1. Flood prone area includes that protected area which may have more severe damage under failure of protection works. In some other areas the local damage may be severe under heavy rains and choked drainage.
- 2. Damage Risk for wall types is indicated assuming heavy flat roof in categories A, B and C (Reinforced Concrete) building
- 3. Source of Housing Data : Census of Housing, GOI, 2011

Housing Category : Roof Type

- Category - R1** - Light Weight (Grass, Thatch, Bamboo, Wood, Mud, Plastic, Polythene, GI Metal, Asbestos Sheets, Other Materials)
 - Category - R2** - Heavy Weight (Tiles, Stone/Slate)
 - Category - R3** - Flat Roof (Brick, Concrete)
 - EQ Zone V : Very High Damage Risk Zone (MSK > IX)
 - EQ Zone IV : High Damage Risk Zone (MSK VIII)
 - EQ Zone III : Moderate Damage Risk Zone (MSK VII)
 - EQ Zone II : Low Damage Risk Zone (MSK < VI)
 - Level of Risk : VH = Very High; H = High; M = Moderate; L = Low; VL = Very Low
- * Total No. of Houses excluding Vacant/Locked Houses

373

374 *Figure 4: Damage Risk and Housing category identified by BMTPC (BMTPC, 2019)*

375 **3.3.5 Multi Hazard Risk Assessment used Globally**

376 **3.3.5.1 FEMA 154**

377 The FEMA handbook demonstrates how to rapidly identify, inventories, and rank buildings that
 378 are at high risk of death, injury, or severe damage in the event of an earthquake. Rapid Visual
 379 Screening (RVS) can be carried out with a short exterior inspection, lasting 15 to 30 minutes,
 380 by trained personnel using the data collection form in the handbook. The guide is targeted at
 381 building officials, engineers, architects, building owners, emergency managers, and citizens
 382 who are interested in the topics.

383 Its purpose was to provide an evaluation of the seismic safety of a large inventory of buildings
 384 quickly and inexpensively, with minimal access to the buildings, and to identify those that
 385 require more detailed examination. FEMA 154 was developed by ATC under contract to FEMA
 386 (ATC-21 Project) in 1988. As with its predecessors, the Third Edition aims to identify,
 387 inventory, and screen buildings that present a potential risk. This latest version includes major
 388 improvements, such as: updating the Data Collection Form and including an optional more
 389 detailed page, preparing additional reference guides, and including additional building types
 390 that are common, considerations such as existing retrofits, additions to existing buildings, and
 391 adjacency, and many others. (FEMA, 2015). Refer (FEMA, 2015) for detail survey form .

392 **3.3.5.2 Flood Vulnerability Assessment survey**

393 The Flood Vulnerability Assessment survey form prepared by the Asian Institute of Technology
 394 (AIT) Bangkok and Climate Technology Centre and Network (CTCN) (Peiris, 2015) has 5
 395 Sections: (i) General Information (ii) Type of Building (iii) Flood damage and cost (iv) Flood
 396 emergency response (v) Effect on livelihood and income, designed for Residential,
 397 Institutional, Commercial/Industrial damages and Infrastructure damages. Refer (Singh et al.,
 398 2019) for Flood Vulnerability Assessment Survey form developed by CTCN and AIT

399 3.3.5.3 *Landslide Vulnerability Assessment survey*

400 Scientists and researchers focus more on researching landslide susceptibility and the hazard
401 component rather than assessing the vulnerability of buildings to landslides. Even when the
402 same construction material is used, construction practices vary across the country. Currently,
403 there is no standard method for determining building vulnerability by using indicators.

404 The parts cover by Landslide risk assessment survey forms are (i) General information (ii)
405 Building Function (iii) Vulnerability Indicators like Architectural Features, Material
406 Characteristics, Structural Features, Geographical features, and quality of Workmanship,
407 Construction & maintenance, etc. which are also covered during RVS and has been covered
408 in the proposed survey form CitSci, GIS based data collection app for landslide (Singh et al.,
409 2019).

410 3.4 *Features required for a Multi Hazard Survey Form for IHR*

411 **3.4.1 Gaps Identified**

412 Existing Survey forms have their strengths & weaknesses. After studying various survey forms
413 for Risk assessment prepared by various national and international authorities, it is observed
414 that hill-specific survey forms that can take care of multiple aspects of risk and sustainability
415 assessment together do not exist. Available forms are complicated, not-so user friendly,
416 consisting of terminologies difficult to communicate and comprehend, no pictorial clues for
417 understanding, involve several rounds of calculations for coherent multi-hazard risk evaluation
418 using the data, and most importantly, they not hill site-specific or designed for the Indian
419 Himalayan region.

420 Hills have their own situation, condition, geography, climate, development trends, construction
421 practices, culture, etc., and they are distinctly different from other regions. RVS is mostly used
422 in India to assess the visual structural vulnerability of the building, as it involves no structural
423 calculations. On the other hand, SVA and DVA are for the detailed structural survey of a
424 building, and therefore more precise and use engineering information along with more explicit
425 data on ground motion. Data filling is not easy enough for the surveyor and requires a very
426 high level of engineering knowledge, skills, and experience. Pictorial explanation from
427 surveyor point of view can ease the communication. Most of the survey forms are focused on
428 single hazard, (mostly for seismic evaluation of a building) irrelevant of multi hazard from
429 Himalayan point of view, and how prone is buildings for its location is from other hazards.
430 Integration between risk understanding and sustainable development is too limited or non-
431 existent. Thus, it has been observed that there is an immense need to design hill-specific
432 questionnaires for multi-hazards risk assessment for Indian Himalayan Region.

433 **3.4.2 Comparative Study of some risk assessment survey forms mostly used in India**

434 Here is the comparative analysis of Risk assessment survey forms developed by various
 435 organizations and mostly used in India with the proposed Multi-Hazard RVS. It has been
 436 compared on various sections like typology, General Information, History of Disasters, Site
 437 Conditions, Building geometry, structural and non-structural component of a building etc.

438 *Table 4: Comparative Study of some risk assessment survey forms mostly used in India*

		1	2	3	4	5	6	7
Developed by/for		ARY A	FEMA	NDM A	IIT-B	HPSDM A	BMTP C	MH-RVS (Proposed)
Source		Arya, 2006	FEMA, 2015	NDM A, 2020	Sinha & Goyal, 2004	Kumar et al., 2016	BMTP C, 2019	Author
Typology	A1: Mud & Unburnt Brick			<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>
	A2: Stone Wall	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	B: Burnt Brick	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	C1: Concrete Wall	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	C2: Wood Wall		<input type="checkbox"/>		<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>
	X: Other Materials			<input type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>
	Steel	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>			<input type="checkbox"/>
General Information	About Building and owner	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>
	Sketch/Photo and drawings	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>			<input type="checkbox"/>
	Occupancy (Day & Night)	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>
	Cost of Construction					<input type="checkbox"/>		
	Construction quality and Maintenance		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>
Disaster History	Seismic Zone		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>
	Disaster History and Damage status					<input type="checkbox"/>		<input type="checkbox"/>
	Disaster cause					<input type="checkbox"/>		
	Retrofitting history							<input type="checkbox"/>
Site Condition	Location of building				<input type="checkbox"/>			<input type="checkbox"/>
	Site Condition			<input type="checkbox"/>		<input type="checkbox"/>		<input type="checkbox"/>
Building Geometry	Dimension of Building					<input type="checkbox"/>		
	Shape of Building, floors	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>
	Re-entrant corners					<input type="checkbox"/>		<input type="checkbox"/>
Foundation	Type of Sub-Soil	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>
	Foundation detail	<input type="checkbox"/>				<input type="checkbox"/>		<input type="checkbox"/>
	Depth of ground water table	<input type="checkbox"/>		<input type="checkbox"/>		<input type="checkbox"/>		<input type="checkbox"/>
Walls	Walls details	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	Separation of walls at joint			<input type="checkbox"/>				<input type="checkbox"/>
	Wall failure observed			<input type="checkbox"/>		<input type="checkbox"/>		<input type="checkbox"/>
Earthquake Bands	Earthquake band details and status			<input type="checkbox"/>		<input type="checkbox"/>		<input type="checkbox"/>

Cracks	Cracks details			<input type="checkbox"/>		<input type="checkbox"/>		<input type="checkbox"/>
	grade of cracks	<input type="checkbox"/>		<input type="checkbox"/>		<input type="checkbox"/>		<input type="checkbox"/>
Openings	Opening(s) details			<input type="checkbox"/>		<input type="checkbox"/>		<input type="checkbox"/>
	Frames details near opening							<input type="checkbox"/>
Roof and Floor	Type and material		<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	Roof's attachment with walls			<input type="checkbox"/>		<input type="checkbox"/>		<input type="checkbox"/>
	Failures observed					<input type="checkbox"/>		<input type="checkbox"/>
Pounding effect	Height of building			<input type="checkbox"/>		<input type="checkbox"/>		<input type="checkbox"/>
	distance from closest building							<input type="checkbox"/>
	Quality of adjacent building		<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>		<input type="checkbox"/>
Heavy weight on top	Type and positioning of Heavy weights					<input type="checkbox"/>		<input type="checkbox"/>
	Intact status with structure							<input type="checkbox"/>
Parapet	Parapet material			<input type="checkbox"/>		<input type="checkbox"/>		<input type="checkbox"/>
	Parapet intact with structure			<input type="checkbox"/>				<input type="checkbox"/>
Overhang	Type of overhangs	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>
	length and intact status			<input type="checkbox"/>				<input type="checkbox"/>
Staircase	Staircase details	<input type="checkbox"/>		<input type="checkbox"/>		<input type="checkbox"/>		<input type="checkbox"/>
	Lift status							<input type="checkbox"/>
Column and Beam	Column Beam details			<input type="checkbox"/>		<input type="checkbox"/>		<input type="checkbox"/>
	Beam with infill wall		<input type="checkbox"/>					<input type="checkbox"/>
	Connection and continuity	<input type="checkbox"/>		<input type="checkbox"/>				<input type="checkbox"/>
Basement	No. of basement					<input type="checkbox"/>		<input type="checkbox"/>
	Column and retaining Wall							<input type="checkbox"/>
Soft Storey	Soft Storey's details		<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>		<input type="checkbox"/>
High Wind	Potential threat from wind							<input type="checkbox"/>
Landslide	Position of potential landslide	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>				<input type="checkbox"/>
	Stabilized slope status		<input type="checkbox"/>	<input type="checkbox"/>				<input type="checkbox"/>
	Barriers to rockfall			<input type="checkbox"/>				<input type="checkbox"/>
Industrial	Potential threat from Industrial Hazard							<input type="checkbox"/>
Fire	Fire Safety Status					<input type="checkbox"/>		<input type="checkbox"/>
	Location of potential fire threats							<input type="checkbox"/>
Climate Change	Understanding & Concern							<input type="checkbox"/>
Non-Structural Elements	Cantilever availability (Chimneys, Balconies, Parapet, Sunshades, claddings)	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>
	Other Non-Structural elements	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		<input type="checkbox"/>
	No. of unattached Non-structural elements							<input type="checkbox"/>

: Concern (major/minor)

440 **4 IHR Specific MHRA Survey Form Preparation**

441 *4.1 Survey Form Preparation*

442 The [proposed](#) survey form is a modification of the Rapid Visual Screening (RVS) survey
443 questionnaire, i.e., a form used for structural and non-structural components of a building that
444 performs during an Earthquake. In the original RVS questionnaire no other hazards are
445 considered. A building's location on a vulnerable site, its structural condition, and performance
446 can lead to disastrous situations. The other hill-specific hazards are also incorporated into the
447 [proposed](#) form to identify the risk components from multi-hazards. Whilst the Himalayan region
448 is prone to earthquakes as per India's Seismic Zonation Map (Figure 3) prepared by the
449 Geographical Survey of India (GSI), the proposed survey form also covers other hazards like
450 landslide, flood, industrial explosion/emissions, fire, hydro-climatic factors, etc., which will be
451 addressed one by one in this paper.

452 *4.2 Preliminary Survey*

453 Before conducting the [Pilot](#) survey, a preliminary survey has been conducted to test the
454 proposed form, research methodology, and identifying gaps in the existing survey form.

455 This small assessment also evaluated the RVS form with minor enhancements evaluate its
456 performance and confirm gaps, and to see if it can meet the requirement for risk assessment
457 at other areas with similar geographical characteristics and conditions as experienced in the
458 Indian Himalayan Region.

459 The [Preliminary](#) survey had been conducted at 5 Gram Panchayats of Chinyalisaur sub-district
460 in Uttarkashi, Uttarakhand, namely Chinyalisaur, Dhanpur, Dharasu, Hidhara, and Bagi, in
461 October and November 2019, [using Draft MHRA Survey form](#). Some of the pictures of the visit
462 are provided in Figure 5.



463

464

Figure 5: View of Site selected for Pilot Survey

465

The **preliminary** survey was conducted to determine (1) Whether the questions are clearly framed? (2) Does it cover all the requirements as per hill communities? (3) Is the wording of the questions correcting enough to lead to the desired outcomes? (4) Is the question as well options for answer suggested is hill specific or not? (5) Is the question positioned is in the most satisfactory order? (6) Surveyors and respondents of all classes understand the questions? (7) The questions and their options are self-explanatory or not? (8) The sections in the survey form cover risk assessment related questions for all identified hazards or not? (9) The questions are as per construction practices and construction materials available on hills or not? (10) Are there any need to add some Questions or specified, or some need to be eliminated so as to mention the flow of the survey session. (11) Does surveyor and Respondent understand the importance of this survey or the objective behind this survey and response in that way?

477

4.2.1 Observations during Preliminary survey

478

Feedback from the **Preliminary** study proved very helpful in determining the key gaps and shortcomings of the form design and in informing improvements to the **proposed** form design. Specifically (1) The **preliminary** study showed that a surveyor's observations of a project site, his or her understanding of each question, and his/her strategy for convincing the residents to provide accurate data played a significant role in risk assessment. (2) In some questions, the use of technical terms or difficult words, or questions designed to gather too much data at

483

484 once, discourage respondent interest in responding further and make the Surveyor
 485 uncomfortable to proceed. (3) The questionnaire may not be self-explanatory and requires
 486 someone with civil engineering training to fill it out. (4) Building geometric, Construction
 487 practices, Construction materials, development trend plays an essential role during any
 488 hazard, thus existing building related questions and options must be incorporated. (5) Survey
 489 questions are developed primarily from observations made by surveys and engineers as
 490 opposed to responses from residents. (6) If the Surveyor is not familiar with the terminologies
 491 and aims behind filling that questionnaire, it leads to no response or respondent sometimes
 492 loose interest to answer further. (7) An unclear survey vision, study purpose, and inadequate
 493 training of the Surveyor will make it difficult to explain the importance of data collection to the
 494 respondent, leading to unclear questions and less accurate responses. (8) Surveyors should
 495 be trained enough to pick out the correct option from respondents' lengthy responses. (9)
 496 Need of pictorial representation of answers/options for better understanding of the Surveyor.
 497 (10) Different answers are obtained when questions are arranged inappropriately or answers
 498 are arranged incorrectly. (11) Observing the interaction between multiple hazard types in the
 499 same area is a challenging aspect of natural hazards risk assessment.

500 **4.3 Proposed MHRA Form**

501 After the Preliminary survey conducted at the Chinyalisaur sub-district, significant points were
 502 identified/observed that has been incorporated in the Proposed survey form of Multi-Hazard
 503 at hill locations will all the simple content and graphical inputs for better understanding. Hence,
 504 the modifications from a Multi-hazard risk point of view and surveyors' point of view can be
 505 seen in the proposed form (Table 5 and 6).

506 These amendments and the full survey form are presented below.

507 *Table 5a: Proposed MHRA Survey form (Part A)*

Rapid Visual Screening (RVS) form		
SURVEYOR		
1	Name of the Surveyor	
2	Mobile no. of Surveyor	
3	Inspection Data	
4	Inspection Time	

508

GENERAL INFORMATION	
5	Name of Building/Owner
6	Address
7	Town/City, District and State
8	Coordinatnates
9	Total No. of Building Blocks present inpremises
10	Name of Block to be survey
11	Draw Sketch of Site Plan

509

12	Function of Block	Residential (Individual House)		Residential (Appartments)		Residential (Other)
		Educational (School)	Educational (College)	Educational (Institute/ University)		
		Lifeline (Hospital)	Lifeline (Police Station)	Lifeline (Fire Station)	Lifeline (Power Station)	Lifeline (Water/ Sewage Plant)
		Commercial (Hotel)	Commencial (Shopping)	Commercial (Recreational)		Commercial (Other)
		Office (Govt.)		Office (Private)		
		Mixed Use (Residential and Commercial)		Mixed Use (Residential and Industrial)		Mixed Use (Other)
		Industrial (Agriculture)		Industrial (Live Stick)		Industrial (Other)
13	Occupancy in day time	0 to 10	11 to 50	51 to 100	101 to 1000	more than 1000
14	Occupancy in night time	0 to 10	10 to 20	51 to 100	101 to 1000	more than 1000
15	Name of Owner					
16	Name of Contact Person					
17	Contact No. of Contact Person					
18	Year of Construction:					
19	Structural or Construction drawings available?	Yes		No		

510

511 *Table 5b: Proposed MHRA Survey form (Part A)*








20	Total built up area (sq.m)					
21	No. of Floors	Low Rise (1 to 3)	Mid Rise (4 to 7)		High Rise (7 and above)	
22	What is the overall Construction quality	Excellent	Good	Average	Poor	Very Poor
23	What is the overall Maintainance Status	Excellent	Good	Average	Poor	Very Poor

512

513










DISASTER HISTORY						
24	Seismic Zone	Zone V	Zone IV	Zone III	Zone II	Don't know
25	Did this area faced any Major disaster?:	Yes		No		
26	If Yes in Q.25, Which Disaster?:	Earthquake	Flood	Landslide	Wind	Industrial
		Fire	Other	If Other, Specify		
27	If Yes in Q.25, in which date/year					
28	If Yes in Q.25,What is the major damage status	No effect	Minimum Effect	Medium Effect	Maximum Effect	
29	Is the building Retrofitted/ Renovated ever?	Yes		No		
30	If Yes in Q.29, Year of last renovated?					

514





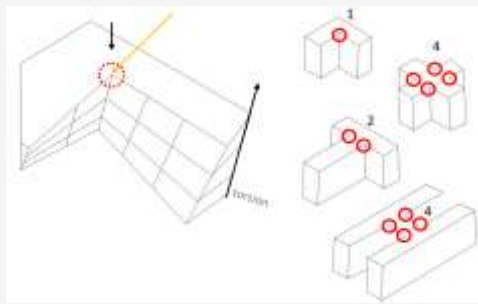
SITE CONDITION					
31	Location of Building:	Isolated	Internal Corner		End
					
32	Slope of Ground:	Flat Terrain	Gentle Slope	Steep Slope	Terraced land
					
33	Cut & Fill Material:	RCC	Hybrid		Other
34	Is there Visible cracks on the ground	Yes, Many		Yes, few	No
35	Is there any open space in the property?	Yes, more than 1500 sq.ft		Yes, less than 1500 sq.ft	No
36	What is the total area of Open spaces in the campus (in sq.ft) :				

515 *Table 5c: Proposed MHRA Survey form (Part A)*









516

BUILDING GEOMETRY						
37	Shape of Building Block in Plan:	Square	Rectangle (L<=3B)	Narrow Rectangle (L>3B)	Rectangle with courtyard	L-Shaped
						
		T-Shaped	U-Shaped	E-Shaped with Central courtyard	H-Shaped	Other
						




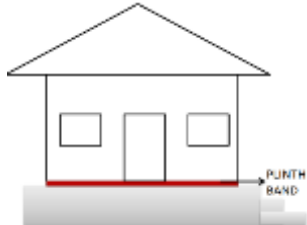
517

38	Shape of building Block in Elevation: No. of Reentrants corner in Plan	Not stepped	Stepped near centre	Stepped near the end	Heavy upper floor	
						
39	No. of Reentrants corner in Plan					
40	Is extra strength available in reentrants corner?	Yes		No		
41	No. of Floors	only G	G+1	G+2	G+3	≥ G+4

518 *Table 5d: Proposed MHRA Survey form (Part A)*










FOUNDATION					
42	Type of Sub Soil:	Rock	Gravel or Sand	Soft or Medium	Other
					
43	Type of Foundation:	Strip		Raft	Isolated
					
		Pile		Combined	Other
					

519

44	Basic Construction material of Foundation:	Adobe	Stone	Brick	RCC	Other
						
45	Mortar Material in Foundation:	Dry Masonry	Mud	Lime	Cement	Other
46	Plinth beam available?	Yes	No			
47	Sinking in Foundation?	Yes		Partial	No	
48	If Yes or Partial in Q.47, What is the Reason for Sinking?	Cause of nearest water resources		Without any water resources		Other (specify)
49	Depth of ground water table					Don't know

520

521 *Table 5e: Proposed MHRA Survey form (Part A)*









WALL							
50	Type of Wall:	Brick	Stone	Confined	RCC	Other	
				Only Column available & No Beams	Column & Beam, both available		
51	Is through-stone used in Stone Wall?	Yes	Partial	No			
52	What is the Wall material?	Adobe or Mud Wall	River Boulder wall	Quarry Stone wall	Dressed wall	fired brick wall	
							
		hollow concrete block wall			Other		
							

522






53	Type of mortar	Dry masonry	Mud	Lime	Cement	Other
54	Thickness of interior Wall (in mm):	< 115 mm	115 mm (4.5")	230 mm (9")	230 to 450 mm	> 450 mm
	Length of longest interior wall (in meter)					
	Max. Height of the wall (in meters)					
55	Thickness of exterior Wall (in mm):	< 115 mm	115 mm	230 mm	230 to 450 mm	> 450 mm
	Length of longest exterior wall (in meter)					
56	Thickness of Mortar (in mm):					
57	How many Separation of walls at T and L junction?					
58	Wall Failure type observed:	Bulging of wall	delaminating of wall	tilting of walls	dampness in wall	No failure
	No. of walls with these failures					

523

524 *Table 5f: Proposed MHRA Survey form (Part A)*

		EARTHQUAKE BANDS				
59	Which of the Earthquake bands available?	Plinth Band	Sill Band	Lintel Band	Roof Band	
						
		Gable Band	Door Band	Window Band	Corner Band	No Band
						
60	If Bands available in Q.59, What is the Material of Band:	Wood	Reinforced brick	Reinforced concrete	Other (Specify)	
61	If Bands available in Q.59, Thickness of Band (in mm):					
62	If bands available in Q59, Are the bands continuous?	Yes	Partial	No		Don't know

525

		CRACKS				
63	Type of Cracks:	Structural cracks		Superficial cracks		N/A
	Note: Superficial cracks are seen in one side of wall, on the other hand structural cracks can be seen on both side of the wall					
64	Type of Structural cracks:	Diagonal cracks	Vertical cracks	Horizontal Cracks	Remark	
						
	Specify, No. of Cracks in each case					
	Specify, Length of cracks in each case (in cm)					
	Grade of Cracks	Grade 5	Grade 4	Grade 3	Grade 2	Grade 1
65	Are there any cracks on	Column	Beam	Near Openings	Near corner	No cracks











526

527 *Table 5g: Proposed MHRA Survey form (Part A)*

528

OPENING					
66	Is there any opening(s) larger than 50% of the length of the wall	Yes, all		Yes, few	No
67	Are there any opening close to wall junction or corner or to floor/roof	Yes, all		Yes, few	No
68	Is frames available around the door?:	Yes		Partial	No
69	If Yes/Partial in Q.68, What is the material of Frame used:	Wooden	MS/SS	other (Specify)	
70	Is frames available around the window	Yes		Partial	No
71	If Yes/Partial in Q.70, What is the material of Frame used:	Wooden	MS/SS	other (Specify)	
72	Is Grills available around the window?:	Yes		Partial	No

529





ROOF AND FLOOR						
73	Type of Roof:	Flat Roof 	One side slope 	two side slope 	four side slope 	Other (specify)
74	Material of Roof:	RCC 		Reinforced brick slab 	Tile or slate 	CGI Sheets 
		Jack arch roof 		Wooden 	Other (Specify)	
75	Are the roof anchored into the wall	Yes		Partial	No	
76	Type of Roof failures observed	Sagging	Cracks	Dampness	Other	No failure
77	Type of Flooring	Mud	Stone	Concrete	Wood.bamboo	Mosaic floor tile

530



POUNDING EFFECT DETAILS					
78	Height of Structure /Block (in meters)				
79	Distance from nearest buildings (in meters)				
80	Is there any adjacent building, which is very close (no gaps) to this BUILDING	Yes	very little gap	No	
81	Quality of adjacent building		Good	Moderate	Poor

531 *Table 5h: Proposed MHRA Survey form (Part A)*

532

HEAVY WEIGHT ON TOP						
82	Type of Heavy weight present on the top of the building?	water tank (Concrete)	Water tank (Plastic)	Car Parking on the top of the building		Big hoarding
		Heavy generator/machine	Communication tower	Roof top Garden	Other	None
		Centric	Eccentric	Distributed	Corners	Remark
83	If Yes in Q.82, What is the Position of Heavy weight?					
		Yes		Partial	No	
84	Are the heavy weight intact properly with structure?					

533

PARAPET WALL					
85	Is Parapet wall present at roof	Yes	Partial	No	
86	If Yes or Partial in Q.85, What is the Material of Parapet Wall?	Lightweight (Wooden, MS/SS)	Heavy weight (RCC, Brick)		Remark
					
87	Intact with structure	Yes	Partial	No	

534

OVERHANGS			
88	Overhangs present	Yes	No
89	Length of overhangs (meters)		
90	Overhangs with structural	Yes	No
91	Overhangs with Brackets /beam	Yes	No

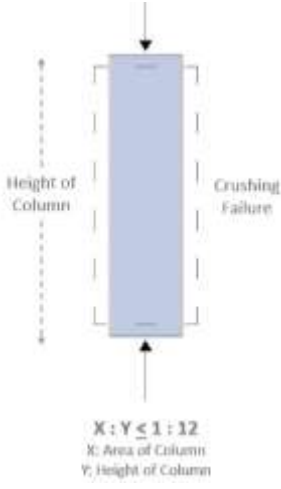
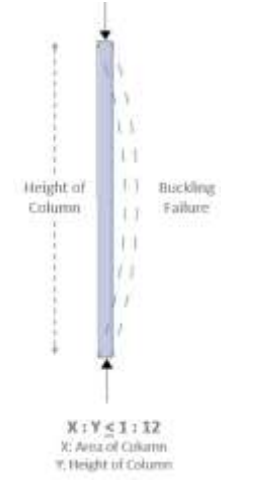
535

STAIRCASE						
92	Staircase present	Yes			No	
93	Staircase placed at symmetrical location in plan of the bulding	Symmetrical			Un-symmetrical	
94	If Yes in Q.92, What is the Material of Staircase?	RCC	Brick	Wooden	MS/SS	Other
95	If Yes in Q.68, Is Staircase intact with building structure?	Yes			No	
96	Lift Status?	Intact	Not Intact		Not Available	

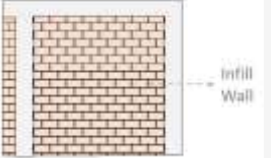



536

Table 5i: Proposed MHRA Survey form (Part A)

537

COLUMN						
97	Column available?	Yes			No	
98	If yes in Q.97, What is the type of Column?	Short Column			Long Column	
						
99	Material of Column	Concrete	Masonry (Brick/ Stone)	Wood	Steel	Other

538

BEAM						
100	Beam available?	Yes			No	
101	If Yes in Q.100., Beam with infill walls available?	Yes	Partial	No		
						
102	If Yes in Q.100., Beam – Column connections?	Centric	Eccentric		Other	
						
103	Beam -Beam Connection?	Centric			Eccentric	
104	If Yes in Q.100., Material of Beam	Concrete	Masonry (Brick/ Stone)	Wood	Steel	Other

539 Table 5j: Proposed MHRA Survey form (Part A)

BASEMENT					
105	Is Basement Available?	Yes		No	
106	If Yes in Q.105, No. of Basement				
107	Effective height of column in basement?	Short Column		Long Column	
108	Retaining wall available ?	Yes		No	
109	If Yes in Q.108, What is the Material of the retaining wall ?	RCC	Brick	Stone	Other

540

SOFT STOREY				
	<p>A soft storey building is a multi-story building in which one or more floors have windows, wide doors, large unobstructed commercial spaces, or other openings in places where a shear wall would normally be required for stability as a matter of earthquake engineering design.</p>	<p>Stiff and Strong upper floors due to masonry infills</p>	<p>The columns in one storey longer than those above</p>	<p>Soft storey caused by discontinuous columns</p>
110	Soft Storey available ?	Yes		No
111	Effective height of column in basement?	Short Column		Long Column

541

542 Table 5k: Proposed MHRA Survey form (Part A)

112	Is shearwall available in Soft Storey?	Yes		Partially	No
113	Retaining wall available ?	Yes			No
114	If Yes in Q.113, What is the Material of the retaining wall ?	RCC	Brick	Stone	Other
MULTI HAZARD SURVEY FORM					

543

544 *Table 6a: Proposed MHRA Survey form (Part B)*

MULTI HAZARD SURVEY FORM						
FLOOD						
1	Is the site low lying or prone to water logging?	Yes				No
2	Is there any water body near the site?	Yes				No
3	What is the type of water body and whether it is prone to flooding?	Lake, flood prone	Lake, not flood prone	River, flood prone	River, not flood prone	N/A
4	What is the distance from the nearest water body?	0 - 250 M	250 - 500 M	500 - 1000 M	1 KM - 2 KM	2 KM and above
5	What is the potential damage level due to the expected duration of flooding?	Very High	High	Medium	Low	Very Low
6	Is the plinth made up of non-erodible material?	Yes				No
7	What is the height of the plinth? (in meters)					

545

HIGH WIND						
8	What is the average wind speed in this location					
9	Are there trees and/or towers too close to the building that may fall on it during high wind/cyclone?	can stop building from functioning		threat can damage building but not hamper functioning		No threat
10	Do the door and windows have a good and accessible latch?	if neither doors or windows have accessible and good latches.		If some of the doors and windows have accessible and good latches		If both doors and windows have accessible and good latches
11	Is there a covered walkway for building to building connection?	no covered walkway		weak covered walkway		strong covered walkway

546

547 *Table 6a: Proposed MHRA Survey form (Part B)*




548

LANDSLIDE						
12	Is there any hills near to the building, which can cause damage due to landslide	Yes				No
13	If Yes in Q.12, what is the distance of the base off the Hill from building?	Less Than 30 M	30 M - 100 M	100 - 250 M	250 - 500 M	More than 500 M
14	Is the slope near the building stabilized?	Yes				No
15	Are there any large rocks or potential falling hazards near the building?	Yes				No
16	Are there barriers to rockfall ?	Yes				No


549

INDUSTRY						
17	Is there any industry near to the building, which can cause damage due to industrial hazard, fire etc.	Yes				No
18	If Yes in Q.17, how many active industries are there?	Yes				No
19	What is the distance of nearest Industry from building?	0 - 100 M	100 - 250 M	250 - 500 M	500 - 1000 M	More than 1 km
20	What is the distance of nearest Petrol Pump from building?	0 - 100 M	100 - 250 M	250 - 500 M	500 - 1000 M	More than 1 km

550

FIRE						
21	Are the access roads from main street wide enough to allow one fire engine to reach, reverse and return to the main road?	two or more such access roads	one such access road		No access road	
						
22	Are there potential fire threats within 30 meters of the building such as petrol pump, electrical substation, combustible materials store, etc.?	Yes				No
23	Is there adequate open assembly area for people during any emergency?	enough space	inadequate open space (1-4 square feet per student)			negligible
24	Is main meter box and switch box located in the staircase/ entrance lobby/ passage/ corridor?	Yes				No

551 *Table 6b: Proposed MHRA Survey form (Part B)*

25	Are the main meter box and switch box enclosed in a metallic box?	Yes			No	
26	Is there more than 1 staircase which can be used as a fire escape staircase ideally at maximum distance from the other staircase?	Yes			No	
27	In case of Public building or Life line building, Are there proper signages in the campus for Emergency Exit, Fire equipment etc.?	Yes			No	
						
28	Is the kitchen located at a safe distance from classrooms, staircase, passage corridor?	Yes, beyond 50 m	Yes, within 20-50 m	Yes, within 10-20 m	adjacent	Kitchen Not Available
29	Is the ceiling material safe from fire?	Yes			No	
30	What is the status of fire safety equipment in the building?	100% - Fire extinguisher in each floor of each block	75% - Fire extinguisher in 3/4 th of all floors	50% - Fire extinguisher in half of all floors	25% - Fire extinguisher in 1/4 th of all floors	0% - No Equipment

552

31	Is the transformer too close to the compound wall or inside the building?	Yes			No	
32	Are there overhead cables running through or near premises/building?	Yes			No	
33	If there is a forest area near the building?	Yes			No	
34	What is the distance of the tree line from the building?					
35	Is there any combustible construction material present in the building?	Yes			No	

553

554 *Table 6c: Proposed MHRA Survey form (Part B)*

CLIMATE CHANGE						
36	How much do you think climate change threatens your personal	Very Likely	Likely	Neutral	Unlikely	Very Unlikely
37	Which issues are of more concern in your opinion? (On the scale of 10, more marks to most concerned)	Climate change/Global Warming	Poverty	Over-population	Un-employment	Crime
		Infectious Diseases	Economic Situation	Unplanned Infrastructure	Deforestation	Air pollution
		Water pollution	Tourism growth	Poor Waste Management	Extinction of species	Traffic
38	In your opinion, What is the reason that the temperature on earth has been rising over the past decade?	Human Activities	Natural Causes	No Change	Don't know	Other
39	How much do you think the following has contributed to global climate change? (on scale of 10, more marks to most contributor)	Deforestation	Overpopulation	Tourist growth	Landuse Landcover	Greenhouse gases
		Industrilization	Melting of Ice	Warming of water surface	Other	Don't know

555

Non Structural Risk/ Falling Hazard							
		<i>Element</i>	<i>Need Attention</i>	<i>Number</i>	<i>Element</i>	<i>Need Attention</i>	<i>Number</i>
1	List of Nonstructural elements which are vulnerable to falling or not attached properly	Fan			Wooden Frame at Roof		
		Tubelight			Door		
		Electrical Wires			Window Frames		
		AC			Heavy Machinaries		
		Open Shelve (Glass)			Cylinder in Open space		
		Open Shelve (Iron)			Board		
		Wardrobe (Wooden)			Ventilator		
		Wardrobe (Iron)			Fire Extinguisher		
		HeavyTable			Cantilever Chimneys		
		Heavy Frames			Cantilever Balconies		
		Heavy Furnitures			Cantilever Sunshades		
		Heavy weight on top of almirah			Other		
2	No. of Exits in the Room:						
3	What is the status of Electrical Safety in the Room	GOOD		OK		POOR	

556

557

558 4.4 Risk Score Computation

559 After all the parametric studies from various Indian Standard codes and Reports (NDMA,
 560 2020), (URDPFI, 2015) (IS-13828, 1993; IS-4326, 1993; IS-1893-1, 2002; IS-1893-1, 2016,
 561 IS-13935, 2009) on ideal building parameters and weak components of a building from
 562 designing, construction, site condition, surrounding condition, location and hazard etc. point
 563 of views, risk scores were decided on an average basis on 24 components separately (refer
 564 section 4.5 of this paper) for better judgment and understanding. Risk scores were derived
 565 from the proposed survey form by appropriately weighing the data points against a risk number
 566 chart with higher weightage given to higher risk (Chouhan et al., 2022b). The data was then
 567 aggregated on a scale of ten (Table 7). For example, if a building answers all weighted MCQs
 568 with the highest risk option, it will be scored 10/10 and similarly for low risk and moderate risk.
 569 All questions in the questionnaire were not weighted; those with ambiguous risk consequences
 570 were left un-weighted to be studied objectively. The risk scores intend to give a relative idea
 571 of where the risk lies within a building and among building to enable prioritization during risk
 572 mitigation planning.

573

Table 7: Risk Score Computation, Source adapted from (Chouhan et al., 2022b)

Risk Score	0 to 2	2.1 to 4	4.1 to 6	6.1 to 8	8.1 to 10
Color Code					
Risk Status	Very low	Low	Moderate	High	Very high
Building Status	Very Safe	Safe	Moderately safe	Unsafe	Very Unsafe
Recommendation	Need Maintenance	Need Attention and Maintenance	Need Attention and SVA	Required DVA and Retrofitting	Required Retrofitting urgently

574

575 4.5 Pilot Survey

576 After finalization of the proposed MHRA Survey form, Pilot survey has been conducted at 10
 577 schools of Uttarakhand state. The results of Building level survey and campus level survey
 578 has been shown below in section 4.5.1. and 4.5.2.

579 4.5.1 Result of Rapid Visual Screening Survey

580 As per IS Code 13935 (2009), the key goal of seismic reinforcement is to improve a weakened
 581 building's seismic resilience as it is being repaired, making it stronger in the event of potential
 582 earthquakes. The individual results of 17 components of RVS are elaborated, which highlights
 583 the weaker part that needs attention in a building.

584 Table 8: Result of RVS of 10 schools through Proposed form

SN	Risk Status	Very Low Risk	Low Risk	Moderate Risk	High Risk	Very High Risk	Total
----	-------------	---------------	----------	---------------	-----------	----------------	-------

1	Site Condition	54%	13%	29%	2%	2%	100%
		32	8	17	1	1	59 blocks
2	Building Geometry	34%	27%	14%	20%	5%	100%
		20	16	8	12	3	59 blocks
3	Foundation	27%	22%	51%	0%	0%	100%
		16	13	30	0	0	59 blocks
4	Wall	36%	37%	27%	0%	0%	100%
		21	22	16	0	0	59 blocks
5	Earthquake Bands	0%	0%	7%	10%	83%	100%
		0	0	4	6	49	59 blocks
6	Cracks	2%	83%	0%	0%	15%	100%
		1	49	0	0	9	59 blocks
7	Openings	63%	17%	19%	1%	0%	100%
		37	10	11	1	0	59 blocks
8	Roof	7%	3%	10%	78%	2%	100%
		4	2	6	46	1	59 blocks
9	Pounding Effect	25%	0%	5%	39%	31%	100%
		15	0	3	23	18	59 blocks
10	Heavy Weight on top	95%	0%	2%	0%	3%	100%
		56	0	1	0	2	59 blocks
11	Parapet	93%	0%	7%	0%	0%	100%
		45	0	4	0	0	59 blocks
12	Overhang	53%	0%	15%	0%	32%	100%
		31	0	9	0	19	59 blocks
13	Staircase	80%	0%	3%	12%	5%	100%
		47	0	2	7	3	59 blocks
14	Column	51%	0%	12%	0%	37%	100%
		30	0	7	0	22	59 blocks
15	Beam	32%	2%	7%	7%	52%	100%
		19	1	4	4	31	59 blocks
16	Basement	100%	0%	0%	0%	0%	100%
		59	0	0	0	0	59 blocks
17	Soft Storey	100%	0%	0%	0%	0%	100%
		59	0	0	0	0	59 blocks

585

586 4.5.2 Result of Other Multi-Hazard Survey

587 The below survey was conducted by considering the campus of the school as one unit. It
588 primarily focuses on the location of school premises under a vulnerable zone or not, if yes, to
589 which kind of hazard. It solves the question of how the school campus is prepared.

590 1. Flood Risk Assessment:


	Flood Risk Assessment				Total
	10%	50%	30%	10%	100%
	1 s	5 schools	3 schools	1 s	10 Schools

591


592 2. Wind Risk Assessment

	Wind Risk Assessment			Total
	70%			100%
	7 schools	2 schools	1 s	10 Schools

594 3. Landslide Risk Assessment

	Landslide Risk Assessment			Total
	100%			100%
	10 schools			10 Schools


596 4. Industrial Risk Assessment

	Industrial Risk Assessment			Total
	100%			100%
	10 schools			10 Schools


598 5. Rainfall Risk Assessment

	Rainfall Risk Assessment			Total
	60%		40%	100%
	6 schools	4 schools		10 Schools

600 6. Fire Risk Assessment

	Fire Risk Assessment			Total
	20%	60%	20%	100%
	2 schools	6 schools	2 schools	10 Schools

602 7. Non-Structural Risk Assessment

	Non-Structural Risk Assessment			Total
	80%		20%	100%
	8 schools		2 schools	10 Schools

605 **5 Discussion:**

606 5.1 Pilot Survey

607 The IHR requires effective and standardised Multi-Hazard Risk Assessment, and for that
 608 purpose a customized designed Survey Form has been designed to capture the unique
 609 characteristics of hill communities and assets. The [proposed](#) form performed reasonably well.
 610 Effectiveness & data collection is comfortable from both ends i.e., Respondents & Surveyor.
 611 The questions are properly framed in various sections, the language is simple and it is easy
 612 to interpret. The pictorial explanation makes it easy for surveyors to correct input data, as its

613 explanation is self-explanatory. The objective behind the data collection is well clear to the
614 Respondents and Surveyor.

615 5.2 Key features of the *proposed* MHRA survey form

616 The key features of the proposed form are it is specially designed for data collection in the
617 Indian Himalayan region with risk of Earthquake, Flood, Wind, Industrial, Non-Structural Risk.,
618 fire etc. It is very useful for any type of study related to Hazard Risk assessment in hills. Time
619 taken to complete the questionnaire, i.e. the length of the questionnaire is good enough i.e.
620 10 minutes for the trained civil engineer and 17 minutes for the trained non-engineering
621 background surveyor. With practice, the surveyor can reduce time. The language of the form
622 is simple and specific, i.e. One answer on one dimension is required, it considers all possible
623 contingencies when determining a response, It is designed in a way that it collects more &
624 more accurate information in less time. Questionnaires permit the collection and analysis of
625 quantitative data in a standardized manner, ensuring their internal consistency and coherence.
626 The question sequence is clear and smooth moving. By sequencing questions properly, the
627 chances of misinterpreting individual questions are greatly reduced. The pictorial options
628 make it comfortable for the surveyor to fill the answer by looking at the building.

629 The survey form is divided into sections so that only one thought can be conveyed at a time.
630 It is the advanced version of RVS that covers risk status for foundation, wall, roof, openings,
631 beam, column, site conditions, etc. of a building. It is covering all the points required for
632 building analysis in RVS. It covers questions related to all identified hazards that are directly
633 indirectly contributing to risk factors. It covers all the required Questions as per hill condition,
634 situation, climate, geography, construction practices, construction materials, etc. The format,
635 including the font and layout, is good enough to read by the surveyor. Before going into the
636 field, the surveyor must require a reading of the full survey form carefully with all terminologies
637 clear. It covers the non-structural risk survey form. The safety of occupants in a building
638 following an incident can be at risk due to reduced capacity of structural components or
639 damage to non-structural components. [This hill-specific MHRA questionnaire survey may act
640 as a risk sensitization tool.](#)

641 5.3 Result of Pilot Survey

642 [It can be seen that the detailed multi-hazard risk assessment will help the schools to identify
643 the potential threats presented in the building as well as premises and the steps to retrofit the
644 structure.](#)

645 [Due to the region's strong earthquake zonation, RVS and NSRA data suggest high structural
646 and non-structural vulnerability an almost all the 10 schools, which assumes greater
647 significance. On the other hand, Schools need to improve its fire safety measurement and](#)

648 trainings on the same. The high wind and flood pose a prominent moderate to high risk.
649 Industry and landslides, on the other hand, pose no risk. The risk of fire arises from a shortage
650 of fire safety equipment and structural issues such as the absence of an alternate staircase,
651 the incorrect placement of fire-risk properties, etc. Fire disasters have the potential to be
652 catastrophic, but this should be a top priority as we advance. The wind is a significant concern
653 in this region because it is vulnerable to frequent windstorms. High-speed winds pose a risk
654 in the form of hazard trees/ towers, flying objects weakly latched doors/windows.

655 Heavy furniture (tables, almirah) and hanging electrical items/wire products face a
656 considerable risk of falling in the case of a tragedy in different rooms and labs. Falling hazards
657 can obstruct escape routes and injure people as they collide with them during minor seismic
658 shaking/earthquakes. When a disaster strikes, it's crucial for students and workers to have as
659 little disruption as possible during the critical reaction time. Mitigation measures primarily
660 involve simple fixes of non-structural elements with the structural element (wall and floor) and
661 are hence, for the most part, low-cost solutions.

662 Overall, the total risk is rated moderate on the risk scale considered by the authors after
663 structural and non-structural factors.

664 **6 Conclusion**

665 The Indian Himalayan region is facing disaster every year with significant loss of life and
666 property, as it is very prone to multi-hazards. Thousands of studies, research, and projects
667 are funded nationally and internationally to minimize the loss and prepare the community to
668 face the upcoming disaster.

669 A questionnaire is the backbone for any survey, which is the base for all types of research
670 work for better accuracy. This article describes why there is a need for a hill-specific survey
671 form that focuses on the multi-hazards in hills and hill's existing scenarios. It then described
672 the steps of how a Hill-specific Multi-Hazard Risk Assessment Survey form was developed,
673 validated through pilot survey, and tailored specifically for hill communities.

674 This article identifying gaps in the existing survey form used in India for risk assessment and
675 highlights the problem faced by the surveyors on ground while filling these survey forms. The
676 proposed form is a self-explanatory, pictorial, simple, easy to understand, covers hill specific
677 important components and it addresses several hazards such as earthquakes, floods,
678 landslides, industrial fires, forest fires etc.

679 The proposed survey form is designed and applied under this study will help all the
680 stakeholders to collect better information from the field and made it easy for the surveyors to

681 understand even for non-technical person. This form will also identify the weak components
682 of a building, construction practices, their development trend, and vulnerability of the location,
683 so that future construction can be planned, considering the risk factors and vulnerable zones.
684 Most of the assessment criteria for multi-hazard risks are met by the proposed survey form.
685 The more accurate the data, and the better will be its results.

686 The preliminary survey conducted at Chinyalisaur district of Uttarakhand validates the
687 questionnaire and survey form, and provided invaluable feedback now incorporated in to the
688 final survey form design. Through preliminary and pilot survey it has been observed that the
689 proposed form is designed in a way that it can collect more accurate information in less time.
690 Questionnaires permit the collection and analysis of quantitative data in a standardized
691 manner, ensuring their internal consistency and coherence. The language and sequence of
692 questions is designed for clear and easy communication. Pictorial explanations of questions,
693 the unique feature, provides easy flow of information between the respondents and surveyors.
694 Thus, this hill-specific MHRA questionnaire survey may act as a risk sensitization tool.

695 The survey form is divided into various sections that covers firstly building specific questions
696 as building plays crucial role during any hazard and secondly location specific questions that
697 covers vulnerability of building towards other hazards. The result of pilot survey highlights risk
698 status for various components of a building which will help further in utilizing the retrofitting
699 and renovation budget in fruitful and planned way. On the other hand, result of pilot survey
700 also shows location wise vulnerability i.e., vulnerability of the building towards other hazards
701 that can help further in decision making related disaster reduction, preparedness and planning
702 strategies at that location for that particular identified hazard. It will also help to understand
703 the development trend in that particular location and take action for future development
704 strategies.

705 The suggested form is a proposed version of Rapid Visual Screening (RVS), which can assess
706 the risk of any structure and includes all structural and non-structural components that respond
707 during a seismic event. It also includes information about the building's sensitivity to possible
708 danger zones such as landslides, floods, wind, and industrial hazards. Research is being
709 undertaken to develop more accurate hill-specific risk assessment survey form that requires
710 less time, marginal effort. identify deficiencies and, most important suggest a site-specific
711 Multi-Hazard Survey form for hills.

712 The data collected using this form can be used in any study related to Multi-Hazard Risk
713 Assessment. It can be used by civil engineers as well as non-civil engineering background
714 people. People can self-assess their building. To do this effectively, it is crucial to reinforce

715 the networks of science, technology, and decision-makers and create a sustainable
716 technological outcome for disaster risk reduction.

717 **Acknowledgment**

718 This research was supported by National Mission for Himalayan Studies (NMHS), Project
719 Grant No. NMH_1334_DMC and CoPREPARE, Project Grant no. IGP2020-24/COPREPARE
720 – funded by UGC. We are indebted to the local residents who actively participated in the
721 household survey. The authors are grateful to Mr. Tom Burkitt, from DHI, for supporting
722 editorial and proofreading.

723 **Data availability Statement**

724 This article is part of doctoral research and the data collection has been done by the first
725 author physically on-site. The data is available from the authors on the request basis.

726 **Disclosure statement**

727 No potential conflict of interest was reported by the authors.

728 **References**

729 Allen, S. K., Rastner, P., Arora, M., Huggel, C., and Stoffel, M.: Lake outburst and debris flow
730 disaster at Kedarnath, June 2013: hydrometeorological triggering and topographic
731 predisposition, *Landslides*, 13(6), 1479–1491. doi:10.1007/s10346-015-0584-3, 2015.

732 Arya, A. S.: Rapid Visual Screening of RCC Buildings, Prepared Under GOI – UNDP Disaster
733 Risk Management Programme, Ministry of Home Affairs, India, 14 pp., 2006

734 BMTPC.: Vulnerability Atlas of India: 3rd edition, Ministry of Housing and Urban Affairs,
735 Government of India, India, 478 pp., <https://vai.bmtpc.org/>, 2019

736 Buck, Kyle. D., and Summers, J. Kelvin.: Application of a multi-hazard risk assessment for
737 local planning local planning, *Geomatics, Nat. Hazards Risk.*, 11(1), 2058-2078,
738 <https://doi.org/10.1080/19475705.2020.1828190>, 2020.

739 Chandel, V. B. S., and Brar, K. K.: Seismicity and vulnerability in Himalayas: the case of
740 Himachal Pradesh, India, *Geomatics, Nat. Hazards Risk.*, 1(1), 69-84, doi:
741 10.1080/19475701003643441, 2010.

742 Chouhan, S., Narang, A., and Mukherjee, M.: Multi-Hazard Risk Assessment of Schools in
743 Lower Himalayas: Haridwar District, Uttarakhand, India, EGU General Assembly 2022,

744 Vienna, Austria, 23–27 May 2022, EGU22-4333, [https://doi.org/10.5194/egusphere-egu22-](https://doi.org/10.5194/egusphere-egu22-4333)
745 4333, 2022a.

746 Chouhan, S., Narang, A., and Mukherjee, M.: Multihazard risk assessment of educational
747 institutes of Dehradun, Uttarakhand, *Int. J. Disaster Resil. Built Environ.*, ISSN: 1759-5908,
748 <https://doi.org/10.1108/IJDRBE-08-2021-0091>, 2022b.

749 COI-Census of India: <https://censusindia.gov.in/census.website/>, last access: 16 July 2022.,
750 2011

751 Disasters in Himalayan Region: <https://library.oapen.org/handle/20.500.12657/22932>, last
752 access: 16 July 2022., 2007.

753 Dunbar, P.K., Bilham, R.G., and Laituri, M.J.: Earthquake Loss Estimation for India Based on
754 Macroeconomic Indicators, *Risk Science and Sustainability*, Edited by: Beer, T., Ismail-Zadeh,
755 A., NATO Science (Vol 112), Springer, Dordrecht, 163-180, [https://doi.org/10.1007/978-94-](https://doi.org/10.1007/978-94-010-0167-0_13)
756 010-0167-0_13, 2003.

757 FEMA.: Rapid Visual Screening of Buildings for Potential Seismic Hazards: A Handbook: 3rd
758 edition, Federal Emergency Management Agency, Washington, 388 pp., 2015.

759 Gerlitz, J. Y., Macchi, M., Brooks, N., Pandey, R., Banerjee, S., and Jha, S. K.: The
760 Multidimensional Livelihood Vulnerability Index – an instrument to measure livelihood
761 vulnerability to change in the Hindu Kush Himalayas, *Clim. Dev.*, 9(2), 124-140, doi:
762 10.1080/17565529.2016.1145099, 2016.

763 Goodrich, C. G., Prakash, A., and Udas, P. B.: Gendered vulnerability and adaptation in Hindu-
764 Kush Himalayas: Research insights, *Environ. Dev.*, 31, 1-8,
765 <https://doi.org/10.1016/j.envdev.2019.01.001>, 2018.

766 Gautam, M. R., Timilsina, G. R., and Acharya, K.: Climate Change in the Himalayas: Current
767 State of Knowledge, World Bank Policy Research Working Paper No. 6516, SSRN, 64 pp.,
768 2013.

769 Gaur, V. S., and Kotru, R.: Sustainable Tourism in the Indian Himalayan Region, Report of
770 Working Group II, NITI Aayog-Government of India, India, 100 pp., 2018.

771 Hackl, J., Adey, B. T., and Heitzler, M.: An Overarching Risk Assessment Process to Evaluate
772 the Risks Associated with Infrastructure Networks due to Natural Hazards,
773 *Int. J. Perform. Eng.*, 11(2), 153-168, doi: 10.23940/ijpe.15.2.p153.mag, 2015.

774 IS-code13828-1993: Indian Standard Improving Earthquake Resistance of Low Strength
775 Masonry Buildings-Guidelines, Indian Standard Codes- guidelines, Bureau of Indian
776 Standards, New Delhi, 22 pp., <https://archive.org/details/gov.law.is.13828.1993>, 2008.

777 IS-code13935-2009: Indian Standard Seismic Evaluation, Repair And Strengthening Of
778 Masonry Buildings-Guidelines (First Revision), Indian Standard Codes- guidelines, Bureau of
779 Indian Standards, New Delhi, 44 pp., <https://archive.org/details/gov.in.is.13935.2009>, 2009.

780 IS-code1893(1)2002: Indian Standard Criteria for Earthquake Resistant Design of Structures
781 Part 1 General Provisions and Buildings (Fifth Revision), Indian Standard Codes- guidelines,
782 Bureau of Indian Standards, New Delhi, 45 pp.,
783 <https://archive.org/details/gov.in.is.1893.1.2002>, 2002.

784 IS-code1893(1)2016: Indian Standard Criteria for Earthquake Resistant Design of Structures
785 Part 1 General Provisions and Buildings (Fifth Revision), Indian Standard Codes- guidelines,
786 Bureau of Indian Standards, New Delhi, 44 pp., <https://archive.org/details/1893Part12016>,
787 2016.
788

789 IS-code4326-1993: Indian Standard Earthquake Resistant Design and Construction of
790 Buildings - Code of Practice (Second Revision), Indian Standard Codes- guidelines, Bureau
791 of Indian Standards, New Delhi, 41 pp., <https://archive.org/details/7.Is.4326.1993>, 1993.
792 Jain, S. K., Mitra, K., Kumar, M., and Shah, M.: A Rapid Visual Seismic Assessment Procedure
793 for RC Frame buildings in India, in: Proceedings of the 9th U.S. National and 10th Canadian
794 Conference on Earthquake Engineering, Toronto, Ontario, Canada, 25-29 June 2010,
795 Paper No 972, doi: 10.13140/2.1.2285.0884, 2010.

796 Kala, C. P.: Deluge , disaster and development in Uttarakhand Himalayan region of India-
797 Challenges and lessons for disaster management, *Int. J. Disaster Risk Reduct.*, 8, 143-152,
798 doi: 10.1016/j.ijdrr.2014.03.002, 2014.

799 Kumar, S. A., Rajaram, C., Mishra, S., Kumar, R. P., and Karnath, A.: Rapid visual screening
800 of different housing typologies in Himachal Pradesh, India, *Nat Hazards*, 85(3), 1851-1875,
801 doi: 10.1007/s11069-016-2668-3, (2016).

802 Map of India: <https://www.mapsofindia.com/maps/india/seismiczone.htm>, last access: 16 July
803 2022., 2021.

804 MHA-Ministry of Home Affairs: [https://www.mha.gov.in/division_of_mha/disaster-](https://www.mha.gov.in/division_of_mha/disaster-management-division)
805 [management-division](https://www.mha.gov.in/division_of_mha/disaster-management-division), last access: 16 July 2022., 2011.

806 Mouri, G., Minoshima, D., Golosov, V., Chalov, S., Seto, S., Yoshimura, K., Nakamura, S.,
807 and Oki, T.: Probability assessment of flood and sediment disasters in Japan using the Total
808 Runoff-Integrating Pathways model, *Int. J. Disaster Risk Reduct.*, 3, 31-43,
809 <https://doi.org/10.1016/j.ijdrr.2012.11.003>, 2013.

810 NDMA: A Primer on Rapid Visual Screening (RVS) Consolidating Earthquake Safety
811 Assessment Efforts in India, Manual and Guidelines, National Disaster Management Authority,
812 Government of India, India, 75 pp., 2020.

813 NMHS- National Mission on Himalayan Studies: <https://nmhs-himal.res.in/login.php>, last
814 access: 16 July 2022., 2019.

815 Parajuli, A., Gautam, A. P., Sharma, S. P., Bhujel, K. B., Sharma, G., Thapa, P. B., Bist, B. S.,
816 and Poudel, S.: Forest fire risk mapping using GIS and remote sensing in two major
817 landscapes of Nepal, *Geomatics, Nat. Hazards Risk.*, 11(1), 2569-2586,
818 <https://doi.org/10.1080/19475705.2020.1853251>, 2020.

819 Pathak, R., Negi, V. S., Rawal, R. S., and Bhatt, I. D.: Alien plant invasion in the Indian
820 Himalayan Region: state of knowledge and research priorities, *Biodivers. Conserv.*, 28(12),
821 3073-3102, <https://doi.org/10.1007/s10531-019-01829-1>, 2019.

822 Peiris, T. A.: Flood Risk Assessment for Dungsum Chu Basin in Samdrup Jonkhar, Data
823 Collection Report, Climate Technology Centre and Network (CTCN) and Asian Institute of
824 Technology (AIT), Bhutan, 33 pp., 2015.

825 Rehman, A., Song, J., Haq, F., Mahmood, S., Ahamad, M. I., Basharat, M., and Mehmood, M.
826 S.: Multi-Hazard Susceptibility Assessment Using the Analytical Hierarchy Process and
827 Frequency Ratio Techniques in the Northwest Himalayas, Pakistan, *Int. J. Remote Sens.*,
828 14(3)-554, 1-31, <https://doi.org/10.3390/rs14030554>, 2022.

829 Roopa, S., and Rani, M.: Questionnaire Designing for a Survey, *Journal of Indian Orthodontic*
830 *Society*, 46(4), 273-277, doi: 10.1177/0974909820120509s, 2012.

831 Sanam, K. A., Lynn, M. R., Luke, j., and Laurence, W. C. Jr.: A geospatial analysis of multi-
832 hazard risk in Dharan, Nepal, *Geomatics, Nat. Hazards Risk.*, 11(1), 88-111,
833 <https://doi.org/10.1080/19475705.2019.1710580>, 2020.

834 Sarkar, S., Kanungo, D. P., and Sharma, S.: Landslide hazard assessment in the upper
835 Alaknanda valley of Indian Himalayas, *Geomatics, Nat. Hazards Risk.*, 6(4), 308-325,
836 <http://dx.doi.org/10.1080/19475705.2013.847501>, 2015.

837 Sekhri, S., Kumar, P., Fürst, C., and Pandey, R.: Mountain specific multi-hazard risk
838 management framework (MSMRMF): Assessment and mitigation of multi-hazard and climate
839 change risk in the Indian Himalayan Region, *Ecol. Indic.*, 118, 106700, doi:
840 10.1016/j.ecolind.2020.106700, 2020.

841 Shah, M.F., Ahmed, A., Brassai., O. K., Alghamdi, A., and Ray, R. P.: A Case Study Using
842 Rapid Visual Screening Method to Determine the Vulnerability of Buildings in two Districts of
843 Jeddah, Saudi Arabia, in: 15th International Symposium on New Technologies for Urban
844 Safety of Mega Cities in Asia, Tacloban, Philippines, 7-9 November 2016, 9 pp., 2016

845 Sharma, S., Roy, P. S., Chakravarthi, V., Srinivasarao, G., and Bhanumurthy, V.: Extraction
846 of detailed level flood hazard zones using multi-temporal historical satellite data-sets – a case
847 study of Kopili River Basin, Assam, India, *Geomatics, Nat. Hazards Risk.*, 8(2), 792-802,
848 <http://dx.doi.org/10.1080/19475705.2016.1265014>, 2017.

849 Siddique, M. I., Desai, J., Kulkarni, H., and Mahamuni, K.: Comprehensive report on Springs
850 in the Indian Himalayan Region, Report number: ACWA/Hydro/2019/H88, Advanced Center
851 for Water Resouces Development and Management, India, 198 pp., doi:
852 10.13140/RG.2.2.12104.06408, 2019.

853 Singh, J. S.: Sustainable development of the Indian Himalayan region: Linking ecological and
854 economic concerns, *Current Science*, 90(6), 784–788, <http://www.jstor.org/stable/24089189>,
855 2005.

856 Sinha, R., and Goyal, A.: A National Policy for Seismic Vulnerability Assessment of Buildings
857 and Procedure for Rapid Visual Screening of Buildings for Potential Seismic Vulnerability,
858 Report, Indian Institute of Technology Bombay, Mumbai, 12 pp., 2001.

859 Srivastava, H. N., Verma, M., Bansal, B. K., and Sutar, A. K.: Discriminatory characteristics of
860 seismic gaps in Himalaya, *Geomatics, Nat. Hazards Risk.*, 6(3), 224-242,
861 <http://dx.doi.org/10.1080/19475705.2013.839483>, 2015.

862 Srivastava, V., Srivastava, H. B., and Lakhera, R. C.: Fuzzy gamma based geomatic modelling
863 for landslide hazard susceptibility in a part of Tons river valley, northwest Himalaya, India.
864 *Geomatics, Nat. Hazards Risk.*, 1(3), 225–242. doi:10.1080/19475705.2010.490103, 2010.

865 URDPFI.: Urban and Regional Development Plans formulation and implementation (URDPFI)
866 Guidelines, 1, Town and Country Planning Organization, Ministry of Urban Development,
867 Government of India, 447 pp., 2015.

868 Wester, P., Mishra, A., Mukherji, A., & Shrestha, A. B. (Eds.):The Hindu Kush Himalaya
869 Assessment, Springer Nature, Nepal, 627 pp., <https://doi.org/10.1007/978-3-319-92288-1>,
870 2019.