

A dense MEMS-based seismic network in populated areas: rapid estimation of exposure maps in Trentino (NE Italy)

Davide Scafidi¹, Alfio Viganò², Jacopo Boaga³, Valeria Cascone³, Simone Barani¹, Daniele Spallarossa¹, Gabriele Ferretti¹, Mauro Carli⁴, Giancarlo De Marchi⁴

¹Dipartimento di Scienze della Terra, dell'Ambiente e della Vita, University of Genoa, Corso Europa 26, 16132 Genoa, Italy

²Servizio Geologico, Provincia autonoma di Trento, Via Zambra 42, 38121 Trento, Italy

³Dipartimento di Geoscienze, University of Padova, Via Gradenigo 6, 35131 Padova, Italy

⁴AD.EL. s.r.l., via Sandro Pertini 5, 30030 Martellago (VE), Italy

Correspondence to: Davide Scafidi (davide.scafidi@unige.it)

Abstract

The MEMS-based seismic network of Trentino (NE Italy) consists of 73 low-cost accelerometers installed close to inhabited areas. These sensors have a suitable sensitivity to detect moderate-to-strong earthquakes but are able to record even weaker seismicity. The densely distributed peak ground acceleration values recorded by MEMS and other types of stations are integrated within the existing seismic monitoring procedure in order to automatically obtain a complete set of strong motion parameters a few minutes after the origin time. The exposure for resident population and critical buildings is estimated by quantifying the different levels of shaking, which is expressed according to the Mercalli-Cancani-Sieberg intensity scale. These types of results, summarized in synthetic PDF (Portable Document Format) documents, can be useful for civil protection purposes to timely evaluate the state of emergency after a strong earthquake and to choose how and where activate first aid measures and targeted structural monitoring.

24 **1 Introduction**

25 During the last decades seismic monitoring has been greatly improved in order to give precise and increasingly detailed
26 information for emergency and environmental purposes. Besides permanent seismic networks, a primary role in capturing
27 the increased amount of instrumental data is given by low-cost micro-electromechanical system (MEMS) instrumentation
28 (D'Alessandro et al., 2019). Nowadays, MEMS accelerometers are widely used on different spatial scales to replace or
29 densify permanent networks, in order to improve seismic detection and evaluate with greater resolution the effects of
30 earthquakes (Cochran et al., 2009; Boaga et al., 2018; Patanè et al., 2022; Vitale et al., 2022). Earthquake early warning
31 systems have also been benefitting greatly from MEMS technology, because targeted timely actions can be automatically
32 taken in case of strong earthquakes (Satriano et al., 2011; Cochran, 2018). For this reason, large earthquake datasets need to
33 be efficiently and rapidly managed (Spallarossa et al., 2021) and related outcomes (e.g., earthquake location and magnitude,
34 strong motion data and maps) shared in real-time with different end users, such as scientists, technicians, politicians, civil
35 protection, decision makers, and citizens.

36 The Trentino region (NE Italy) is currently monitored by a permanent seismic network, which has been managed by the
37 Autonomous Province of Trento (PAT) since 1981 (Geological Survey–Provincia Autonoma di Trento, 1981; Viganò et al.,
38 2021; Fig. 1). According to the Italian building code (Ministero delle Infrastrutture e dei Trasporti, 2018) this area is
39 characterized by peak ground acceleration (PGA) values lower than 0.18 g (for a return period of 475 years), with highest
40 seismic hazard in southern Trentino (upper Lake Garda and lower Adige Valley) and eastern Trentino (lower Valsugana,
41 Tesino and Primiero) where fault systems are mostly active (Viganò et al., 2015) (Fig. 2). The resident population on 1st
42 January 2022 is 540,958 (ISTAT, 2012) and is mostly concentrated in the city of Trento and along the main valleys where
43 principal road networks and infrastructures are located.

44 Here, we present a local network based on MEMS accelerometers in Trentino, aimed at real-time monitoring and automatic
45 generation of exposure maps. Co-seismic recordings are automatically processed and integrated with those from other
46 stations (e.g., belonging to other permanent networks), allowing for a dense distribution of ground motion measurements.

47

48 **2 Method**

49 Maps displaying seismic shaking are widely used during emergency due to their ability to summarize earthquake effects and
50 their potential impact on local targets (Michelini et al., 2020). In order to lead effective emergency actions, it is essential that
51 these maps, named “exposure maps” hereafter, are available in a few minutes after a seismic event. In fact, they provide a
52 first-level overview of the expected damage over the monitored area.

53 The exposure maps of the Trentino civil protection are automatically generated by using all the available seismic data (i.e.,
54 ground motion measurements), with the aim of estimating the asset exposed to an earthquake (Fig. 3). In particular, MEMS
55 recordings are integrated with those from other stations and used to obtain a complete set of strong motion data, in order to
56 quantify the numbers of resident population and buildings subjected to different levels of shaking. A step-by-step description
57 of the method used to generate the exposure maps is given in the next sections.

58

59 **2.1 MEMS accelerometer design and installation**

60 The low-cost MEMS sensor adopted in the presented network is the ADXL355 of the Analog Device. AD.EL s.r.l., an
61 Italian based telecommunication company, developed the board for housing and operating the MEMS accelerometer, named
62 “ASX1000v2” (D600158 AD.EL code; Fig. 4a). The ASX1000v2 is a capacitive triaxial accelerometer, conceived to be a
63 platform for data acquisition and recording for long-term measurements. It is equipped with a high-performance
64 MicroController Unit (MCU; STM32H743 model by STMicroelectronics) and communication channels for remote control
65 and data transmission: a serial channel RS-422 or RS485, a LAN Ethernet 10/100 Mbit/s, an USB 2.0, and a 4G LTE modem
66 (Fig. 4b). This sensor operates in high sensitivity mode for an acceleration range of ± 2 g (it supports also the ± 4 g full scale
67 configuration), with a 250 Hz sampling rate. Time synchronization is obtained using the Network Time Protocol (NTP).
68 Data streams from each single station are collected by a dedicated server; here, data are formatted, stored and made available
69 for the automatic processing by using a standard SeedLink server.

70 The noise analysis relative to each component reveals a Power Spectral Density with a general downward trend between -80
71 and -65 dB in the 0.03–10 Hz frequency range (Fig. 5). As shown in Figure 5, the detectability threshold of seismic events
72 corresponds to a moment magnitude of about 3.5. Therefore, this sensor has a suitable sensitivity to detect moderate-to-
73 strong events, those that are of primary interest to public administration for emergency management.

74 The MEMS sensors are installed inside telecommunication infrastructures. Each sensor is firmly coupled with the ground
75 with screws and plugs, at the base of the local server room; the azimuth is carefully measured during installation. Each
76 sensor is plugged into a wall outlet for power. A complete station costs only a few hundred euros, making possible the
77 deployment of dense arrays of accelerometers.

78

79 **2.2 Data integration and seismic processing**

80 Seismic data processing is here performed by using the software CASP – Complete Automatic Seismic Processor (Scafidi et
81 al., 2016; 2018; 2019). By taking advantage of the features of its iterative procedure, this software can effectively manage
82 (during phase picking and location) data provided by different seismic stations with variable signal quality. Contrary to
83 stations of permanent monitoring networks, which are usually installed in remote and quiet areas to ensure seismic signals
84 with low noise levels, signals from seismic stations deployed in urban areas, such as those from our MEMS network, can be
85 significantly affected by high level noise (producing spikes and impulsive signals) due to anthropogenic activities. This may
86 lead to an uncontrolled proliferation of false (i.e., non-seismic triggers). Therefore, their use in automatic phase picking
87 procedures may affect the reliability of the final earthquake location and, in some cases, lead to false events. Hence, noisy
88 stations are often neglected in automatic earthquake monitoring. CASP processes signals by using an iterative procedure
89 within which the phase picking is driven by earthquake location (Spallarossa et al., 2014). On the one hand, this allows
90 identification of false triggers. On the other hand, arrival times are improved at each iteration, leading to an optimization of
91 the earthquake location.

92 With reference to the present application, which integrates data from permanent monitoring networks and data from the
93 MEMS stations, CASP is set not to use MEMS data in the first iteration of the location procedure, thus assuming that they
94 are affected by significant background noise. In this step, the definition of arrival times is not yet driven by location but it is
95 based on an envelope function on signals (Spallarossa et al., 2014). This precaution may not be necessary for local strong
96 earthquakes, for which the seismic signal clearly dominates the background noise, but it is useful when managing signals
97 from weak earthquakes. From the second iteration on, signals from all stations are used and P- and S-wave arrivals are
98 computed by applying the Akaike Information Criterion – AIC (Akaike, 1974) on signal windows centred, for each station,
99 around the expected arrival times obtained by the location code. In fact, these picks are determined (at each iteration) by the
100 location algorithm working in conjunction with CASP, the NonLinLoc software (Lomax et al., 2000). This allows to reliably
101 discriminate between seismic phase arrivals and signal disturbances also in the case of weak-to-moderate earthquakes
102 recorded by different stations, regardless of the type of sensor used.

103 In addition to the computation of hypocentral parameters, for each station with at least one phase picked, CASP returns the
104 values of a number of ground motion parameters (e.g., PGA, peak ground velocity PGV, spectral acceleration).

105 In the case of the Trentino region, a fully automated earthquake monitoring has been already operating based on CASP
106 (Viganò et al., 2021). Thus, the great amount of data provided by the 73 installed MEMS stations (starting date July 2022;
107 Fig. 1) has been easily integrated within the seismic monitoring procedure as the only requirements for CASP are real-time
108 data transmission in standard SeedLink format and station response metadata in seismological standard format (i.e., Dataless,
109 StationXML, Poles and Zeroes – PAZ file). About data transmission between the MEMS stations and the central processing
110 system, the typical average latency is in the order of about 15 s, while the data stream of all the MEMS stations is continuous
111 and complete at about 99.5 %.

112

113 **2.3 Exposure maps**

114 Exposure maps are automatically created using the GMT software (Wessel and Smith, 1998) and the PHP open-source
115 scripting language. At first, shaking data recorded by each station (i.e., peak ground accelerations) are converted to intensity
116 values (Mercalli-Cancani-Sieberg scale, MCS) using empirical relationships for Italy (Faenza and Michelini, 2010 for PGA
117 $< 1 \text{ cm s}^{-2}$; Oliveti et al., 2022 for PGA $\geq 1 \text{ cm s}^{-2}$). Intensity, which is considered more informative than peak ground
118 acceleration for civil protection purposes as it is directly based on earthquake damage and perception, is colour coded
119 according to the ShakeMap palette (Michelini et al., 2020). These densely distributed data are then gridded using adjustable
120 tension continuous curvature splines (“surface” routine command in GMT, with tension set to 0.5), with no pre-processing
121 (e.g., blockmean) or interpolation. This is possible because of the dense distribution of MEMS stations, which are mainly
122 located in the vicinity of inhabited areas. At this stage, a maximum intensity value is assigned to each municipality in
123 Trentino, for which the cumulative number of resident population is known (Fig. 6). Then, the intensity map is compared to
124 the distribution and density of resident population in Trentino (last national census; ISTAT, 2012), where territorial localities
125 are classified as (i) urban area, (ii) small inhabited areas, (iii) productive areas or (iv) wide spread houses. For each locality

the procedure automatically calculates the maximum intensity and combines it with the population density. The cumulative population for each intensity level is then computed. In a similar way, the system automatically processes (as polygonal features) the distribution of buildings of interest for the Autonomous Province of Trento (Fig. 6), and the cumulative number of buildings for each intensity class is obtained. Finally, peak ground acceleration is measured at 16 instrumented dams located in Trentino (Fig. 6). As the strong motion parameters from all the other stations, also these ones are converted to intensity values and used to create the Trentino exposure maps.

3 Results

The estimation of exposure maps in Trentino is usually carried out within 10 minutes from an earthquake. A local magnitude (M_L) threshold for their automatic generation is set to M_L 4.0. The procedure has been activated since July 2022, using a standard workstation equipped with an Intel Core i5 CPU. Even if no strong earthquakes occurred until now (October 2023) in the monitored area, MEMS stations have been used for standard locations (i.e., available additional phase arrivals from MEMS stations are used by the location procedure) and to record the ground motions of low-to-medium energy seismic events. We note that a seismic signal recorded by a MEMS station is commonly clearly detectable for events with M_L greater than about 2.5, considering hypocentral distances of a few tens of kilometres (compare also with results by Cascone et al., 2021). In fact, even if the MEMS application presented in this study is principally aimed to perform quasi real-time exposure maps in the urbanized areas of Trentino, in Appendix A the low magnitude earthquakes which were recorded by at least one MEMS station during the period July 2022–October 2023 is listed. In some cases, some stations recorded a readable signal, related both to seismic events inside or outside the Trentino area. As an example, we can consider the automatically detected P- and S-phase arrival times (red and blue vertical lines in Fig. 7, respectively) for the M_L 2.7 earthquake occurred on November 10th 2022 in the Fassa Valley (NE Trentino). GAGG is a standard seismic station of the permanent PAT network, while station 003B belongs to the MEMS network (see Fig. 1). Both stations are located in the same area (2 km apart from each other) at about 65 km from the earthquake hypocentre. Even if the P-phase onset for station 003B is masked by the background noise, which is clearly higher than the noise affecting the GAGG recordings, the CASP procedure is able to detect the S-phase arrival time. Thus, both GAGG and 003B can be used to calculate the strong motion parameters for that event (Fig. 8). Few minutes (maximum 5) after the origin time, CASP returns event location, magnitude, and the strong motion table (for all the analysed stations), which includes: PGA, PGV, Peak Ground Displacement (PGD), Spectral Acceleration (SA) for different response periods, response spectrum intensity (also known as Housner Intensity, IH) for different period ranges (0.1–0.5 s, IH 0; 0.1–1.0 s, IH 1; 0.1–1.5 s, IH 2), and Instrumental Intensity (I_{MCS} ; Mercalli-Cancani-Sieberg scale). Compared to station GAGG, station 003B shows stronger shaking values that can be attributed to the effect of different subsoils (Fig. 8). As with all stations belonging to the PAT permanent network, GAGG is deployed on bedrock, while 003B is located in the middle of an alluvial valley near the town of Vezzano. Here, alluvial deposits are reasonably assumed to be responsible of the observed shaking amplification. The higher ground motion values of station 003B are used for a site-specific exposure map, which can take into account local seismic effects near towns and populated areas.

The exposure maps and all the relevant seismic results provided by CASP are reported in an automatically generated document in standard PDF (Portable Document Format) format, which also contains links to the high resolutions maps stored online. This summary file represents an easy and user-friendly mean of communications that can be easily disseminated through emails and messaging platforms (e.g., Telegram), read online, or printed. Figure 9 shows the PDF of the exposure map generated for an M_L 2.1 earthquake occurred on July 11th 2023 in Western Trentino. After a synthetic textual and graphical summary of event location (magnitude, area, origin time and hypocentral data), tables and maps relative to the seismic shaking and exposure are displayed. The first table contains a quantification of the population and the number of buildings of interest (A and B levels according to the administrative classification) possibly stricken by the earthquake for each intensity level. The maximum recorded intensity is VI MCS at about 5 km from the earthquake hypocentre (which is only 4.8 km deep). Of note, without the information provided by the MEMS network, we would have significantly underestimated the maximum intensity induced by the earthquake, which would not have exceeded III MCS. The PDF also shows two intensity maps that can be helpful for a rapid inspection of the damaged area. The first one shows interpolated values while the second one displays the values actually observed at each analysed station. Besides the maps, two tables provide further details about the measured shaking levels for both potentially involved population (first 20 municipalities sorted according to decreasing intensity) and available instrumented dams (listed according to both decreasing intensity and PGA values).

In order to test the procedure considering a realistic emergency scenario for a moderate event, we have simulated an M_L 5.8 earthquake in Southern Trentino (45.834 °N latitude, 11.066 °E longitude, 9.0 km depth). This event has been selected to roughly simulate the so-called “Middle Adige Valley” earthquake, which represents a reference for the seismic potential of the Trentino region, as also evidenced by recent studies (e.g., Ivy-Ochs et al. 2017 and references therein). This earthquake dated to 1046 AD, with estimated epicentral intensity IX MCS and co-seismic shaking responsible for great damage and catastrophic induced events. The performed calculation represents a simplified simulation, obtained by assigning the selected event magnitude and then calculating PGA at each seismic station of the network (MEMS and permanent stations). PGA is computed using the regional attenuation law developed within the framework of the INGV-DPC Project S4 (Michellini et al., 2008). In particular, the regionalized attenuation relation adopted for the Eastern Alps is used. The summary PDF document relative to this earthquake is shown in Figure 10. According to this scenario (possibly even worse than presented, because of the simplified approach used), about 60 thousand people and 262 buildings of interest are involved in the area with maximum intensity (VIII MCS); the four municipalities with maximum intensity count a total population of about 52,000 people. Concerning dams, two of them reach PGA values greater than 0.3 g; this is important in order to define specific structural monitoring when predetermined PGA thresholds are overcome.

190

191 **4 Summary and conclusions**

192 We have presented an upgrade of the seismic monitoring procedure of the Trentino region through the integration of data
193 provided by 73 low-cost MEMS accelerometers installed in urban areas. This dense MEMS-based network has a suitable

194 sensitivity to detect moderate-to-strong seismic events; weaker earthquakes with local magnitude lower than 3.0 can be even
195 recorded and analysed. The additional data in conjunction with the automatic monitoring procedure currently in use allows
196 us to obtain a densely distributed set of strong motion measurements and, consequently, high-definition shaking maps that
197 relies only on actual recorded data. Integrating these dense MEMS data, though noisy, allows avoiding the use of ground
198 motion prediction equations, thus leading to a more reliable picture of the actual ground shaking (hence, of the expected
199 damage). This is of paramount importance for post-earthquake emergency planning in densely populated, urbanized areas
200 characterized by high seismic risk. The use of the CASP code is crucial to properly manage such noisy data with the aim of
201 getting reliable results in quasi real-time.

202 In addition to shaking data, the procedure presented here provide automatically generated exposure maps that quantify the
203 resident population and the number of critical buildings in Trentino, subjected to different levels of shaking during an
204 earthquake. Exposure maps are reported in synthetic PDF documents, which are very useful for civil protection in order to
205 rapidly evaluate the local state of emergency after a strong earthquake and to choose how and where activate first aid
206 measures, both for population and buildings of interests like dams.

207

208 **Code availability**

209 The Complete Automatic Seismic Processor (CASP) is a commercial software.

210

211 **Author contributions**

212 DS, AV, JB and MC conceptualized the project; JB, VC, MC and GDM developed the MEMS sensor; DS, AV, JB and MC
213 followed MEMS installation; DS, AV, MC and GDM performed data integration; DS and GF made the earthquake
214 simulation; DS, AV, JB, GF and SB wrote the manuscript draft; DS, AV, JB, GF, SB and DSp edited the manuscript; DS,
215 AV, VC and GDM revised the manuscript.

216

217 **Competing interests**

218 The authors declare that they have no conflict of interest.

219

220 **Acknowledgements**

221 This research was supported by the Geological Survey of the Autonomous Province of Trento (www.protezionecivile.tn.it).
222 TIM (Telecom Italia Mobile) is gratefully acknowledged for supporting AD.EL during installation of MEMS stations. Maps
223 were made using Generic Mapping Tools v.4.5 (Wessel and Smith, 1998).

224

225 **References**

- 226 Akaike, H.: Markovian representation of stochastic processes and its application to the analysis of autoregressive moving
227 average process, *Ann. Inst. Stat. Math.*, 26, 363–387, 1974.
- 228 Boaga, J., Casarin, F., De Marchi, G., Valluzzi, M. R., and Cassiani, G.: 2016 Central Italy earthquakes recorded by low-cost
229 MEMS-distributed arrays, *Seismol. Res. Lett.*, 90, 672–682, doi:10.1785/0220180198, 2018.
- 230 Cascone, V., Boaga, J., and Cassiani, G.: Small locale earthquake detection using low-cost MEMS accelerometers: examples
231 in Northern and Central Italy, *The Seismic Record*, 1, 20–26, 2021.
- 232 Cochran, E. S.: To catch a quake, *Nat. commun.*, 9, 2508, doi:10.1038/s41467-018-04790-9, 2018.
- 233 Cochran, E. S., Lawrence, J. F., Christensen, C., and Jakka, R. S.: The quake-catcher network: citizen science expanding
234 seismic horizons, *Seismol. Res. Lett.*, 80, 26–30, doi:10.1785/gssrl.80.1.26, 2009.
- 235 D’Alessandro, A., Scudero, S., and Vitale, G.: A review of the capacitive MEMS for seismology, *Sensors*, 19, 3093,
236 doi:10.3390/s19143093, 2019.
- 237 Geological Survey–Provincia Autonoma di Trento: Trentino Seismic Network, International Federation of Digital
238 Seismograph Networks, Dataset/Seismic Network, doi:10.7914/SN/ST, 1981.
- 239 ISTAT: 15° censimento della popolazione e delle abitazioni 2011, GU serie generale, 209, 2012-12-18, Suppl. ordinario,
240 294, 2012.

241 Ivy-Ochs, S., Martin, S., Campedel, P., Hippe, K., Alfimov, V., Vockenhuber, C., Andreotti, E., Carugati, G., Pasqual, D.,
 242 Rigo, M., and Viganò, A.: Geomorphology and age of the Marocche di Dro rock avalanches (Trentino, Italy), *Quat. Sci.*
 243 *Rev.*, 169, 188–205, doi:10.1016/j.quascirev.2017.05.014, 2017.

244 Lomax, A., Virieux, J., Volant, P., and Thierry-Berge, C.: Probabilistic earthquake location in 3D and layered models, in
 245 *Advances in Seismic Event Location*, C. H. Thurber and N. Rabinowitz (Editors), Kluwer Academic Publishers,
 246 Dordrecht, The Netherlands/Boston, Massachusetts/London, United Kingdom, 101–134, 2000.

247 Michelini, A., Faenza, L., Lauciani, V., and Malagnini, L.: ShakeMap implementation in Italy, *Seismol. Res. Lett.*, 79, 688–
 248 697, 2008.

249 Michelini, A., Faenza, L., Lanzano, G., Lauciani, V., Jozinović, D., Puglia, R., and Luzi, L.: The new ShakeMap in Italy:
 250 progress and advances in the last 10 yr, *Seismol. Res. Lett.*, 91, 317–333, 2020.

251 Ministero delle Infrastrutture e dei Trasporti: Norme Tecniche per le Costruzioni. Decreto del Ministero delle Infrastrutture,
 252 GU serie generale, 42, 2018-02-20, Suppl. ordinario, 8, 2018.

253 Oliveti, I., Faenza, L., and Michelini, A.: New reversible relationships between ground motion parameters and macroseismic
 254 intensity for Italy and their application in ShakeMap, *Geophys. J. Int.*, 231, 1117–1137, 2022.

255 Patanè, D., Tusa, G., Yang, W., Astuti, A., Colino, A., Costanza, A., D’Anna, G., Di Prima, S., Fertitta, G., Mangiagli, S.,
 256 Martino, C., and Torrisi, O.: The urban seismic observatory of Catania (Italy): a real-time seismic monitoring at urban
 257 scale, *Remote Sens.*, 14, 2583, 2022.

258 Peterson, J.: Observations and modelling of seismic background noise, *US Geol. Surv. Open-File Rept.*, 93–322.

259 Satriano, C., Wu, Y.-M., Zollo, A., and Kanamori, H.: Earthquake early warning: concepts, methods and physical grounds,
 260 *Soil Dyn. Earthq. Eng.*, 31, 106–118, doi: doi:10.1016/j.soildyn.2010.07.007, 2011.

261 Scafidi, D., Spallarossa, D., Turino, C., Ferretti, G., and Viganò, A.: Automatic P- and S-wave local earthquake tomography:
 262 testing performance of the automatic phase-picker engine “RSNI-Picker”, *Bull. Seismol. Soc. Am.*, 106, 526–536, 2016.

263 Scafidi, D., Viganò, A., Ferretti, G., and Spallarossa, D.: Robust picking and accurate locations with RSNI-Picker₂: real-time
 264 automatic monitoring of earthquakes and nontectonic events, *Seismol. Res. Lett.* 89, 1478–1487, 2018.

265 Scafidi, D., Spallarossa, D., Ferretti, G., Barani, S., Castello, B., and Margheriti, L.: A complete automatic procedure to
 266 compile reliable seismic catalogs and travel-time and strong-motion parameters datasets, *Seismol. Res. Lett.*, 90, 1308–
 267 1317, 2019.

268 Spallarossa, D., Ferretti, G., Scafidi, D., Turino, C., and Pasta, M.: Performance of the RSNI-Picker, *Seismol. Res. Lett.*, 85,
 269 1243–1254, doi: 10.1785/0220130136, 2014.

270 Spallarossa, D., Cattaneo, M., Scafidi, D., Michele, M., Chiaraluce, L., Segou, M., and Main, I. G.: An automatically
 271 generated high-resolution earthquake catalogue for the 2016–2017 Central Italy seismic sequence, including *P* and *S*
 272 phase arrival times, *Geophys. J. Int.*, 225, 555–571, doi:10.1093/gji/ggaa604, 2021.

273 Stucchi, M., Meletti, C., Montaldo, V., Crowley, H., Calvi G. M., and Boschi, E.: Seismic Hazard Assessment (2003-2009)
 274 for the Italian Building Code, *Bull. Seismol. Soc. Am.*, 101, 1885–1911, doi:10.1785/0120100130, 2011.

275 Viganò, A., Scafidi, D., Ranalli, G., Martin, S., Della Vedova, B., and Spallarossa, D.: Earthquake relocations, crustal
 276 rheology, and active deformation in the central-eastern Alps (N Italy), *Tectonophysics*, 661, 81–98,
 277 doi:10.1016/j.tecto.2015.08.017, 2015.
 278 Viganò, A., Scafidi, D., and Ferretti, G.: A new approach for a fully automated earthquake monitoring: the local seismic
 279 network of the Trentino region (NE Italy), *J. Seismol.*, 25, 419–432, doi:10.1007/s10950-021-09993-0, 2021.
 280 Vitale, G., D’Alessandro, A., Di Benedetto, A., Figlioli, A., Costanzo, A., Speciale, S., Piattoni, Q., and Cipriani, L.: Urban
 281 seismic network based on MEMS sensors: the experience of the seismic observatory in Camerino (Marche, Italy),
 282 *Sensors*, 22, 4335, doi:10.3390/s22124335, 2022.
 283 Wessel, P., and Smith W. H. F.: New, improved version of the Generic Mapping Tools released, *Eos Trans. AGU*, 79, 579,
 284 1998.



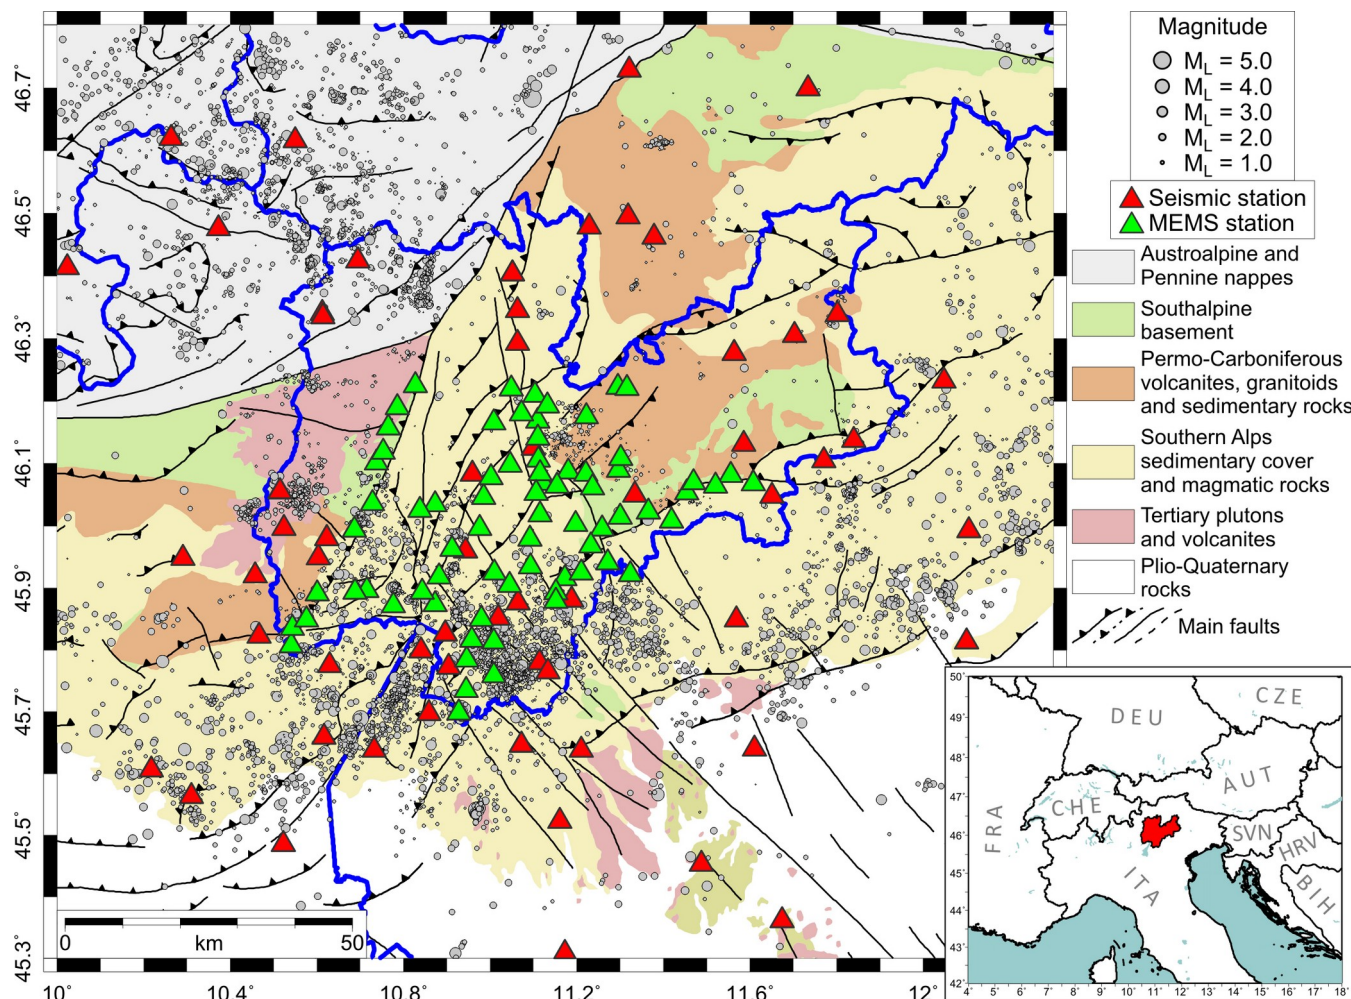


Figure 1: Simplified geological map of the Trentino region with epicentral distribution of earthquakes in the period 1981-2021 and local seismic networks. Green triangles represent the MEMS-based network (73 stations at October 2023).

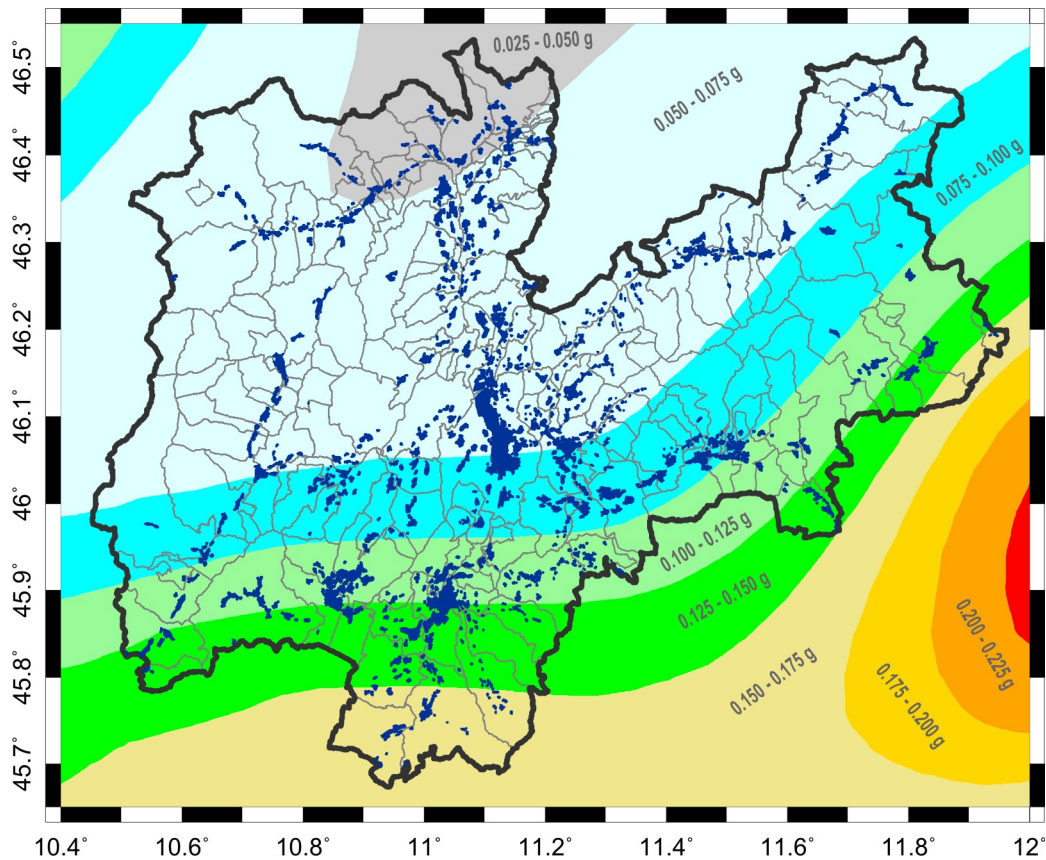


291 Figure 2: Seismic hazard map showing the peak ground acceleration for a return period of 475 years (10%
292 probability of exceedance in 50 years) (Stucchi et al., 2011). Localities highlighted in dark blue (ISTAT, 2012).

293
294
295

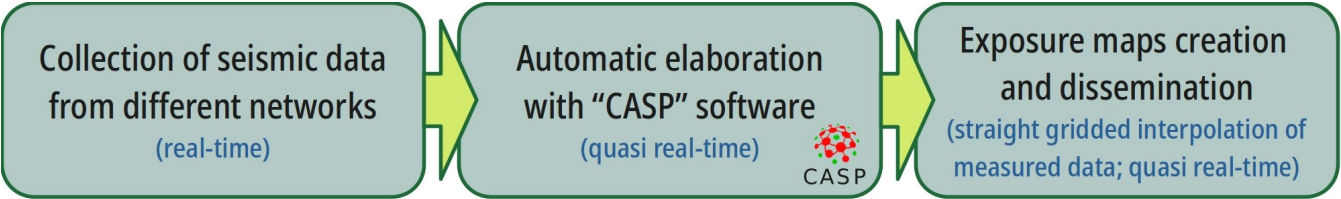


296 Figure 3: Flowchart showing the process behind the generation of the exposure maps for the Trentino region.


297

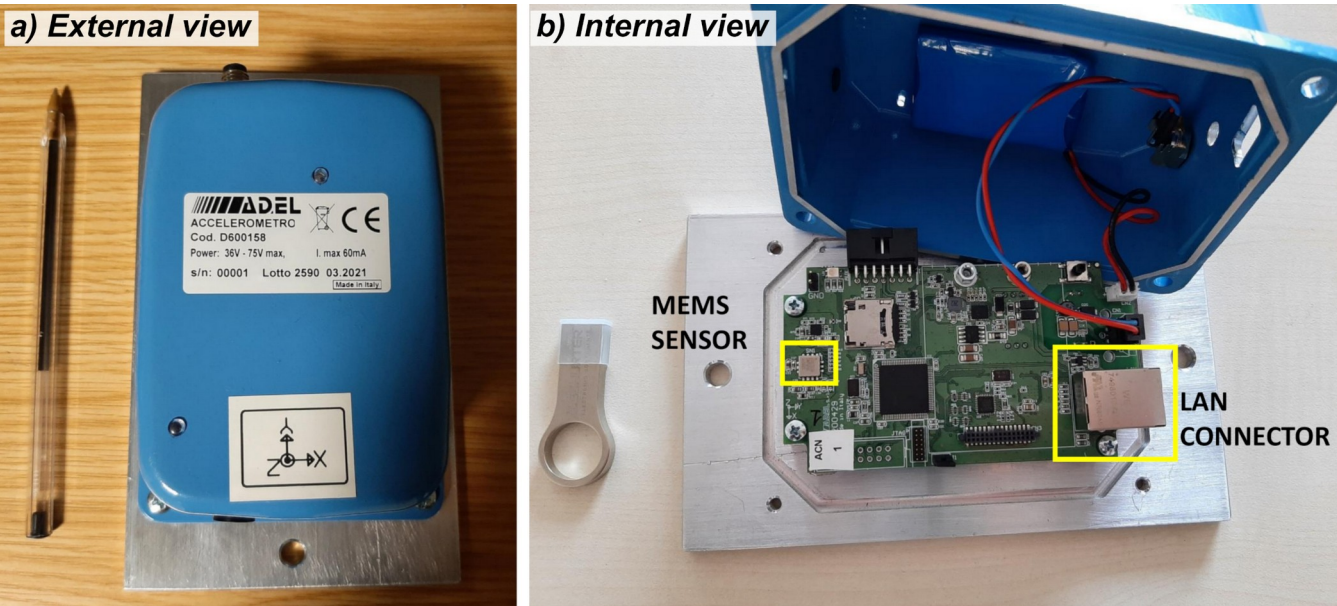


299 **Figure 4: (a) The ASX1000v2 MEMS sensor prototype; (b) internal circuit batch.**

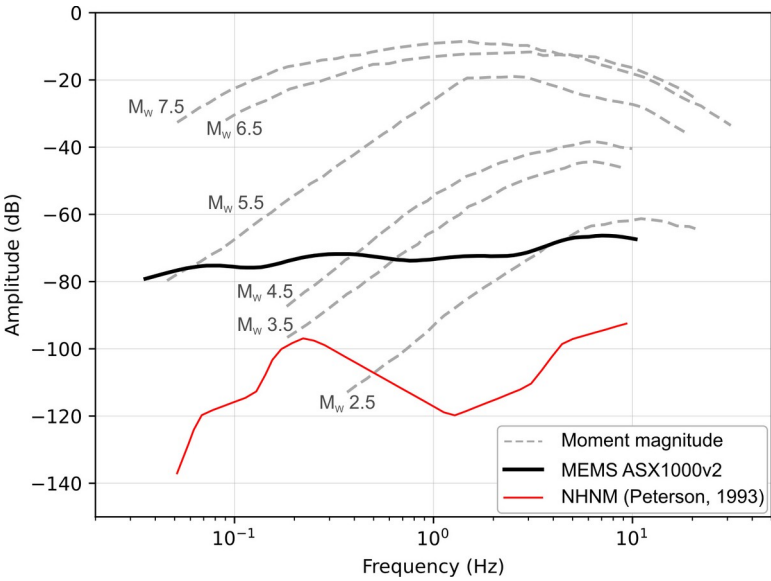

301 **Figure 5: Noise floor of the ASX1000v2 MEMS compared to typical ground motion amplitudes of earthquakes**
302 **measured at 10 km from the epicentre for different moment magnitudes (dashed lines). The new high noise model**
303 **(NHHM) from Peterson (1993) is also shown for reference.**

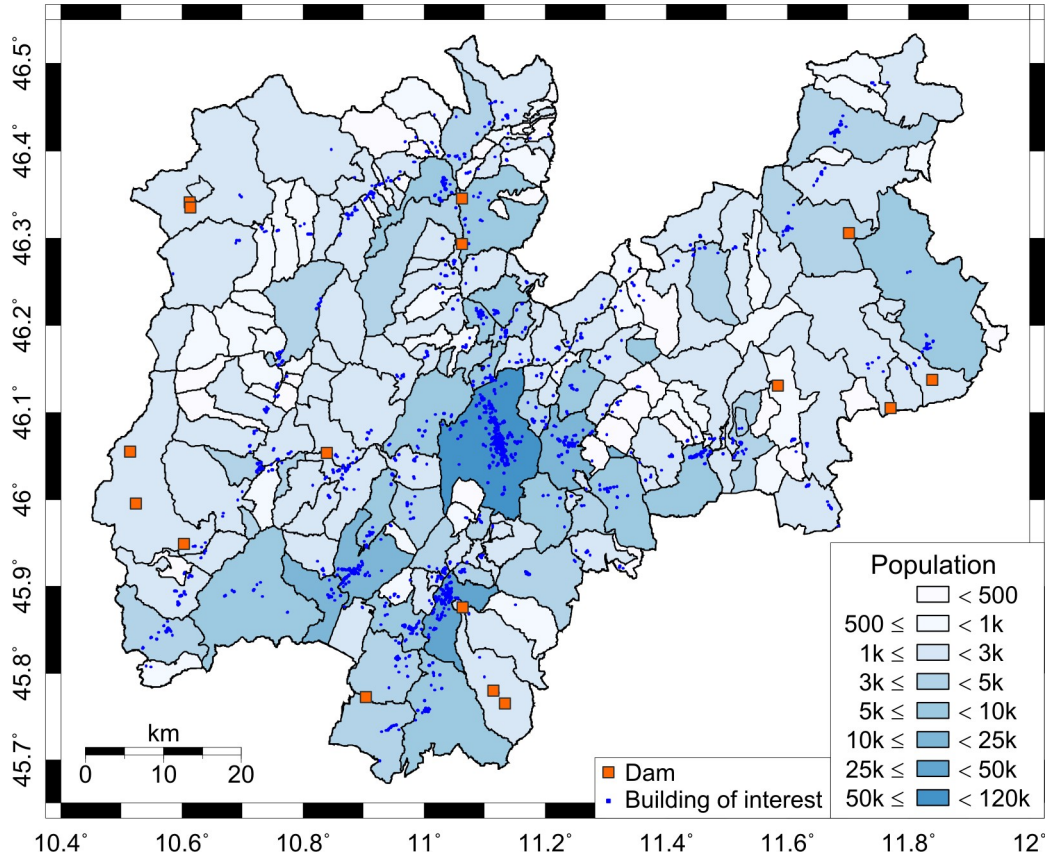

306 **Figure 6: Trentino municipalities coloured according to the resident population density (ISTAT, 2012), with buildings**
307 **of interest and main dams highlighted.**

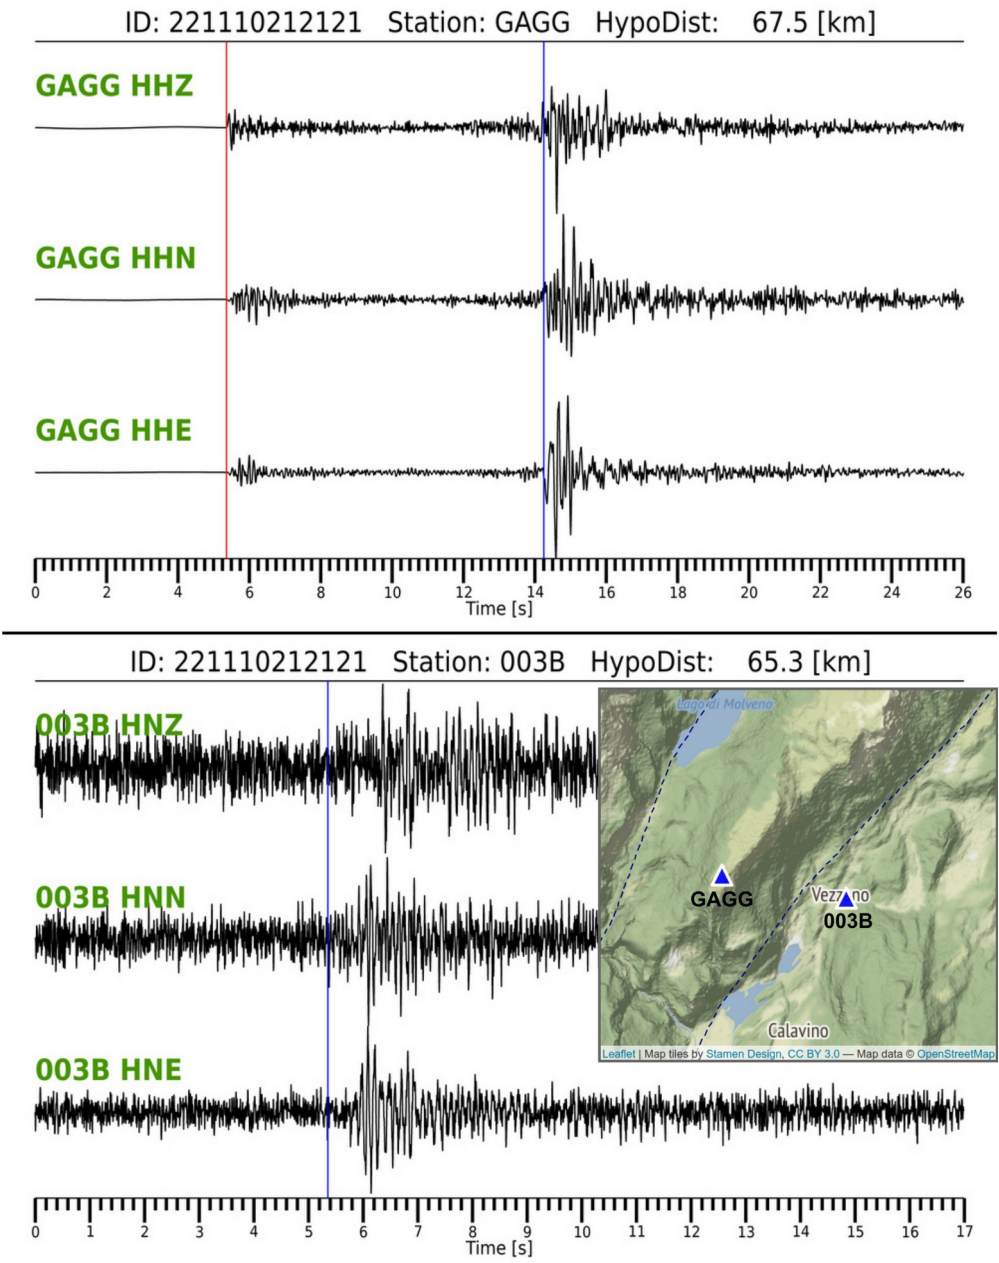


310 **Figure 7: Unfiltered three-component seismic traces from standard (GAGG) and MEMS sensors (003B) associated**
311 **with automatically detected P- and S-phase arrival times (red and blue lines, respectively).**
312

Station	Net	Chan.	PGA (g)	PGV (m/s)	PGD (m)	IH 0* (m)	IH 1* (m)	IH 2* (m)	Sa(T=0.10) (g)	Sa(T=0.30) (g)	Sa(T=1.00) (g)	Sa(T=3.00) (g)	Dist. (km)	Azim. (°)	I _{MCS}
GAGG	ST	HNZ	1.1544e-4	2.2126e-5	6.2110e-7	1.0179e-5	1.9381e-5	2.8232e-5	2.1453e-4	3.5065e-5	2.1356e-6	4.2307e-7	67.4	234	-
GAGG	ST	HNN	2.9669e-4	6.0573e-5	2.2308e-6	4.2506e-5	6.9291e-5	6.9291e-5	5.6295e-4	1.3750e-4	8.1487e-6	1.3107e-6	67.4	234	-
GAGG	ST	HNE	1.6050e-4	3.0075e-5	9.4923e-7	2.0460e-5	3.6440e-5	5.1543e-5	3.2503e-4	7.9317e-5	4.1464e-6	7.4897e-7	67.4	234	-
GAGG	ST	HHZ	6.2145e-5	1.2363e-5	3.1840e-7	5.5445e-6	1.0630e-5	1.5508e-5	1.1933e-4	1.8409e-5	1.1905e-6	2.3914e-7	67.4	234	-
GAGG	ST	HHN	1.8374e-4	3.3499e-5	1.0534e-6	2.2252e-5	3.9742e-5	3.9742e-5	3.6630e-4	8.2173e-5	4.3522e-6	8.3149e-7	67.4	234	-
GAGG	ST	HHE	3.4416e-4	6.5648e-5	2.4004e-6	4.6288e-5	7.5544e-5	1.0331e-4	6.5411e-4	1.4711e-4	8.9149e-6	1.4392e-6	67.4	234	-
003B	TN	HNZ	7.3837e-4	1.7043e-4	1.5931e-5	1.1293e-4	2.6258e-4	3.6550e-4	2.9278e-3	4.2887e-4	1.2247e-4	8.3564e-6	65.2	232	1.3
003B	TN	HNN	6.3724e-4	9.0012e-5	9.0852e-6	6.8410e-5	1.4765e-4	1.4765e-4	2.3232e-3	2.9415e-4	6.2978e-5	7.1631e-6	65.2	232	1.2
003B	TN	HNE	9.8603e-4	1.6420e-4	7.6455e-6	1.0939e-4	2.0714e-4	2.9276e-4	4.5366e-3	2.8501e-4	1.1568e-4	7.3048e-6	65.2	232	1.6

314 **Figure 8: Screenshot of the automatically created summary table with strong motion data from standard (GAGG)**
315 **and MEMS sensors (003B). Net, network; Chan., recording channel; Dist., hypocentral distance; Azim., azimuth; see**
316 **text for the other parameter abbreviations and meaning.**

MAGNITUDE (M_L): 2.1
Area: Trentino_SW_Lago_di_Garda_e_Lessini
Origin Time: 2023/07/11 14:20:00 (GMT +0)
Epicentre: 46.027 (°N) ; 10.738 (°E)
Depth: 4.8 (km)




Seismic shaking exposure

Intensity (I_{acc}):	≤ III	IV	V	VI	VII	VIII	IX	X	≥ XI	
Perceived Shaking:	Very light	Light	Moderate	Quite strong	Strong	Very strong	Severe	Very severe	Extreme	
Population ⁽¹⁾ :	-	1.8K	3.7K	0	0	0	0	0	0	Total: 5.6k
Buildings of interest A ⁽²⁾ :	-	9	14	0	0	0	0	0	0	Total: 23
Buildings of interest B ⁽²⁾ :	-	2	21	0	0	0	0	0	0	Total: 23

⁽¹⁾ISTAT 2011 census estimation; ⁽²⁾PAT 2022 census estimation.


SHAKING INTENSITY (interpolated values)

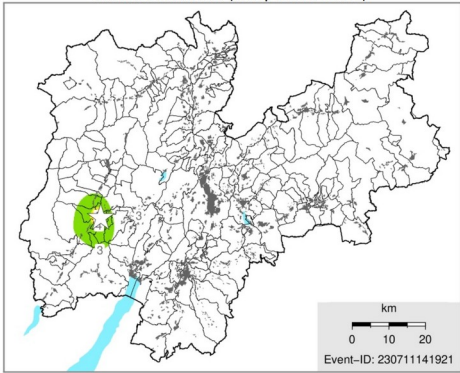

MUNICIPALITIES EXPOSURE (first 20)

I_{acc}	Municipality	Population
V (5.4)	TIONE DI TRENTO	3.665
IV (4.8)	BORGIO LARES	707
IV (4.7)	TRE VILLE	1.404
IV (4.2)	SELLA GIUDICARIE	2.894
III (3.9)	PORTE DI RENDENA	1.752
III (3.5)	BLEGGIO SUPERIORE	1.516
III (3.2)	LEDRO	5.248
III (3.1)	PIEVE DI BONO-PREZZO	1.430
III (3.1)	FAIVÈ	1.055
III (3.1)	PELUGO	390
III (3.0)	COMANO TERME	2.895
III (3.0)	DRO	5.057
III (3.0)	SPIAZZO	1.244
III (3.0)	TENNO	1.992
III (3.0)	VALDAONE	1.141
< III (2.8)	RIVA DEL GARDA	17.646
< III (2.7)	STENICO	1.178
< III (2.4)	ARCO	17.798
< III (2.4)	BOCENAGO	396
< III (2.4)	STREMBO	609

SHAKING INTENSITY (actual values)

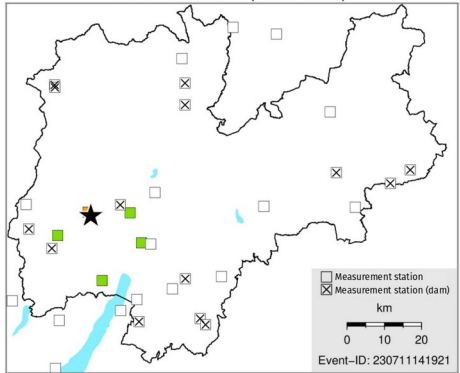


DAMS (decreasing exposure)

I_{acc}	Accel. max (g)	Dams
< III (1.6)	0.0009	Malga Boazzo
< III (1.3)	0.0007	Ponte Pià
< III (1.2)	0.0006	Murandin
< III (0.0)	0.0002	Malga Giumela
< III (0.0)	0.0001	Pian Palù
< III (0.0)	0.0001	Mollaro
< III (0.0)	0.0000	Santa Giustina
< III (0.0)	0.0000	San Colombano
< III (0.0)	0.0000	Busa
< III (0.0)	0.0000	Pra da Stua
< III (0.0)	0.0000	Costabrunella
< III (0.0)	0.0000	Val Noana
< III (0.0)	0.0000	Speccheri
< III (0.0)	0.0000	Val Schener

319 Figure 9: Exposure map PDF for a weak earthquake occurred in Western Trentino. See text for description.

MAGNITUDE (M_L): 5.8
Area: Trentino_SW_Lago_di_Garda_e_Lessini
Origin Time: 0000/00/00 00:00:00 (GMT +0)
Epicentre: 45.834 (°N); 11.066 (°E)
Depth: 9.0 (km)




Seismic shaking exposure

Intensity (I_{MS}):	≤ III	IV	V	VI	VII	VIII	IX	X	≥ XI	
Perceived Shaking:	Very light	Light	Moderate	Quite strong	Strong	Very strong	Severe	Very severe	Extreme	
Population ⁽¹⁾ :	-	70.7K	107.3K	187.4K	72.5K	71K	0	0	0	Total: 509.1K
Buildings of interest A ⁽²⁾ :	-	198	375	231	89	161	0	0	0	Total: 1.054
Buildings of interest B ⁽²⁾ :	-	270	390	618	235	201	0	0	0	Total: 1.714

⁽¹⁾ISTAT 2011 census estimation; ⁽²⁾PAT 2022 census estimation.


SHAKING INTENSITY (interpolated values)

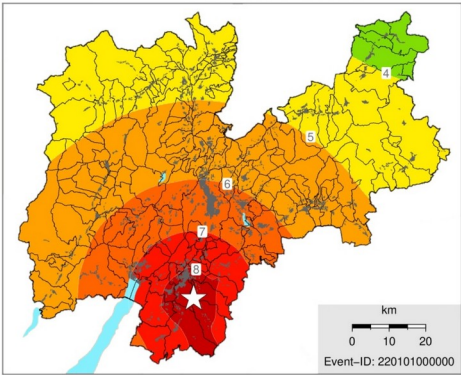

MUNICIPALITIES EXPOSURE (first 20)

I_{MS}	Municipality	Population
VIII (8.5)	ALA	8.792
VIII (8.5)	ROVERETO	39.954
VIII (8.5)	TRAMBILENO	1.468
VIII (8.5)	VALLARSA	1.364
VIII (8.4)	MORI	9.974
VIII (8.3)	BRENTONICO	4.021
VIII (8.2)	ISERA	2.754
VIII (8.2)	TERRAGNOLO	696
VIII (8.0)	NOGAREDO	2.075
VIII (8.0)	VOLANO	3.020
VII (7.9)	VILLA LAGARINA	3.825
VII (7.9)	CALLIANO	1.996
VII (7.9)	FOLGARIA	3.150
VII (7.9)	POMAROLO	2.418
VII (7.9)	RONZO-CHIENIS	987
VII (7.8)	AVIO	4.072
VII (7.8)	NOMI	1.312
VII (7.7)	BESENELLO	2.746
VII (7.5)	ALDENO	3.187
VII (7.5)	ARCO	17.798

SHAKING INTENSITY (actual values)

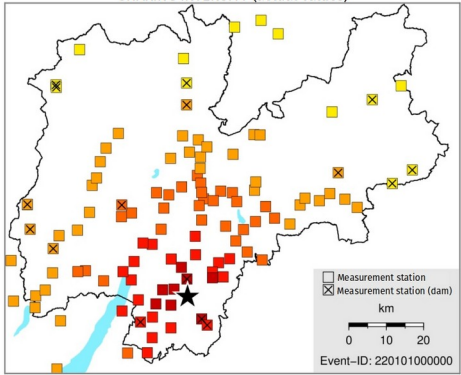

DAMS (decreasing exposure)

I_{MS}	Accel. max (g)	Dams
VIII (8.5)	0.3360	San Colombano
VIII (8.3)	0.3010	Busa
VII (7.9)	0.2470	Speccheri
VII (7.3)	0.1780	Pra da Stua
VI (6.1)	0.0800	Ponte Pià
V (5.6)	0.0580	Murandin
V (5.3)	0.0450	Malga Boazzo
V (5.2)	0.0390	Malga Bissina
V (5.1)	0.0380	Mollaro
V (5.1)	0.0350	Costabrunella
IV (4.9)	0.0310	Santa Giustina
IV (4.7)	0.0260	Val Schener
IV (4.5)	0.0220	Pian Palù
IV (4.5)	0.0210	Malga Giumela
IV (4.4)	0.0200	Val Noana
IV (4.3)	0.0180	Forte Buso

321 Figure 10: Exposure map PDF for a strong earthquake simulated in Southern Trentino. See text for description.

322 **Appendix A**

323

324 List of low magnitude earthquakes recorded by at least one MEMS station, in the period July 2022–October 2023. The
325 event–MEMS distance is calculated considering the closest station to the hypocentre.

ID	Date (yyyy-mm-dd)	UTC time (hh:mm:ss)	M _L	Epicentral area (-)	Recording MEMS (#)	Event–MEMS distance (km)
1	2022-10-21	07:15:37	1.7	Trentino	2	14.0
2	2022-11-10	21:22:12	2.7	Trentino	2	46.7
3	2023-02-07	08:37:24	1.8	Trentino	1	16.3
4	2023-03-29	11:05:14	0.9	Trentino	1	18.0
5	2023-04-04	04:08:42	1.3	Trentino	1	10.7
6	2023-05-22	13:04:19	2.1	Trentino	1	44.4
7	2023-07-06	11:10:36	0.8	Trentino	1	4.7
8	2023-07-11	14:20:17	2.1	Trentino	4	5.0
9	2023-07-23	07:05:50	0.8	Trentino	1	3.1
10	2023-08-06	21:57:41	1.8	Trentino	2	10.6
11	2023-09-13	20:10:41	2.3	Trentino	6	5.2
12	2023-10-13	07:25:19	3.4	Outside Trentino	1	133.9
13	2023-10-25	13:45:37	4.2	Outside Trentino	13	79.7
14	2023-10-28	15:29:23	4.2	Outside Trentino	6	84.2

326