

The value of ~~ultra-detailed survey~~multi-source data for an improved flood damage modelling with explicit input data uncertainty treatment: INSYDE 2.0

Mario Di Bacco¹, Daniela Molinari², Anna Rita Scorzini³

5 ¹ Department of Civil and Environmental Engineering, University of Florence, 50139 Firenze, Italy

² Department of Civil and Environmental Engineering, Politecnico di Milano, 20133 Milano, Italy

³ Department of Civil, Environmental and Architectural Engineering, , University of L'Aquila, 67100 L'Aquila, Italy

Correspondence to: Anna Rita Scorzini (annarita.scorzini@univaq.it)

10

Abstract. Accurate flood damage modelling is essential to estimate the potential impact of floods and to develop effective mitigation strategies. However, flood damage models rely on diverse sources of hazard, exposure and vulnerability data, which are often incomplete, inconsistent, or totally missing. These issues with data quality or availability introduce uncertainties in the modelling process and affect the final risk estimations. In this study, we present INSYDE 2.0, a flood
15 damage modelling tool that integrates ~~ultra-detailed~~ survey and desk-based data for an enhanced reliability and informativeness of flood damage predictions, including an explicit representation of the effect of uncertainties arising from an incomplete knowledge on the variables ~~characterizing~~characterising the system under investigation.

1 Introduction

In recent years, a policy shift from a mere hazard control to a more holistic flood risk management has steadily increased the demand for reliable quantitative flood risk assessment methodologies (Sayers et al. 2002; Merz et al., 2010). ~~In this scenario~~However, despite the significant advancements achieved in flood damage modelling over the past decade, the application of developed tools in practical decision-making for flood risk management has been limited, mainly because of concerns on modelling uncertainties affecting the results of loss estimations (Morgan et al., 1990; Apel et al., 2008; Wagenaar et al., 2016; Winter et al., 2018; Marvi, 2020).

25 Uncertainty, arising from an incomplete knowledge of the system under investigation, in terms of input data and/or model assumptions, could be reduced by enhancing model complexity (i.e., better representation of modelled mechanisms) and/or by using high quality input data (Wagenaar et al., 2016). In this regard, recent literature has demonstrated that multi-variable flood damage models not only outperform simpler (stage-damage) functions (Schröter et al., 2014; Wagenaar et al., 2017; Amadio et al., 2019), but ~~they~~ also provide ancillary advantages, such as the ~~These cover the ability to identify~~identification of the most important damage explanatory variables key variables influencing damage (useful, for instance, ~~to~~in guiding interventions for improving building resilience); and ~~the possibility~~, for probabilistic models, ~~of the possibility of including~~the explicit treatmently of handling uncertainty into the modelling framework, thus supporting comprehensive and informative damage assessments (Morgan et al., 1990; Rözer et al., 2019; Zarekarizi et al., 2020). ~~However~~Nevertheless, practical constraints, such as budget, operational timelines, computational efforts, as well as issues ~~on~~in data quality and
35 availability, often hinder the actual implementation of such models at large (e.g., river basin) scale, with the consequent risk of providing decision-makers with a limited perspective on potential damage scenarios (Pappenberger and Beven, 2006; Merz et al., 2008; Wagenaar et al., 2016; Albano et al., 2018; Zarekarizi et al., 2020; Razavi et al., 2021).

With specific reference to data, for the case of residential buildings, literature has pointed out that several features characterizing both the event (e.g., water depth, flow velocity, inundation duration, debris and contamination loads) and the
40 exposed object (e.g., material and construction type, age and finishing quality of the building, in addition to its geometrical parameters and more micro-scale characteristics) affect the resulting flood ~~damaging process~~losses (Penning-Rowsell et al.,

2005; Dottori et al., 2016; Wagenaar et al., 2016; Mohor et al., 2020; Nofal et al., 2020; Malgwi et al., 2021; Paulik et al., 2022). Hence, to ensure ~~reliable-accurate~~ flood damage assessments, ~~based on a thorough characterisation of the building stock, there is a need-critical~~ to ~~gather-count on detailed data-oncomprehensive~~ vulnerability and exposure ~~featuresdata~~, including relevant ancillary information, ~~in order to achieve a thorough characterization of the buildings~~. Unfortunately, the availability and reliability of ~~required-such~~ data is ~~generally-lowoften limited~~, especially for large-scale applications (Papathoma-Köhle et al., 2007; Schröter et al., 2018; Bhuyan et al., 2022; Velez et al., 2022).

To tackle this issue, a few existing tools have been designed to adapt to actual available knowledge on hazard and building features: an example is represented by INSYDE (Dottori et al., 2016), which is a synthetic (i.e., based on “what-if” analysis) multi-variable flood damage model for residential buildings, capable of handling missing input data by assigning them specific default values typical for the country/region of implementation (Dottori et al., 2016; Molinari et al., 2017; Scorzini et al., 2022). ~~StillHowever, the use-ofrelying on~~ this approach could lead to biased results, since missing and known inputs are treated as equivalent when the former are set to their corresponding built-in defaults. ~~Such-a-problemThis challenge~~ could be ~~overcome-mitigated~~ by considering probabilistic distributions of unknown input data; within a Monte-Carlo approach, ~~which still necessitates of~~ ~~In this case,~~ representative empirical distributions for the ~~relevant input~~ variables, ~~in order to account for-at stake-are required to both-consider~~ the local nature of flood damage mechanisms and to ~~obtain-ensure~~ ~~indicative-meaningful~~ and reliable uncertainty bounds (Cammerer et al., 2013; Wagenaar et al., 2018; Sairam et al., 2019; Scorzini et al., 2021, 2022). ~~These distributions should be derived based on the actual characteristics of the analyzed area, which implies the availability of building inventories and/or the possibility of conducting ad hoc surveys~~. However, the commonly poor availability of specific databases (~~especially-regardingparticularly concerning~~ very ~~micro-sealedetailed~~ building attributes, such as the elevation of the first floor from ground level or the perimeter of internal walls), ~~on-the-one hand, andcoupled with~~ the time-consuming operation of ~~carrying-outconducting~~ surveys, ~~on-the-other hand~~, are currently the main obstacles to thorough analyses of model’s sensitivities to uncertainties stemming from input data.

The divergent needs of balancing modelling costs and informative results (Di Bacco et al., 2023; Sieg et al., 2023) then pose two questions concerning the applicability of sophisticated and data-intensive models in flood damage assessments: (i) ~~how can multi-source data be used to provide an added value to advanced damage modelling toolswhat is the added value,~~ in terms of output quality and usefulness?; ~~attained-by-utilizing more detailed data and advanced methodologies?~~ (ii) which are essential variables that play a key role in constraining the uncertainty bounds, making them worthy of investments in data collection?

The present paper aims at answering these questions, by leveraging the updating of the INSYDE model towards an use with the full treatment of input data uncertainty, involving the exploitation of detailed flood hazard and building inventories, here specifically developed and/or consulted for [the Po River District](#) (northern Italy, [Figure S1](#)), but with the potential for replication in any other contexts.

2 Materials and methods

2.1 From INSYDE to INSYDE 2.0


INSYDE is a synthetic, micro-scale, multi-variable flood damage model for the residential sector, released as an open-source R script, originally developed and validated for Italy, but ~~also~~ extended ~~also~~ to Belgium (Dottori et al., 2016; Molinari et al., 2017; Scorzini et al., 2022). In INSYDE, the calculation of direct economic damages at the building scale relies on explicit, physically based mathematical equations describing flood damage mechanisms for each building component (and sub-components), as a function of more than 20 variables, including flood event (i.e., water depth, flow velocity, inundation duration, sediment and pollution load) and building ~~parameters-characteristics~~ (i.e., geometric and qualitative features (e.g.: footprint area, internal and external perimeter, building material, type and quality, etc.)), as well as prices for the reparation

or replacement of ~~the~~-damaged items. For some building components, the damage mechanisms affected by greater uncertainties are modelled probabilistically by accounting for the probability of damage occurrence as a function of certain hazard intensity measures.

As stated in the Introduction, in case of missing information, the original model ~~proposes-proposed~~ deterministic default values for each input variable, calibrated on expert judgment and/or based on the analysis of large-scale local databases ([Dottori et al., 2016](#)). Some of them, such as extensive ~~parameters-variables~~ (e.g., internal area, external and internal perimeter of the building, etc.), ~~are-were~~ defined by default functional relationships calibrated on a typical configuration of a 100 m² Italian house. According to Authors' experience, the implementation of INSYDE can ~~then~~-lead to biased results (due to the pairwise consideration of known and unknown input data) or inaccurate estimations, especially when applied to large buildings, like apartment blocks, ~~thus~~-implying a scalability issue ([Galliani et al., 2020](#)). For this reason, in INSYDE 2.0, following the strategy proposed for the Belgian version of the model ([Scorzini et al., 2022](#)), the housing unit (HU) has been chosen as the minimum calculation item for multifamily buildings (i.e., apartment buildings). In addition, to enhance and ease model's usability and to mitigate the impact of input data quality issues on the accuracy of damage assessment, an algorithm has been implemented to automatically split the building's footprint area into a suitable number of HUs if the value introduced by the user significantly exceeds a representative building size.

Considering the sensitivity of damage estimates to individual input variables (albeit in varying degrees, not known a-priori), it is crucial to conduct a comprehensive analysis of the effects of missing information on model outcomes, by accounting also for both mutual and non-linear relationships among the variables. Such an approach can provide practical insights for finding an efficient trade-off between model accuracy and efforts for input data retrieval ([Di Bacco et al., 2023](#)); ~~and, then at the same time~~, a shift from the use of fixed deterministic values to suitable distributions of input variables could enhance users' awareness on damage estimation uncertainty.

By employing a step-wise procedure, the present ~~_study~~ then aims to address the aforementioned issues by proposing an updated version of INSYDE that will also enable the exploration of the two ~~principal~~-research questions outlined in the Introduction. In detail, ~~T~~the methodological approach consistsed of the main following phases (Figure 1):

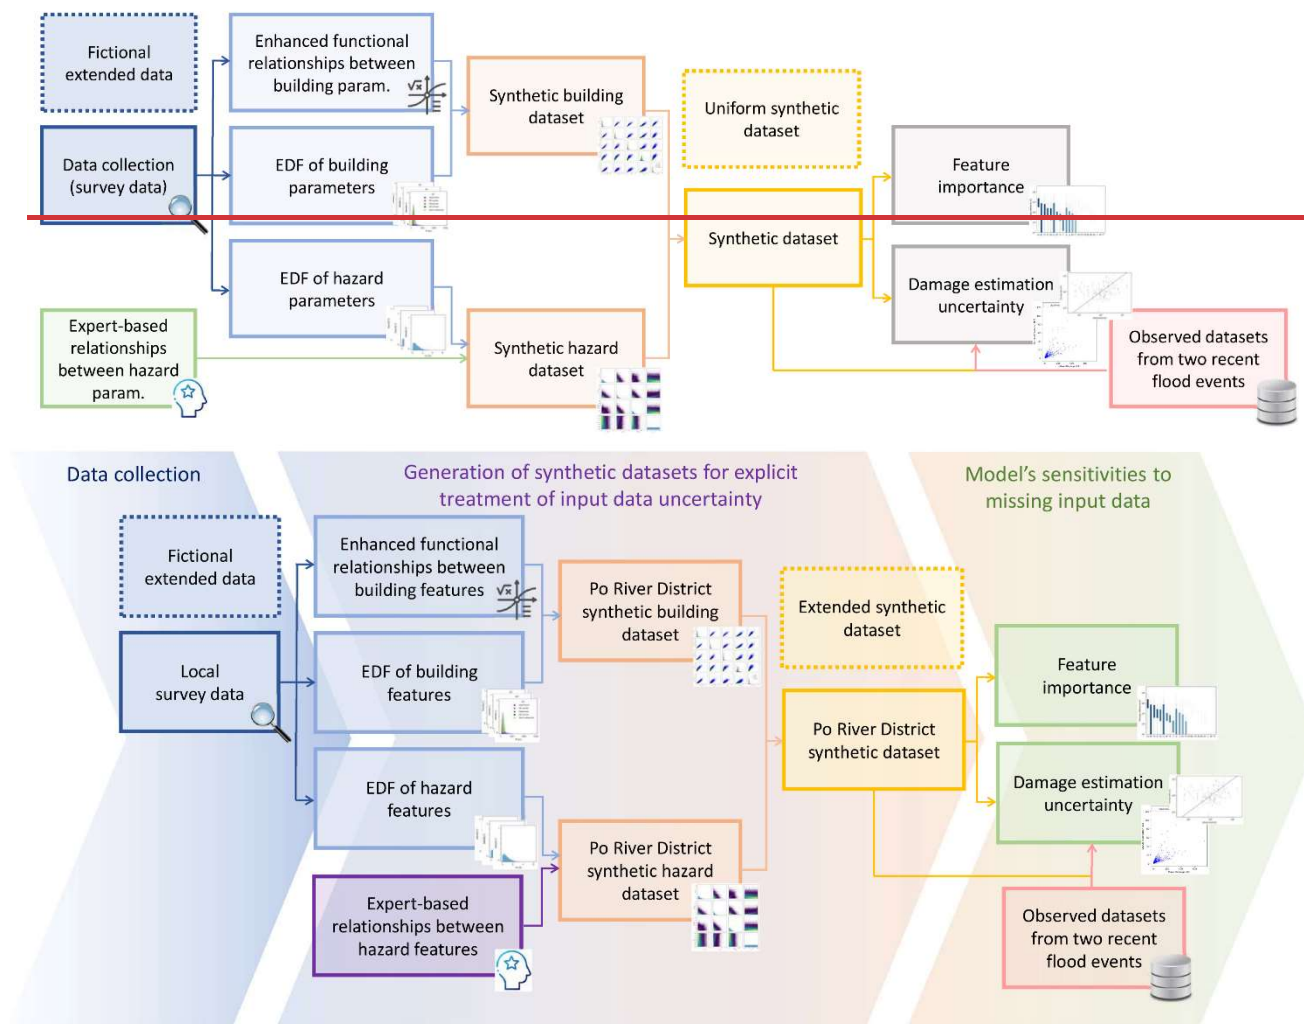

110 **Figure 1. Overview of the methodological approach. Dotted-line boxes represent an alternative dataset for the analysis, while maintaining the same methodological flow as depicted in the solid-line boxes.**

- 115 ■ Data collection (Section 2.2) to acquire relevant information on hazard and building features required by INSYDE;
- 120 ■ Development of INSYDE 2.0, incorporating a module for handling missing inputs in a probabilistic framework: this phase involves the generation of a synthetic datasets based on the collected empirical data combined with expert-based knowledge concerning relationships between hazard parameters-variables (Section 2.3 and 2.43);
- 125 ■ Assessment of model's sensitivities to missing input data: this phase includes the analysis of the feature importance using the developed synthetic datasets, as well as the evaluation of the impact of individual or combined missing inputs on uncertainty in damage estimation. This analysis has been conducted on a sampled synthetic building portfolios and on observed datasets for two recent flood events in Italy (Sections 2.54).

120 2.2 Procedure and data for updating INSYDE Data collection

125 Due to the local nature of damage models, the initial phase focused on establishing the foundation for a model capable of accurately capturing the hazard and building-specific details of the region of implementation, here represented by the Po River District as an exemplificatory case. To achieve this, a "survey dataset" was has been developed as a basis for the generation of empirical probability distribution functions (EDFs) for the variables at stake, which serve for sampling representative features of the populations of interest in case of unknown inputs are encountered for in the application of INSYDE. In addition to traditional methods, such as deriving information from statistical data (Italian National Institute of Statistics, ISTAT), building inventories (OpenStreetMap, OSM) and field inspections, Virtual surveys (Scorzini et al., 2022), offering in-depth insights into building vulnerability and supporting the establishment of functional relationships for

different building features (e.g., internal and external perimeter as a function of footprint area), can be entailing the analysis of building descriptions, floor layouts and photographs from real estate listings employed as an additional means to conventional approaches based on statistical data and building inventories. In the specific case of the Po River, while traditional datasets (derived from the Italian National Institute of Statistics (ISTAT) and OpenStreetMap (OSM)) provided extensive coverage of the whole district for the entire building stock, virtual surveys focused on a smaller sample due to limited real estate listings with complete information and the time-demanding micro-scale analysis of building details, photographs and floor layouts. With this virtual approach, were considered as useful means to collect information on micro-scale building parameters influencing specific flood damage mechanisms (Scorzini et al., 2022) or to establish functional relationships among extensive parameters (e.g., internal and external perimeter as a function of footprint area) for different building typologies. 119 buildings were assessed, compiling comprehensive information on building material, systems, quality, as well as the position and dimensions of building components, among other relevant details (Huayra Mena, 2022). The EDFs for describing the typical inundation phenomena in terms of water depth and flow velocity were can be instead derived from the analysis of the hazard maps included, for instance, in Flood Risk Management Plans or other detailed hydraulic studies existing for the investigated region. In the analysed case study, we leveraged produced for the information contained in the 2021 update of the Flood Risk Management Plan of the Po River Basin District Authority (Autorità di Bacino del Fiume Po, 2022), which consisted of raster files obtained from 2D hydrodynamic modelling of flood scenarios across various return periods (ranging from 20 to 500 years) in specific catchments of the district. These catchments represent distinctive inundation types in both rural and urban areas, as well as in flat or steeper regions of district, where inundation phenomena typically result from riverine and artificial channel floods in the central plain area and flash floods in the mountainous regions located in the northern and southern parts of the basin (Figure S1). Specifically, the selected maps consisted in raster files obtained from 2D hydrodynamic modelling for high to low frequency (20 to 500 year return period) flood scenarios in specific catchments of the district representing the distinctive inundation types occurring in rural or urban areas as well as in flat or steeper regions within the Po River district. The medium-frequency scenario has been selected as the representative case for deriving the EDFs for water depth and flow velocity, based on its designation as the typical reference scenario for implementing mitigation measures in the Po catchment. The inclusion of different inundation types in the hazard dataset was driven by the goal of establishing a comprehensive model applicable to the entire district, aligning with exposure and vulnerability features which are representative of the whole region. Given the limited availability of detailed information on inundation duration and sediment load, expert Expert knowledge was utilized to determine suitable distributions for these other hazard variables (as described in Section 2.3), like inundation duration and sediment load, with limited or null availability of detailed information that are able to capture the qualitative characteristics of typical flood events occurring in northern Italy. For instance, Due to the inherent random nature of water pollution in flood events, a conservative assumption was made for the variable accounting for this process, by assigning a 50% probability of having contaminated floodwater. Details on data statistics derived from the analysis of ISTAT data, OSM building inventory, virtual surveys and flood-related data are available in the work by Huayra Mena (2022).

2.3 Major changes to the original model structure

Based on the descriptive statistics obtained from the analysis of the data described in the previous section, the first modifications to the original version of INSYDE concerned the resolution of the scalability issues associated with the use of the functional relationships among extensive building parameters (Galliani et al., 2020). Following the strategy proposed for the Belgian version of INSYDE (Scorzini et al., 2022), the housing unit (HU) has been chosen as the minimum calculation item for multifamily buildings (i.e., condominiums). Typical ranges for the geometrical dimensions of individual HUs and empirical formulas expressing the different extensive variables as a function of the building footprint area were determined for each building type based on the samples gathered through the virtual survey in the investigated region. In addition, to

enhance and ease model's usability and to mitigate the impact of input data quality issues on the accuracy of damage assessment, an algorithm has been implemented in INSYDE 2.0 to automatically split the building's footprint area into a suitable number of HUs if the value introduced by the user significantly exceeds the maximum sizes observed in the empirical samples. Such approach ensures that damage calculations are always performed at the HU scale, with the correct tailored representative relationships among the variables at stake, even when input data are mistakenly provided at the whole building scale, as it may happen in cases with limited data availability; only after this process, the resulting damages for each HU are summed up to derive the overall estimate for the entire building.

2.34 Towards an use of INSYDE 2.0 with an Generation of synthetic datasets for explicit treatment of input data uncertainty

The probability distributions of the different input features representative of ~~northern Italy~~ the Po River District for INSYDE 2.0 were generated based on the described collected the available empirical hazard and building data, while also accounting for the intrinsic interdependence among the variables (Tables 1 and 2). Specifically, the assumptions regarding the relationship between the building features relied upon the empirical-survey ~~dataset~~ base and findings reported in Huayra Mena (2022), while a physically informed approach was adopted in the case of the hazard variables, depending on the features characterizing both riverine (i.e., long-duration, low flow velocity) and flash (i.e., rapid on-set, greater flow velocities and shallower water depth compared to other type) inundation phenomena.

More in detail, probability distributions were first retrieved independently for the hazard variables based on detailed data, when available (he, v), or upon expert-based assumptions derived from aggregated or approximated data (d, s, q), ~~and used to sample sets of 250.000 elements;~~ Then furthermore, considering a set of 250,000 elements, the following functional dependencies were assumed to describe the correlation among the features, based on the values sampled for he, d and v :

$$d^* = c_1 + c_2 \cdot \sqrt{he} \cdot N(\mu = 1, \sigma = 0.2)$$

$$v^* = c_3 - d/\max(d) \cdot N(\mu = 1, \sigma = c_3 - d/\max(d))$$

$$s^* = c_4 + c_5 \cdot \sqrt{v} \cdot N(\mu = 1, \sigma = 0.2)$$

with N being a random number from a normal distribution with mean μ and standard deviation σ , while the coefficients c_i are constant values introduced in the expert-based approach to obtain the desired functional relationships among the variables; q was instead assumed independent from the other hazard features.

Although ~~The~~ the resulting d^*, v^* and s^* account for the correlation among the hazard variables, they do not follow the probability distributions retrieved independently for the variables d, v and s ; on the contrary, the latter were sampled independently from the correct distributions, but they do not provide information on the rank correlation among the variables. To obtain a dataset with both the mentioned properties are auxiliary-datasets describing the correlation among the hazard variables, but in general they do not follow the probability distributions retrieved independently for d, v and s ; to obtain the correct distributions without losing information on the interdependence among the variables, the values of d^*, v^* and s^* were then replaced-ranked and replaced with the correspondent-corresponding percentiles derived ~~from the ordered versions datasets~~ of d, v and s .

Furthermore, additional synthetic distributions (referred to as "extended synthetic dataset" hereinafter), while preserving the nature of the identified functional relationships among the variables, but spanning over wider ranges of them (as reported in the Supplementary material), were also generated to support a more comprehensive analysis of INSYDE 2.0, regardless of the specific characteristics of the Po River District.

This dual analysis is rooted, on one hand, in the need for context-specific insights into flood damage assessment, in order to support efficient data retrieval efforts, allowing for a prioritisation of data collection on variables that really play a key role in the considered context. On the other hand, a non-region-specific scenario, encompassing a broader range of values for the

input variables, is instead aimed at providing more general findings on the influence of the different variables on the damage estimation process.

215 **Table 1. Hazard features considered in INSYDE 2.0 and assumed probability distributions for the case of ~~northern Italy~~the Po River District.**

Variable	Description	Distribution
he	Water depth [m]	Weibull minimum (shape=1.25, scale=1); if $h < 0.01$ resampled from Uniform{0.01, 0.03}
d	Inundation duration [hours]	Weibull minimum (shape=1.25, scale=36); if $d < 1$ resampled from Uniform{1, 2}
q	Presence of pollutants [yes (1) / no (0)]	$P(q=0) = 0.5, P(q=1) = 0.5$
v	Velocity [m/s]	Weibull minimum (shape=1.15, scale=0.35); if $v < 0.05$ resampled from Uniform{0.05, 0.1}
s	Sediment load [-]	Uniform{0.05, 0.2}

Table 2. Building features considered in INSYDE 2.0 and assumed probability distributions for the case of the Po River District of northern Italy.

Variable	Description	Distributions
BT	Building type [-]	<i>ECDF</i> Empirical distribution function based on ISTAT data $P(BT=1 \text{ (Detached)})=0.54; P(BT=2 \text{ (Semi-detached)})=0.10; P(BT=3 \text{ (Apartment)})=0.10; P(BT=4 \text{ (Attached corner)})=0.10; P(BT=5 \text{ (Attached center)})=0.13$
FA	Footprint area [m ²]	<i>Empirical distribution function ECDF</i> based on OSM data Truncated normal ($\mu = 160, \sigma = 60, \text{min}=50, \text{max}=320$) if BT=1 Truncated normal ($\mu = 110, \sigma = 20, \text{min}=50, \text{max}=160$) if BT=2 Truncated normal ($\mu = 95, \sigma = 20, \text{min}=60, \text{max}=160$) if BT=3 Truncated normal ($\mu = 85, \sigma = 15, \text{min}=45, \text{max}=140$) if BT=4 Truncated normal ($\mu = 85, \sigma = 15, \text{min}=45, \text{max}=120$) if BT=5
IA	Internal area [m ²]	$0.9 \cdot FA$
BA	Basement area [m ²]	$0.5 \cdot FA \cdot \text{Normal}(\mu=1, \sigma=0.2)$
EP	External perimeter [m]	<i>Empirical relationships identified from the analysis of OSM data</i> $4.1 \cdot \sqrt{FA} \cdot \text{Normal}(\mu=1, \sigma=0.2)$ if BT=1 $3 \cdot \sqrt{FA} \cdot \text{Normal}(\mu=1, \sigma=0.2)$ if BT=2 or BT=4 $-6.9729 + 0.2885 \cdot FA \cdot \text{Normal}(\mu=1, \sigma=0.2)$ if BT=3 $2 \cdot \sqrt{FA} \cdot \text{Normal}(\mu=1, \sigma=0.2)$ if BT=5
IP	Internal perimeter [m]	<i>Empirical relationships identified from the analysis of the data from the virtual surveys</i> $20.151 + 0.6254 \cdot FA \cdot \text{Normal}(\mu=1, \sigma=0.2)$ if BT=1 $20.119 + 0.6105 \cdot FA \cdot \text{Normal}(\mu=1, \sigma=0.2)$ if BT=2 $20.336 + 0.6576 \cdot FA \cdot \text{Normal}(\mu=1, \sigma=0.2)$ if BT=3 $9.709 + 0.6902 \cdot FA \cdot \text{Normal}(\mu=1, \sigma=0.2)$ if BT=4 $16.801 + 0.559 \cdot FA \cdot \text{Normal}(\mu=1, \sigma=0.2)$ if BT=5
BP	Basement perimeter [m]	<i>Empirical relationships identified from the analysis of the data from the virtual surveys</i> $4.2 \cdot \sqrt{FA} \cdot \text{Normal}(\mu=1, \sigma=0.2)$
NF	Number of floors [-]	<i>Empirical distribution function ECDF</i> based on ISTAT data $P(NF=1) = 0.09, P(NF=2) = 0.56; P(NF=3) = 0.25; P(NF>3) = 0.10$
IH	Interfloor height [m]	<i>Empirical distribution function ECDF</i> based on survey data Virtual Survey ECDF + Truncated normal ($\mu=0, \sigma=0.5, \text{min}=-0.15, \text{max}=0.15$)
BH	Basement height [m]	<i>Empirical distribution function ECDF</i> based on survey data Skewed normal (skewness= -4, $\mu=3, \sigma=0.25$)
GL	Ground floor level [m]	<i>Empirical distribution function ECDF</i> based on survey data Normal($\mu=0.1, \sigma=0.09$)
BL	Basement level [m]	$-GL - BH - 0.3$
BS	Building structure [-]	<i>Empirical distribution function ECDF</i> based on ISTAT data $P(BS=1 \text{ (Reinforced concrete)}) = 0.33; P(BS=2 \text{ (Masonry)}) = 0.67$
FL	Finishing level (i.e. building quality) [-]	<i>Empirical distribution function ECDF</i> based on survey data $P(FL=0.8 \text{ (Low)}) = 0.05, P(FL=1 \text{ (Medium)}) = 0.42; P(FL=1.2 \text{ (High)}) = 0.53$
LM	Level of maintenance [-]	<i>Empirical distribution function ECDF</i> based on ISTAT data $P(LM=0.9 \text{ (Low)}) = 0.13, P(LM=1 \text{ (Medium)}) = 0.47; P(LM=1.1 \text{ (High)}) = 0.40$
YY	Year of construction [-]	<i>Empirical distribution function ECDF</i> based on ISTAT data
PD	Heating system distribution [-]	<i>Empirical distribution function ECDF</i> based on the analysis of grey-literature and survey data

		if $YY \geq 1990$: $P(PD=1 \text{ (Centralized)}) = 0.11$, $P(PD=2 \text{ (Distributed)}) = 0.89$ if $YY < 1990$: $P(PD=1) = 0.6$, $P(PD=2) = 0.4$
PT	Heating system type [-]	<i>Empirical distribution function ECDF-based on the analysis of grey-literature and survey data</i> if $YY > 2000$ & $FL > 1$: $P(PT=1 \text{ (Radiator)}) = 0.2$, $P(PT=2 \text{ (Pavement)}) = 0.8$ else $P(PT=1) = 0.8$, $P(PT=2) = 0.2$
BE*	Basement exists [-]	<i>Empirical distribution function ECDF-based on survey data</i> $P(BE=0 \text{ (No)}) = 0.2$, $P(BE=1 \text{ (Yes)}) = 0.8$

220 * new variable introduced in INSYDE 2.0.

2.45 Model's sensitivities to missing input data

2.45.1 Analysis of the feature importance

In the new framework for missing data handling, the generated ~~synthetic-datasets~~ synthetic distributions ~~has-can be~~ been exploited in a feature importance exercise aimed at a quantitative assessment of the sensitivity of damage calculations to the absence of information on certain input variables, in order to identify key features deserving attention in data collection. This analysis, based here on a probabilistic test performed on a complete subsetportfolio of 2550,000 hypothetically flooded buildings (generated from the identified distributions for the Po District as well as for the "extended case"), involved the following steps: first, INSYDE 2.0 is used to calculate damage on ~~this-the~~ complete dataset, where all input values are assumed to be available, and the resulting estimate is taken as a reference point; ~~Next~~, the values of one input variable are removed at a time from the dataset, and the corresponding missing values are sampled from the generated synthetic dataset. This process is repeated for each variable and, each time, damage is recalculated; the difference in damage with respect to the reference value is finally recorded and then the variance induced by each feature on model outcome can be determined.

2.45.2 Analysis of damage estimation uncertainty

In addition to assessing the possible contribution of unknown single input features to damage estimation uncertainty, a further analysis ~~was-can be~~ carried out to evaluate the impact of the combined absence of multiple input variables on the variability of damage estimations.

2.54.2.1 Analysis on the synthetic dataset

A first ~~application of INSYDE 2.0 test was-has been~~ conducted, for computational reasons, on the complete synthetic subsample portfolio of 5,000 buildings extracted from the complete building portfolio mentioned in the previous section of the Po River District, this time altered to account for the presence of multiple unknown input data within the ~~tested~~ sample. The reduction in the dataset's level of completeness was achieved by assuming different percentages of missing data for each feature, which were assigned based on their typical availability or ease of retrieval, as experienced by the Authors in the Italian context. Except for he and FA, which were considered as the minimum known variables for a damage assessment, the missing values were placed randomly, as follows: 10% for variables of easy retrieval, either due to their availability at the meso-scale (e.g., census block scale) or to their low variability (BT, IH, NF, BS, LM, FL, YY) and 20% for other building features that require specific surveys for correct characteriszaion (EP, BE and related variables, BH, BA, BP); for GL, which is generally not available in databases, but potentially appraisable through (virtual) surveys, this percentage was increased to 50%, while 95% was assumed for the building features that are hardly ever known (or only after internal surveys), such as IP and PD. For the hazard variables, the percentages were assumed to be 10, 20, 50 and 80%, respectively for v, d, s and q, taking into account the increasing modelling costs from a simple 2D steady hydrodynamic simulation to a more complex unsteady run with the inclusion of sediment transport modelling; the very specific and detailed data requirements regarding the presence and propagation of pollutants instead explain the higher value assumed for q. For each tested object, 1,000 complete replicates were generated by filling missing input data with values sampled from the developed synthetic dataset-distributions and the corresponding average damage and standard deviation were calculated.

255 2.45.2.2 Analysis on field data from recent flood events

A similar analysis ~~was~~ has been also carried out considering real-world, field databases compiled for two flood events that occurred in the Po River valley: the 2002 Adda flood in Lodi and the 2010 Bacchiglione flood in Caldogno, both of which have been described in previous applications of INSYDE (Dottori et al., 2016; Amadio et al., 2019; Molinari et al., 2020). Table 3 provides a concise overview of the available datasets, by specifically highlighting the unknown variables for
260 INSYDE 2.0 in the two case studies. As typical in large-scale flood damage assessments, the missing data mainly concerned the ultra-detailed characteristics of the dwellings, while only approximate information on inundation duration was available from the reports of the events, which provided a rough indication of 24 hours on average for both cases. To ensure a reasonable level of uncertainty, while considering the available information on inundation duration, the empirical distribution for this variable was modified with respect to the one in Table 1, by sampling d values from an assigned
265 truncated normal distribution ~~entered~~ centred at 24 hours and spanning between 16 and 48 hours. As in the previous case, the approach entailed calculating damage over 1,000 complete replicates for each affected building and registering the corresponding damage statistics.

Furthermore, considering the availability of observed losses for the two case studies, we also investigated the impact of missing inputs on the results of classical validation exercises, ~~raising questions on~~ prompting a broader discussion on the
270 ~~general~~- interpretation of their results when performed for simple (e.g., univariable) or complex models without a proper treatment of uncertainties (Molinari et al., 2019, 2020). In this context, since its formulation, INSYDE has undergone continuous updates and validation, with reported superior performance when compared to other tested damage models (Dottori et al., 2016; Amadio et al., 2019; Molinari et al., 2020). Although these previous studies consistently demonstrated INSYDE's capacity to provide accurate damage estimations, the reliance on fixed default values for missing input data
275 limited the quantitative assessment of the uncertainty associated with validation outcomes.

Table 3. Unknown input features for INSYDE in the considered ~~validation~~-case studies of Lodi and Caldogno floods.


Case study	Unknown input features in the dataset
Lodi	d^* , s , IP, IH, BH, PD, PT, BA, BP (for all buildings (271) in the dataset) GL and NF (partial availability - known, respectively, for 47 and 265 buildings)
Caldogno	d^* , s , q , IP, IH, BH, GL, PD, PT, LM, BA, BP, HB (for all buildings (294) in the dataset)


3 Results and discussion

3.1 Generation of the synthetic datasets

The pair plot ~~shown~~ in Figure 2 ~~enhances the visualization of~~ displays the pairwise relationships ~~assumed in this study~~ among
280 the flood hazard variables, water depth (h_e), flow velocity (v), inundation duration (d) and sediment load (s). characterising the developed synthetic dataset for the Po River District. This graphical tool employs a scatter plot to illustrate the relationship between each pair of variables in the dataset, while the diagonal axis displays kernel density plots ~~indicates the distribution for~~ each variable. From the patterns represented in Figure 2, it is evident the physically informed approach adopted for ~~describing~~ hypothesizing the relationships among the variables: for instance, a positive relationship between h_e and d , as well as between v and s , with the latter explained by the tendency of flash floods to carry greater amounts of debris;
285 similarly, d and v were considered to be negatively correlated, in consideration of the short duration typically associated with flash floods.

An analogous pair plot for the extensive building variables is presented in Figure 3, which illustrates the functional relationships (Table 2) identified from the analysis of the building empirical-survey dataset for the region (Huayra Mena,
290 2022).

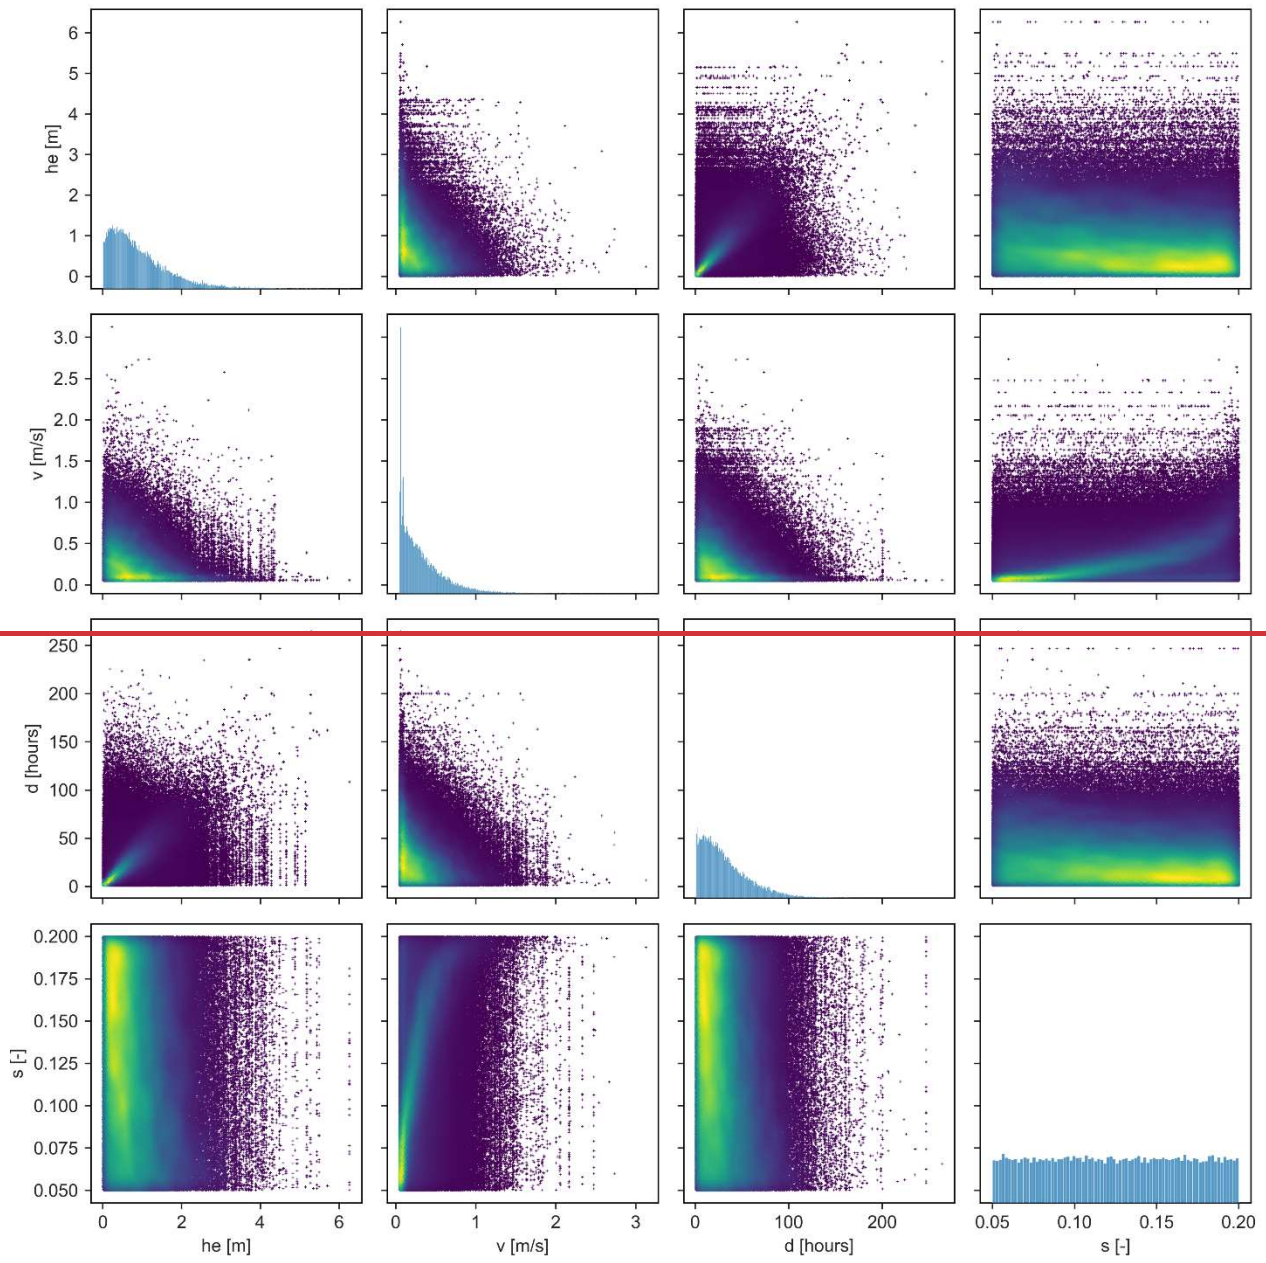


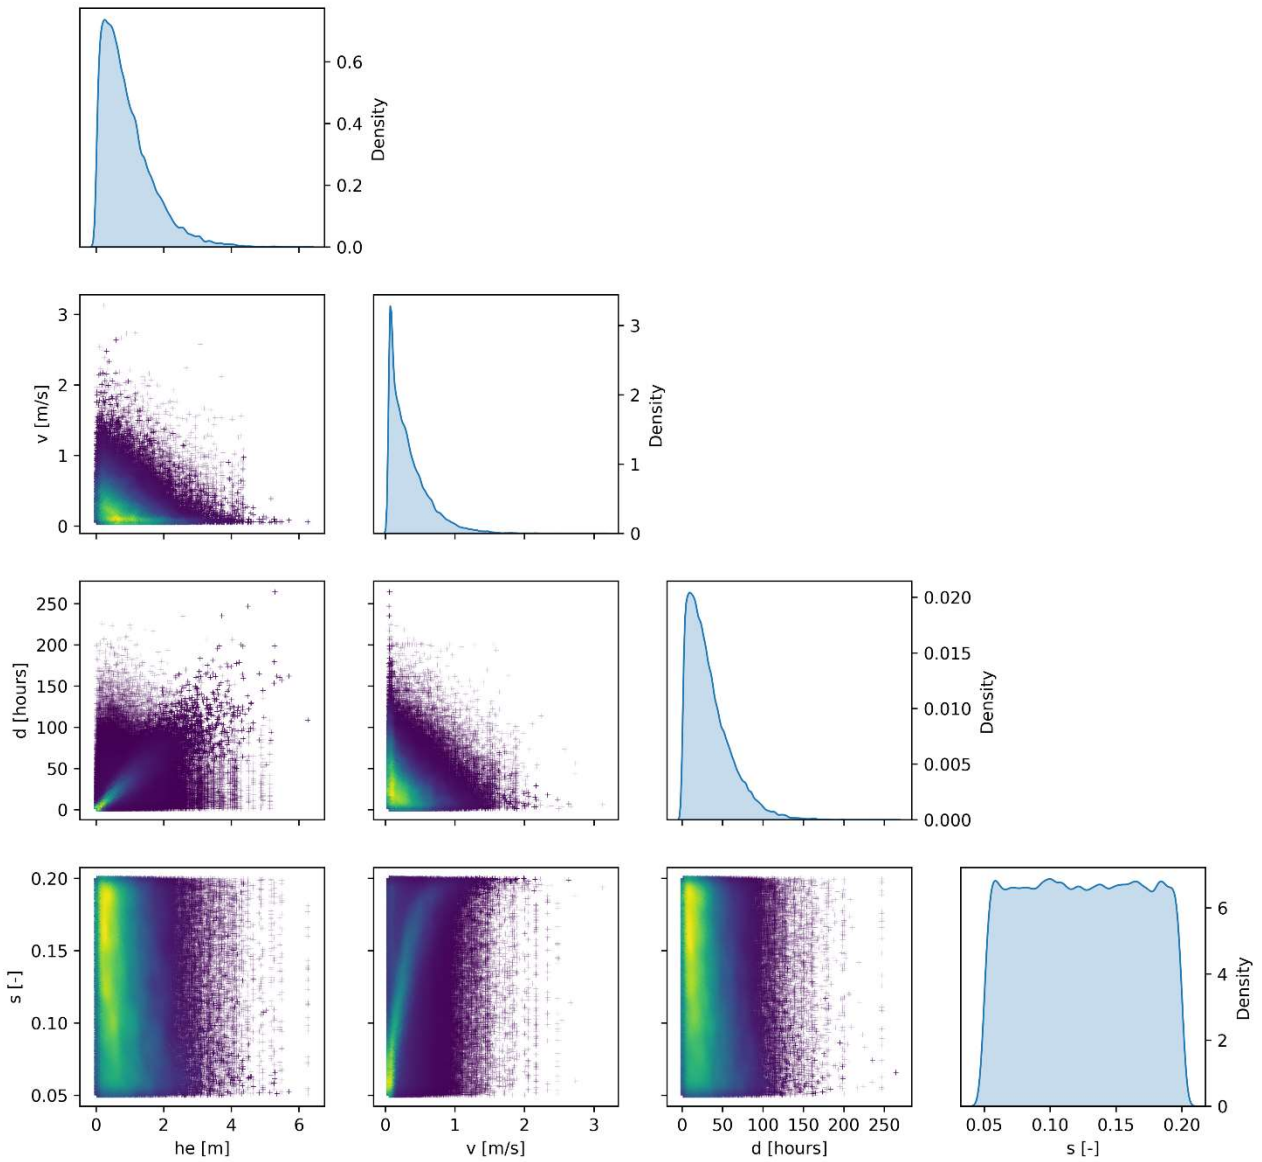

295 **Figure 2. Empirical pairwise relationships assumed for the generation of the distributions representative of northern Italy Po River District synthetic dataset: hazard parameters-variables (water depth (he), flow velocity (v), inundation duration (d) and sediment load (s)).**

For the sake of clarity, it should be noted that the distributions for the “Apartment” category are represented in Figure 3 at the building block scale, having assumed a number of housing units ($n_{HU} \geq 1$) generated from a Weibull distribution with shape and scale parameters equal to 2 and 4, respectively. ~~The pair plots reported in the Supplementary material (Figures S1 and S2), while preserving the nature of the identified functional relationships among the variables, but spanning over wider ranges of them, were also generated to support a more comprehensive investigation of the feature importance within INSYDE 2.0, regardless of the specific characteristics of the sample representative of northern Italy.~~

305 The pair plots illustrating the extended synthetic dataset (generated for obtaining more general findings on the influence of input features on damage estimation beyond the specificities of the region under investigation) are provided in the Supplementary material (Figures S2 and S3) for comprehensive reference.

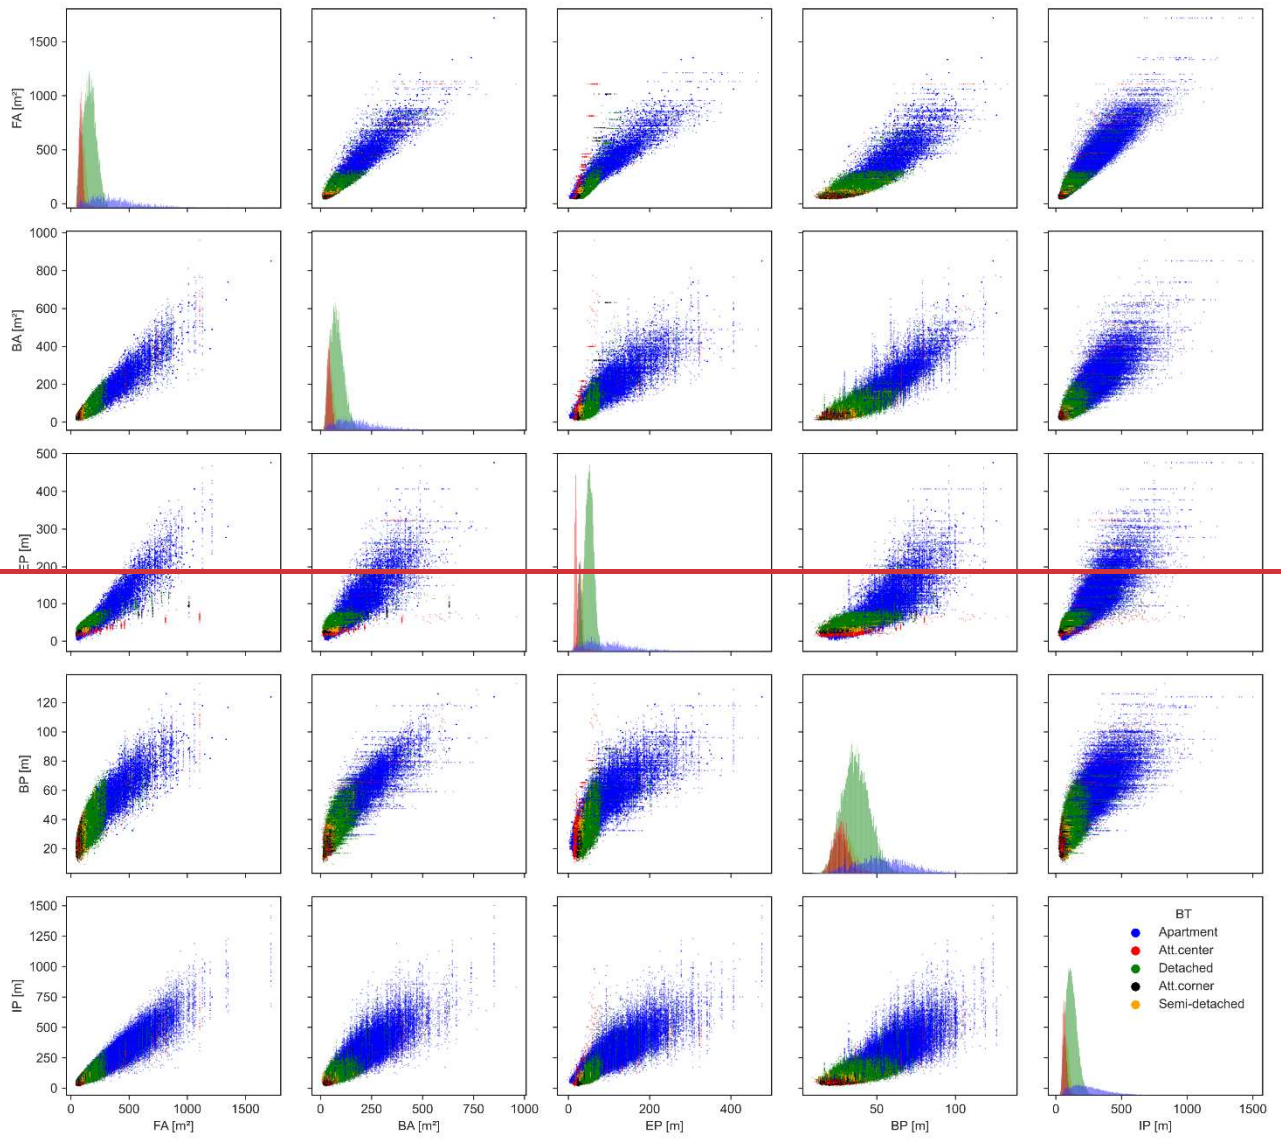

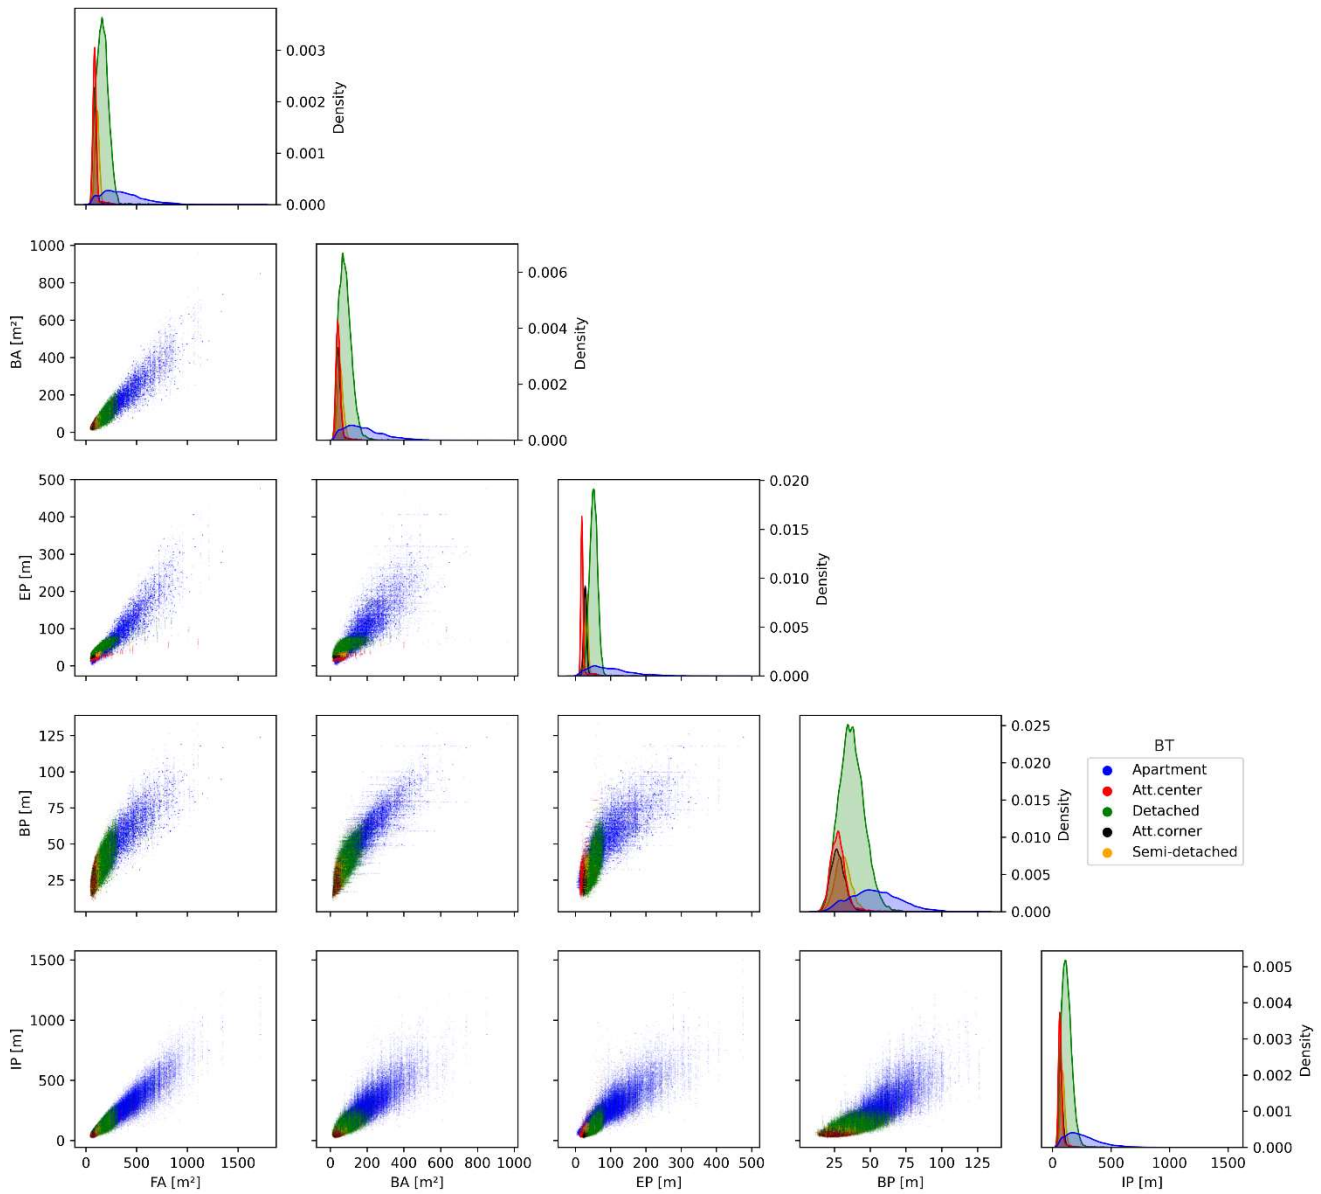


Figure 3. Empirical pairwise relationships assumed for the generation of the Po River District synthetic dataset of the distributions representative of northern Italy: extensive building parameters-variables (footprint (FA) and basement (BA) area; external (EP), internal (IP) and basement perimeter (BP)).



310


3.2 Model's sensitivities to missing input data

3.2.1 Analysis of the feature importance

This section reports on uncertainty in damage calculations resulting from the potential lack of knowledge on certain input data in INSYDE 2.0. In detail, Figure 4 summarizes the results of the feature importance analysis by showing the difference in computed damage when applying the model to a reference complete synthetic set of 250,000 buildings and to their replicas obtained by replacing the values of one input variable at a time with a sampling from the dataset generated for the northern Italy Po River District case (upper panel) or from the extended uniform-synthetic dataset reported in the Supplementary material (lower panel).

315

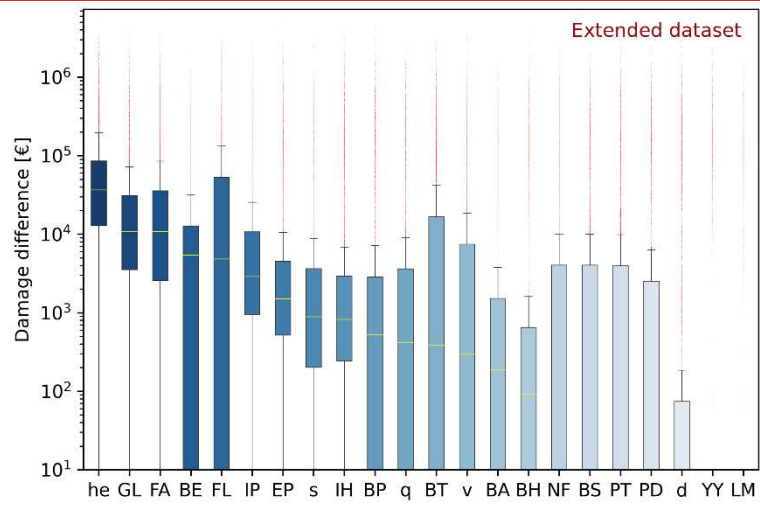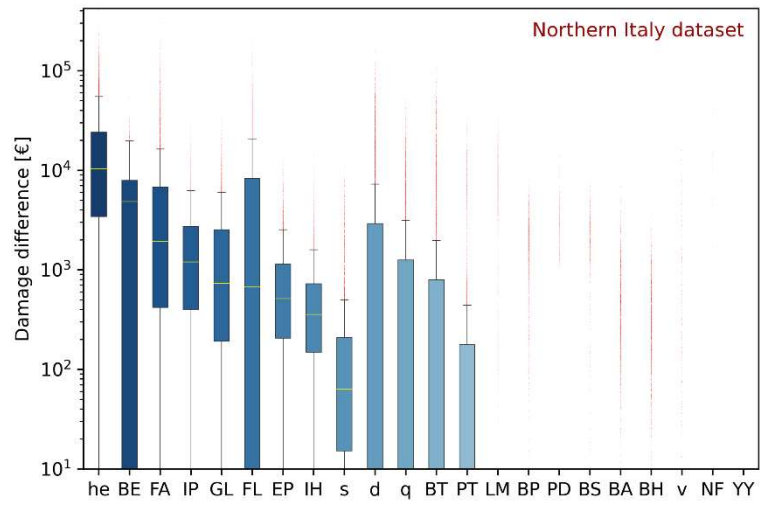

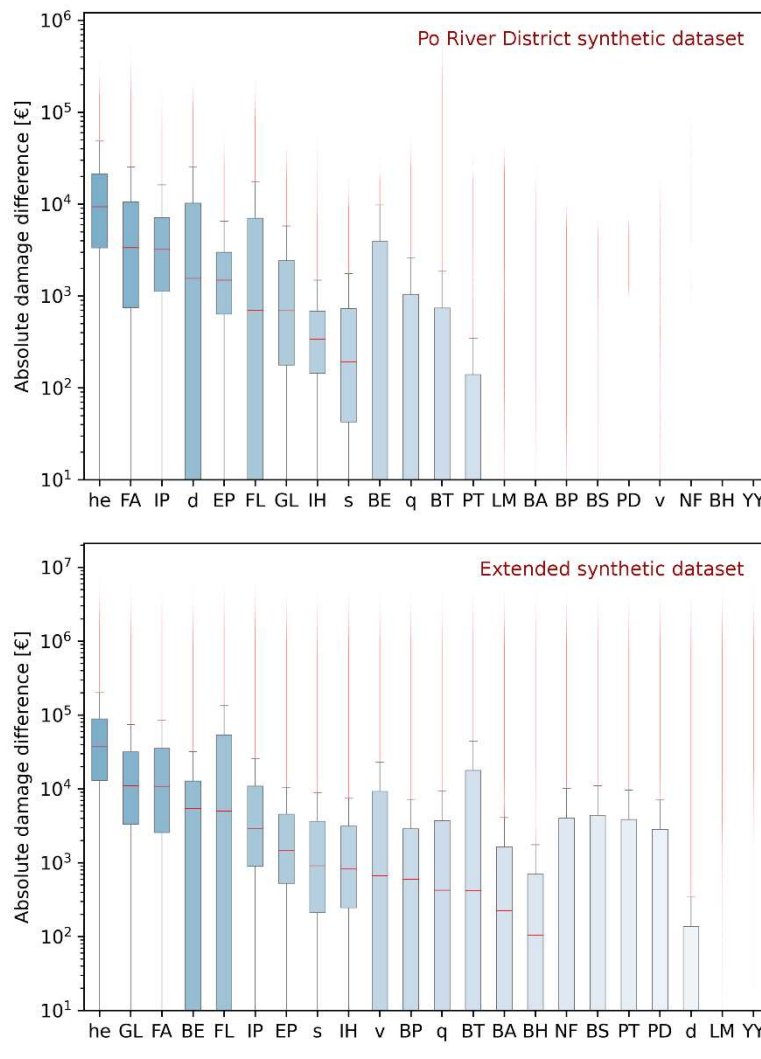

320

Figure 4. Feature importance in INSYDE 2.0: (upper panel) test with sampling from the Po River District synthetic dataset (upper panel) developed for northern Italy; (lower panel) test with sampling from the uniform-extended synthetic dataset (ref. to Figures S1-S2-S2S3) (lower panel). The variables are ranked according-based onto the median value (in yellow) of the estimated absolute damage difference with respect compared to the reference damage calculated on a complete dataset. Outliers are visualised as red points in the plots.

325

Consistently with the literature (Kelman and Spence, 2004; Schröter et al., 2014; Dottori et al., 2016; Amadio et al., 2019; Scorzini et al., 2022), Figure 4 confirms the importance for flood damage modelling of relying on accurate input data for water depth, even though damage differences associated to it are found-to-be-limited, on average, around only 10,000 Euro (upper panel), due to the intrinsic limited-small variability assumed for this variable in the generation of the empirical-representative distributions for the context of northern Italy (Figure 2). Albeit with a comparatively lower influence, sediment load, inundation duration and the indicator for the presence of pollutants can be ranked as other important hazard input features, with the latter two inducing more variability in the results, as a consequence of some damage mechanisms activated in INSYDE on the basis of thresholds on d or q (Dottori et al., 2016; for clarity, an example of such damage mechanism is reported in the Supplement). The riverine inundation characteristics, typical of the examined context (Figure 2) and insufficient to cause structural damages (Clausen and Clark, 1990), also explain why a lack of input data on flow velocity does not induce any tangible effect on damage estimation. A different pattern is instead visible in the lower panel of Figure 4, obtained from a sampling based on the extended synthetic dataset (Figures S1-S2 and S2S3), featuring larger ranges of values for the tested input variables and thus providing more general insights on model sensitivity to input data availability (regardless of the specific local characteristics for the context of model customization). In this case, apart from the greater differences observed in absolute terms, the-figure_4 indicates that velocity has a far more relevant impact than inundation duration on damage estimation uncertainty when dealing with long-lasting flood events (as

340


represented in the extended synthetic dataset, Figure S1-S2), exceeding the duration threshold assumed for certain damage mechanisms (Dottori et al., 2016; please refer to the code of INSYDE 2.0 for details).

345 Regarding building ~~features~~ characteristics, the upper panel of Figure 4 reveals the significant and obvious influence of the extensive ~~variables~~ features (FA, IP, EP), of the binary variable BE for the presence of the basement (which masks the importance of the basement-related variables, BA, BP and BH), and building's elevation with respect to the ground level (GL). Finishing level (FL) causes relevant variability on model outcomes, with an observed median damage difference of about 670 € for the ~~northern Italy~~ Po River data, while a detailed knowledge on variables such as level of maintenance (LM), building structure (BS) and heating distribution (PD) type, and even more the number of floors (NF) and the year of
350 construction (YY), appear to provide an overall negligible impact on damage estimation uncertainty. Again, such results are dependent on the specific datasets used for sampling missing values and, therefore, for a more general overview on the ranking of the feature importance in INSYDE 2.0, it is possible to refer to the lower panel of Figure 4, which illustrates how some variables (such as NF, BS, PD and PT) gain increasing importance when hazard parameters are set to (larger) values, capable of activating damage mechanisms to more building components. These findings then demonstrate how the
355 importance of specific input parameters can vary depending on the characteristics of the study region, thus highlighting the cruciality of relying on regionally representative hazard and building datasets for an enhanced and efficient flood damage modelling.

3.2.2 Analysis of damage estimation uncertainty

3.2.2.1 Analysis on the Po River District synthetic dataset

360 Figure 5 reports the results of the analysis aimed at evaluating the performance of INSYDE 2.0 when the absence of multiple inputs is considered. In detail, the figure shows the mean damage and standard deviation calculated for each of the 5,000 modified (i.e., with multiple missing inputs) items over their 1,000 complete replicates generated by populating the missing information with values sampled from the Po River District defined synthetic dataset for northern Italy. Interestingly, the figure shows that, for all the building typologies, the results tend to lie on two different trend lines corresponding to higher or
365 lower damage variability. A closer inspection of the results ~~reveals~~ revealed that these distinct patterns are not necessarily related to the quantity of missing variables, but rather to their role in the damage mechanisms implemented in INSYDE. Indeed, ~~in certain instances, for certain building components,~~ the estimated damage ~~for certain building components~~ depends on the occurrence of ~~certain specific~~ conditions ~~on across~~ multiple variables. In such cases, when more than one of these conditions are met, the maximum resulting damage is assumed to hold, ~~since as~~ the most ~~unfavorable~~ unfavourable state is
370 thought to dominate the damage mechanism, ~~irrespective regardless~~ of the other ~~conditionss~~ (Dottori et al., 2016). ~~An example of~~ This situation is ~~represented exemplified~~ by the components related to the interior or exterior plaster (details in the Supplementary material ~~as well as~~ and in the code), ~~for which~~ Here, damage occurrence is supposed to depend on inundation duration and flow velocity, ~~with a~~ varying degree expressed by the corresponding fragility functions, as well as on water quality (q) and level of maintenance (LM) of the building; ~~specifically,~~ with a 100% probability of damage
375 occurrence ~~is assigned~~ in case of contaminated water (q=1) or average/poor level of maintenance (LM≤1); ~~in particular,~~ These conditions applied to the ~~last latter~~ two variables ~~are the ones that~~ eliminate any potential estimation uncertainties arising from missing data on other parameters involved in the damage mechanism. A similar uncertainty-limiting ~~behavior~~ behaviour is also distinctive of damage to pavement components, which theoretically depend on different input features, but only when finishing level (FL) is set to certain values (FL>1).

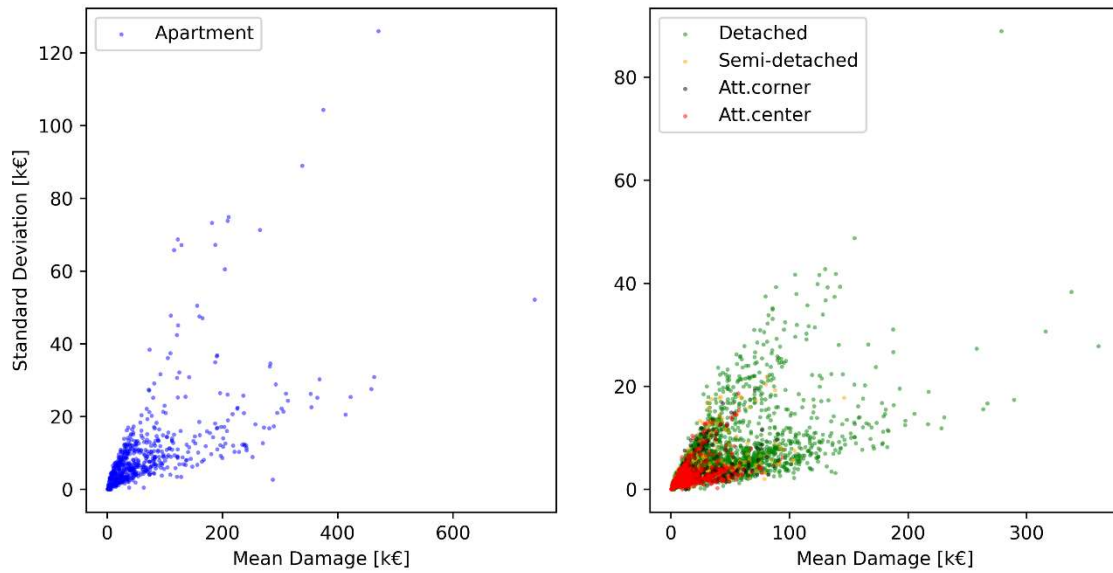


380

Figure 5. Damage estimation variability observed on the altered (i.e., with randomly generated multiple missing inputs) Po River District synthetic dataset ~~representative of northern Italy~~.

3.2.2.2 Analysis on field-observed data from recent flood events

385

Similar trend patterns to those presented in Figure 5 are also evident in Figure 6, which displays the results obtained by replicating the data filling procedure to the empirical datasets for the flood events in Lodi and Caldogno, both of which originally characterized by the presence of some unknown input features (Table 3). The minor differences visible between the two case studies (Figure 6) are again a consequence of the type of missing variables within each dataset.

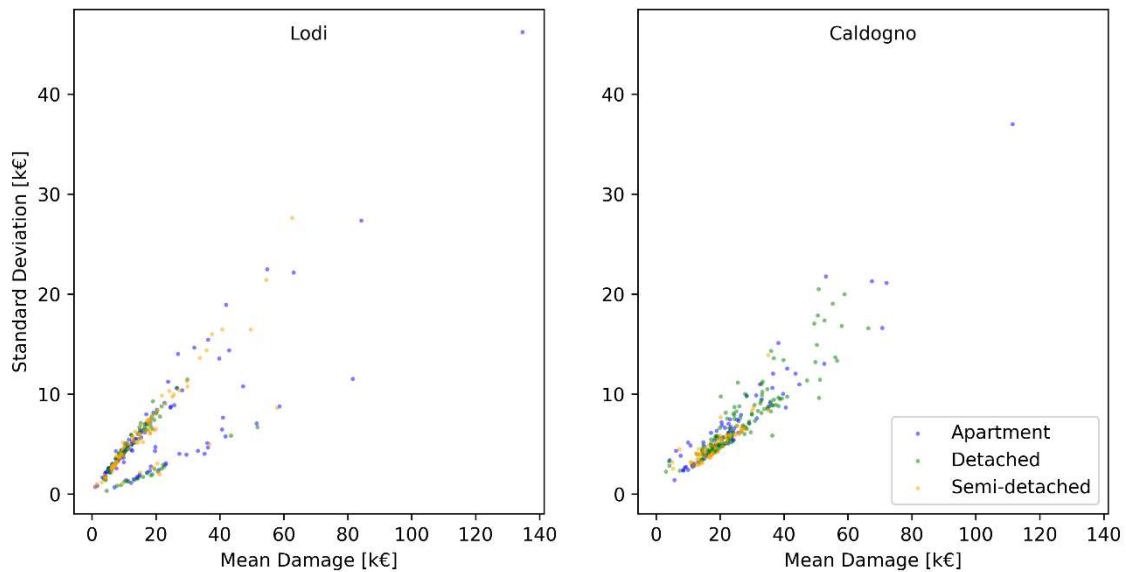

390

Figure 6. Damage estimation variability observed on the empirical datasets for the case studies of Lodi and Caldogno.

Specifically, the points lying on the lower variability trend line for the Lodi case are representative of those buildings with available information on GL, which significantly reduces damage estimation uncertainty. If excluding these data, Lodi generally exhibits slightly larger standard deviations for the same calculated mean damage in Caldogno. Such difference can be explained by considering the input data availability in the two cases for certain key variables (q and LM) which can act as limiting or amplifying factors of damage estimation variability. In detail, complete information on these key variables is only available for the Lodi dataset, with just a restricted number of buildings exhibiting the mentioned “uncertainty limiting values” $q=1$ and $LM \leq 1$ (respectively in $\sim 6\%$ and $\sim 15\%$ of the elements in the dataset).

The two cases studies were also considered to highlight the value of the proposed approach in interpreting the results of model validation, particularly important for a complex multi-variable damage model like INSYDE. The outcomes of the test are summarized in Table 4, which compares total observed damages-losses against damage statistics obtained by applying INSYDE 2.0 over 1,000 replicates for each affected item in the two building portfolios containing missing input features. These findings are complemented by Figure 7, which offers a visual representation of the detected differences between estimations and observations at the individual building scale.

Table 4 illustrates a general convergence between observed and estimated damages, particularly around the 75th percentile, where the calculated losses align with the reported values. The median estimates exhibit a satisfactory level of agreement with the observed losses, which is consistent with typical outcomes observed in validation exercises for models demonstrating overall good performances (e.g., Amadio et al. 2019; Molinari et al., 2020). It should be noted that the model tends to overestimate lower entity damages across all building types (Figure 7), but this discrepancy, rather than being a consequence of any model-related issue, can be primarily attributed to the limitations in the representativeness of claim data, particularly for minor losses, as documented in the literature (Merz et al., 2008; Molinari et al., 2020; Pinelli et al., 2020).

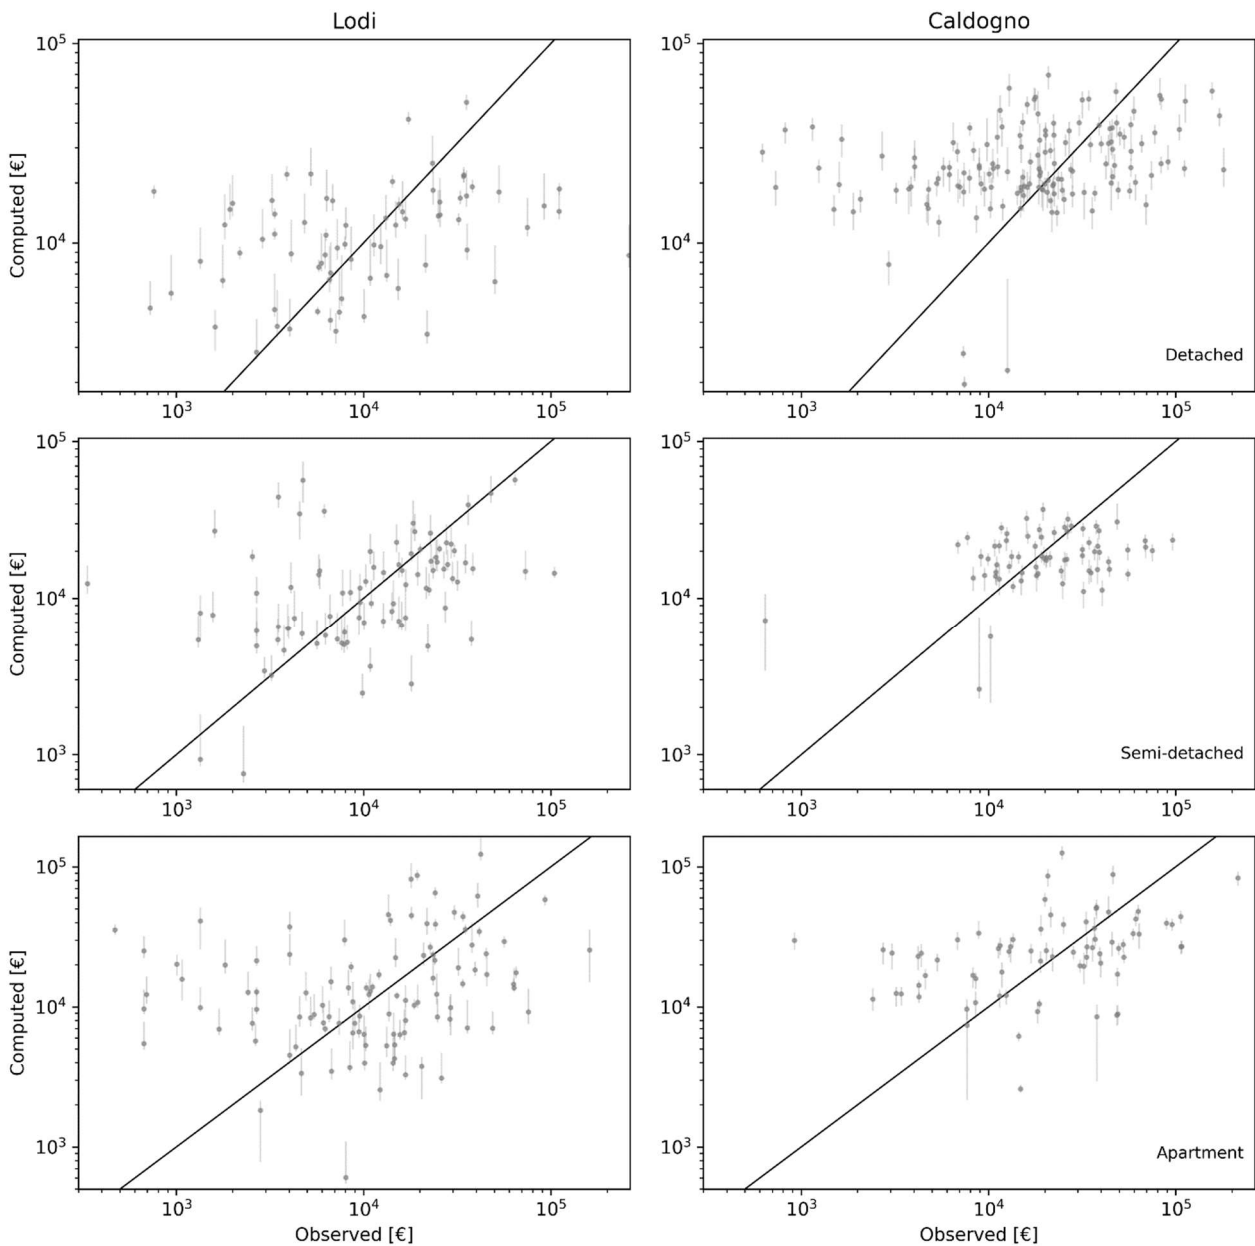


Figure 7. Results of the probabilistic validation of INSYDE 2.0 for the case study of Lodi (left) and Caldogno (right). Median computed damage (dot) and corresponding interquartile range (line) are plotted for each building against observed damage (expressed in 2021 Euro).

Table 4. Results of the probabilistic validation of INSYDE 2.0 for the case studies of Lodi and Caldogno: Statistics-statistics of total ~~calculated-estimated~~ damages with INSYDE 2.0 versus reported damages for the considered case studies.

Case study	Calculated- Estimated damage [M€ 2021]					Observed damage [M€ 2021]
	5 th percentile	25 th percentile	median	75 th percentile	95 th percentile	
Lodi	3.13	3.68	4.18	5.26	8.06	5.05
Caldogno	3.46	6.44	7.53	8.54	10.34	8.35

420 While confirming the performance of INSYDE 2.0 in accurately depicting the overall damage figures ~~of-for~~ the two events (~~Dottori et al., 2016; Amadio et al., 2019; Molinari et al., 2020~~), the results of this analysis ~~also emphasize~~ the ~~advantages~~ ~~benefits~~ of incorporating the treatment of input data uncertainty when presenting ~~the-outcomes-of-a~~ model validation ~~outcomes, also in consideration of the well-known biases and limitations of damage observations in fully capturing reality~~ (Molinari et al., 2020). Indeed, ~~previous validation exercises on earlier model versions, relying on a deterministic approach~~ ~~for handling unknown input features, while reporting limited errors ranging from -1.7% to +5.1% for Caldogno and up to +19.1% for Lodi~~ (Dottori et al., 2016; Amadio et al., 2019), ~~lacked insights into the uncertainty introduced by the selection of fixed default values for handling missing variables in the tested cases. Here, by providing a clear indication of the uncertainty bounds of the estimations, the new this~~ approach ~~instead~~ enhances ~~the-model's~~ robustness, ~~transparency~~ and reliability ~~of the model, by providing a clear indication of the uncertainty bounds of the estimations,~~ thus effectively
425 ~~mitigating the risk of conveying a false perception of certainty, which instead may be instead encountered with simpler~~ deterministic approaches or even with more sophisticated models when used in combination with oversimplified assumptions (Merz et al., 2005; Pappenberger and Beven, 2006).

4 Conclusions

Accurately assessing flood risk is crucial for mitigating the potentially devastating effects of flooding. However, the
435 complexity of the systems involved, and the significant amount of data required, make flood damage estimation a challenging task, susceptible to uncertainties from input data, model structure and assumptions. Achieving a trade-off between outcome reliability (with a quantitative characteris~~z~~ation of uncertainty) and estimation efforts (in terms of time and financial resources for both data retrieval and modelling) is essential for efficient and comprehensive risk assessments, enabling optimal decision-making (Apel et al., 2008; Merz et al., 2015; Sieg et al., 2023). To strike this balance, it is
440 important to examine the possible added value of utilis~~ing~~ ~~more~~ detailed data and advanced methodologies, as well as identifying critical variables that reduce damage estimation uncertainty, justifying investments in data collection.

In this context, the present study aimed at addressing these issues through the development of an updated version of a multi-variable flood damage model, INSYDE, which estimates direct economic damages at the building scale as a function of several flood event and building features. ~~In-consideration-of-the~~ ~~Given the~~ amount and detail of required input variables, ~~the~~ ~~process-of-data-retrieving-and-preparing-data-retrieval-and-preparation~~ for a multi-variable model, like INSYDE, can be resource-intensive; ~~on the other hand, and~~ incomplete inputs, ~~may exert ean-a~~ significantly impact on the variability of calculated damages. The proposed updated version of INSYDE ~~then~~ incorporates a probabilistic module for filling missing input data, offering a transparent information on uncertainties arising from limited knowledge on damage explicative variables. This approach, ~~tailored to the Po River District as an exemplificatory case,~~ ensures more reliable and robust
450 assessments, reducing the risk of conveying a false perception of certainty that can occur when using univariable, ~~or~~ simple deterministic approaches, ~~or~~ even when interpreting the results of model validation exercises (Merz et al., 2005;

Pappenberger and Beven, 2006; Amadio et al., 2019; Molinari et al., 2019, 2020). ~~Therefore, the primary lesson learned from INSYDE 2.0 lies in transcending the confines of deterministic damage models. By challenging the conventional notion of certainty in damage assessments, our approach emphasised the importance of acknowledging uncertainty arising from “known-unknowns”. From a decision-maker perspective, a thorough understanding of modelling assumptions and awareness of the broad variability of model outcomes stemming from limited knowledge on certain inputs, can be indeed crucial for making well-informed decisions. As a second aspect, acknowledging the complex interplay of assumptions in model input and output as well as possible biases in observed damages, we also question the use of the term “validation” in damage modelling, as this may imply a level of certainty that is inherently elusive. Our idea, instead, shifts from just seeking convergence between estimations and observations to embracing a comprehensive understanding of the uncertainties that characterise flood damage estimations.~~

In this context, the present study ~~(even under necessary assumptions on certain variables, due to the lack of pertinent information) demonstrates~~ the value of generating comprehensive local synthetic datasets of flood hazard and building features that can be leveraged to identify key variables worthy of specific investments in data retrieval. ~~Indeed~~ Additionally, the development and use of synthetic datasets, combined with uncertainty analysis on model outcomes, can help in bridging the data gaps and addressing the challenges associated with the availability and completeness of input variables.

Obtained results also indicated ~~d~~ that, ~~in addition to the beside~~ standard hazard variables, an accurate description of ~~the~~ building features is essential to derive reliable estimations of flood damage (Schröter et al., 2018; Molinari et al., 2020; Taramelli et al., 2022). While data retrieval on large-scale for some of the vulnerability variables can be costly (Ruggieri et al., 2021), the use of the proposed probabilistic missing data filling procedure, based on representative datasets of the local building stock, can be employed as an option. This can not only help to solve the problem of insufficient knowledge about certain input features (Pinelli et al., 2020; Gómez Zapata et al., 2022), but also to provide decision makers with a better understanding of the uncertainty associated with the estimations (Razavi et al., 2021). Moreover, the ~~results-lessons derived from~~ ~~of~~ the feature importance analysis conducted in this study ~~highlights~~ highlighted the significance of relying on representative datasets capturing the characteristics of the investigated area for a proper identification of the key variables to be considered when modelling flood damage.

The process for developing these specific datasets, here exemplified for northern Italy ~~(Po River district)~~, but theoretically replicable, with adaptation, in any other region/country, mainly involves a combination of traditional methods for data collection, such as desk-based analysis of statistical ~~databases~~ data sources, as well as virtual surveys ~~for creating building portfolios~~; even though such tasks can be time-consuming, especially in consideration of the possible significant regional spatial variability of the building stock, it is worth noting that emerging technologies, such as remote sensing and automatic image reconnaissance (Velez et al., 2022), can potentially enhance the process in the future, with a more efficient and accurate exposure and vulnerability modelling.

In conclusion, this study ~~demonstrates~~ demonstrated the significant added value of adopting a probabilistic approach with the explicit treatment of input data uncertainties, thus providing insights for more informed risk assessments, while ensuring efficient data collection procedures. Overall, it also ~~emphasized~~ emphasized the ~~ongoing~~ enduring importance of continuously refining data collection and modelling approaches, ~~since given that~~ a comprehensive and reliable characteriszation of inundation phenomena and impacted assets ~~is crucial~~ remains crucial for enhancing confidence in the outcomes of damage assessment processes.

Acknowledgements

The Authors gratefully acknowledged Grecia Geraldine Huayra Mena for contributing to the first phase of the present study during her M.Sc. and the Po River District Authority for supplying the data required for the investigation of hazard features in Northern Italy.

495 [This study was carried out within the RETURN Extended Partnership and received funding from the European Union Next-GenerationEU \(National Recovery and Resilience Plan – NRRP, Mission 4, Component 2, Investment 1.3 – D.D. 1243 2/8/2022, PE0000005\).](#)

Code availability

500 The code of INSYDE 2.0 is available at the following link https://drive.google.com/file/d/16EpvE-xkmh-ivaSxzfq540HuaP_sXrtc/view?usp=sharing (during the review process) and it will be stored in Mendeley Data upon acceptance.

Authors contribution

505 Conceptualization: M.D.B., D.M. and A.R.S.; Data curation: M.D.B. and A.R.S.; Formal analysis: M.D.B. and A.R.S.; Investigation of results: M.D.B., D.M. and A.R.S.; Software: M.D.B.; Visualization: M.D.B. and A.R.S.; Writing – original draft: A.R.S.; Writing – final draft: M.D.B., D.M. and A.R.S.

Competing interests

The authors declare that they have no conflict of interest.

References

- 510 Albano, R., Sole, A., Adamowski, J., Perrone, A. and Inam, A.: Using FloodRisk GIS freeware for uncertainty analysis of direct economic flood damages in Italy, *Int. J. Appl. Earth. Obs. Geoinf.*, 73, 220-229. doi: 10.1016/j.jag.2018.06.019, 2018.
- Amadio, M., Scorzini, A.R., Carisi, F., Essenfelder, A.H., Domeneghetti, A., Mysiak, J. and Castellarin, A.: Testing empirical and synthetic flood damage models: the case of Italy, *Nat. Hazards Earth Syst. Sci.*, 19(3), 661-678. doi: 10.5194/nhess-19-661-2019, 2019.
- 515 Apel, H., Merz, B. and Thielen, A.H.: Quantification of uncertainties in flood risk assessments, *Int. J. River Basin Manag.*, 6(2), 149-162. doi: 10.1080/15715124.2008.9635344, 2008.
- Autorità di Bacino del Fiume Po: Aggiornamento e revisione del Piano di Gestione del Rischio di Alluvione – II ciclo (2021-2027), Final report, 2022. <https://pianoalluvioni.adbpo.it/piano-gestione-rischio-alluvioni-2021/> (last access: 9 October 2023)
- Bhuyan, K., Van Westen, C., Wang, J. and Meena, S.R.: Mapping and characterising buildings for flood exposure analysis using open-source data and artificial intelligence, *Nat. Hazards*, 1-31. doi: 10.1007/s11069-022-05612-4, 2022.
- 520 Cammerer, H., Thielen, A.H. and Lammell, J.: Adaptability and transferability of flood loss functions in residential areas, *Nat. Hazards Earth Syst. Sci.*, 13(11), 3063-3081. doi: 10.5194/nhess-13-3063-2013, 2013.
- Clausen, L. and Clark, P.B.: The development of criteria for predicting dam break flood damages using modelling of historical dam failures, in: *International Conference on River Flood Hydraulics*, edited by: White, W.R., Hydraulics Research Limited, John Wiley & Sons Ltd., Wallingford, UK, 369-380, 1990.
- 525 Di Bacco, M., Rotello, P., Suppasri, A. and Scorzini, A.R.: Leveraging data driven approaches for enhanced tsunami damage modelling: Insights from the 2011 Great East Japan event, *Environ. Model. Softw.*, 160, 105604. doi: 10.1016/j.envsoft.2022.105604, 2023.

- 530 Dottori, F., Figueiredo, R., Martina, M.L., Molinari, D. and Scorzini, A.R.: INSYDE: a synthetic, probabilistic flood damage model based on explicit cost analysis, *Nat. Hazards Earth Syst. Sci.*, 16(12), 2577-2591. doi: 10.5194/nhess-16-2577-2016, 2016.
- Galliani, M., Molinari, D. and Ballio, F.: Brief Communication: Simple-INSYDE, development of a new tool for flood damage evaluation from an existing synthetic model, *Nat. Hazards Earth Syst. Sci.*, 20(11), 2937-2941. doi: 10.5194/nhess-20-2937-2020, 2020.
- 535 Gómez Zapata, J.C., Pittore, M., Cotton, F., Lilienkamp, H., Shinde, S., Aguirre, P. and Santa María, H.: Epistemic uncertainty of probabilistic building exposure compositions in scenario-based earthquake loss models, *Bull. Earthq. Eng.*, 20(5), 2401-2438. doi: 10.1007/s10518-021-01312-9, 2022.
- Huayra Mena, G.C.: Flood damage model: development of INSYDE in the Po River basin. Master Thesis, Politecnico di Milano, Milano, 137p., 2022.
- 540 Kelman, I. and Spence, R.: An overview of flood actions on buildings, *Eng. Geol.*, 73(3-4), 297-309. doi: 10.1016/j.enggeo.2004.01.010, 2004.
- Malgwi, M.B., Schlögl, M. and Keiler, M.: Expert-based versus data-driven flood damage models: A comparative evaluation for data-scarce regions, *Int. J. Disaster Risk Reduct.*, 57, 102148. doi: 10.1016/j.ijdrr.2021.102148, 2021.
- [Marvi, M.T.: A review of flood damage analysis for a building structure and contents. *Nat. Hazards*, 102\(3\), 967-995. doi: 10.1007/s11069-020-03941-w, 2020.](https://doi.org/10.1007/s11069-020-03941-w)
- 545 Merz, B., Kreibich, H. and Apel, H.: Flood risk analysis: uncertainties and validation, *Österreichische Wasser-und Abfallwirtschaft*, 60, 89-94. doi: 10.1007/s00506-008-0001-4, 2008.
- Merz, B., Kreibich, H., Schwarze, R., and Thieken, A.: Review article "Assessment of economic flood damage", *Nat. Hazards Earth Syst. Sci.*, 10(8), 1697-1724. doi: 10.5194/nhess-10-1697-2010, 2010.
- Merz, B., Vorogushyn, S., Lall, U., Viglione, A. and Blöschl, G.: Charting unknown waters - On the role of surprise in flood risk assessment and management, *Water Resour. Res.*, 51(8), 6399-6416. doi: 10.1002/2015WR017464, 2015.
- 550 Molinari, D. and Scorzini, A.R.: On the influence of input data quality to flood damage estimation: The performance of the INSYDE model, *Water*, 9(9), 688. doi: 10.3390/w9090688, 2017.
- Molinari, D., De Bruijn, K.M., Castillo-Rodríguez, J.T., Aronica, G.T. and Bouwer, L.M.: Validation of flood risk models: Current practice and possible improvements, *Int. J. Disaster Risk Reduct.*, 33, 441-448. doi: 10.1016/j.ijdrr.2018.10.022, 555 2019.
- Molinari, D., Scorzini, A.R., Arrighi, C., Carisi, F., Castelli, F., Domeneghetti, A., [...] and Ballio, F.: Are flood damage models converging to "reality"? Lessons learnt from a blind test, *Nat. Hazards Earth Syst. Sci.*, 20(11), 2997-3017. doi: 10.5194/nhess-20-2997-2020, 2020.
- 560 Morgan, M.G., Henrion, M. and Small, M.: *Uncertainty: a guide to dealing with uncertainty in quantitative risk and policy analysis*. Cambridge University Press, Cambridge, UK. ISBN: 0521365422, 1990.
- Nofal, O.M., van de Lindt, J.W. and Do, T.Q.: Multi-variate and single-variable flood fragility and loss approaches for buildings, *Reliab. Eng. Syst. Saf.*, 202, 106971. doi: 10.1016/j.ress.2020.106971, 2020.
- Papathoma-Köhle, M., Neuhäuser, B., Ratzinger, K., Wenzel, H. and Dominey-Howes, D.: Elements at risk as a framework for assessing the vulnerability of communities to landslides, *Nat. Hazards Earth Syst. Sci.*, 7(6), 765-779. doi: 565 10.5194/nhess-7-765-2007, 2007.
- Pappenberger, F. and Beven, K.J.: Ignorance is bliss: Or seven reasons not to use uncertainty analysis, *Water Resour. Res.*, 42(5), W05302. doi:10.1029/2005WR004820, 2006.
- Paulik, R., Wild, A., Zorn, C. and Wotherspoon, L.: Residential building flood damage: Insights on processes and implications for risk assessments, *J. Flood Risk Manag.*, 15(4), e12832. doi: 10.1111/jfr3.12832, 2022.

- 570 Penning-Rowsell, E., Johnson, C., Tunstall, S., Morris, J., Chatterton, J., Green, C., Koussela, K., and Fernandez-Bilbao, A.: The Benefits of Flood and Coastal Risk Management: a Handbook of Assessment Techniques, Middlesex Univ. Press, Middlesex, Hydraulic Engineering Reports. ISBN 1904750516, 2005.
- Pinelli, J.P., Da Cruz, J., Gurley, K., Paleo-Torres, A.S., Baradaranshoraka, M., Cocke, S. and Shin, D.: Uncertainty reduction through data management in the development, validation, calibration, and operation of a hurricane vulnerability
575 model, *Int. J. Disaster Risk Sci.*, 11, 790-806. doi: 10.1007/s13753-020-00316-4, 2020.
- Razavi, S., Jakeman, A., Saltelli, A., Prieur, C., Iooss, B., Borgonovo, E. [...] and Maier, H.R.: The future of sensitivity analysis: An essential discipline for systems modeling and policy support, *Environ. Model. Softw.*, 137, 104954. doi: 10.1016/j.envsoft.2020.104954, 2021.
- Rözer, V., Kreibich, H., Schröter, K., Müller, M., Sairam, N., Doss-Gollin, J., Lall, U. and Merz, B.: Probabilistic models
580 significantly reduce uncertainty in Hurricane Harvey pluvial flood loss estimates, *Earth's Future*, 7(4), 384-394. doi: 10.1029/2018EF001074, 2019.
- Ruggieri, S., Cardellicchio, A., Leggieri, V. and Uva, G.: Machine-learning based vulnerability analysis of existing buildings, *Autom. Constr.*, 132, 103936. doi: 10.1016/j.autcon.2021.103936, 2021.
- Sairam, N., Schröter, K., Rözer, V., Merz, B. and Kreibich, H.: Hierarchical Bayesian approach for modeling spatiotemporal
585 variability in flood damage processes, *Water Resour. Res.*, 55(10), 8223-8237. doi: 10.1029/2019WR025068, 2019.
- Sayers, P.B., Hall, J.W. and Meadowcroft, I.C.: Towards risk-based flood hazard management in the UK. In *Proceedings of the Institution of Civil Engineers-Civil Engineering* (Vol. 150, No. 5, pp. 36-42). Thomas Telford Ltd. doi: 10.1680/cien.2002.150.5.36, 2002.
- Schröter, K., Kreibich, H., Vogel, K., Riggelsen, C., Scherbaum, F. and Merz, B.: How useful are complex flood damage
590 models? *Water Resour. Res.*, 50(4), 3378-3395. doi: 10.1002/2013WR014396, 2014.
- Schröter, K., Lüdtke, S., Redweik, R., Meier, J., Bochow, M., Ross, L., Nagel, C. and Kreibich, H.: Flood loss estimation using 3D city models and remote sensing data, *Environ. Model. Softw.*, 105, 118-131. doi: 10.1016/j.envsoft.2018.03.032, 2018.
- Scorzini, A.R., Di Bacco, M. and Manella, G.: Regional flood risk analysis for agricultural crops: Insights from the
595 implementation of AGRIDE-c in central Italy, *Int. J. Disaster Risk Reduct.*, 53, 101999. doi: 10.1016/j.ijdr.2020.101999, 2021.
- Scorzini, A.R., Dewals, B., Rodriguez Castro, D., Archambeau, P. and Molinari, D.: INSYDE-BE: adaptation of the INSYDE model to the Walloon region (Belgium), *Nat. Hazards Earth Syst. Sci.*, 22(5), 1743-1761. doi: 10.5194/nhess-22-1743-2022, 2022.
- 600 Sieg, T., Kienzler, S., Rözer, V., Vogel, K., Rust, H., Bronstert, A., Kreibich, H., Merz, B. and Thielen, A.H.: Toward an adequate level of detail in flood risk assessments, *J. Flood Risk Manag.*, e12889. doi: 10.1111/jfr3.12889, 2023.
- Taramelli, A., Righini, M., Valentini, E., Alfieri, L., Gatti, I. and Gabellani, S.: Building-scale flood loss estimation through vulnerability pattern characterization: application to an urban flood in Milan, Italy, *Nat. Hazards Earth Syst. Sci.*, 22(11), 3543-3569. doi: 10.5194/nhess-22-3543-2022, 2022.
- 605 Velez, R., Calderon, D., Carey, L., Aime, C., Hultquist, C., Yetman, G., Kruczkiewicz, A., Gorokhovitch, Y. and Chen, R.S.: Advancing Data for Street-Level Flood Vulnerability: Evaluation of Variables Extracted from Google Street View in Quito, Ecuador, *IEEE Open Journal of the Computer Society*, 3, 51-61. doi: 10.1109/OJCS.2022.316688, 2022.
- Wagenaar, D. J., De Bruijn, K. M., Bouwer, L.M. and De Moel, H.: Uncertainty in flood damage estimates and its potential effect on investment decisions, *Nat. Hazards Earth Syst. Sci.*, 16(1), 1-14. doi: 10.5194/nhess-16-1-2016, 2016.
- 610 Wagenaar, D., de Jong, J. and Bouwer, L.M.: Multi-variable flood damage modelling with limited data using supervised learning approaches, *Nat. Hazards Earth Syst. Sci.*, 17(9), 1683-1696. doi: 10.5194/nhess-17-1683-2017, 2017.

Wagenaar, D., Lüdtkke, S., Schröter, K., Bouwer, L.M. and Kreibich, H.: Regional and temporal transferability of multivariable flood damage models, *Water Resour. Res.*, 54(5), 3688-3703. doi: 10.1029/2017WR022233, 2018.

615

[Winter, B., Schneeberger, K., Huttenlau, M. and Stötter, J.: Sources of uncertainty in a probabilistic flood risk model. *Nat. Hazards* 91, 431-446. doi: 10.1007/s11069-017-3135-5, 2018.](#)

Zarekarizi, M., Srikrishnan, V. and Keller, K.: Neglecting uncertainties biases house-elevation decisions to manage riverine flood risks, *Nat. Commun.*, 11(1), 1-11. doi: 0.1038/s41467-020-19188-9, 2020.