

Juan Montes  
Earth Sciences Department, INMAR, University of Cadiz  
23/05/2024

Dear Editor Robert Sakic Trogrlic,

We thank you for your time and for the opportunity to submit the reviewed version of this manuscript entitled "Validated probabilistic approach to estimate flood direct impacts on the population and assets on European coastlines".

The present document contains detailed answers to the comments made by the two reviewers and the author's track-changes file to show the modifications made following the review. In addition, a reference to the part of the text that has been modified as a result of the comments is included in the replies. The lines' numbers refer to the new track-changes manuscript version.

We hope that the answers will clarify the concerns raised during the review and improve the document to be considered for acceptance.

Many thanks,  
Juan Montes

## **Response to the reviewer 1**

Dear referee, many thanks for your time and feedback. This reply contains the detailed answers to the comments provided in the first reply, modified where necessary according to the changes made in the text, which is also attached to show the changes. A reference to the part of the text that has been modified as a result of the comments is also included for each comment.

### **1. Line 33: Indirect impacts also have short-term consequences.**

As the way it is written may lead to confusion, the paragraph was corrected in L33-36 to clarify that indirect impacts also have short-term consequences.

### **2. Line 35/36: Sentence a bit vague, not clear why you use the word “instead”.**

It was corrected to improve the connection between sentences and make the paragraph easier to understand, as the sentence was a bit vague. Modifications are made on L33-36.

### **3. From line 86: It of course inevitable for this ECFAS project to have multiple associated names, but for the reader this is a bit unclear. What is the difference between ECFAS Pan-EU Impact Catalogue and ECFAS Flood impact layers generated for ECFAS Flood Catalogue. What is the ECFAS CEMS framework?**

The ECFAS Pan-EU Flood Catalogue consists of flood maps covering most of the European coast, describing 15 flood scenarios of maximum TWL and duration for each of the defined coastal sectors (see Le Gal et al. (2023)\* for more details). The ECFAS Pan-EU Impact Catalogue collects layers of impacts to population and other assets, such as buildings, roads, etc, and it was produced using the flood maps from the ECFAS Pan-EU Flood Catalogue.

The paragraph was edited on L87-97 to avoid confusion between the different products and the methodology presented in this paper.

\*Le Gal, M., Fernández-Montblanc, T., Duo, E., Montes, J., Cabrita, P., Souto Ceccon, P., Gastal, V., Ciavola, P. and Armaroli, C. (2023). A new European coastal flood database for low–medium intensity events. *Natural Hazards and Earth System Sciences*, 23(11), 3585-3602.

### **4. Section 2.1: On which basis were the extreme weather events and cities selected?**

The extreme coastal events and locations were retrieved from the ECFAS database of extreme events (Souto Ceccon et al., 2021)\*. The database contains information of extreme coastal events in the period 2010-2020 that were identified based on information collected through publicly available resources, Copernicus Emergency Management Service activations, and from other flood impact databases. The ECFAS database contains events that generated significant flooding and impacts along EU coastlines, and therefore it was used to retrieve coastal flood impact data necessary to perform the analysis and to build the impact

tool and catalogue of impacts at pan-EU scale. Additional information can also be found at Souto Cecon et al. (2024)\*\*.

Information about the database used to retrieve the extreme weather events and affected cities, together with a new reference, was added to Section 2.1 (L108-112) in order to clarify this aspect.

\*Souto Cecon, P., Duo, E., Ciavola, P., Fernández Montblanc, T., Armaroli, C., 2021. Database of extreme events, test cases selection and available data, Deliverable 5.1 – ECFAS Project

\*\* Souto-Cecon, P. E., Montes-Perez, J., Duo, E., Ciavola, P., Fernández Montblanc, T., and Armaroli, C.: A European database of resources on coastal storm impacts, Earth Syst. Sci. Data Discuss. [preprint], <https://doi.org/10.5194/essd-2024-183>, in review, 2024.

**5. Section 3.2: The correction of interpolated values using the ratio between the cell areas of the flood map and the datasets is mentioned. It would be beneficial to explain the rationale behind this correction in more detail, as it could be a critical step in ensuring accuracy.**

The number of people affected by coastal flooding was carried out using the Global Human Settlement - Residential Population (GHS-POP) and ENACT layers, with a spatial resolution of 250 m and 1 km respectively. For each cell of the layer, the value represents the absolute number of inhabitants in the cell, and it is therefore dependent on the cell area. Given that the spatial resolution of the flood layers used in this study (100 m) is better than the population datasets, the population layers were interpolated (nearest neighbor) using as reference the center of the cells of the flood maps. The interpolated values were corrected by multiplying them by the ratio between the cell areas of the flood map and the dataset to take into account the different cell resolutions. For example, the ratio between the cell areas of the flood maps and the GHS-POP layer is 0.16: if the interpolated value is 100 people (in a cell with a resolution of 250 m), the corrected value is 16 people (in a “flooded” cell with a resolution of 100 m). This is reported in the manuscript at L203-209.

The first paragraph of Section 3.2 (L203-213) was improved to clarify this aspect.

**6. Section 3.2: The section mentions that the datasets were interpolated to match the spatial resolution of the flood model. Please provide more information which interpolation method is used and provide elaboration on why despite which limitations the upscaling has been selected.**

The interpolation used was the nearest neighbor method, which, after several tests, proved to be the most reliable in comparison to the linear interpolation or other common methods. Please, see the previous answer (Comment 5) for details on the correction applied to match the resolution of the flood maps.

**7. Section 3.3: The manuscript mentions the use of an ensemble approach based on FDCs, citing Figueiredo et al. (2018) and Duo et al. (2020). It would be helpful to briefly explain how this ensemble approach works and its advantages in the context of building damage evaluation.**

The model ensemble approach is a probabilistic-based assessment that relies on the combination of flood damage curves from different impact models. Most impact models are deterministic, but different studies have shown that the use of multi-models produces better results. The result of these types of approaches, like the one from Figueiredo et al. (2018), provides reliable probabilistic damage estimates that are more useful results for interpretation and decision making. For model ensembles, results improve as more models are considered.

Additional information was added to the section of the general aspect (Section 3.1; L186-196) to briefly describe the ensemble approach and how it works.

**8. Table 5: at Xaver road impact range is not presented.**

This was an oversight from an older version of the manuscript. In the meantime, results were rerun and refined. The current version (Appendix D for details) reports 24.4 – 45 k€/km (32.9 k€/km) as road impact for Xaver. The missing information was added to Table 5.

**9. Section 5: The manuscript adequately acknowledges the alignment of simulated damage with reported ranges for residential buildings in the Xaver storm, emphasizing the potential for overestimation and attributing it to uncertainties inherent in the probabilistic approach. However, it would greatly benefit from a more detailed elaboration on the specific sources of uncertainty, such as the assumptions made in vulnerability modeling or the variability in reported data. Similarly, while the underestimation of damage for commercial buildings and the mixed category is acknowledged, a deeper exploration into the nuanced factors contributing to this discrepancy and their implications for the model's reliability in diverse urban environments is warranted. Additionally, the discussion on the significant gap between simulated and reported road damage is informative, yet a more thorough analysis of whether the model adequately captures the diverse characteristics of different road types and the potential reasons behind this observed difference would enhance the manuscript's comprehensiveness.**

Validating impact models for large-scale applications is a difficult process due to several factors, such as the limited availability of reliable data and the fact that data are often provided in an aggregated form. In the present work, an extensive effort has been made to collect data on the impacts generated for different reference cases along the European coasts, performing the validation with impacts generated by 3 historical events that impacted coastal areas with different characteristics.

In this type of analysis, the selected flood model, the flood damage curves and the reported damage can introduce uncertainty into the study. An under- or overestimation of the flood extension or of the flood depth could lead to an under- or overestimation of the damage. In Section 2.2 the characteristic of the used flood maps is explained. In the case of the flood damage curves, this paper uses an ensemble approach. For example for commercial

buildings, 4 different flood damage curves were used to build the ECFAS Impact Model. These flood damage curves may have discrepancies at certain values of flood depth. In section 3.3 the used models are described. Finally, in section 3.5 (table 4) an analysis of the reliability and the representativeness of the different resources used for the validation of the modelled results is presented; an analysis of the confidence of the data used for validation is presented in section 5.1.4, and a description of the limitations of the methodology is presented in section 5.3.

## **Response to the reviewer 2**

Dear referee, many thanks for your time and feedback. This reply contains the detailed answers to the comments provided in the first reply, modified where necessary according to the changes made in the text, which is also attached to show the changes. A reference to the part of the text that has been modified as a result of the comments is also included for each comment.

**1. Conclusions: The concluding remarks read more like an endorsement of a specific EU project and prospects for future model advancements rather than a reflection on the key findings of the paper itself. It's essential to rephrase them to emphasize the main takeaways from the study. What insights were gained? Avoid introducing new elements; those can be addressed in the discussion section.**

The conclusion section (L549-571) was reviewed and edited to better highlight the key findings of the paper.

**2. Validation: The comparison between computed damages and observed damages in the three reference cases reveals disparities, which is understandable given the incomplete input and damage data. While the authors attempt to account for these differences, the explanations seem more like attempts to justify them. It's crucial to maintain a factual approach.**

The scarcity of reliable data on the impact of storms, usually available only in aggregated form, makes validation of impact models for coastal areas difficult. In this study, a validation process was carried out for 3 historical events that impacted different coastal areas (Section 5.1), together with an analysis of the reliability and representativeness of the different resources used for the validation of the model output (Section 5.1.4). Although the authors agree that an analytical approach would be more appropriate for comparison with the results, due to the type and amount of available data an expert judgment approach was considered appropriate.

**3. Scope of Analysis: Given the discrepancies observed in the three reference cases and the explanations needed to analyze these, I advise not presenting the additional sites. What additional value does it offer? The results for these cases are inadequately presented and explained (only in the context of grid-based vs object-based). I strongly advise to focus solely on the three reference cases in this paper. There is adequate scope to write a paper on this.**

Although the authors agree that the information for the 3 reference cases provide key information for the scope of this study, the test cases represent important additional information because they have been used to compare the object-based methodology presented in the study with a grid-based analysis that is widely used in similar studies by the scientific community, therefore we think that they represent a supplementary useful information for the reader. In fact, the test cases represent sites that have experienced coastal storms that generated remarkable impacts in the period 2010-2020. The validation of these results is not possible due to the lack of data and because the direct comparison between the object-based and the grid-based approaches is not meaningful.

**4. Clarity on Probabilistic Approaches: The frequent use of the term "probabilistic" lacks immediate clarity regarding the specific stochastic processes employed. It would be beneficial to provide a concise overview of the stochastic methodologies used. Which stochastic variables do you consider? Which not, and why not?**

Additional information regarding the model ensemble approach and its ability to provide an uncertainty estimation was added to section 3.1 to clarify the approach(See Answer to Reviewer 1, Comment 7).

The probabilistic resample was applied to the number of people affected by the flood, to the financial damage to buildings and to roads. Given the different approaches, the resampling was different for each damage sector. The general description, common to population, buildings and roads, was described in Section 3.1, while the specific information was detailed in sections 3.2, 3.3 and 3.4. Some clarifications are presented below:

- Population (number of affected people): the method generates an ECDF based on a set of values of the number of affected people in each flooded cell. The set is built using multiple sources of population density. Then, for each flooded cell, a large number of values (1000) is randomly generated from the ECDF, representing the probabilistic estimation (distribution) of the number of affected people in that flooded cell. The process is applied to each flooded cell and the probabilistic estimate of the total affected population is based on the resampling set of each cell. This process is described in L203-213 and in Figure 2.
- Buildings (relative damage): the method generates an ECDF based on a set of values of relative damage factor for each flooded building. The set is built using a set of damage curves. Then, for each flooded building, a large number of values (1000) is randomly generated from the ECDF, representing the probabilistic estimation (distribution) of the damage factor for that flooded building. The distribution is then multiplied for the (deterministic) maximum damage to retrieve the financial damage. The process is applied to each flooded building and the probabilistic estimate of the total building damage is based on the resampling set of each building. Additional information was added to section 3.3 to clarify this aspect.
- Roads (relative damage and maximum damage): the probabilistic resampling is applied to both the relative damage (using multiple damage curves) and the maximum damage (using an empirical set). As before, in both cases the method generates an ECDF based on a set of values of relative damage factor for each flooded road, and a set of values of maximum damage, and the ECDFs are resampled (n=1000). The resampling of the relative and maximum damage are combined generating a set of n x n values of financial damage for each road that represent the probabilistic estimation. This is described in Section 3.4 and in Figure 5. The caption of Figure 5 was modified to include some of the information therein in the main text.

Note that other variables were not chosen for the probabilistic estimates mainly because of the lack of available data or the lack of multiple models for the implementation of the model ensembles.

Information about the general description was added to Section 3.1 (L190-196). Specific information about buildings was added to Section 3.3 (L249-253). For roads, the caption of Fig.5 was modified (L285-289) and a sentence was added (L275).

**5. Treatment of Population Data:** In one instance, it appears that population data is treated as a stochastic variable. However, given the deterministic nature of population demographics, this approach seems unwarranted. You know the month and time that an event impacted a particular coast. It is more appropriate to explore the sensitivity of the results to different population datasets by comparing the two data sets (thus one of the 24 elements of the second data set).

The number of people affected by the coastal flood is evaluated by both the Global Human Settlement - Residential population (GHS-POP) and ENACT datasets. There are different sources of uncertainty from the selected datasets: related to the temporal reference of the datasets (ENACT: 2011; GHS: 2015) in comparison with the date of the flood event, and related to the differences between flood maps and the spatial resolution of the datasets. The seasonal and night/day variability is accounted for by applying the probabilistic resampling of the datasets. At the operational level, an evaluation of the affected population based on the timing of the coastal extreme is expected to be more appropriate. Certainly, it would represent a refinement of the assessment, from a deterministic point of view. By evaluating the number of people on the test case Aols, the results of the comparisons between the GHS-POP and the yearly average night/day and summer/winter seasons showed minor variability in terms of magnitude of the people's presence. In general, all evaluations identify a similar number of affected people, if variations within the same magnitude are considered acceptable. For these reasons, a probabilistic implementation was preferred using the combination of the different datasets.

**6. Sensitivity Analysis of Vulnerability Curves:** While the vulnerability curves significantly impact the results, they are not inherently probabilistic. Reframing the discussion around sensitivity analysis might be more accurate.

The authors agree that an FDC is not a probabilistic model itself. However, using multiple curves as multi-model ensembles is recognized to generate probabilistic estimates, as long as the result is represented as a distribution (mean-dev.stand, quantiles, etc...) generated by combining the curves. Information was added to Section 3.1 to clarify this and other issues highlighted by the reviewers (L186-196). Furthermore, a statement related to this comment was added in the conclusions (L563-564).

**7. Wind: how is damage due to wind treated and isolated in the damage reports?**

The effect of wind is not isolated from the reported damage, so the reported damage was interpreted with caution. Although the authors would like to have disaggregated data, it is in most cases impossible to access it and it is a limitation of this type of studies. Nevertheless, the selected reference cases have been thoroughly analysed, and although wind can play an important role in the damage, the impacts generated by the selected events have mainly been caused by flooding.



**8. Estimation of Cost Data: The utilization of probabilistic methods for estimating cost data requires clarification on the approach employed.**

A brief description of the ECDF-based approach of cost estimation is present in the manuscript at L270-278, which includes: references to the dataset used from Van Ginkel et al. (2021), reference to the details in the Appendixes, and a figure (Figure 5) that shows the representativeness of the ECDFs applied in comparison to the original dataset. Additional information about the ECDF observed and the ECDF calculated was added (L275).

**9. Assessment of Flood Maps: It seems that the flood maps are considered as given, obtained from an external source. It would be valuable to evaluate the accuracy of these maps, particularly in the context of the three reference cases. What was the bias between the model results and the observations in terms of high water marks and flood extends?**

The flood maps were retrieved from the European flood catalogue implemented in the ECFAS project and described in the paper by Le Gal et al. (2023)\*. The process of flood map generation and validation can be found in Le Gal et al. (2023)\*. The calibration and validation of the numerical model used for the generation of the flood maps (LISFLOOD-FP) can be found in Le Gal et al. (2022) and Le Gal et al. (2024)\*\*\*.

\*Le Gal, M., Fernández-Montblanc, T., Duo, E., Montes, J., Cabrita, P., Souto Ceccon, P., Gastal, V., Ciavola, P. and Armaroli, C. (2023). A new European coastal flood database for low–medium intensity events. *Natural Hazards and Earth System Sciences*, 23(11), 3585-3602.

\*\*Le Gal, M., Ciavola, P., Gastal, V., Fernández-Montblanc, T. and Delbour, S. (2022). Validated LISFLOOD-FP model for coastal areas, Deliverable 5.2 – ECFAS Project (GA 101004211), [www.ecfas.eu](http://www.ecfas.eu) (Versión 2). Zenodo. <https://doi.org/10.5281/zenodo.7488694>

\*\*\*Le Gal, M., Fernández-Montblanc, T., Montes, J., Souto Ceccon, P., Duo, E. and Ciavola, P.; Influence of model configuration for coastal flooding across Europe, *Coastal Engineering*, 104541, <https://doi.org/10.1016/j.coastaleng.2024.104541>, 2024

**10. Explanation of Methodology: The paper contains numerous references to methods described in other works, making it challenging for readers not familiar with the referenced EU project to follow. Providing more detailed explanations of the methodologies employed would enhance comprehension.**

In this paper several damage models from previous studies are used to build the ECFAS impact approach based on a multi-model ensemble. A brief description on the selected FDCs to calculate the impacts on buildings along with an indication of the macro-class for which a curve was available (Residential, Commerce and Industry) can be found in Table 3 and Figure 3. For roads, based on Van Ginkel et al. (2021), a detailed description of the FDCs, the characteristics of roads and hydrodynamic flow conditions, number of lanes and construction cost ranges is provided in Appendix C.

Additionally, the text has been improved by adding relevant information for some key references (L242-243; L262-263), i.e., Huizinga et al. (2017) and Van Ginkel et al. (2021).

**11. Reference Clarification: There is a discrepancy where section 3.1 in Line 230 is referenced, but no description of the probabilistic evaluation is provided therein.**

In section “3.1 General aspects”, paragraph 2 (lines 185-196), reference is made to the probabilistic evaluation. As this aspect was common for population, buildings and roads, the authors decided to add it in a general section to avoid repetitions.

**12. Inclusion of Damage Maps: Please show maps depicting computed and observed damages . Incorporating such visual representations, including building footprints and damage extents, would provide valuable context for interpreting the aggregated results.**

An appendix with modelled impact maps for the reference cases was added (Appendix E) and referred to in the text (L328). The maps contain information on the floods used to model the impacts, the estimation of the affected people, a damage assessment for buildings (number of flooded buildings and mean damage) and a damage assessment for roads (affected road length and mean damage). Even if the scale of the maps does not allow to depict all details (e.g., impacted buildings), the information on impacts and flood extent is also provided in the legend. The figures provide an overview of the impacts at the reference case scale.

**13. Line 266: What is a semi-quantitative, holistic comparison?**

The terms were deleted to avoid adding unnecessary long explanations (Line 291).

**14. Figure 8: the uncertainties seem very small. Is this because the variations in Figure 10 are so small?**

The small uncertainty for affected population values are due to the fact that the used datasets (ENACT and GHS-POP) provide similar information, as shown in Fig.10 and discussed in Section 5.3.1. To note that in both figures (Figure 8 and 10) the representation of affected people follows a logarithmic scale.

**15. Table 5 Xaver/Roads still has xx’s.**

This was an oversight from an older version of the manuscript. In the meantime, results were rerun and refined. The current version (Appendix D for details) reports 24.4 – 45 k€/km (32.9 k€/km) as road impact for Xaver. The missing information was added to Table 5.

# Validated probabilistic approach to estimate flood direct impacts on the population and assets on European coastlines

Enrico Duo<sup>1,2</sup>, Juan Montes<sup>1,3\*</sup>, Marine Le Gal<sup>1,2</sup>, Tomás Fernández-Montblanc<sup>3</sup>, Paolo Ciavola<sup>1,2</sup> and Clara Armaroli<sup>4\*</sup>

5 <sup>1</sup>Department of Physics and Earth Sciences, University of Ferrara, Ferrara, Italy

<sup>2</sup>Consorzio Futuro in Ricerca, Ferrara, Italy

<sup>3</sup>Earth Sciences Department, University of Cadiz INMAR, Avda. República Saharaui s/n, Puerto Real, 11510 Cadiz, Spain

<sup>4</sup>Department of Biological, Geological, and Environmental Sciences, University of Bologna Alma Mater Studiorum, Bologna, Italy

10 \*Correspondence to: Juan Montes ([juan.montes@uca.es](mailto:juan.montes@uca.es)) [and Clara Armaroli \(clara.armaroli2@unibo.it\)](mailto:clara.armaroli2@unibo.it)

**Abstract.** This work presents the approach used to estimate coastal flood impact, developed within the EU H2020 European Coastal Flood Awareness System (ECFAS) Project, for assessing flood direct impacts on population, buildings, and roads along the European coasts. The methodology integrates object-based and probabilistic evaluations to provide uncertainty estimates for damage assessment. The approach underwent a user-driven co-evaluation process, it was applied to 16 test cases across Europe and validated against reported impact data in three major reference cases: Xynthia at La Faute-sur-Mer (France) in 2010, Xaver at Norfolk (UK) in 2013, and Emma at Cadiz (Spain) in 2018. A comparison with grid-based damage evaluation methods was also conducted. The findings demonstrate that the ECFAS Impact approach offers valuable estimates for affected populations, reliable damage assessments for buildings and roads, and improved accuracy compared to traditional grid-based approaches. The methodology also provides information for prevention and preparedness activities, facilitates further evaluations of risk scenarios and cost-benefit analysis of disaster risk reduction strategies. The approach is a tool suitable for large-scale coastal flood impact assessments, offering improved accuracy and operational capability for coastal flood forecasts. It represents a potential advancement of the existing EU-scale impact method used by the European Flood Awareness System (EFAS) for riverine flood warnings. The integration of object-based and probabilistic evaluations, along with uncertainty estimation, enhances the understanding and management of flood impacts along the European coasts.

## 25 1 Introduction

The assessment of flood impacts is crucial for coastal management, providing insights on consequences of coastal extremes for risk management (e.g., Van Dongeren et al., 2018). Historical loss analysis and scenario-based variations support strategy evaluation (e.g., Sanuy et al., 2018) and participatory risk management (Barquet and Cumiskey, 2018), as required by the Floods Directive (2007/60/EC). Estimations of the impact of forecasted floods could support civil protection actions (Dottori et al., 2017). With climate change and increasing human pressure, flood impacts will likely intensify (European Commission, 2017; Vousdoukas et al., 2018b), and there is a need for accurate predictions at various spatial and temporal scales.

This study focuses on flood direct impacts, which result from physical contact between water and objects, causing immediate and local effects. ~~In contrast, indirect impacts have long-term consequences; Nevertheless, indirect impacts can also persist in the long-term.~~ affecting local, regional, and larger scales through chain-reaction mechanisms. ~~Assessing-While the assessment of~~ indirect impacts is challenging due to their diverse nature and ~~complex-the complexity of~~ processes across multiple sectors and scales (Meyer et al., 2013; Armaroli et al., 2019). ~~Instead,~~ there are numerous methods to assess direct impacts (Gerl et al., 2016). Because of the heterogeneity of these methods, ongoing investigations are looking into their limitations for appropriate applications (Molinari et al., 2020; Marvi, 2020; Aribisala et al., 2022).

Methods to calculate flood direct impacts primarily focus on population, buildings, and transport networks, which are the most significant exposed elements (Thomas et al., 2019; Marvi, 2020; Koks et al., 2022). For the population, the impact assessment quantifies the affected individuals, and when data on the characteristics of the exposed population are available (e.g., age, socio-economic status, governance, accessibility), comprehensive risk-based estimates can be derived using social science approaches. Direct impacts on buildings and roads are often measured by the number of affected assets, damage, or financial loss.

Traditional large-scale direct impact assessments often rely on grid-based, meso-scale evaluations, which are known to overestimate impacts (Molinari et al., 2020). Correcting these evaluations introduces additional uncertainties due to approximations and assumptions. However, object-based evaluations using detailed vector data and vulnerability models offer more accurate damage assessments (Molinari et al., 2020; Aribisala et al., 2022). While typically used for local scale assessments, a few studies (e.g., Van Ginkel et al., 2021) provide valuable insights for novel large-scale applications.

The European Flood Awareness System (EFAS; <https://www.efas.eu/en>) represents the current European-scale operational application for riverine flood impact assessment. EFAS uses deterministic meso-scale methods to assess impacts on population (affected people, exposure only), infrastructure (affected roads, exposure only), and urban, built-up, and agricultural areas (affected areas identified using land cover data). The method provides evaluations of direct economic losses (Dottori et al., 2017). While the approach has limitations related to dataset approximation and deterministic impact assessment methods, it has demonstrated to produce reliable results considering the continental scale of the application. When evaluating impact assessment models, it is important to consider the scale of analysis, the magnitude and the uncertainty of the estimations.

Uncertainty evaluation is crucial in impact assessments, influencing disaster prevention, management, and policymaking. Researchers are investigating various sources of uncertainty, with consensus on the main driving factors (Hinkel et al., 2021). Besides the inundation model's performance (hazard component), which determines asset flooding (Vousdoukas et al., 2018a), socio-economic components significantly contribute to uncertainties (de Moel and Aerts, 2011; Jongman et al., 2012; Figueiredo and Martina, 2016; Nguyen et al., 2016), particularly related to exposure and vulnerability. These effects become more pronounced in the analysis of future scenarios.

Two types of uncertainty affect modelled flood impacts: aleatory and epistemic (Merz and Thielen, 2009; Wagenaar et al., 2016). Aleatory uncertainty arises from choices made in representing variables and processes in the model, such as using a single vulnerability model for all residential buildings without accounting for variability within the category (e.g., detached or

semi-detached). It dominates for small flood events or local domains due to the limited sample size of affected assets. Epistemic uncertainty stems from incomplete understanding of the system and it is the prevalent uncertainty for the analysis of the effects of large flood events or when applying impact methods on large domains.

70 Probabilistic modelling is used to address uncertainties in coastal flood impact assessment. These models incorporate evaluations of uncertainty, often expressed as percentile-based ranges, to account for specific sources of uncertainty. For instance, multi-model ensembles introduce uncertainty due to the variability of impact models (Figueiredo et al., 2018). Similarly, applications employing one model with multiple parametrizations or resampling of input data produce outcomes with the uncertainty linked to the variability of input data.

75 There is a growing interest in applying local object-based approaches to assess coastal flood impacts at large scales and incorporating uncertainty evaluation. This is now feasible due to improved computational capabilities and the availability of comprehensive datasets like the Copernicus Coastal Zone layer (<https://land.copernicus.eu/local/coastal-zones>), which provides up-to-date Land Cover/Land Use (LC/LU) information for coastal areas. The layer was implemented by the European Environment Agency (EEA) in the framework on the thematic mapping of the Copernicus Land Monitoring Service (CLMS). Another valuable resource is the Open Street Map (OSM) dataset, which offers free object-based vector data.

80 This paper presents a coastal flood impact assessment approach for estimating direct impacts on population, buildings and roads across Europe. The approach integrates methodologies that prioritize object-based and probabilistic evaluations to provide uncertainty estimates for damage assessment. Developed within the EU H2020 European Copernicus Coastal Flood Awareness System (ECFAS) Project (Grant Agreement No 101004211; [www.ecfas.eu](http://www.ecfas.eu)), the approach underwent a user-driven co-evaluation process (Velegrakis et al., 2022). Referred to as the ECFAS Impact approach, it was applied to 16 test cases  
85 along different European coasts and it was validated against reported impact data in three major reference cases. In this work, a comparison with a grid-based damage evaluation of buildings and roads was also conducted on all test cases.

The ECFAS Impact approach was ~~used-applied~~ in the framework of the ECFAS project to generate impact layers for the using the flood maps of the ECFAS Pan-EU Flood Catalogue (Le Gal et al., 2023b). These-The flood maps were implemented running the LISFLOOD-FP model to cover over 95% of the European coastline (Le Gal et al., 2024). The catalogue and  
90 includes various-almost 8000 flood maps (i.e., flood extension, water depth and velocities) built using 15 different scenarios of total water levels (considering the contribution of tides, storm surge, ocean circulation, steric sea level, wave setup) and storm durations. The generated impact layers, implemented considering the extent of the different flooding scenarios (i.e., flood maps of the flood catalogue), were compiled into the ECFAS Pan-EU Impact Catalogue (Duo et al., 2022). ~~These-Both~~  
95 ~~catalogues were used to implement a proof of concept for-of a European coastal flood early warning system, which provides notifications-warnings based on the affected population following the framework of the European Flood Awareness System for river flooding of the Copernicus Emergency Management Service-aggregated by NUTS3 administrative units and is developed considering the EFAS-CEMS framework.~~

The paper is organized by a detailed description of the test cases, reference cases and the data used to apply and validate the ECFAS Impact approach (Section 2), a detailed description of the approach to evaluate direct impacts on population and assets

100 (Section 3), an overview of the impacts for the reference cases and test cases (Section 4), a comprehensive discussion on the validation with reported impacts, a comparison with grid-based damage evaluations and the limitations of the approach (Section 5) and the conclusions (Section 6).

## 2 Data

### 2.1 Test cases and reference cases


105 A total of 16 test cases (Table 1) were selected to apply the ECFAS Impact approach. The test cases include 10 extreme events covering the period 2010-2020, generating considerable flooding and impacts along 15 European coastal sites (Figure 1). These were selected from the database of extreme events and test cases produced in the framework of the ECFAS project (Souto Cecon et al., 2021; Souto Cecon et al., 2024). The database contains events that generated significant flooding and impacts along EU coastlines, and it was used to retrieve coastal flood impact data necessary to perform the analysis. The  
 110 database which includes a list of sources of information for each identified test case, was produced based on collected through an ~~an~~ extensive research of publicly available resources, of information for events included in the list of activations of the Copernicus Emergency Management Service (CEMS) and other national and European databases. The area of interest (AoI) of each site (Figure 1) was defined based on the reported affected areas or the AoIs defined for the CEMS activations. Note that all the analyses reported in this work are limited to the AoIs.

115 Three reference cases were selected from the previous list to implement detailed comparison with reported damages for validation purposes: Xynthia at La Faute-sur-Mer (France) in 2010, Xaver at Norfolk (UK) in 2013, and Emma at Cadiz (Spain) in 2018. The reference cases were selected because they represent significant events that were able to generate damages and flooding over large coastal areas, and because the media and institutional coverage generated enough information to be used for validation purposes. General information on the event of the reference cases is summarized in Table 2. The reference  
 120 cases were selected because of their dimension in terms of hazard and impacts. The flood extension and water depths used for the impact assessment in the test cases was modelled using the LISFLOOD-FP model (Le Gal et al. ~~2023a~~2023; ~~2023~~2024b) as described in the following section.

**Table 1: Overview of the test cases. The selected reference cases are highlighted in bold.**

Site Name	Country	Storm Name	Reference Date	AoI Area [km <sup>2</sup> ]	AoI simulated flooded area [km <sup>2</sup> ]	AoI simulated water depth [m]
Source: see Section 2.2						

La Baule	France	No name	02/01/2014	60.8	6.9	0.13 - 2.88
<b>La Faute-sur-Mer</b>	<b>France</b>	<b>Xynthia</b>	<b>27/02/2010</b>	<b>321.6</b>	<b>176.4</b>	<b>0.15 - 3.54</b>
Lorient	France	No name	02/01/2014	48.0	6.0	0.12 - 2.82
Warnemunde	Germany	Axel	05/01/2017	7.8	0.2	0.10 - 0.90
Wismar	Germany	Axel	05/01/2017	33.9	1.0	0.11 - 1.36
Laganas	Greece	Ianos	18/09/2020	4.7	0.1	0.12 - 0.23
Lido delle Nazioni	Italy	Saint Agatha	05/02/2015	81.0	44.7	0.14 - 4.22
Lido delle Nazioni	Italy	Vaia	29/10/2018	81.0	34.9	0.15 - 3.89
Lido delle Nazioni	Italy	Detlef	11/11/2019	81.0	44.8	0.15 - 4.16
Rimini	Italy	Saint Agatha	05/02/2015	148.8	5.4	0.11 - 1.18
Świnoujście	Poland	Axel	05/01/2017	52.7	10.1	0.12 - 1.33
Castellon	Spain	Gloria	20/01/2020	3.4	0.2	0.11 - 0.63
Ebro	Spain	Gloria	20/01/2020	19.5	17.6	0.34 - 2.83
Girona	Spain	Gloria	20/01/2020	13.2	0.7	0.11 - 0.96
<b>Norfolk</b>	<b>United Kingdom</b>	<b>Xaver</b>	<b>06/12/2013</b>	<b>207.1</b>	<b>52.3</b>	<b>0.17 - 3.39</b>
<b>Cadiz</b>	<b>Spain</b>	<b>Emma</b>	<b>01/03/2018</b>	<b>23.9</b>	<b>14.7</b>	<b>0.15 - 2.51</b>

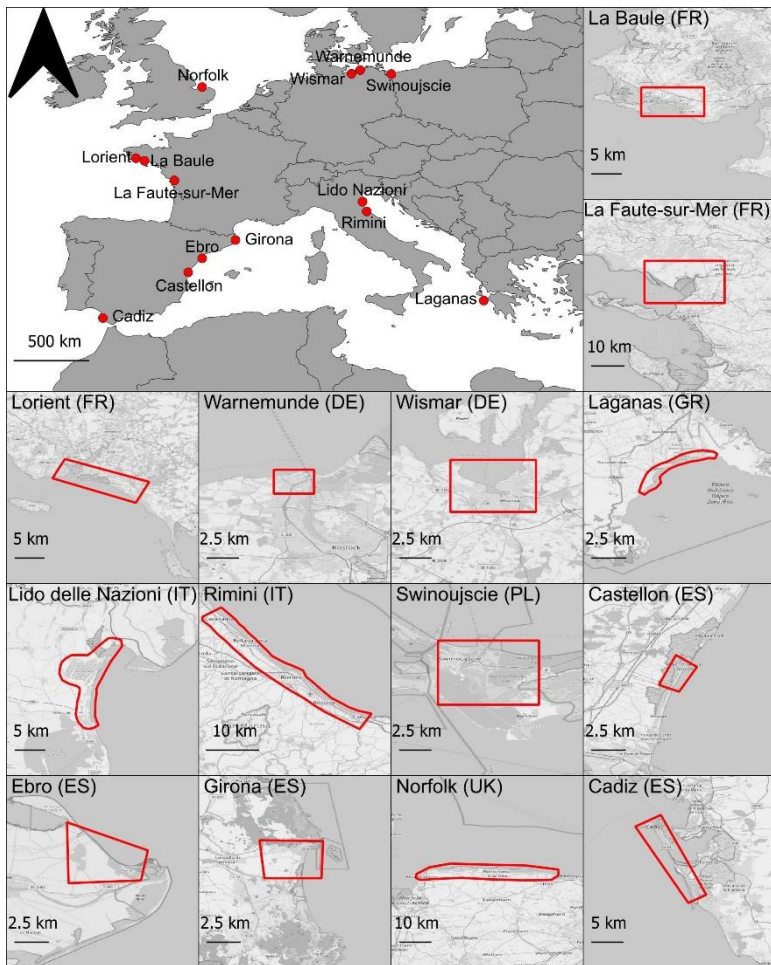

**Figure 1: Overview of the location of the sites of the selected test cases, and AoIs (red polygons).**

**Table 2: Overview of the characteristics of the reference cases events.**

Reference case event	Dates	Offshore conditions	Consequences	References
Xynthia (France)	27-28 Feb. 2010	Water Levels: 4.7 m	Affected coast: 200 km Flooded area: 500 km <sup>2</sup> 47 deaths Defence overtopping	Vinet et al., 2012 Creach et al., 2015 Kolen et al., 2013
Xaver (United)	4-6 Dec. 2013	Sign. Wave Height: 3.8 m	Flooding of cities, harbours, private	Spencer et al., 2014 Spencer et al., 2015



Kingdom)		60-years return level surge	properties, commercial activities, transport infrastructures Cliff collapse Beach Erosion	
Emma (Spain)	28 Feb. - 3 Mar. 2018	Sign. Wave Height: 6.9 m Water Levels: 2.1 m	Flooding of roads, promenades, private and commercial properties Beach Erosion Overwash	Ferreira et al., 2019 Plomaritis et al., 2019 Talavera et al., 2020 Malvarez et al., 2021 Montes et al., 2018

130

## 2.2 Flood maps

The flood maps used to represent the coastal flood for the test cases were retrieved from the database of flood maps produced by Le Gal et al. (2023a; 2023b2024) using the LISFLOOD-FP model (Bates et al., 2005) in the framework of the ECFAS project. The approach utilised a 10 m DEM (COP-DEM-EEA10; European Space Agency and Airbus, 2022) to generate a 100 m resolution grid. The bottom friction was spatially adapted by using literature-based Manning coefficients adjusted to the LC/LU from the Copernicus Coastal Zone layer (see Section 2.3). The flood models were forced with total water level timeseries built by linear addition of the mean sea level, tide, and storm surge components retrieved from Copernicus Marine Environment Monitoring Service (CMEMS) ocean models (for tides, the FES2014 model was used when data was missing; more details in Irazoqui Apecechea et al., 2023), and empirical estimate of the wave set-up based on CMEMS wave models data. More details can be found in Le Gal et al. (2023a; 2023b2024).

135

140

## 2.3 Main datasets for impact assessment

All datasets used to implement the flood impact assessment were collected in the framework of the ECFAS project (Ieronymidi and Grigoriadis, 2022). The Global Human Settlement Population Grid (GHS-POP R2019A; Schiavina et al., 2019) and the ENhancing ACTivity and population mapping 2011 Population Grid (ENACT-POP R2020A; Schiavina et al., 2020), that provide raster-based information about the distribution of population, were used to assess the number of people affected by the flood (see Section 3.2). The GHS-POP includes a static layer of the distribution of people in 2015; the ENACT includes 24 layers describing the population distribution by night and day for each month of the reference year 2011. The OSM vector dataset, that includes information about buildings and transport networks, was used to assess the flood damage to buildings (Section 3.3) and roads (Section 3.4). Note that the OSM coverage of the roads at the EU level is reliable for large-scale evaluations, with almost complete coverage for the EU countries (Barrington-Leigh and Millard-Ball, 2017; Van Ginkel et al.,

145

150

2021). However, for buildings, the spatial coverage depends on the country. The Copernicus Coastal Zone (CCZ; <https://land.copernicus.eu/local/coastal-zones>; Innerbichler et al., 2021) vector layer, that represents the most detailed up-to-date Land Cover / Land Use (LC/LU) layer for coastal areas in Europe, was used in support of the damage assessment for buildings and of the grid-based damage evaluations implemented for comparison purposes (Section 3.6). It represents a highly detailed dataset compared to CORINE (Büttner et al., 2014) or LUISA (Rosina et al., 2018) for the coastal areas. A detailed overview of the characteristics of the datasets and links to the sources can be found in Appendix A.

## 2.4 Sources of reported impacts

Reported impacts are essential for evaluating the performance of impact models. However, this type of information is often scarce, with qualitative information being more often available than quantitative ones. Databases of micro-scale flood damages are quite common, but they often represent very local datasets, which are difficult to retrieve, are usually reported in local languages and even more difficult to be used for large-scale analysis. On the other hand, aggregated information on impacts and damages are generally available at different spatial and temporal scales, but they can rarely be used in direct comparisons with simulated impacts, as often data disaggregation and manipulation are needed for comparisons. Additionally, reported damages are often incomplete and reliable estimates might not be available for years after the event (Thieken et al., 2016). Information on reported impacts were collected and used as ground truth for validation purposes. The data were extracted, georeferenced and characterized by analysing the sources of information included in the database of extreme events and test cases produced in the framework of the ECFAS project (Souto Cecon et al., 2021). The sources of information include institutional websites, scientific articles, databases, news, technical reports, blogs and videos, among others. The collected information was analysed to build a database of impact markers that the events generated within the AoI of the affected sites. Impacts were categorised according to the type of impact as defined by the RISC-KIT project (Viavattene et al., 2015), thus discriminating between impacts to the population, buildings/private properties, infrastructures, economy, environment and cultural heritage. Quality indexes were assigned to the identified markers to ensure the control of the reliability of the information using an approach adapted from Sancho-García et al. (2021). This approach employs 3-level indexing of the quality of the spatial and temporal references, and for the level of detail of the information contained in the original source. For each identified impact marker, when available, the reported local damage in euros was provided. Any additional information that could possibly support the analysis was included for each identified marker.

## 3 Methods

### 3.1 General aspects

The ECFAS Impact Approach integrates methodologies to assess direct impacts on population and assets. Developed specifically to be applied at the EU scale, object-based, micro-scale methods were preferred when possible. Exposure and vulnerability aspects were considered depending on data availability and reliability. Exposure-based evaluations were preferred

when vulnerability data was not available, or when the assumptions related to the application of vulnerability models generated biased, or very uncertain, results. For population, a grid-based approach was used, while buildings and roads were assessed through object-based methods, incorporating category-based vulnerability.

185 Impacts were calculated for each affected cell (population), or asset (buildings and roads) based on multiple input data or model ensembles. The model ensemble consists of a combination of different deterministic impact models. The ensemble approach usually works better than deterministic ones. Model ensemble reduces the importance of model selection, allowing to obtain a probabilistic distribution and providing an estimation of the uncertainty (Figueiredo et al., 2018). Probabilistic impacts were generated by resampling an empirical cumulative distribution function (ECDF), generating 1000 scenarios.

190 Although the use of FDCs is not inherently probabilistic, the use of a multi-model ensemble approach generates a probabilistic estimation and provides information about the impact distribution (mean, standard deviation, or quantiles, among others). The total impact in the flooded area was calculated by summing the contribution of each cell/asset for each scenario. The distribution of impact was represented by percentiles (2.5, 50 and 97.5). These evaluations can be repeated to calculate disaggregated impacts by category of asset. The probabilistic resample was applied to the number of people affected by the flood and the financial damage to buildings and to roads. Given the different approaches, the resampling was different for each damage sector and a detailed explanation is provided below in each asset section.

195

Damages were based on average 2020 prices of the former EU-28, adjusted using Eurostat Real Gross Domestic Product (GDP) statistics 2000 – 2020 (Eurostat, 2019). The reference year of the dataset for the GDP deflator (Index=100) is 2010.

Water depths lower than 0.1 m were excluded, considering flood model uncertainties (see Section 2.2). Representative flood depths for buildings and roads were assigned through nearest neighbour interpolation of flood maps applied on the perimeter for buildings (Section 3.3) and on the polyline for roads (Section 3.4).


200

### 3.2 Population

The number of people affected by coastal flooding was evaluated by considering all the 25 layers of the GHS-POP and ENACT datasets (Section 2.2) through a probabilistic approach. Given that the spatial resolution of the flood model (~ 100 m) is higher than that of the datasets (250 m for GHS-POP, 1 km for ENACT), these were interpolated by using as reference the centre of the cells of the flood map raster (Figure 2). The interpolated values were corrected using the ratio between the cell areas of the flood map and the datasets (ratio = flood map cell area / population cell area) to consider the above-mentioned different cell resolutions. Thus, for each cell of the flood map with non-null values (i.e., the flooded cells), 25 evaluations of the number of people were available. These were used to fit an ECDF for each cell. In order to balance the higher number of layers of the ENACT dataset, weights were assigned: 1/24 for the 24 evaluations based on the ENACT layers, and 1 for the evaluation based on the GHS-layer (i.e., assuming that the value is representative for day/night, for each month). For each cell, the affected number of people was resampled following the probabilistic approach described in Section 3.1, for which a schematic representation was provided in Figure 2.

205

210

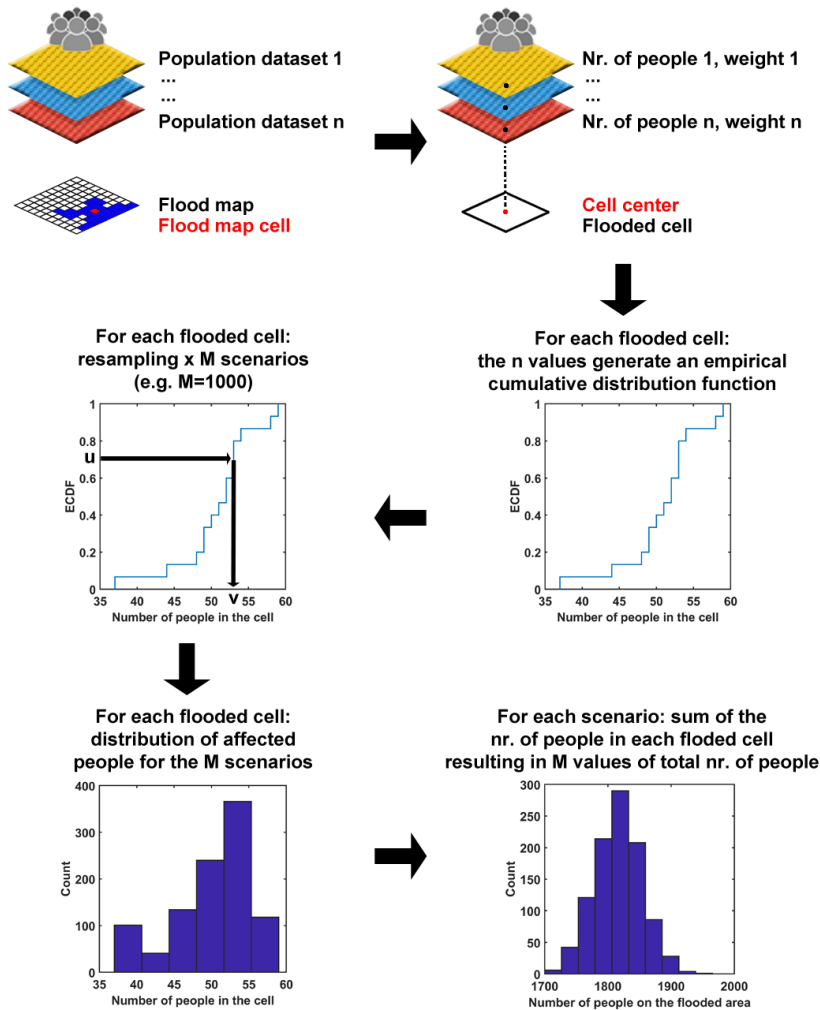

215

**Figure 2:** Scheme of the methodology applied to estimate the number of affected people in the flooded AoIs.

### 3.3 Buildings

Building damage evaluation relies on an object-based method using flood damage curves (FDCs). Figueiredo et al. (2018) showed that model ensembles offer a useful alternative to deterministic impact assessments, allowing for semi- or fully probabilistic evaluations and considering uncertainty. Duo et al. (2020) also used a similar approach, albeit not fully probabilistic, for assessing damage in Stavanger Harbour, Norway.

Impact models based on FDCs were preferred due to their straightforward implementation and state-of-the-art approach. More complex models (e.g., Dottori et al., 2016; Nofal et al., 2020; Taramelli et al., 2022) were not used due to the lack of required

225 detailed input data at the large scale. Simpler models (e.g., Manselli et al., 2022) do not have the level of details required for this study. The main datasets used were the OSM vector layer of buildings and the CCZ. The OSM layer provides the position and geometric characteristics of the buildings, excluding those with a footprint area less than 20 m<sup>2</sup> or identified as Places of Worship. This approach avoids potential outliers in the damage distribution.

The CCZ's level-5 classes were used to categorize OSM buildings, using the dominant class for each element. In a second stage, buildings were reclassified based on macro-classification (residential, commercial, industrial, commercial/industrial, and other) defined in Table A 1 in Appendix A. The CCZ's macro-classification was derived from analyzing the specific classes according to Innerbichler et al. (2021). Assumptions were made to ensure accurate representation of exposed building classes, such as including "Green urban, sports and leisure facilities" (refer to Table B 1 in Appendix B) in the commercial macro-class for leisure and commercial activities in green urban areas. Limitations were discussed in Section 5.3.2. Damage was calculated using FDCs for residential, commercial, industrial, and commercial/industrial macro-classes. No damage was calculated for the "other" macro-class due to the unavailability of damage models. The ensemble approach applies curves described in Table 3 and shown in Figure 3. Seven curves were used for residential buildings; four curves were used for commercial and industrial buildings. For the mixed commercial/industrial category, both commercial and industrial FDCs were applied. The curves were selected based on available technical documentation and scientific publications, ensuring consistency by using damage factors relative to maximum damage. This allowed us to focus on the variability of the vulnerability models (i.e., the FDCs), limiting the uncertainty related to the reference value of the damage factors, that, in other cases, refers to construction or repair costs. The maximum damage from Huizinga et al. (2017), that developed a global database of depth-damage curves containing the maximum damage value, was used for all models. Note that for the mixed class commercial/industrial, defined to consider the aggregated CCZ Level - 5 class 11210 that includes industrial and commercial units, but also public and military units, both commercial and industrial models were applied for a total of eight curves.

Relative damage for each flooded building was calculated using all selected curves for its macro-class, then multiplied by the country-specific object -based maximum damage. The probabilistic evaluation of building damage, total damage in the AoI, and average damage by asset type follows the method described in Section 3.1. Then, for each flooded building, a large number of values (1000) is randomly generated from the ECDF, representing the probabilistic estimation (distribution) of the damage factor for that flooded building. The distribution is then multiplied for the (deterministic) maximum damage to retrieve the financial damage. The process is applied to each flooded building and the probabilistic estimate of the total building damage is based on the resampling set of each building.

255 **Table 3: Selected flood damage curves to calculate impacts to the identified buildings: brief descriptions and references are provided along with an indication of the macro-class for which a curve was available (R: residential; C: commerce; I: industry).**

Flood damage curves			Macro-class		
Short name	Description	References	R	C	I
COMRISK2004	Coastal FDCs for the Wadden Sea (estuarine environment)	Kystdirektoratet (2004)	x	-	x
		Vousdoukas et al. (2018a)			
Hallegatte2011	Coastal FDCs for Copenhagen	Hallegatte et al. (2011)	x	x	x
		Vousdoukas et al. (2018a)			
Enghlhardt2019	Generic FDCs for masonry (IIIb), mixed, concrete and steel (IVb) two-story buildings.	Enghlhardt et al. (2019)	x	-	-
JRC2017 Europe	Generic FDCs for Europe	JRC report and database	x	x	x
		Huizinga et al. (2017)			
MCM2013	Coastal FDCs for typical UK properties. Adaptation of the fluvial DDFs with an uplift factor to account for salinity.	Viavattene et al. (2015, 2018)	x	x	-
		Vousdoukas et al. (2018a)			
Vousdoukas 2018 DDF <sub>A</sub>	Coastal FDCs based on small-scale coastal studies	Vousdoukas et al. (2018a)	x	x	x
Total FDCs for each macro-class			7	4	4

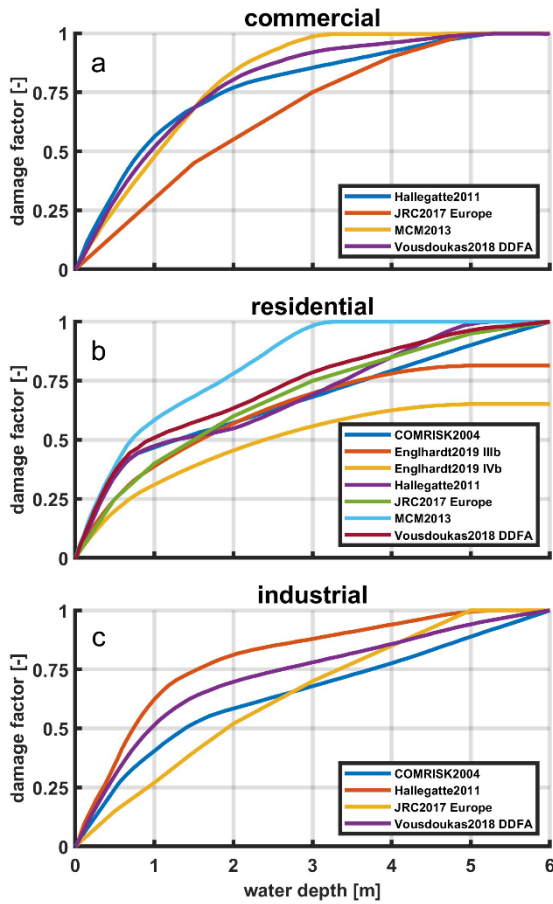


Figure 3: Overview of the applied flood damage curves for the building types commercial (a), residential (b) and industrial (c).

### 260 3.4 Roads

Road impact evaluation uses an object-based method with multiple FDCs, adapted from the work of Van Ginkel et al. (2021) [who developed a flood impact assessment for roads at EU-scale ~~road~~ using a new dataset of road-specific damage functions flood impact assessment](#). FDCs are based on damage factors relative to construction costs for various road types. The available method was improved for this work by probabilistically resampling literature-based construction cost data from Van Ginkel et al. (2021).

The main dataset used was the OSM roads vector layer, providing position and geometric characteristics of roads. Road macro-classification (see Table B 2 in Annex B) and FDCs (Figure 4) were applied following Van Ginkel et al. (2021). Multiple curves exist for each category, considering road accessory characteristics and hydrodynamic flow conditions. Motorways and Trunks are represented by curves C1 and C2 if highly accessorized (e.g., with street lighting and electronic signalling), C3 and C4 otherwise. Less important roads are represented by curves C5 and C6 (see Table C 1 in Appendix C). All curves were

applied, multiplying them by probabilistic resampling of the appropriate construction cost range using ECDFs. An ECDF was fitted on the literature-based sample of construction costs for motorways from Van Ginkel et al. (2021) and rescaled within defined ranges (Table C 2 in Appendix C) for different road types and accessories. Damage was calculated accordingly, following authors' recommendations (Table C 1 in Appendix C). An overview of applied ECDFs is shown in ~~the~~ Figure 5, where the curves were compared with the ECDFs of the empirical sample for each type of road.

The original methodology adjusts costs based on the number of lanes of each road segment, but in this application, default lanes were used (see Table C 2 in Appendix C). The probabilistic resampling considers both multi-FDCs damage factors and construction cost ranges. The probabilistic estimates of total damage and average damage by road type follow the method described in Section 3.1.


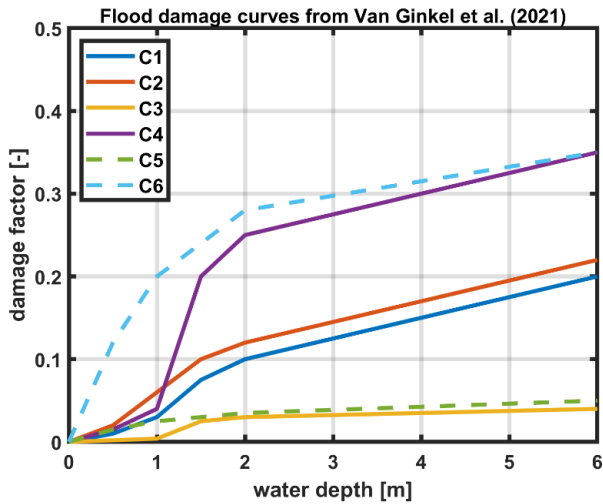


Figure 4: Overview of the flood damage curves for roads from Van Ginkel et al. (2021).



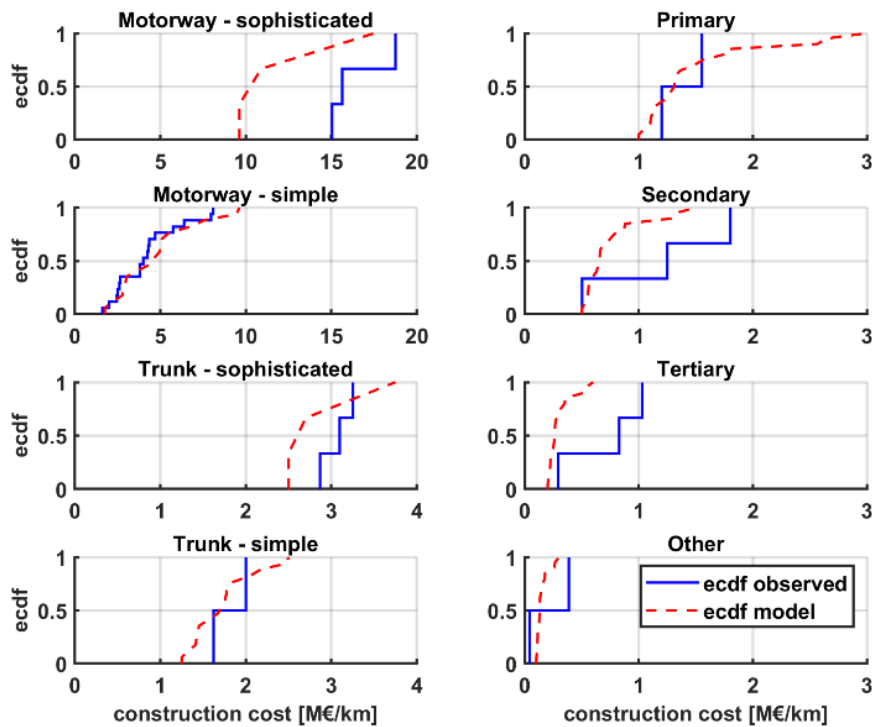

285 Figure 5: The literature-based sample of construction costs for motorways from Van Ginkel et al. (2021) was used to calculate an ECDF that was then rescaled based on the ranges of the construction costs defined by the authors for each type of road and level of accessories for the application of the damage model (ecdf model, red dashed line). The curves are compared with the ECDFs of the empirical sample for each type of road (ecdf observed, blue solid line). ~~The recommendations provided by the authors on the correct ranges to apply to each FDCs were followed.~~ The costs are based on 2015 prices for Europe, as reported by Van Ginkel et al. (2021).

### 290 3.5 Validation with reported impacts

Validation of the ECFAS Impact approach for the reference cases involved a ~~semi-quantitative, holistic~~ comparison between modelled and reported impact data (see Section 2.4). Quantitative performance evaluations were conducted when reliable quantitative data was reported, while qualitative discussion was given otherwise. In the first case, the comparisons focused on average damage to assets rather than absolute damage due to differences in spatial representation; the probabilistic representation of simulated impacts (95% range; 50% percentile) was considered and reported damages were corrected based on 2020 price levels of the former EU-28, accounting for the event year and country (see Section 2.1). On the other hand, qualitative comparison was applied by evaluating the capacity of the adopted methodology to describe the reported damages. Performance assessment on the AoIs introduced potential bias due to aleatory uncertainties, but these are minimized in large-scale applications (Merz and Thieken, 2009; Wagenaar et al., 2016). For example, in small-scale applications, commercial buildings in an area that is macro-classified as residential (see Section 3.3 for methodology) can lead to overestimation of the flooded buildings' area and average damage per building. To address these issues, comparisons were carefully evaluated for

reliability and representativeness, determining confidence levels. The reliability was defined based on three categories: low, medium, and high, depending on the verifiability of information, whether only general information (low), descriptive (medium) or quantitative and technical (high) information are included. The representativeness was defined based on three categories: low, medium, and high, depending on the scale of the data, whether valid for specific assets, or based on aggregated (from local to large scale) data. Because of the scale of this application, aggregated data at the regional or national level was considered as more representative than punctual or local information. Confidence levels ranged from very low to very high based on the combination of reliability and representativeness (Table 4).

310 **Table 4: Definition of the confidence based on the reliability and representativeness of the validation.**

		Reliability		
		Only general information [Low]	Only descriptive specific information [Medium]	Quantitative and technical information [High]
Representativeness	Specific case [Low]	Very low	Low	Medium
	Local scale aggregated data [Medium]	Low	Medium	High
	Large scale aggregated data [High]	Medium	High	Very high

### 3.6 Comparison with grid-based damage evaluations

To implement a comparison with commonly used impact approaches, and to support the analysis, grid-based impact assessments were implemented for buildings and roads. For consistency with the object-based methods, to implement the grid-based evaluations the chosen reference dataset for LC/LU was the CCZ layer. The flooded cells of the flood maps were considered the basic unit of calculation, to which the most frequent LC/LU class in the cell was assigned.

Based on reclassification of the CCZ class, which is the same applied for the object-based method for buildings (Section 3.3), the damage was calculated for the flooded cell area by applying the FDCs for residential, commercial and industrial buildings, and the LU-based maximum damage provided by Huizinga et al. (2017).

320 The damage to roads was calculated applying the FDCs for infrastructure (roads), and the LU-based maximum damage (25 €/m<sup>2</sup> in 2010 prices for the entire Europe) provided by Huizinga et al. (2017). The damage was calculated for a fraction of the flooded cell area which was defined for each CCZ class (“Percentage of the road infrastructure” in Table B 1 in Annex B) by adapting the application from Van Ginkel et al. (2021), thus based on guidelines provided by Huizinga et al. (2017) and EEA (2006).


## 325 **4 Results**

### **4.1 Reference cases detailed impacts**

Detailed results for the Xynthia (France, 2010), Xaver (UK, 2013), and Emma (Spain, 2018) reference cases are presented in this section [\(Figure E. 1, Figure E. 2 and Figure E. 3\)](#). Figure 6 displays detailed, disaggregated impact results for buildings, while Figure 7 shows the results for roads, including their uncertainty bands.


330 The residential sector is the most impacted in terms of affected buildings and area in all three reference cases. However, when considering potential total damage to buildings, the residential sector accounts for roughly half of the damage in Xynthia, but around 35% in Xaver and Emma. The remaining damage is primarily associated with commercial or commercial/industrial buildings. Uncertainty in total damage estimates for buildings is generally contained.

Road damage is significantly lower than building damage. Minor roads are most affected, but main roads such as motorways, 335 trunks, and primary roads also experience damage. Notably, no motorways were impacted in the analysed areas. Uncertainty ranges for total road damage, though smaller than building damage ranges, are relevant when compared to the magnitude of the total damage to roads.

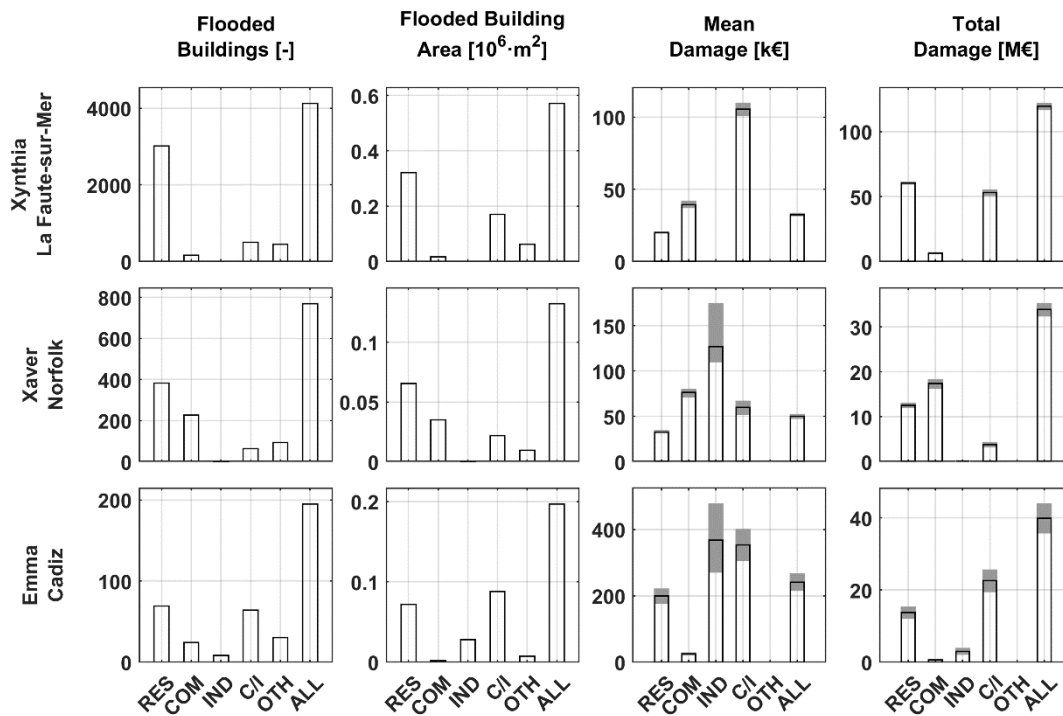

340 Figure 6: Overview of impacts to buildings for Xynthia at La Faute-sur-Mer (France, 2010; first row), Xaver at Norfolk (UK, 2013; second row) and, Emma storm at Cadiz (Spain, 2018; third row): number of flooded buildings (deterministic estimate; first column), flooded building area in millions of  $m^2$  (deterministic estimate; second column), mean damage per asset in thousands of € (probabilistic estimate; third column) and, total damage (in the AoI) in millions of € (probabilistic estimate; fourth column). The results are shown for residential (RES), commercial (COM), industrial (IND), commercial/industrial (C/I), others (OTH) and all (ALL) buildings. Damages are based on average 2020 price levels for EU-28, European Union with 28 Member States; Eurostat, 2019).

345

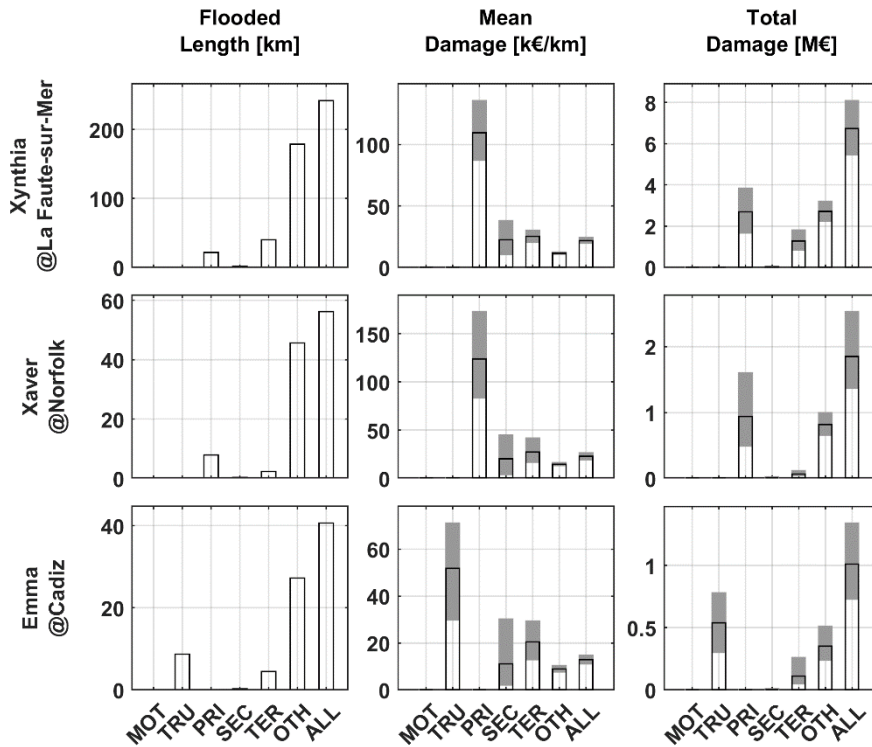

350 **Figure 7: Overview of impacts to roads for Xynthia at La Faute-sur-Mer (France, 2010; first row), Xaver at Norfolk (UK, 2013; second row) and, Emma storm at Cadiz (Spain, 2018; third row): length of flooded roads in km (deterministic estimate; first column), mean damage per km in thousands of € (probabilistic estimate; second column) and, total damage (in the AoI) in millions of € (probabilistic estimate; third column). The results are shown for motorways (MOT), trunks (TRU), primary (PRI), secondary (SEC), tertiary (TER), others (OTH) and all (ALL) roads. Damages are based on average 2020 price levels for EU-28, European Union with 28 Member States (Eurostat, 2019).**

#### 355 4.2 Overview of impacts for the test cases

The impacts on population, buildings and roads simulated with the ECFAS Impact approach (Sections 3.2, 3.3, and 3.4) are shown in Figure 8 for the analysed test cases. For buildings and roads, the corresponding impact evaluation implemented using a grid-based method (Section 3.6) are also reported in Figure 8, for comparison purposes. The detailed results can be found in Table D 1 in Appendix D.

360

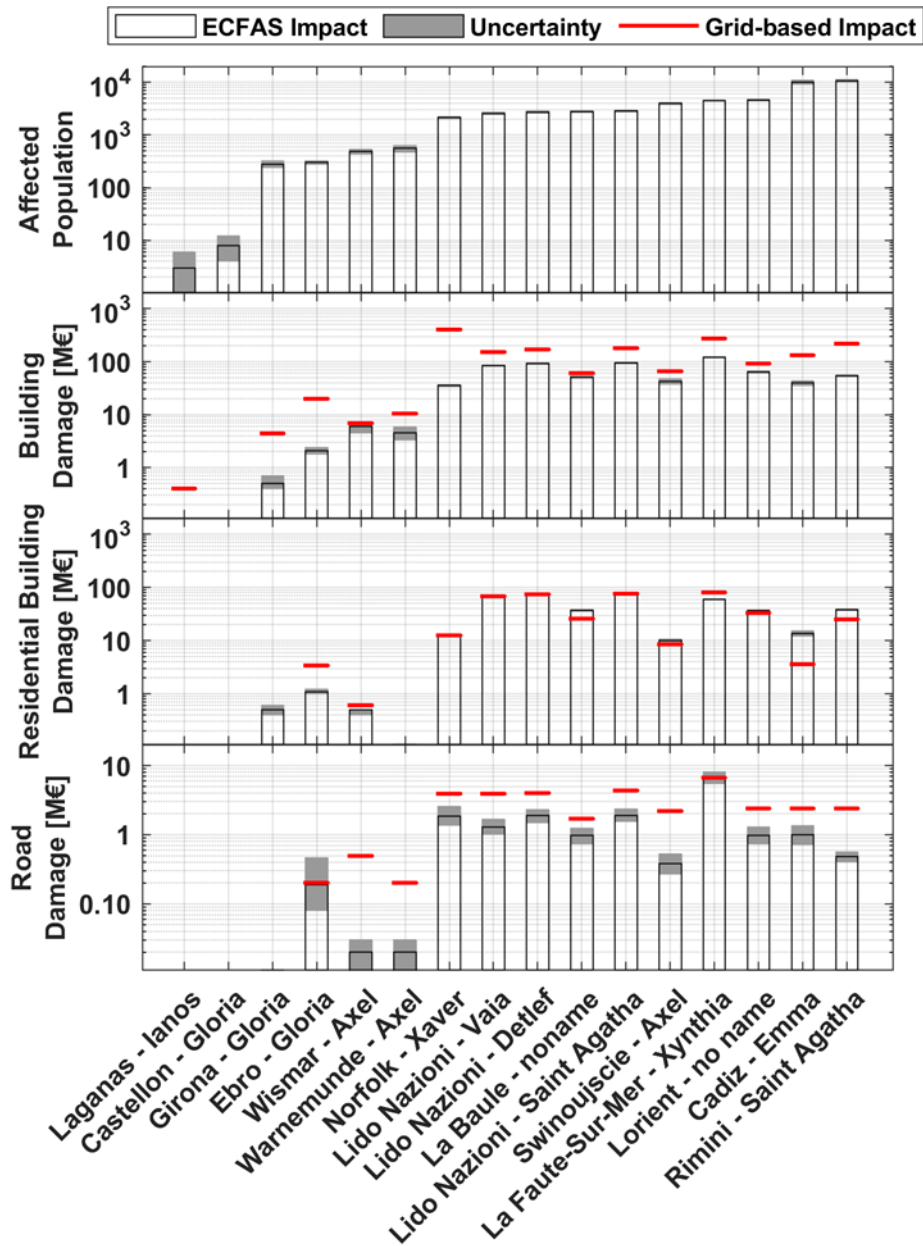


Figure 8: Impacts on population, buildings and roads simulated with the ECFAS Impact approach for the 16 test cases, and comparison with grid-based methods.

## 5 Discussion

### 365 5.1 Validation with reported impacts

Detailed comparisons of simulated damage due to coastal floods with reported data for buildings and roads are summarized in Table 5. Buildings and roads are crucial sectors in terms of flood financial losses, making these comparisons valuable for validation purposes. Reported data vary in type and detail, depending on the country and event significance. Xynthia, for example, raised significant attention and resulted in abundant scientific and governmental information. In the UK, efficient flood impact collection and analysis, as well as a robust insurance system, provided detailed technical information for events like Xaver. On the other hand, for Emma limited information was available, mainly sourced from media due to a lack of technical reports.

375 **Table 5: Modelled and reported impact data for the quantitative validation applied for the reference cases. Damages are based on average 2020 price levels for EU-28, European Union with 28 Member States (Eurostat, 2019).**

Reference case	Sector (type of damage)	Modelled value range 95% (50% percentile)	Reported reference value(s)	Description	Source
Xynthia (2010)	Residential buildings (average damage per asset)	19.8 – 20.2 k€ (20.0 k€)	31.6 k€ (Charente-Maritime) 33.6 k€ (Vendée) 25.4 k€ (All affected areas)	Based on damage to insured properties. Residential damage corrected considering 1.13 households per building (Paprotny et al., 2021)	FFSA-GEMA (2011)
	Commercial buildings (average damage per asset)	Commercial: 37.4 - 41.5 k€ (39.5 k€) Com/Ind: 101.2 - 109.6 k€ (105.5 k€)	60.2 k€ (Charente-Maritime) 31.6 k€ (Vendée) 40.6 k€ (All affected areas)		
Xaver (2013)	Residential buildings (average damage per asset)	31.7 – 33.9 k€ (32.9 k€)	Fluvial/coastal flood: 6.8-59.3 k€ (lowest-highest) 26.2 k€ (best estimate) Coastal flood only: 35.5 k€ (best estimate)	Based on aggregated data for England and Wales for the winter 2013/14. Data referring to coastal (storm surge) damage only was extrapolated from data	Environment Agency (2016)
	Commercial buildings	Commercial: 71.5 - 79.7 k€	Fluvial/coastal flood: 10.5-125.4 k€ (lowest-highest)		

	(average damage per asset)	(76.3 k€) Industrial: 110.3 - 174.3 k€ (126.9 k€) Com/Ind: 52.4 - 66.5 k€ (60 k€)	93.5 k€ (best estimate) Coastal flood only: 98.7 k€ (best estimate)	from 23 Dec 2013 to 28 Feb. 2014.	
	Roads (average damage per km)	All roads: <del>xx-24.4</del> - <del>xx-45</del> k€/km ( <del>25-32.9</del> k€/km)	Fluvial/coastal flood: 0.67 - 1.62 M€/km (lowest-highest) 1.32 M€/km (best estimate) Reported for 155 km of flooded roads	Based on aggregated data for England for the winter 2013/14. Largely uncertain data.	
Emma (2018)	Commercial buildings (damage)	Commercial: 21.4 - 27.6 k€ (24.5 k€) Industrial: 272.0 - 477.4 k€ (368.8 k€) Com/Ind: 306.8 - 400.5 k€ (353.5 k€)	70 k€ for three beach restaurants	Declared by the owner of the commercial activities on the media. Georeferenced information.	Diario de Cadiz (2018a) La Voz del Sur (2018)
	Roads (average damage per km)	Tertiary roads: 12.9 - 29.3 k€/km (20.4 k€/km)	Carretera Playa de Camposoto (Cadiz, Spain): 45.4 k€/km Reported for 1.7 km of flooded road	Retrieved from online news media. Georeferenced information.	Diario de Cadiz (2018b)

### 5.1.1 Xynthia storm, La Faute-sur-Mer (France), 2010

**Buildings.** The modelled damage for residential buildings underestimates reported values by a factor of 0.6 when compared to disaggregated data. When compared to aggregated (all areas) reported damage, the simulated damage underestimates average damage by a factor of 0.8. Note that the simulated damage includes both structure and content. Content damage is estimated to be roughly 30% of total damage (André et al., 2013; Paprotny et al., 2021). The simulation does not consider building



collapse, which was an important aspect for this test case: extensive damage led to destruction of properties and compensation by the government (~1500 houses at an average of €150,000 per house) (Kolen et al., 2013).

385 The average simulated damage for commercial and mixed (commercial/industrial) categories differs significantly due to varying footprint areas. For the mixed category, 27% of the flooded building area derives from assets larger than 1000 m<sup>2</sup>, while commercial buildings are all smaller than 1000 m<sup>2</sup>. Reported damage for professional properties aligns with simulated damage for commercial buildings by a factor of 0.65-1.25. However, for the mixed category, the comparison shows factors higher than 1.75.

Roads. Quantitative information on road impacts was limited. Government reports mention significant damages, while media and other sources show erosion, debris deposition, and asphalt damage. The Route de la Tranche-sur-Mer (Figure 9a) experienced significant erosion outside the AoI. A quick assessment considered it as a tertiary road with a simulated flood of approximately 1 m. Damage for the 375 m segment ranged from 2.1 - 43.4 k€ (5.5 - 115.8 k€/km). Calculated damage factors for the AoI were 0.6 - 28.3%, with only 20% of roads showing relative damage above 15%. Higher values above 11% (van Ginkel et al., 2021) matched reported damages (Figure 9a), suggesting that the higher portion of the distribution (75-97.5%) better represents road damage. The model considers both low and high flow conditions, while reported damages mainly relate to high flow.

### 5.1.2 Xaver storm, Norfolk (United Kingdom), 2013

Buildings. Simulated damage in the residential sector aligns with the reported range for fluvial and coastal floods (Environment Agency, 2016). However, it slightly exceeds the reported best estimate. When considering disaggregated data for coastal floods only, the average damage matches the simulation. The reported estimation, extrapolated from data from 23 December 2013 to 28 February 2014, likely underestimates coastal flood damage for the Xaver event. Overall, the impact approach for residential buildings appropriately represents the magnitude of the average damage for coastal flooding. However, a tendency to overestimate the average damage must be underlined, as seen in the comparison with the reported best estimate for fluvial and coastal floods. The probabilistic-based approach accounts for this, including uncertainties in vulnerability models. Nevertheless, an overestimation of residential damage, even in magnitudes, is expected (Molinari et al., 2020). In this specific case, the approximation factor is 0.9-1.25 when compared to the reported best estimate for fluvial and coastal floods.

405 The average simulated damage significantly differs between the commercial and mixed categories, but it is comparable in magnitude. Only one industrial building in the flooded area incurs damage (~127 k€). The model underestimates damage for commercial buildings by a factor of 0.7-0.8. The evaluation for the mixed category also falls below the reported best estimate. When considering disaggregated data for coastal floods only for business properties, the underestimation is slightly emphasized. However, all simulated damages align with the reported range for riverine and coastal floods.

Roads. The comparison between simulated and reported average damage reveals a significant discrepancy, with simulated damage being two orders of magnitude lower than reported values (for fluvial and coastal floods). The reported information on road impacts carries large uncertainty, as acknowledged by the authors of the report (Environment Agency, 2016). The lack

415 of detailed context information in the report raises doubts about the accuracy of the reported length of flooded/affected roads. Moreover, the reported examples primarily focus on damages to motorway and trunk roads, suggesting that the reported average damage may be more representative of those road types. In contrast, the simulated results primarily represent primary and other roads (see Figure 7). Simulated average damage for primary roads is approximately one order of magnitude higher than other road classes. Assuming all flooded roads as trunks, the average simulated damage ranges from 129.2 to 141.8 (135.5) 420 k€/km. Similarly, for motorways, it ranges from 468.0 to 516.3 (491.9) k€/km. This assessment supports the notion that the reported data may better reflect the average damage for motorways and trunks.

By analysing reported information (see Section 3.5), the type of damages affecting roads can be determined and qualitatively compared with the estimated damage from the applied model. Figure 9 (b and c) provides examples for this test case, where debris deposition represents the main physical impact on minor roads (primary, secondary, tertiary, other). Cleaning operations 425 account for most of the financial damage, while repair works typically pertain to the regular maintenance due to lower maintenance standards compared to motorways and trunks (van Ginkel et al., 2021). These reported damages indicate that the flooding had low flow velocities, whereas the model considers damage curves for both low and high flow velocities. Therefore, it is reasonable to assume that the simulated damage for roads overestimates the overall damage, and the lower half of the sample (percentiles: 2.5%-50%; relative damage < 5%) better represents the actual road damage. The construction cost used 430 to calculate absolute damage introduces some uncertainty, but this is addressed through probabilistic application.

### 5.1.3 Emma storm, Cadiz (Spain), 2018

Buildings. The high simulated damage for the residential sector could be related to the existence of large residential buildings. None of the sources of information analysed refer to damage to residential properties for this reference case, which could lead to the conclusion that residential buildings were not affected by the flooding, although the analysed resources do not represent 435 official reports.

Considering the commercial sector, the comparison was implemented by analysing a single case of a beach restaurant. This building was repeatedly flooded during the event (Figure 9e), as confirmed by news, videos and the qualitative analysis of the data from a video monitoring system in the area (Montes et al., 2018). The simulated damage for the beach restaurant is estimated between 52.5 and 99.5 k€ (95% probability), and the 50% percentile is 78.8 k€. The estimated damage reported by 440 the owner of one of the beach restaurants in the area considered three beach restaurants. Nonetheless, the other two properties did not suffer significant damages, and it is reasonable to assume that most of the reported damage refers to the former. By taking this aspect into account, and the fact that the owner may have overestimated the damages, the comparison between the average simulated and the reported damage shows no significant differences. The approximation factors vary in the range of 0.75-1.4.

445 Roads. The damage reported for the Carretera Playa de Camposoto is higher than the upper limit of the simulated range for tertiary roads. However, it is comparable with the simulated damage for the specific road: 5.8 - 121.3 (38.9) k€/km. The corresponding simulated relative damage is 2.6-21.3%. The results are in line with the observed damage (i.e., mainly cleaning

costs and possible minor damage to asphalt; Figure 9d). The lower limit of the simulated damage is expected to represent those cases where only cleaning cost is needed.

450



455

**Figure 9: Examples of damage to roads: (a) Route de la Tranche-sur-Mer in the area of La Faute-sur-Mer (France) after the Xynthia event in February 2010; (b) Coast Rd (Salhouse, Holt) and (c) Beach Rd (Holme-next-the-Sea, Hunstanton) in the Norfolk (UK) area after the Xaver event in December 2013; (d) Carretera Playa de Camposoto in the south of the city of Cadiz (Spain) after the Emma event in March 2018. The images were retrieved from the sources of information collected in the ECFAS database of extreme events and test cases (Souto Ceccon et al., 2021).**

#### 5.1.4 Confidence

The comparisons for the reference cases were assessed based on confidence levels (Section 3.5). For residential buildings, the Xynthia and Xaver storms showed underestimations (max. factor 2) and overestimations (max. factor 1.3), with good agreement in magnitude. No validation was possible for residential buildings in the Emma reference case. Comparisons for commercial buildings showed underestimates (max. factor 2) and overpredictions (max. factor 3), with appropriate magnitude estimates. Road comparisons generally agreed with reported damages, with slight overestimations expected.

High confidence was assigned to the Xynthia reference cases validation, based on aggregated data from national insurance and scientific reports. The Xaver reference case had medium-high confidence due to reliable national technical reports aggregated that were considered more representative for evaluating the performance of an impact model to be applied at the large scale. The Emma reference case had low confidence due to limited data availability and representativeness. Commercial building validation relied on specific news information, while road comparison was limited to a 1.7 km segment in Cadiz.

#### 5.2 Comparison with grid-based damage evaluations

The comparison in Figure 8 showed that object-based evaluations of the ECFAS Impact approach generate lower results than grid-based methods for total damage to buildings and roads. The latter often report values that are two or more times, or even


one order of magnitude, higher. Interestingly, the differences never exceed one order of magnitude, and the grid-based damage to residential buildings showed a general agreement with the corresponding object-based evaluations, with some exceptions. For damage to buildings, in fact, the residential FDC from Huizinga et al. (2017) applied for the grid-based estimates approximates the average behaviour of the set of curves applied by the ECFAS Impact approach (Figure 3) for residential buildings. Moreover, the maximum damage for both methods is retrieved from the same source (Huizinga et al., 2017). Although overestimation can be expected for the grid-based assessment, the overestimates of the building flooded area is partially balanced by the lower (LU-based) maximum damage applied. In this context, the ECFAS Impact approach represents a more reliable method for refined damage estimates. The object-based approaches outperform the grid-based ones in terms of resolution and detail of the assessment, although no conclusion can be drawn on the performance of grid-based methods when compared with reported data. Indeed, implementing the comparisons as described in Section 3.5 would not be feasible with grid-based results because of the nature of the methodology (e.g., it is not possible to estimate the number of affected assets without the availability of specific information).

### 5.3 Limitations

#### 5.3.1 Population

The evaluation of affected people provides an estimate of individuals directly exposed to the flood. Uncertainties arise from temporal differences between datasets (ENACT: 2011; GHS: 2015) and the flood event's reference year, as well as spatial resolution discrepancies between the flood map and datasets. Uncertainty due to the input datasets are expected for these type of assessment (Lichter et al., 2011). The probabilistic resampling partially accounts for it. It also accounts for seasonal and day/night variability. Timing-based assessments of the affected population would be more appropriate for operational applications. Certainly, it would represent a refinement of the assessment from a deterministic point of view. Comparisons between GHS-POP and ENACT datasets for the number of people in the affected areas show minor variations (Figure 10; horizontal axes in logarithmic scale). Exceptions exist, like Castellon (Spain), where ENACT's low resolution makes it statistically unreliable. Overall, similar numbers of affected people are identified, with acceptable variations within the same magnitude. Probabilistic implementation was preferred due to these reasons. Constructing ECDFs at the flood map cell scale involved applying different weights to datasets. Equal weights would favour ENACT, so using different weights aims to homogenize representativeness. This weighting method has a significant impact on the evaluation. Alternative solutions may require assumptions on dataset uncertainty, generating values to feed the ECDF, but these introduce additional uncertainties. Validating the reliability of simulated affected population numbers using reported figures is challenging, as reported data mostly focus on casualties, injuries, and hospitalizations. These factors depend not only on human presence but also on early warning systems and emergency response efficiency. Additional considerations could involve evacuated households, long-term flood-related illnesses, or other indirect impacts to estimate the number of affected people.

Vulnerability-based evaluations can enhance flood risk assessment, but large-scale implementation is hindered by the need for  
 505 detailed socio-economic, cultural, and governance data (Thomas et al., 2019).

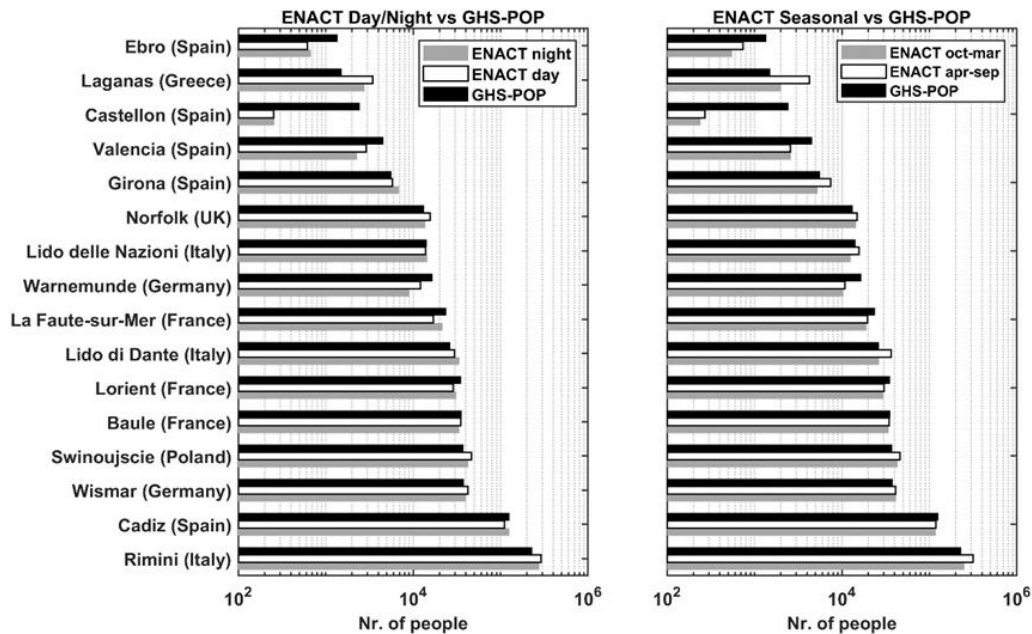

510 **Figure 10: Overview of the population on the AoIs of the sites' test cases: the GHS-POP estimate is compared with the ENACT estimate for the day-time and night-time (left box) and with the ENACT estimate for summer (April-September) and winter (October-March) seasons (right box). The number of people is represented using a logarithmic scale.**

### 5.3.2 Buildings

OSM provides reliable building coverage for large-scale evaluations at the EU level. However, quality control at specific sites revealed some coverage gaps (e.g., Castellon site in Spain), leading to underestimations of building damage. Nevertheless, this limitation is considered non-critical as OSM is regularly improved and updated.

515 The macro-classification is based on CCZ layer representativeness analysis. OSM buildings were found on beaches classified as open spaces in the CCZ layer (sandy, 62111; shingle, 62112), representing beach facilities and economic activities, such as tourism (e.g., Emilia-Romagna coast Italian sites: Lido delle Nazioni, Lido di Dante and Rimini). Hence, beach related CCZ classes were included in the commercial macro-class, providing a practical solution for commercial buildings located on beaches without specific commercial classification in the CCZ layer.

520 Numerical interpolation of data introduces limitations. The interpolation method for representative flood depth calculation can influence the number of flooded buildings and the building macro-classification. These aspects refer to the aleatory component of the uncertainty and should be therefore contained when modelling large-scale events (see Section 3.5).

The application utilizes damage factors and object-based maximum damage (provided by Huizinga et al., 2017), accounting for country-based GDP. However, this simplified approach may not capture intra-country variability, and maximum damage-

525 based curves generally overestimate flood damage to buildings (Molinari et al., 2020). To improve the assessment, robust national, regional, or municipality-based damage curves can be generated, as recently demonstrated by Martínez-Gomariz et al. (2020) for Spain.

The multi-model ensemble implementation based on Figueiredo et al. (2018) has limitations due to the number of models and other factors discussed in previous studies (e.g., Duo et al., 2020). In this case, the number of models applied for each building  
530 macro-class is limited due to the scale of application of the impact assessment. Despite limitations, multi-model ensembles demonstrate better predictive skills compared to single-model (deterministic) assessments (Figueiredo et al., 2018).

### 5.3.3 Roads

Limitations exist regarding the numerical interpolation of data, as discussed previously for building impacts.

The macro-classification used is adapted from Van Ginkel et al. (2021). Negligible uncertainty is expected from this  
535 reclassification due to the coverage of OSM roads dataset, particularly for important roads. However, there may be some uncertainty for less significant roads.

In this case, probabilistic resampling assumes that the empirical construction cost distribution for motorways is applicable to other road types. The comparisons shown in Figure 5 supports this hypothesis. The main difference is observed for highly accessorized motorways due to a lack of observations in the literature-based sample within a specific cost range (8.2 and 14.9  
540 M€/km; 2015 prices).

Probabilistic resampling is applied at two levels: for input data on construction costs and for multiple FDCs applied to each road class. This provides an evaluation of uncertainty in both construction costs and FDCs.

The approach uses the default number of lanes for each road segment. While this may introduce uncertainty, it should be limited, particularly at a large scale (aleatory uncertainty, see Section 3.5), and it is accounted for by probabilistic resampling  
545 of construction costs.

It is important to note that certain aspects, such as infrastructure failure or damage from compound hazards (e.g., pluvial, landslides), are not addressed by the method of Van Ginkel et al. (2021), as recently demonstrated by Koks et al. (2022).

## 6 Conclusions

The ECFAS Impact approach assesses flood direct impacts on population, buildings, and roads in European coastal areas.  
550 ~~Developed within the EU H2020 ECFAS Project, the methodology~~ relies on a model ensemble approach that allows for an uncertainty estimation through probabilistic evaluations, and is object-based for buildings and roads ~~incorporates object-based and probabilistic evaluations~~. The presented approach was also validated against reported direct impacts for the Xynthia storm at La Faute-sur-Mer (France) in 2010, the Xaver event at Norfolk (UK) in 2013, and the Emma storm at Cadiz (Spain) in 2018. Results showed a valuable estimation for affected populations, and reliable damage assessments for buildings and roads. The

555 ~~results can support prevention and preparedness activities, and can feed further evaluations of risk scenarios, including cost-benefit analysis of DRR strategies,; and it was tested against grid-based approaches on 16 test cases across Europe.~~

~~Key findings indicate that the approach provides:~~

- ~~• valuable estimates for affected populations to address prevention and preparedness activities;~~
- ~~• reliable damage assessments for buildings and roads that can feed further evaluations of risk scenarios, including~~

560 ~~cost-benefit analysis of DRR strategies;~~

- ~~• improved accuracy for damage to buildings and roads compared to traditional grid-based approaches.~~

The ECFAS Impact approach improves upon the EU-scale operational approach for riverine flood warnings (EFAS) by utilizing detailed recent datasets and probabilistic methods. The use of multiple FDC as multi-model ensemble allows to

generate the probabilistic estimations. Additionally, the adoption of object-based methods for buildings and roads improves

565 the detail and reliability of the simulated impacts, moving from the meso-scale to the micro-scale analysis, even if it is applied at large scale. The presented methodology, tested against grid-based approaches on 16 test cases across Europe, shows a better accuracy for damage to buildings and roads than traditional and widely used grid-based approaches.

-The approach presented in this work is part of the ECFAS system, which can extend the capabilities of the Copernicus Emergency Management System for coastal flood early warnings, complementing EFAS for riverine floods. Future  
570 developments aim to enhance population assessment incorporating vulnerability and risk to life estimates and refine damage and uncertainty evaluation for buildings and roads.

**Table A 1: Overview of the dataset used for the impact assessment. The data is available through the Zenodo platform (Ieronymidi and Grigoriadis, 2022; <https://zenodo.org/records/7319270>).**

Dataset	Type	Ref. year	Res.	Nr. of layers	Description	Link
Global Human Settlement Population Grid (GHS-POP R2019A)	Raster	2015	250 m	1	Distribution of population (nr. of people per cell) for the year 2015	<a href="https://ghsl.jrc.ec.europa.eu/ghs_pop2019.php">https://ghsl.jrc.ec.europa.eu/ghs_pop2019.php</a>
ENACT 2011 Population Grid (ENACT-POP R2020A)	Raster	2011	1 km	24	Distribution of population (nr. of people per cell) during night- and day-time, for each month of the year 2011	<a href="https://data.jrc.ec.europa.eu/dataset/be02937c-5a08-4732-a24a-03e0a48bdcda">https://data.jrc.ec.europa.eu/dataset/be02937c-5a08-4732-a24a-03e0a48bdcda</a>
Open Street Map (OSM)	Vector	2021	Various	4	Buildings (polygons) Roads (polylines) Railways (polylines) POIs (points and polygons)	<a href="http://www.openstreetmap.org">www.openstreetmap.org</a>
Copernicus Coastal Zone (CCZ)	Vector (polygons)	2018	Minimum mapping 0.5 ha 10 m	1	Land use classification for the EU coastal area	<a href="https://land.copernicus.eu/local/coastal-zones">https://land.copernicus.eu/local/coastal-zones</a>



## Appendix B. Macro-classifications defined for buildings and roads

580 **Table B 1: Macro-classification of the type of building based on the Copernicus Coastal Zone layer classes and assumed percentage of road infrastructure for each relevant class.**

ECFAS macro-category	Copernicus Coastal Zone layer		Percentage of road infrastructure
	5-digit code	Class	
Residential	11110	Continuous urban fabric (IMD* $\geq 80\%$ )	18
	11120	Dense urban fabric (IMD $\geq 30-80\%$ )	12
	11130	Low density fabric (IMD $< 30\%$ )	6
Commercial	12350	Marinas	40
	14000	Green urban, sports and leisure facilities	10
Industrial	11220	Nuclear energy plants and associated land	21
	12310	Cargo port	40
	12330	Fishing port	40
	12370	Shipyards	40
	13110	Mineral extraction sites	21
	13120	Dump sites	21
	13130	Construction sites	21
Commercial/Industrial	11210	Industrial, commercial, public and military units (other)	21
	12340	Naval port	40
Other	12100	Road networks and associated land	100
	12320	Passenger port	40
	12360	Local multi-functional harbours	40
	12400	Airports and associated land	40
	-	All other classes	-

**Table B 2: Macro-classification of the type of roads based on OSM classes.**

Road type	OSM class
-----------	-----------

Motorway	motorway, motorway_link, motorway_junction
Trunk	trunk, trunk_link
Primary	primary, primary_link
Secondary	secondary, secondary_link
Tertiary	tertiary, tertiary_link
Other	unclassified, residential, living_street, service, pedestrian, bus_guideway, escape, raceway, road, cycleway, construction, bus_stop, crossing, mini_roundabout, passing_place, rest_area, turning_circle, traffic_island, yes, emergency_bay
Track	track, unsurfaced, corridor, trail, footway, path
None	none, bridleway, steps, proposed, elevator, emergency_access_point, give_way, speed_camera, street_lamp, services, stop, traffic_signals, turning_circle, toll_gantry, stop, disused, dummy, planned, razed, abandoned

## Appendix C. Additional information on impact to roads

**Table C 1: Flood damage curves from Van Ginkel et al. (2021): characteristics of roads and hydrodynamic flow conditions.**

Curve ID	Road type	Road accessories	Hydrodynamic flow conditions
C1	Motorway Trunk	Sophisticated accessories (i.e., curves to be applied with the upper half of the provided range of construction costs; Table C 2)	Low
C2			High
C3		Simple roads (i.e., curves to be applied with the lower half of the provided range of construction costs; Table C 2)	Low
C4			High
C5	Primary Secondary	No embankments	Low
C6	Tertiary Other		High

**Table C 2: Default number of lanes and construction cost ranges by road type from Van Ginkel et al. (2021).**

Road type	Default nr. of lanes per road segment [directions x lanes]	Min. constr. cost [M€/km]	Max. constr. cost [M€/km]
Motorway*	1x2	1.75	17.5
Trunk*	1x2	1.25	3.75
Primary	2x1	1.0	3.0
Secondary	2x1	0.5	1.5

Tertiary	2x1	0.2	0.6
Other	1x1	0.1	0.3

590


## Appendix D. Overview of the results for each test case

**Table D 1: Overview of impacts on population, buildings and roads for the test cases.**

Test Case	Nr. Of people inside flooded area	Flooded Building Area [m <sup>2</sup> ]	Nr. Of flooded buildings	Buildings Total Damage [M€]	Nr. Of affected residential buildings	Residential Damage [M€]	Roads Length [km]	Roads Total damage [M€]
Baule – No name	2924 – 3131 (3028)	238957	1436	48.7-52.2(50.5)	1296	36.1 - 37.9 (37.0)	36.42	0.74 - 1.24 (0.97)
La Faute-sur-Mer – Xynthia	4432 - 4612 (4521)	571821	4130	117.2- 121.9(119.6)	3016	59.6 - 60.9 (60.3)	242.03	5.47 - 8.09 (6.74)
Lorient – No name	4421 - 4666 (4544)	357189	2453	60.6-66.5(63.6)	2058	36.3 - 37.1 (36.7)	52.48	0.74 - 1.28 (0.97)
Warnemunde – Axel	478 - 636 (558)	33769	35	3.0-5.6(4.3)	6	0.1 - 0.1 (0.1)	2.75	0.01 - 0.03 (0.02)
Wismar – Axel	433 - 537 (486)	56449	76	4.5-7.1(5.9)	33	0.4 - 0.5 (0.5)	2.65	0.01 - 0.03 (0.02)
Laganas – Ianos	1 - 6 (3)	133	1	0.0-0.0(0.0)	-	-	0.03	-
Lido delle Nazioni – Saint Agatha	2755 - 2967 (2862)	295138	1423	93.2-97.1(95.2)	1089	75.3 - 77.3 (76.3)	72.28	1.56 - 2.34 (1.91)


Lido delle Nazioni – Vaia	2470 - 2675 (2573)	227942	1162	82.2-85.8(84.1)	954	66.2 - 67.9 (67.1)	50.97	1.02 - 1.66 (1.30)
Lido delle Nazioni – Detlef	2614 - 2816 (2713)	265682	1315	90.4-94.0(92.2)	1014	73.0 - 75.0 (74.0)	68.24	1.51 - 2.32 (1.89)
Rimini – Saint Agatha	10100 - 11159 (10635)	373525	1200	51.9-55.0(53.5)	786	36.7 - 38.7 (37.7)	52.59	0.41 - 0.56 (0.48)
Swinoujscie – Axel	3746 - 4142 (3953)	140311	268	35.7-44.3(40.2)	103	9.4 - 10.7 (10.0)	24.28	0.27 - 0.53 (0.38)
Castellon - Gloria	4 - 12 (8)	-	-	-	-	-	-	-
Ebro – Gloria	279 - 324 (301)	12235	91	1.7-2.2(2.0)	54	1.0 - 1.2 (1.1)	9.59	0.08 - 0.46 (0.19)
Girona – Gloria	243 - 317 (277)	5702	8	0.4-0.7(0.5)	6	0.4 - 0.6 (0.5)	1.32	0.00 - 0.01 (0.01)
Norfolk – Xaver	2041 - 2244 (2139)	132491	770	32.5-35.2(33.9)	383	12.1 - 13.0 (12.6)	56.18	1.37 - 2.53 (1.85)
Cadiz - Emma	9261 - 10952 (10103)	197006	195	35.9-43.9(39.9)	69	12.2 - 15.2 (13.8)	40.63	0.73 - 1.34 (1.01)

**Appendix E. Impact maps for the reference cases**

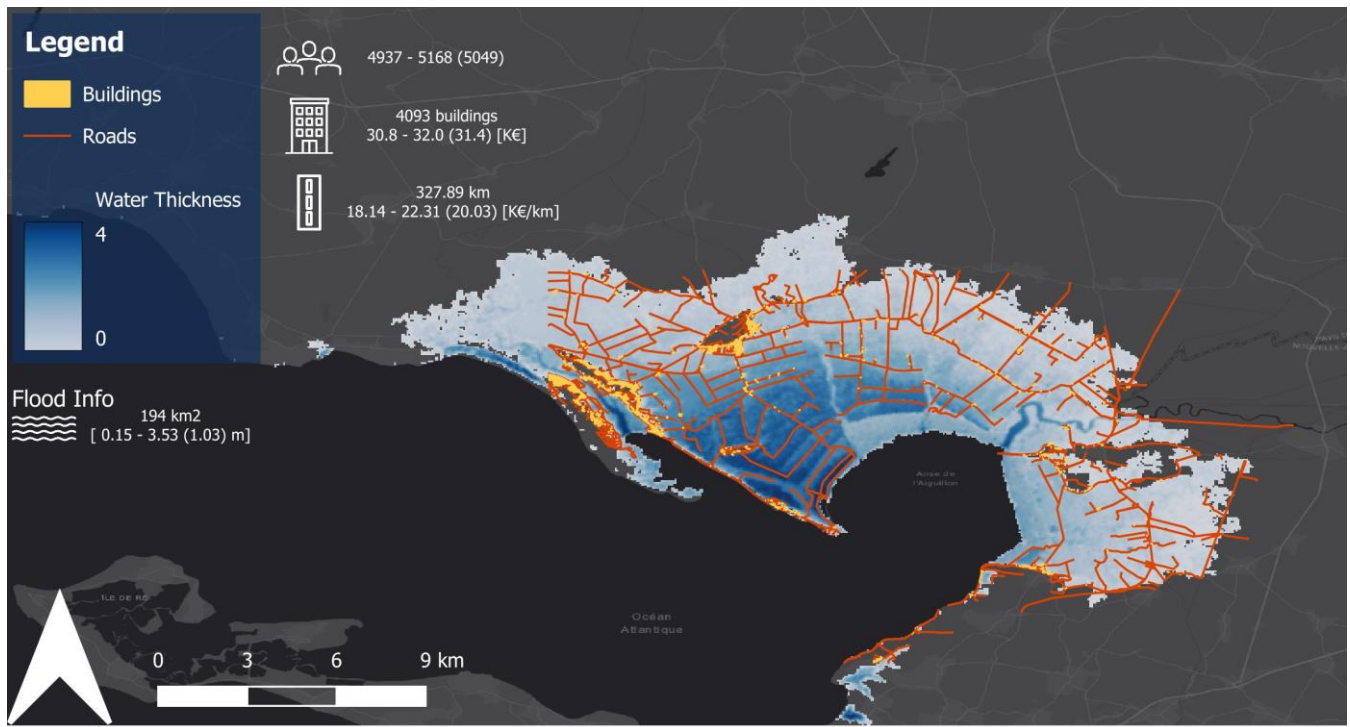


**Figure E. 1. Modelled impact map for Xynthia (La Faute-sur-Mer, France) – 2010. The map contains information on the modelled flood extent, the estimation of affected people, the damage assessment for buildings (number of flooded buildings and mean damage) and the damage assessment for roads (affected road length and mean damage).**

600

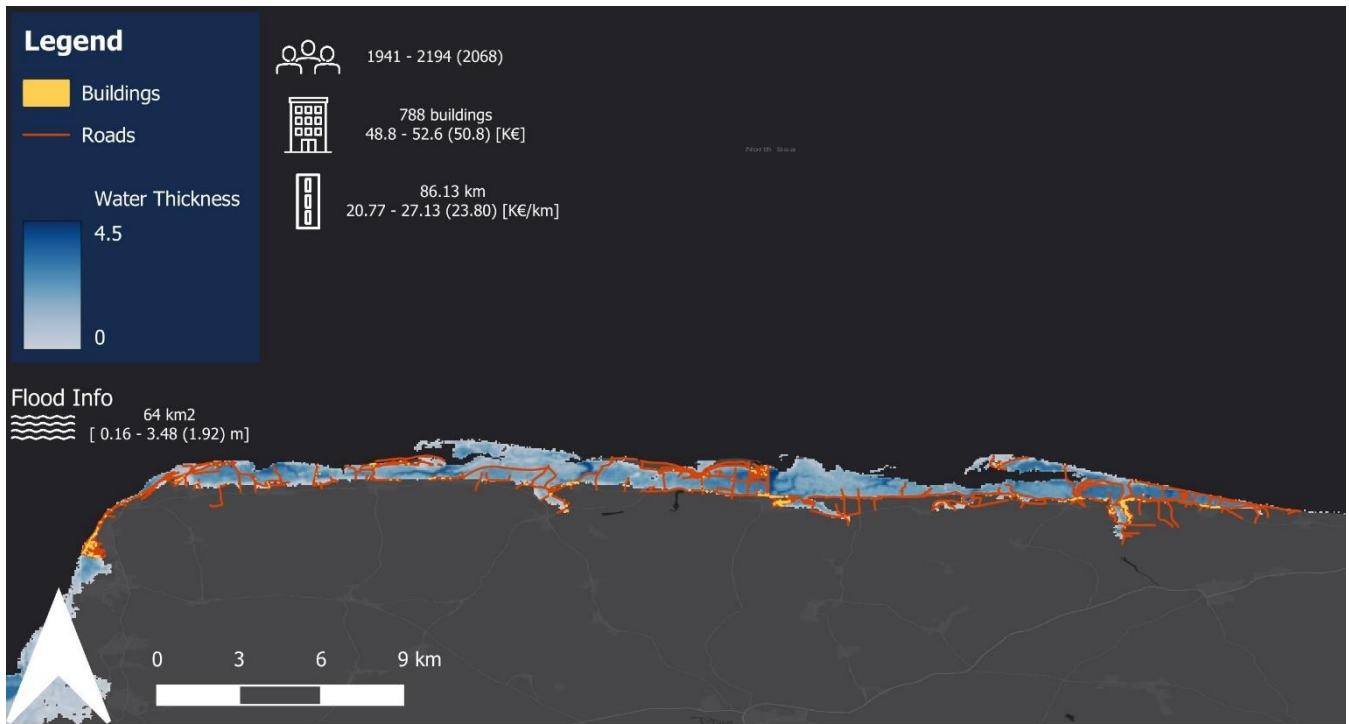

**Figure E. 2. Modelled impact map for Xaver (Norfolk, UK) – 2013. The map contains information on the modelled flood extent, the estimation of affected people, the damage assessment for buildings (number of flooded buildings and mean damage) and the damage assessment for roads (affected road length and mean damage).**



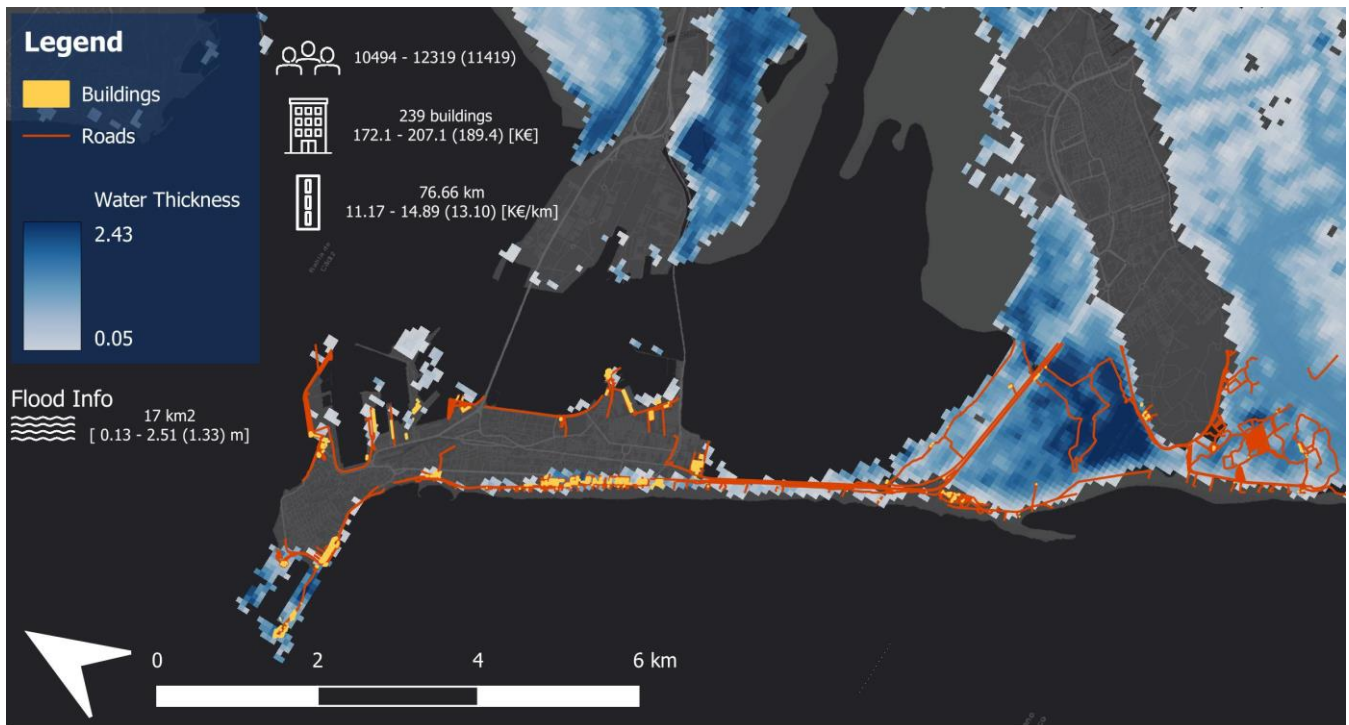

**Figure E. 3. Modelled impact map for Emma (Cadiz, Spain) – 2018. The map contains information on the modelled flood extent, the estimation of affected people, the damage assessment for buildings (number of flooded buildings and mean damage) and the damage assessment for roads (affected road length and mean damage).**

**Code and data availability.** The data and code related to this work and produced during the EU H2020 ECFAS project (GA 101004211; [www.ecfas.eu](http://www.ecfas.eu)) can be accessed through the Zenodo platform: Impact Tool (Duo et al., 2022; <https://doi.org/10.5281/zenodo.7489035>); Pan-EU Flood Catalogue (Le Gal et al., 2022; <https://doi.org/10.5281/zenodo.7488978>); Pan-EU Impact Catalogue (Duo et al., 2022; <https://doi.org/10.5281/zenodo.6951527>). The data presented in this study are available on request from the corresponding author.

**Author contribution.** Enrico Duo: Conceptualisation, Methodology, Software, Validation, Formal analysis, Investigation, Writing - Original Draft, Visualization. Juan Montes Perez: Methodology, Software, Validation, Formal analysis, Investigation, Writing - Original Draft. Marine Le Gal: Resources, Writing - Review & Editing. Tomas Fernández Montblanc: Resources, Writing - Review & Editing. Paolo Ciavola: Writing - Review & Editing, Supervision, Funding acquisition. Clara Armaroli: Writing - Review & Editing, Supervision, Funding acquisition.

**Competing interest.** The authors declare that they have no known competing financial interests or personal relationships that could have appeared to influence the work reported in this paper.

625

**Acknowledgements.** The authors are thankful to Paulo Cabrita, Paola Emilia Souto Ceccon, Maia Irazoqui, Vera Gastal, Sebastien Delbour, Dionysis Grigoriadis, and Emmanouela Ieronymidi, for their support to the work described in this paper. This work received funding from the H2020 European Project ECFAS (A proof-of-concept for the implementation of a European Copernicus coastal flood awareness system, GA n° 101004211; [www.ecfas.eu](http://www.ecfas.eu)). Juan Montes has a postdoctoral contract Margarita Salas at the University of Cadiz from the Ministry of Universities of Spain, funded by the European Union-NextGenerationEU. Marine Le Gal benefited from the "Go for IT" grant (Area 04 - Scienze della Terra) from the Fondazione CRUI under the responsibility of Prof. Paolo Ciavola.

630

## References

- André, C., Monfort, D., Bouzit, M., and Vinchon, C.: Contribution of insurance data to cost assessment of coastal flood damage to residential buildings: insights gained from Johanna (2008) and Xynthia (2010) storm events, *Nat. Hazards Earth Syst. Sci.*, 13, 2003–2012, <https://doi.org/10.5194/nhess-13-2003-2013>, 2013.
- Aribisala, O. D., Yum, S.-G., Adhikari, M. D., and Song, M.-S.: Flood Damage Assessment: A Review of Microscale Methodologies for Residential Buildings, *Sustainability*, 14, 13817, <https://doi.org/10.3390/su142113817>, 2022.
- Armaroli, C., Duo, E., and Viavattene, C.: From Hazard to Consequences: Evaluation of Direct and Indirect Impacts of Flooding Along the Emilia-Romagna Coastline, Italy, *Front. Earth Sci.*, 7, 203, <https://doi.org/10.3389/feart.2019.00203>, 2019.
- Barquet, K. and Cumiskey, L.: Using participatory Multi-Criteria Assessments for assessing disaster risk reduction measures, *Coastal Engineering*, 134, 93–102, <https://doi.org/10.1016/j.coastaleng.2017.08.006>, 2018.
- Barrington-Leigh, C. and Millard-Ball, A.: The world's user-generated road map is more than 80% complete, *PLoS ONE*, 12, e0180698, <https://doi.org/10.1371/journal.pone.0180698>, 2017.
- Bates, P. D., Dawson, R. J., Hall, J. W., Horritt, M. S., Nicholls, R. J., Wicks, J., and Hassan, M. A. A. M.: Simplified two-dimensional numerical modelling of coastal flooding and example applications. *Coastal Engineering*, 52(9), 793-810, <https://doi.org/10.1016/j.coastaleng.2005.06.001>, 2005.
- Büttner, G., Soukup, T., and Kosztra, B.: CLC2012. Addendum to CLC2006 Technical Guidelines, European Environment Agency, Copenhagen, Denmark, 35 pp., 2014.
- Creach, A., Pardo, S., Guillotreau, P., and Mercier, D.: The use of a micro-scale index to identify potential death risk areas due to coastal flood surges: lessons from Storm Xynthia on the French Atlantic coast, *Nat Hazards*, 77, 1679–1710, <https://doi.org/10.1007/s11069-015-1669-y>, 2015.

640

645

650

- De Moel, H. and Aerts, J. C. J. H.: Effect of uncertainty in land use, damage models and inundation depth on flood damage estimates, *Nat Hazards*, 58, 407–425, <https://doi.org/10.1007/s11069-010-9675-6>, 2011.
- 655
- Diario de Cadiz: 'Emma' se come las playas, [https://www.diariodecadiz.es/noticias-provincia-cadiz/Emma-comes-playas\\_0\\_1223278229.html](https://www.diariodecadiz.es/noticias-provincia-cadiz/Emma-comes-playas_0_1223278229.html) (last access: 18 June 2023), 2018a.
- Diario de Cadiz: El Ayuntamiento cifra en cuatro millones los daños del temporal, [https://www.diariodecadiz.es/noticias-provincia-cadiz/Ayuntamiento-cifra-millones-danos-temporal\\_0\\_1225977960.html](https://www.diariodecadiz.es/noticias-provincia-cadiz/Ayuntamiento-cifra-millones-danos-temporal_0_1225977960.html) (last access: 18 June 2023), 2018b.
- 660
- Dottori, F., Kalas, M., Salamon, P., Bianchi, A., Alfieri, L., and Feyen, L.: An operational procedure for rapid flood risk assessment in Europe, *Nat. Hazards Earth Syst. Sci.*, 17, 1111–1126, <https://doi.org/10.5194/nhess-17-1111-2017>, 2017.
- Dottori, F., Salamon, P., Bianchi, A., Alfieri, L., Hirpa, F. A., and Feyen, L.: Development and evaluation of a framework for global flood hazard mapping, *Advances in Water Resources*, 94, 87–102, <https://doi.org/10.1016/j.advwatres.2016.05.002>, 2016.
- 665
- Duo, E., Fernández-Montblanc, T., and Armaroli, C.: Semi-probabilistic coastal flood impact analysis: From deterministic hazards to multi-damage model impacts, *Environment International*, 143, 105884, <https://doi.org/10.1016/j.envint.2020.105884>, 2020.
- Duo, E., Montes Pérez, J., Le Gal, M., Souto Cecon, P. E., Cabrita, P., Fernández Montblanc, T., and Ciavola, P.: ECFAS Pan-EU Impact Catalogue, D5.4 – Pan-EU flood maps catalogue - ECFAS project (GA 101004211), [www.ecfas.eu](http://www.ecfas.eu) (1.2). <https://doi.org/10.5281/zenodo.6951527>, 2022.
- 670
- EEA: The thematic accuracy of Corine land cover 2000 – assessment using LUCAS, Technical report No 7/2006, European Environment Agency, Copenhagen, Denmark, 33 pp., 2006.
- European Space Agency and Airbus: Copernicus DEM EEA-10 [data set], <https://doi.org/10.5270/ESA-c5d3d65>, 2022.
- 675
- Englhardt, J., de Moel, H., Huyck, C. K., de Ruiter, M. C., Aerts, J. C. J. H., and Ward, P. J.: Enhancement of large-scale flood risk assessments using building-material-based vulnerability curves for an object-based approach in urban and rural areas, *Nat. Hazards Earth Syst. Sci.*, 19, 1703–1722, <https://doi.org/10.5194/nhess-19-1703-2019>, 2019.
- Environment Agency: The costs and impacts of the winter 2013 to 2014 floods, Report – SC140025/R1, [https://rpaltd.co.uk/uploads/report\\_files/the-costs-and-impacts-of-the-winter-2013-to-2014-floods-report.pdf](https://rpaltd.co.uk/uploads/report_files/the-costs-and-impacts-of-the-winter-2013-to-2014-floods-report.pdf), 2016.
- 680
- European Commission. Joint Research Centre.: Science for disaster risk management 2017: knowing better and losing less., Publications Office, LU, 2017.
- Eurostat: Real GDP per capita, Statistical Office of the European Union, European Commission, Brussels, Belgium, available at: <https://ec.europa.eu/eurostat/web/main/data/database> (last access: 15 June 2023), 2019.
- 685
- Ferreira, Ó., Plomaritis, T. A., and Costas, S.: Effectiveness assessment of risk reduction measures at coastal areas using a decision support system: Findings from Emma storm, *Science of The Total Environment*, 657, 124–135, <https://doi.org/10.1016/j.scitotenv.2018.11.478>, 2019.

- FFSA-GEMA: La tempête Xynthia du 28 février 2010 Bilan chiffré au 31 décembre 2010, <https://www.mrn.asso.fr/wp-content/uploads/2018/01/2010-bilan-tempete-xynthia-2010-ffsa-gema.pdf> (last access: 18 June 2023), 2011.
- 690 Figueiredo, R. and Martina, M.: Using open building data in the development of exposure data sets for catastrophe risk modelling, *Nat. Hazards Earth Syst. Sci.*, 16, 417–429, <https://doi.org/10.5194/nhess-16-417-2016>, 2016.
- Figueiredo, R., Schröter, K., Weiss-Motz, A., Martina, M. L. V., and Kreibich, H.: Multi-model ensembles for assessment of flood losses and associated uncertainty, *Nat. Hazards Earth Syst. Sci.*, 18, 1297–1314, <https://doi.org/10.5194/nhess-18-1297-2018>, 2018.
- 695 Gerl, T., Kreibich, H., Franco, G., Marechal, D., and Schröter, K.: A Review of Flood Loss Models as Basis for Harmonization and Benchmarking, *PLoS ONE*, 11, e0159791, <https://doi.org/10.1371/journal.pone.0159791>, 2016.
- Hallegatte, S., Ranger, N., Mestre, O., Dumas, P., Corfee-Morlot, J., Herweijer, C., and Wood, R. M.: Assessing climate change impacts, sea level rise and storm surge risk in port cities: a case study on Copenhagen, *Climatic Change*, 104, 113–137, <https://doi.org/10.1007/s10584-010-9978-3>, 2011.
- 700 Hinkel, J., Feyen, L., Hemer, M., Le Cozannet, G., Lincke, D., Marcos, M., Mentaschi, L., Merkens, J. L., de Moel, H., Muis, S., Nicholls, R. J., Vafeidis, A. T., van de Wal, R. S. W., Vousdoukas, M. I., Wahl, T., Ward, P. J., and Wolff, C.: Uncertainty and Bias in Global to Regional Scale Assessments of Current and Future Coastal Flood Risk, *Earth's Future*, 9, <https://doi.org/10.1029/2020EF001882>, 2021.
- Huizinga, J., de Moel, H., and Szewczyk, W.: Global flood depth-damage functions: Methodology and the database with guidelines (No. JRC105688), Joint Research Centre, <http://dx.doi.org/10.2760/16510>, 2017.
- 705 Ieronymidi, E. and Grigoriadis, D.: Coastal dataset including exposure and vulnerability layers, Deliverable 3.1 - ECFAS Project (GA 101004211), [www.ecfas.eu](http://www.ecfas.eu) (5), <https://zenodo.org/records/7319270>, 2022.
- Innerbichler, F., Kreisel, A., and Gruber, C.: Coastal Zones Nomenclature Guideline <https://land.copernicus.eu/user-corner/technical-library/coastal-zones-nomenclature-and-mapping-guideline.pdf> (last access: 15 June 2023), 2021.
- 710 Irazoqui Apecechea, M., Melet, A. and Armaroli, C: Towards a pan-European coastal flood awareness system: Skill of extreme sea-level forecasts from the Copernicus Marine Service. *Front. Mar. Sci.* 9:1091844. doi: 10.3389/fmars.2022.1091844, 2023.
- Jongman, B., Kreibich, H., Apel, H., Barredo, J. I., Bates, P. D., Feyen, L., Gericke, A., Neal, J., Aerts, J. C. J. H., and Ward, P. J.: Comparative flood damage model assessment: towards a European approach, *Nat. Hazards Earth Syst. Sci.*, 12, 3733–3752, <https://doi.org/10.5194/nhess-12-3733-2012>, 2012.
- 715 Koks, E. E., van Ginkel, K. C. H., van Marle, M. J. E., and Lemnitzer, A.: Brief communication: Critical infrastructure impacts of the 2021 mid-July western European flood event, *Nat. Hazards Earth Syst. Sci.*, 22, 3831–3838, <https://doi.org/10.5194/nhess-22-3831-2022>, 2022.
- Kolen, B., Slomp, R., and Jonkman, S. N.: The impacts of storm Xynthia February 27-28, 2010 in France: lessons for flood risk management: Impacts of storm Xynthia, *J. Flood Risk Manage.*, 6, 261–278, <https://doi.org/10.1111/jfr3.12011>, 720 2013.



- Montes, J., Simarro, G., Benavente, J., Plomaritis, T., and del Río, L.: Morphodynamics Assessment by Means of Mesoforms and Video-Monitoring in a Dissipative Beach, *Geosciences*, 8, 448, <https://doi.org/10.3390/geosciences8120448>, 2018.
- 755
- Nguyen, T. T. X., Bonetti, J., Rogers, K., and Woodroffe, C. D.: Indicator-based assessment of climate-change impacts on coasts: A review of concepts, methodological approaches and vulnerability indices, *Ocean & Coastal Management*, 123, 18–43, <https://doi.org/10.1016/j.ocecoaman.2015.11.022>, 2016.
- Nofal, O. M., van de Lindt, J. W., and Do, T. Q.: Multi-variate and single-variable flood fragility and loss approaches for buildings, *Reliability Engineering & System Safety*, 202, 106971, <https://doi.org/10.1016/j.ress.2020.106971>, 2020.
- 760
- Paprotny, D., Kreibich, H., Morales-Nápoles, O., Wagenaar, D., Castellarin, A., Carisi, F., Bertin, X., Merz, B., and Schröter, K.: A probabilistic approach to estimating residential losses from different flood types, *Nat Hazards*, 105, 2569–2601, <https://doi.org/10.1007/s11069-020-04413-x>, 2021.
- Plomaritis, T. A., Ferreira, O., and Costas, S.: Validation of a Bayesian based Early Warning System for coastal hazards: the Emma storm impact at Faro Beach (South Portugal), in: *Coastal Sediments 2019, International Conference on Coastal Sediments 2019*, Tampa/St. Petersburg, Florida, USA, 1447–1459, [https://doi.org/10.1142/9789811204487\\_0126](https://doi.org/10.1142/9789811204487_0126), 2019.
- 765
- Rosina, K., Batista e Silva, F., Vizcaino, P., Marín Herrera, M., Freire, S., and Schiavina, M.: Increasing the detail of European land use/cover data by combining heterogeneous data sets, *International Journal of Digital Earth*, 13, 602–626, <https://doi.org/10.1080/17538947.2018.1550119>, 2018.
- 770
- Sancho-García, A., Guillén, J., Gracia, V., Rodríguez-Gómez, A. C., and Rubio-Nicolás, B.: The Use of News Information Published in Newspapers to Estimate the Impact of Coastal Storms at a Regional Scale, *JMSE*, 9, 497, <https://doi.org/10.3390/jmse9050497>, 2021.
- Sanuy, M., Duo, E., Jäger, W. S., Ciavola, P., and Jiménez, J. A.: Linking source with consequences of coastal storm impacts for climate change and risk reduction scenarios for Mediterranean sandy beaches, *Nat. Hazards Earth Syst. Sci.*, 18, 1825–1847, <https://doi.org/10.5194/nhess-18-1825-2018>, 2018.
- 775
- Schiavina, M., Batista, F., Rosina, K., Ziemba, L., Marin Herrera, M., Craglia, M., Lavalle, C., Kemper, T., and Freire, S.: ENACT-POP R2020A - ENACT 2011 Population Grid, <https://doi.org/10.2905/BE02937C-5A08-4732-A24A-03E0A48BDCDA>, 2020.
- 780
- Schiavina, M., Freire, S., and MacManus, K.: GHS population grid multitemporal (1975-1990-2000-2015), R2019A, <https://doi.org/10.2905/0C6B9751-A71F-4062-830B-43C9F432370F>, 2019.
- Souto Ceccon, P.E., Duo, E., Ciavola, P., Fernandez-Montblanc, T., and Armaroli, C.: Database of extreme events, test cases selection and available data, Deliverable 5.1 – ECFAS Project (GA 101004211), [www.ecfas.eu](http://www.ecfas.eu) (2), <https://zenodo.org/records/7488643>, 2021.
- 785
- Spencer, T., Brooks, S. M., Evans, B. R., Tempest, J. A., and Möller, I.: Southern North Sea storm surge event of 5 December 2013: Water levels, waves and coastal impacts, *Earth-Science Reviews*, 146, 120–145, <https://doi.org/10.1016/j.earscirev.2015.04.002>, 2015.

Souto-Ceccon, P. E., Montes-Perez, J., Duo, E., Ciavola, P., Fernandez Montblanc, T., and Armaroli, C.: A European database of resources on coastal storm impacts, Earth Syst. Sci. Data Discuss. [preprint], <https://doi.org/10.5194/essd-2024-183>, in review, 2024.

790

Spencer, T., Brooks, S. M., Möller, I., and Evans, B. R.: Where Local Matters: Impacts of a Major North Sea Storm Surge, *Eos Trans. AGU*, 95, 269–270, <https://doi.org/10.1002/2014EO300002>, 2014.

Talavera, L., del Río, L., and Benavente, J.: UAS-based High-resolution Record of the Response of a SeminatURAL Sandy Spit to a Severe Storm, *Journal of Coastal Research*, 95, 679, <https://doi.org/10.2112/SI95-132.1>, 2020.

795

Taramelli, A., Righini, M., Valentini, E., Alfieri, L., Gatti, I., and Gabellani, S.: Building-scale flood loss estimation through vulnerability pattern characterization: application to an urban flood in Milan, Italy, *Nat. Hazards Earth Syst. Sci.*, 22, 3543–3569, <https://doi.org/10.5194/nhess-22-3543-2022>, 2022.

Thielen, A. H., Bessel, T., Kienzler, S., Kreibich, H., Müller, M., Pisi, S., and Schröter, K.: The flood of June 2013 in Germany: how much do we know about its impacts?, *Nat. Hazards Earth Syst. Sci.*, 16, 1519–1540, <https://doi.org/10.5194/nhess-16-1519-2016>, 2016.

800

Thomas, K., Hardy, R. D., Lazrus, H., Mendez, M., Orlove, B., Rivera-Collazo, I., Roberts, J. T., Rockman, M., Warner, B. P., and Winthrop, R.: Explaining differential vulnerability to climate change: A social science review, *WIREs Climate Change*, 10, <https://doi.org/10.1002/wcc.565>, 2019.

Van Dongeren, A., Ciavola, P., Martinez, G., Viavattene, C., Bogaard, T., Ferreira, O., Higgins, R., and McCall, R.: Introduction to RISC-KIT: Resilience-increasing strategies for coasts, *Coastal Engineering*, 134, 2–9, <https://doi.org/10.1016/j.coastaleng.2017.10.007>, 2018.

805

Van Ginkel, K. C. H., Dottori, F., Alfieri, L., Feyen, L., and Koks, E. E.: Flood risk assessment of the European road network, *Nat. Hazards Earth Syst. Sci.*, 21, 1011–1027, <https://doi.org/10.5194/nhess-21-1011-2021>, 2021.

Velegrakis A., Chatzistratis, D., Chalazas, T., Armaroli C., Schiavon, E., Konstantina, P., Antigoni, N. And Giorgia, G.: Final report on users’ needs and requirements. Regulations vs needs and technical specifications, Deliverable 2.4 – ECFAS Project (GA 101004211), [www.ecfas.eu](http://www.ecfas.eu), 2022.

810

Viavattene, C., Jiménez, J. A., Ferreira, O., Priest, S., Owen, D., and McCall, R.: Selecting coastal hotspots to storm impacts at the regional scale: a Coastal Risk Assessment Framework, *Coastal Engineering*, 134, 33–47, <https://doi.org/10.1016/j.coastaleng.2017.09.002>, 2018.

815

Viavattene, C., Micou, A.P., Owen, D., Priest, S., Parker, D.: Library of Coastal Vulnerability Indicators, Guidance Document. Deliverable No: D.2.2 –Coastal Vulnerability Indicator Library. [https://eprints.mdx.ac.uk/15199/1/RISC-KIT\\_D.2.2\\_CVIL\\_Guidance\\_Document.pdf](https://eprints.mdx.ac.uk/15199/1/RISC-KIT_D.2.2_CVIL_Guidance_Document.pdf) (last access: 18 June 2023), 2015.

Vinet, F., Lumbroso, D., Defossez, S., and Boissier, L.: A comparative analysis of the loss of life during two recent floods in France: the sea surge caused by the storm Xynthia and the flash flood in Var, *Nat Hazards*, 61, 1179–1201, <https://doi.org/10.1007/s11069-011-9975-5>, 2012.

820

- Vousdoukas, M. I., Bouziotas, D., Giardino, A., Bouwer, L. M., Mentaschi, L., Voukouvalas, E., and Feyen, L.: Understanding epistemic uncertainty in large-scale coastal flood risk assessment for present and future climates, *Nat. Hazards Earth Syst. Sci.*, 18, 2127–2142, <https://doi.org/10.5194/nhess-18-2127-2018>, 2018a.
- 825 Vousdoukas, M. I., Mentaschi, L., Voukouvalas, E., Bianchi, A., Dottori, F., and Feyen, L.: Climatic and socioeconomic controls of future coastal flood risk in Europe, *Nature Clim Change*, 8, 776–780, <https://doi.org/10.1038/s41558-018-0260-4>, 2018b.
- Wagenaar, D. J., de Bruijn, K. M., Bouwer, L. M., and de Moel, H.: Uncertainty in flood damage estimates and its potential effect on investment decisions, *Nat. Hazards Earth Syst. Sci.*, 16, 1–14, <https://doi.org/10.5194/nhess-16-1-2016>, 2016.