

Temporal persistence of postfire flood hazards under present and future climate conditions in southern Arizona, USA

Tao Liu¹, Luke A. McGuire², Ann M. Youberg³, Charles J. Abolt¹, Adam L. Atchley¹

¹Earth and Environmental Sciences Division, Los Alamos National Laboratory, Los Alamos, NM 87545, USA

5 ²Department of Geosciences, University of Arizona, Tucson, AZ 85721-0011, USA

³Arizona Geological Survey, University of Arizona, Tucson, AZ 85721-0011, USA

Correspondence to: Tao Liu (taoliu@lanl.gov)

Abstract. Changes to soil hydraulic properties that reduce infiltration capacity following fire can increase flash flood risks. These risks are exacerbated by rainfall intensification associated with a warming climate. However, the potential effects of climate-change-driven rainfall intensification on postfire floods remain largely unexplored. Using rainfall and runoff observations from a 49.4 km² watershed in southern Arizona, USA, and a hydrological model (KINEROS2), we examined the temporal evolution following a historic fire of three crucial hydrologic parameters: soil saturated hydraulic conductivity (K_{sp}), net capillary drive (G_p), and hydraulic roughness (n_c). We explored how the effect of fire on these parameters may influence peak flow under future climate scenarios derived from CMIP6, specifically the medium emissions scenario (SSP245) and high emissions scenario (SSP585). Results demonstrate an increase in K_{sp} from 11 mm/hr in the first postfire year to 60 mm/hr in postfire year three. G_p similarly increased from 19 mm in the first postfire year to 30 mm in the third, while n_c was relatively constant. The highest simulated Q_p occurred in the first postfire year. Under the SSP245 scenario, the likelihood of a 100-yr flood is projected to be twice as large by the middle century relative to its historical magnitude. Simulations further indicate that the maximum expected discharge associated with a postfire flood, as derived from historical data, could be triggered by a 10-yr rainstorm under the SSP585 scenario by the late century. Simulations also demonstrate that rainfall intensification will lead to greater persistence of elevated flood hazards following fire by late century under both the SSP245 and SSP585 scenarios.

1 Introduction

Effects of moderate and high severity fire on soil and vegetation promote increases in runoff and erosion (McGuire et al., 2024; Moody et al., 2013; Robichaud et al., 2016), which alters watershed responses to rainfall (Cannon et al., 2008). Modest rainfall can trigger floods and debris flows in recently burned areas (Esposito et al., 2023), with more extreme rainfall having the potential for devastating impacts on areas downstream (Kean et al., 2019; Lancaster et al., 2021). Increases in fire activity (Boer et al., 2016; Canadell et al., 2021; Senande-Rivera et al., 2022) and rainfall intensification (Westra et al., 2014; Fowler et al., 2021) driven by climate change have the potential to further exacerbate postfire flow hazards in the coming decades (Kean and Staley, 2021). Hydrologic models are a valuable tool for quantifying fire effects and assessing postfire flow hazards (McLin et al., 2001; Wu et al., 2021; Li et al., 2022; Liu et al., 2022; Yu et al., 2023), including how they may change under

future climate scenarios. However, our ability to use hydrologic models for predicting and mitigating post-fire flow hazards would be improved by a better understanding of how to update model parameters after a fire. This includes both the immediate changes following a fire and their temporal evolution as a function of time since the burn (Cydzyk and Hogue, 2009; Ebel, 2020; Liu et al., 2021).

Increases in infiltration-excess overland flow are often associated with increases in flood (Ebel, 2024; Xu et al., 2023) and debris flow hazards (Nyman et al., 2011) in the first several years following fire. Increases in infiltration-excess overland flow following fire result from reductions in interception (Stoof et al., 2012) and water storage in litter and duff (Robichaud et al., 2016) as well as changes to soil hydraulic properties that reduce infiltration capacity (Ebel and Moody, 2017; Ebel, 2019). Soil burn severity significantly affects hydrologic response by altering key soil properties, with higher severities leading to reduced infiltration and increased runoff, particularly in the initial post-fire events (Campbell et al., 1977; Moody et al., 2016). The immediate effects and temporal persistence of fire-driven changes to soil hydraulic properties have been inferred from model calibration (Cydzyk and Hogue, 2009; Liu et al., 2021) and studied using point scale measurements (Liu et al., 2023; Perkins et al., 2022) and plot scale rainfall simulation experiments (Robichaud et al., 2016). Fire effects on soil hydraulic properties and runoff are greatest immediately after fire and decay with time (Noske et al., 2016; Ebel and Martin, 2017; Saxe et al., 2018), which is consistent with the conceptual model of a window of disturbance following fire (Shakesby and Doerr, 2006). Ebel and Martin (2017) represent postfire changes in saturated hydraulic conductivity using a logistic curve, though the superposition of fire effects and seasonal variations in soil hydraulic properties can lead to more complex, non-monotonic relationships between soil hydraulic properties and time since fire (Perkins et al., 2022).

The intensity of runoff responses in burned areas also tends to be greatest immediately following fire with subsequent decreases over time. More than 70% of the largest postfire floods in the USA have occurred in the first three postfire years (Ebel 2024). Temporal changes in susceptibility to extreme responses following fire are reflected in changes to rainfall intensity-duration (ID) thresholds, which are a commonly used tool to assess debris flow and flash flood likelihood in recently burned watersheds. Rainfall ID thresholds for floods and debris flows are lowest immediately following fire and increase over time (Cannon et al., 2008; Hoch et al., 2021; Thomas et al., 2021; Liu et al., 2022). Increases in infiltration capacity and hydraulic roughness contribute to increases in rainfall ID thresholds as a function of time since fire (McGuire et al 2021; Thomas et al 2021; Liu et al, 2022). Rainfall ID thresholds based on intensities averaged over durations of 15-60 minutes have been used to assess postfire runoff (Ebel et al., 2020) and floods (Moody and Martin, 2001; Liu et al., 2022). Changes in climate are expected to alter rainfall intensity-duration-frequency curves, with the greatest increases in rainfall intensity occurring over sub-hourly durations (Martel et al., 2021). Increases in rainfall intensity over sub-hourly durations could therefore have a strong effect on postfire flow hazards (Kean and Staley, 2021; Oakley, 2021). However, the combined effects of climate change and postfire hydrologic processes on projections of future flooding and debris flows are poorly studied to date.

The primary objectives of this study are to (1) use observations of rainfall and runoff activity to better constrain temporal changes in effective hydrologic parameters following fire for watershed-scale flash flood simulations, and (2) use the calibrated model to quantify changes in postfire flash-flood peak discharges between present day and mid-late century due to rainfall intensification under future climate conditions. In regions like the southwestern USA, where short-duration, high-intensity rainfall events are common, severe flooding can occur with little warning. We focus, in particular, on postfire runoff driven by infiltration-excess overland flow since this is a primary driver of postfire flash flood and debris flow hazards (Schmidt et al., 2011; Ebel, 2020; Gorr et al., 2024). Our study utilizes data and observations from a 49.4 km² watershed in southern Arizona, USA that was burned by the 2020 Bighorn Fire. While this watershed is larger than those typically associated with flash floods (e.g., <10 km²), post-fire alterations to soil hydrologic properties, such as reduced infiltration capacity, can enhance infiltration excess overland flow, leading to rapid streamflow responses to sub-hourly rainfall events, similar to flash flood dynamics observed in smaller watersheds. This work provides guidance for constraining fire effects on soil hydrologic parameters in similar environments, particularly within the southwestern USA where fire severity and area burned are increasing (Singleton et al., 2019).

2 Study Area

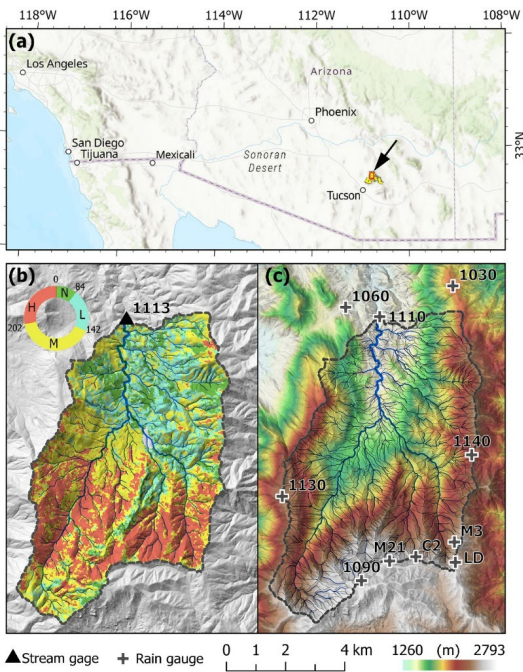


Figure 1: (a) The location of the upper Cañada del Oro (CDO) watershed and the 2020 Bighorn Fire perimeter near Tucson, Arizona, USA; (b) Soil burn severity for the 2020 Bighorn Fire in the CDO watershed. Soil burned severity is classified as either unburned (N), low (L), moderate (M), or high (H) based upon an updated Burned Area Reflectance Classification (BARC) dataset from the U.S. Forest Service Burned Area Emergency Response (BAER) team. The BARC thresholds used to define different soil burn severity classes are 84, 142, and 202. The black triangle indicates the location of the stream gage (1113) installed by the Pima County Regional Flood Control District; (c) Digital elevation model with shaded relief showing the CDO watershed with locations of ten rain gauges (black crosses). The upper CDO watershed KINEROS2 model discretization contains 1198 hillslope planes and 487 channel segments.

Our study focused on the upper Cañada del Oro (CDO) watershed, which drains 49.4 km² of the northern portion of the Santa Catalina Mountains to the north of Tucson, Arizona, USA (Fig. 1). The mean annual rainfall is about 640 mm with a maximum of 1186 mm and minimum of 112 mm between 1980-2024 (Abatzoglou, 2013). Approximately 44% of mean annual precipitation is delivered between June and September due to convective rainstorms associated with the North American monsoon (Adams and Comrie, 1997). According to NOAA Atlas 14 (Perica et al. 2011; <https://hdsc.nws.noaa.gov/pfds/>), the estimated rainfall intensity for a 2-year storm event is approximately 77 mm hr⁻¹ over a 15-minute duration and about 19 mm

hr⁻¹ over a 60-minute duration. Infiltration excess overland flow during intense monsoon rainstorms is the primary mechanism for generating postfire floods and debris flows in Arizona (Raymond et al., 2020; Gorr et al., 2023a; Gorr et al., 2023b).

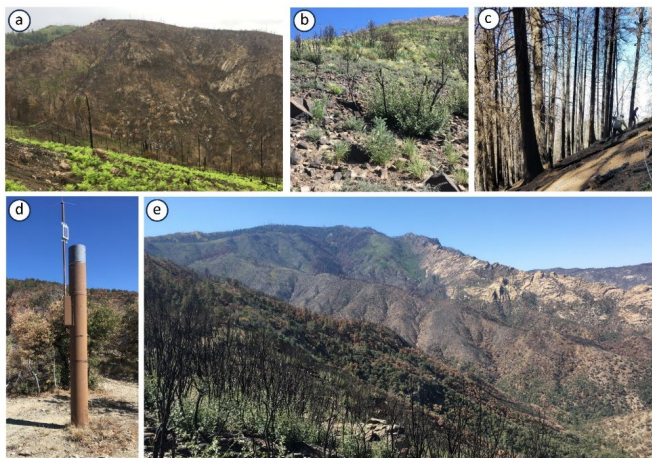


Figure 2. (a) Photo taken on 7 July 2020 of small tributaries at the headwaters of the CDO watershed, near the MLFD rain gauge. The area burned primarily at moderate and high severity. (b) Photo taken in October 2020 of a hillslope, which burned at moderate severity in the 2003 Aspen Fire and moderate severity in the 2020 Bighorn Fire, near the MLFD rain gauge. (c) Photo taken in October 2020 of a hillslope near the C2 rain gauge, which did not burn in the 2003 Aspen Fire and was burned at moderate severity in the 2020 Bighorn Fire. (d) The Automated Local Evaluation in Real Time (ALERT) rain gauge installed at Dan's Saddle (1140). (e) A view of the headwaters of the CDO watershed in October 2020.

The Bighorn Fire, which ignited on 5 June 2020 and was contained on July 23, burned 306.5 km² of the Santa Catalina Mountains. The type and density of vegetation in the Santa Catalina Mountains varies substantially with elevation. The fire burned through a range of plant communities from Sonoran Desertscrub at the lowest elevations to mixed conifer forest at higher elevations. Soil burn severity (SBS) was mapped by the Burned Area Emergency Response team (e.g. Parson et al., 2010) using a combination of remote sensing data, namely the differenced normalized burn ratio (*dNBR*), and field observations. Approximately 10% of the area within the fire perimeter was classified as unburned or burned at very low severity, 21% burned at low severity, 41% at moderate severity, and 28% at high severity (Fig 1b). In addition to burning during the Bighorn Fire in 2020, the CDO watershed was also burned by the 2003 Aspen Fire (10% low severity, 15% moderate severity, 55% high severity).

3 Materials and methods

3.1 Hydrologic monitoring

Temporal changes in soil hydrologic parameters were quantified by calibrating a model to a series of rainfall-runoff events that occurred in the CDO watershed at different times following the fire, as described in more detail in Section 3.2. Model calibration required rainfall, runoff, and soil moisture data. We utilized rainfall measurements collected by six Automated Local Evaluation in Real Time (ALERT) tipping bucket rain gauges maintained by the Pima County Regional Flood Control District (PCRFCF) (Figure 2d). Data from these gauges are available throughout the entire study period from July 2020 to September 2023. We further installed one tipping bucket rain gauge (Onset HOBO RG3-M), which we refer to as the Loma Linda gauge (LD, Figure 1), near the headwaters of the CDO in July 2020. Data are available for this gauge from July 2020 to October 2021, which includes the first two monsoon seasons following the fire (Figure 1). Three additional tipping bucket rain gauges, which we refer to as M21, M3, and C2, were installed near the headwaters of the CDO prior to the 2021 monsoon season and used here to supplement data from the other gauges for the 2021 monsoon season (Figure 1). We utilize data from all available rain gauges as input for the watershed-scale hydrologic model.

Runoff hydrographs at the outlet of the CDO watershed were estimated from a pressure transducer maintained by PCRFCF. The pressure transducer is located approximately 0.6 meters above the channel's lowest point. Flows with peak depths below 0.6 meters would therefore not be detected. Stage data from the pressure transducer were converted to discharge using a rating table developed by PCRFCF in 2021. Once flow is detected by the pressure transducer, data are initially logged and transmitted every 5 minutes. The timing of subsequent data transmissions during a rainstorm may then occur on a coarser temporal resolution depending on the degree to which the pressure varies over time. On average, the gauge provided estimates of discharge at a time interval of approximately 5 minutes during runoff events (Figure 3).

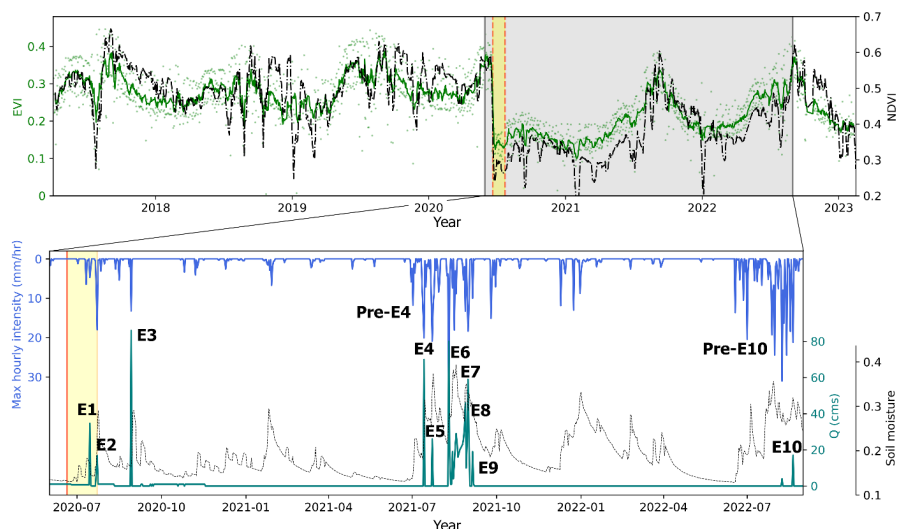


Figure 3. The 12 simulated events occurred after the ignition of the 2020 Bighorn Fire. The Enhanced Vegetation Index (EVI) and Normalized Difference Vegetation Index (NDVI) data, were derived from MODIS Terra satellite imagery at a resolution of 500 meters. Rainfall measurements collected by six Automated Local Evaluation in Real Time (ALERT) tipping bucket rain gauges maintained by the Pima County Regional Flood Control District (PCRFC), supplemented by four additional gauges we installed during the study period (referenced in Figure 1). The maximum hourly rainfall intensity was estimated using these rain gauge data with the Thiessen polygon method. Runoff hydrographs at the outlet of the CDO watershed were obtained from a PCRFC-maintained streamflow gauge.

Table 1. A summary of simulated rainfall-runoff events after the 2020 Bighorn Fire during 2020–2023 on the upper Cañada del Oro watershed.

Event ID	Date	Initial soil moisture	Rainfall depth (mm)	Rainfall duration (min)	Peak I15 (mm/hr)	Peak I30 (mm/hr)	Median intensity coverage*	Runoff ratio	Peak Q (m ³ /s)
1	7/15/2020	0.18	6.4	44	12.0	9.3	27%	0.13	34.7
2	7/22/2020	0.15	7.9	35	23.3	14.9	25%	0.03	7.8
3	8/29/2020	0.16	19.9	121	22.1	19.0	80%	0.12	86.0
Pre-4	6/30/2021	0.14	15.5	189	10.1	7.8	35%	0	0
4	7/14/2021	0.19	28.8	124	33.8	26.8	69%	0.10	70.0
5	7/23/2021	0.27	39.4	182	40.7	30.0	58%	0.03	26.0
6	8/10/2021	0.24	47.8	527	45.4	40.4	43%	0.22	80.0
7	8/30/2021	0.31	30.9	955	25.8	21.0	48%	0.36	25.0
8	8/31/2021	0.31	75.9	725	40.4	37.2	74%	0.11	59.0
9	9/5/2021	0.31	16.1	71	26.0	16.0	46%	0.19	19.0
Pre-10	7/1/2022	0.19	19.9	72	31.2	26.6	39%	0	0
10	8/20/2022	0.29	60.5	456	27.3	23.8	68%	0.08	17.0

* Median intensity coverage: the proportion of the rainfall area where the intensity exceeds the median value of the entire rainfall field.

We selected storm events for hydrologic modeling by compiling all 10 events between the beginning of the 2020 monsoon season (June 2020) and the end of the 2023 monsoon season (September 2023) that produced high-intensity rainfall and a measurable flow response at the outlet of the upper CDO watershed (Events 1-10 in Figure 3 and Table 1). In addition, we selected two storms that produced high-intensity rainfall but no measurable flow response (Pre-4 and Pre-10 in Figure 3 and Table 1). The daily volumetric soil moisture content (0-5 cm) for each event was obtained from Climate Forecast System Reanalysis (CFSR, Schneider et al., 2013).

3.2 Inferring roughness and soil hydrologic parameters

We used the KINEROS2 (K2) hydrological model to simulate rainfall partitioning, overland flow generation, and flood routing for individual events in the upper CDO watershed with the goal of inferring temporal changes in hydrologic parameters as a function of time since fire. K2 is an event-scale, distributed-parameter, process-based watershed model, which has been used extensively for rainfall-runoff processes in semi-arid and arid watersheds (Smith et al., 1995; Goodrich et al., 2012). Its infiltration dynamics are modeled after the Parlange et al. (1982) approach, complementing the kinematic wave equations that efficiently simulate overland and channel flows in steep, mountainous regions (Woolhiser et al. 1967). The model has been used in past studies to infer temporal changes in watershed-scale hydrologic and hydraulic parameters in burned watersheds (e.g., Chen et al., 2013; Liu et al., 2021).

K2 idealizes topography as a series of connected hillslope planes and channel segments. The upper CDO watershed was discretized into 1685 elements, including 1198 hillslope planes and a stream network of 487 channel segments based on a 1 m lidar-derived digital elevation model (DEM). The simulation files needed to run K2, including these structured hillslope and channel segments, and default parameterizations were prepared using the Automated Geospatial Watershed Assessment toolkit (AGWA; Miller et al., 2007). For all portions of the model domain, we calculated the initial soil saturation (SAT) from the top 5 cm soil moisture data (CFSR), normalized by soil porosity (0.39-0.44).

We selected six parameters (Table 2) for model calibration: soil hydraulic conductivity of hillslopes (K_{sp}) and channels (K_{sc}), net capillary drive of hillslopes (G_p) and channels (G_c), and Manning's n roughness of hillslopes (np) and channels (nc). Meles et al. (2024) considered these parameters to be the most influential in the simulated rainfall-runoff behavior. The values of these parameters were calibrated in areas burned at moderate or high severity, where they were assumed to be spatially invariant (Fig 1b). The parameters for unburned and low SBS hillslopes and channels were initially given default values from the AGWA lookup tables based on soil types and land cover properties. However, preliminary event-based model calibrations indicated that default values for K_{sp} and G_p , which control infiltration capacity on hillslopes, were lower than calibrated values for areas burned at moderate to high severity in postfire years 2 and 3. As a result, using default value for K_{sp} and G_p in unburned and low severity areas would lead to simulations where runoff was being preferentially generated from low severity and unburned areas as opposed to areas burned at moderate to high severity, which was inconsistent with observations. For

this reason, we set values for K_{sp} and G_p equal to values calibrated for areas burned at moderate to high severity in postfire year 3. This is consistent with the assumption that soil hydrologic parameters had approximately returned to typical unburned values by postfire year 3.

A total of 6000 parameter sets were generated using Progressive Latin Hypercube Sampling strategy (Sheikholeslami & Razavi, 2017). For the events with measurable streamflow (Events 1-10), we evaluated model performance for each parameter set by quantifying the match between the observed and simulated hydrographs during time periods when discharge was greater than 5% of the event peak discharge. We determined best-fit parameters for each event by maximizing the Kling-Gupta Efficiency (KGE; Gupta et al., 2009), with the top 100 KGE-ranked simulations used to estimate parameter uncertainty. For events Pre-4 and Pre-10 where there was no measurable streamflow observed, simulations that produced peak discharge rates between 0.5 m³/s and 1.5 m³/s were used to infer minimum effective values for parameters. We were able to use this approach to determine minimum values for model parameters since modeled peak discharge increases with a decrease in any of the calibrated parameters. For example, the minimum K_{sp} can be estimated based on the lowest value of K_{sp} that results in a simulated peak discharge of less than 1.5 m³/s.

We determined estimates for model parameters as a function of time since fire based on calibration to all events where the model provided a good match to the observed runoff response, as quantified by the KGE metric. In cases where the model was not capable of reproducing the observed runoff response, as indicated by a low KGE value, we have low confidence in our ability to infer fire-driven changes in model parameters via calibration. Poor model performance, for example, could be attributed to rainfall characteristics and initial soil moisture conditions that promote saturated-excess overland flow rather than infiltration-excess overland flow, which K2 is better suited to represent. Therefore, we did not include values of model parameters inferred from events where no combination of K2 parameters resulted in a reasonable fit to the observed hydrograph.

Table 2. Calibrated parameters in the KINEROS (K2) model

Parameter name	Units	Feasible range	Description
n_p	s/[m ^{1/3}]	0.01–0.20	Manning’s roughness coefficient of hillslopes
K_{sp}	mm/hr	1–70	Saturated hydraulic conductivity of hillslopes
G_p	mm	1–70	Effective net capillary drive of hillslopes
n_c	s/[m ^{1/3}]	0.01–0.20	Manning’s roughness coefficient of channels
K_{sc}	mm/hr	1–30	Saturated hydraulic conductivity of channels
G_c	mm	1–30	Effective net capillary drive of channels

Using the same 6000 parameter sets drawn from Progressive Latin Hypercube Sampling strategy and the corresponding model outputs, we conducted a sensitivity analysis using the Variogram Analysis of Response Surfaces (VARS) methodology (Razavi

and Gupta, 2016a and 2016b) with a goal of ranking parameter importance. We used the KGE to construct a model response surface to calculate VARS-TO, a sensitivity metric which is equivalent to Sobol's variance-based Total-Order effect, as explained in Razavi and Gupta (2015). The relative importance for each parameter, ranging from 0 to 1, was calculated by dividing the VARS-TO of the parameter by the sum of VARS-TOs across all parameters, offering a quantitative assessment of each parameter's influence on the model response (i.e. KGE).

3.3 Projected precipitation frequency estimates

Climate change is projected to increase precipitation extremes (Westra et al., 2014; Fowler et al., 2021). Sub-hourly precipitation rates, which significantly impact post-fire hydrogeomorphic hazards, could intensify beyond the expected 7%-8% per degree Celsius increase predicted by the Clausius-Clapeyron (CC) relation (Prien et al. 2017; Cannon and Innocenti 2019; Fowler et al. 2021). Here, we used gridded precipitation frequency estimates to represent rainfall intensification. We determined reference rainfall intensity-duration frequency curves for the CDO based on historical data from NOAA Atlas 14 (Perica et al. 2011; <https://hdsc.nws.noaa.gov/pfds/>). We then modified reference rainfall intensities, I_{ref} , based on the projected change in mean annual temperature, ΔT ($^{\circ}\text{C}$), at our study site according to (Martel et al., 2021),

$$I_{fut} = I_{ref} \left(\frac{100 + R_{sc}}{100} \right)^{\Delta T} \quad (1)$$

where I_{fut} is the future rainfall intensity and $R_{sc} = 8\%/^{\circ}\text{C}$ is a CC scaling factor.

The change in temperature was computed using data for our study site location from Localized Constructed Analogs version 2 (LOCA2; Pierce et al. 2023) for several future scenarios. The LOCA2 data are derived from 27 Coupled-Model Intercomparison Project Phase 6 (CMIP6) sets of climate model simulations covering the period between 1950 and 2100 at a 6-km spatial resolution (Pierce et al. 2023). The future scenarios used here include mid-21st Century (2045–2074) and late-21st Century (2075–2100) for both SSP245 and SSP585 scenarios. The SSP245 scenario represents the medium pathway of future greenhouse gas emissions with climate protection measures being taken, while the SSP585 scenario represents the upper boundary of future pathways (O'Neill et al., 2016). The LOCA2 data provide monthly minimum and maximum temperature for each of the 27 CMIP6 models. We computed the average of monthly minimum and maximum temperature to calculate the mean temperature change from reference for each future period and warming scenario (Fig. S1). We then used equation 1 to calculate the 15-minute ($I15$) and 30-minute ($I30$) rainfall intensities associated with annual recurrence intervals (ARIs) of 1, 2, 5, and 10 years.

We used I_{fut} to construct design rainstorms to explore postfire flash flood magnitude in the CDO watershed. The duration of all input hyetographs is 30 minutes. The 30-min input hyetograph has the shape of a Gaussian distribution with a total rainfall

depth equal to $130/2$. The depth of rainfall occurring in the middle 15 minutes of the design storm is equal to $115/4$. We produced the 30-min hyetographs at the 1-, 2-, 5-, and 10-year ARI for the reference and the four future climate scenarios (Fig. S2-S3). To account for the uncertainty associated with the spatial scale of rainfall over the watershed and its influence on flood magnitude (e.g., Ebel 2024), we randomly selected continuous hillslope elements within the model domain to receive the designed rainstorm in thirty different configurations. The total area of the selected hillslopes accounted for 10%, 30%, 50%, 70%, and 90% of the CDO watershed, respectively. The selected areas cover the portions of the watershed with different soil burn severity. As such, for a given ARI rainstorm (1, 2, 5, or 10 years) and a particular climate scenario (1 reference and 4 future climate scenarios), we ran 450 simulations (5 rainfall extent factors, 3 postfire years, and 30 configurations) to estimate peak discharge.

4 Results

4.1 Hydrological condition and model behaviour

We performed 12 simulations of observed rainfall-runoff events, which exhibited distinct hydrological conditions. Events 1-4, pre-4, and pre-10 commenced with relatively dry soil conditions, characterized by saturation levels below 0.43 (volumetric soil moisture divided by porosity). Conversely, the remaining five events initiated from a comparatively wet state, with saturation between 0.55-0.84 (Figure 4d). Furthermore, the rainfall durations varied substantially between these two groups of events. Events 1-5, pre-4, and pre-10 were relatively short-lived, lasting less than 2 hours. In contrast, the other five events were characterized by longer durations, between 7.6-15.9 hours (Figure 4d). These disparities in hydrological conditions suggest that the dominant mechanisms governing overland flow generation might differ between the two groups of events.

The hydrological model, driven by observed rainfall data, demonstrated an adequate representation of rainfall-runoff processes in the CDO watershed for events 1-5 (Figure 4; Figure 5). Among the top 100 simulations ranked by the KGE metric, the median KGE values for these five events ranged between 0.34 and 0.72, while the highest KGE values spanned from 0.63 to 0.82. The simulated hydrographs effectively captured the peak discharge, timing, and runoff volume of the observed events (Figure 5). In contrast, the model's performance for events 6-10 was relatively poor. The highest KGE values among the top 100 simulations for these events ranged from 0.07 to 0.35, while the median KGE values were considerably lower, ranging from 0.04 to 0.31.

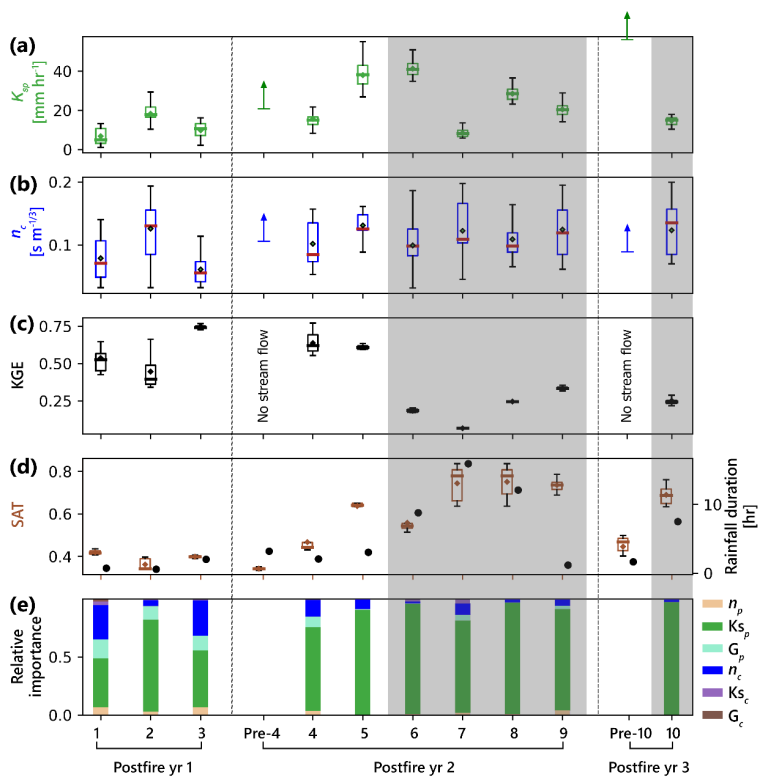


Figure 4. Summary of calibrated hydrological parameters (K_{sp} , n_c), model performance (KGE), volumetric soil moisture divided by porosity (SAT), rainfall duration, and relative parameter importance for the simulated 12 events. Note the shaded simulations for event 6-9 and event 10 indicate that they are excluded from analyses to constrain changes in fire-affected model parameters as a function of time since fire due to poor model performance.

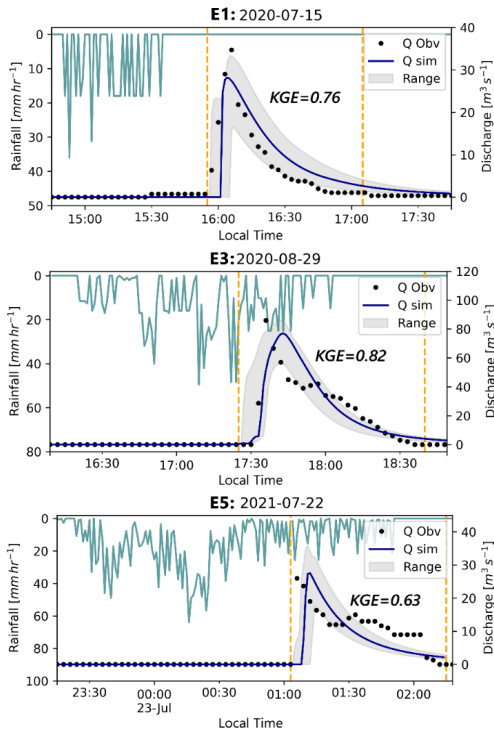


Figure 5. The simulated hydrograph associated with the largest KGE (dark blue line) and the top 100 KGE-ranked simulations (gray area) overlaid on the observed rainfall (green lines) and discharge (black dots) for events 1, 3 and 5. Boundaries of the evaluation periods (i.e. data used to compute KGE) are indicated by the dashed orange lines.

The sensitivity analysis showed that K_{sp} was the most influential parameter across all ten events when evaluating model performance using KGE (Figure 4e). For events 6, and 8-10, K_{sp} was a particularly dominant factor governing rainfall-runoff processes, exhibiting a relative importance of 0.87-0.96 (Figure 4e). In the case of events 1, and 3-5, the second most important parameter was n_c , closely followed by G_p (Figure 4e). The remaining parameters, such as n_p (Manning's roughness on hillslopes), G_c , and K_{sc} , exhibited negligible influence on model performance.

4.2 Changes in model parameters after fire

Since the model reproduced the observed runoff response (or lack thereof) reasonably well during events 1-5, pre-4, and pre-10, we utilize the calibrated model parameters from those events to quantify fire-affected model parameter values at different times since fire. To represent the effective hydrologic condition for the first postfire year, we used the average of the calibrated parameter values associated with the largest KGE from events 1-3. Similarly, the parameter sets associated with the best fits to events pre-4 and 4-5 were used to determine representative parameter values for the second postfire year, while event pre-10 was used to determine minimum values for representative parameters during the third postfire year. There is a substantial increase in K_{sp} from a minimum value of approximately 11 mm/hr in the first postfire year to 29 mm/hr and 60 mm/hr in postfire years two and three, respectively (Figure 4a-b; Table 3). Over the 3-year study period, K_{sp} exhibited a rate of change of 24.0 mm/hr/year ($R^2 = 0.76$), as determined by a linear regression analysis. Effective net capillary drive of hillslope planes (G_p) also presented an increasing trend with time since fire despite its more minor influence on simulated runoff relative to K_{sp} (Table 3; Figure 4c). In contrast, the Manning’s roughness coefficient of the channels, n_c , remained relatively constant over time (Figure 4b). The representative value for n_c fluctuated between 0.085 s/m^{1/3} and 0.105 s/m^{1/3} over the first three postfire years.

Table 3. Summary of model parameters for post-fire years 1, 2, and 3.

Postfire year	Calibrated events	K_{sp} [mm/hr]	n_c [s/m ^{1/3}]	G_p [mm]
1	1-3	11	0.085	19
2	Pre-4 and 4-5	29	0.105	23
3	Pre-10	60	0.090	30

4.3 Increasing flood magnitude in a warming future

On average, I/I_5 associated with a given ARI increased relative to reference values by factors of 1.16, 1.23, 1.22, and 1.44 for scenarios SSP245 mid-21st century, SSP245 late-21st century, SSP585 mid-21st century, and SSP585 late-21st (Figure S2; Figure S3). We compared the peak discharge rates produced by rainstorms of varying ARIs covering half of the watershed in the first three postfire years under reference (1950-2014) and projected future climate scenarios (SSP245 and SSP585 for 2045-2074 and 2075-2100). Since we are interested primarily in relative changes, we normalized the peak discharge by dividing it by the mean peak discharge obtained from thirty simulations for postfire year 1 under the reference scenario. These simulations were designed to encapsulate uncertainties associated with the spatial distribution of rainfall events. Extreme discharge events become more pronounced with higher emissions pathways and greater ARIs in the CDO watershed (Figure 6). For example, the maximum peak flow under the SSP585 late 21st century is 4.7 times the reference level for an ARI of 1-yr. The ratio of the peak discharge associated with a 5-yr ARI rainstorm in postfire year one under the SSP585 late 21st century scenario is 10.4 times greater than that associated with the 1-yr ARI rainstorm under the reference scenario. Simulated peak discharge decreases with time since fire (Figure 6).

Deleted: Figure 7

Deleted: Figure 7

For an ARI of 1-yr in the postfire year 1, the average peak flows under the scenarios of SSP245 mid-21st century, SSP245 late-21st century, SSP585 mid-21st century, and SSP585 late-21st century were amplified by factors of 2.1, 2.4, 2.5, and 3.6, respectively, compared with the reference peak flow. The ratios of the average peak flows in postfire year 2 to the reference peak flow in postfire year 1 are 0.5, 0.7, 0.8, and 1.5 under scenarios SSP245 mid-21st century, SSP245 late-21st century, SSP585 mid-21st century, and SSP585 late-21st, respectively. For an ARI of 2-yr, the ratios of the average peak flows under the four future scenarios in postfire year 2 to that of reference level in postfire year 1 are 0.7, 0.9, 0.9, and 1.5. For an ARI of 5-yr, the ratios are 0.9, 1.0, 1.1, and 1.6 (Figure 6). The ratios of peak flows between postfire year 3 and the postfire year 1 reference level are all less than one regardless of the rainstorm's ARI. In summary, peaks flows increase in magnitude as future greenhouse gas emissions move from the medium pathway to a high pathway. They also increase from mid- to late-century regardless of the greenhouse gas emissions scenario.

Deleted: Figure 7

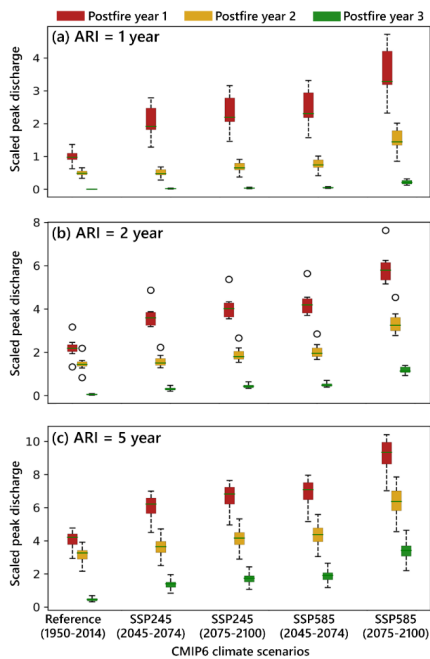


Figure 6. The boxplots of the scaled peak discharge rates derived from thirty rainstorms over 50% of the watershed at the 1-, 2-, and 5-year average recurrence intervals (ARI) in postfire years 1-3 for the reference and future scenarios at the CDO watershed. The peak discharges were scaled by the mean peak discharge from thirty simulations for runoff in response to a 1-yr ARI rainstorm

Deleted: 7

in postfire year 1 for the reference scenario. Thirty rainstorms were produced to account for the uncertainty in the location and spatial extent of rainfall over the CDO watershed.

340 The variability in peak flows increases with ARI as well as with the change from SSP245 to SSP585. Under the reference scenario, the normalized peak flow varies from 0.6-1.4 for a 1-yr ARI, from 1.3-3.2 for a 2-yr ARI, and from 2.9-4.8 for a 5-yr ARI in the first postfire year (Figure 6). For rainstorms at 1-yr ARI in the postfire year 1, the range of the normalized peak flows increased from 0.6-1.4 in the reference period to 1.3-2.8 in the mid-century SSP245 scenario. It then broadened to 1.5-3.3 under both the late-century SSP245 and the mid-century SSP585 scenarios, eventually reaching 2.3-4.7 under the late-century SSP585 scenario. This suggests that extreme flash floods become more common and more severe in the future high pathway of emissions (Figure 7).

345

Deleted: 7

Deleted: Figure 8

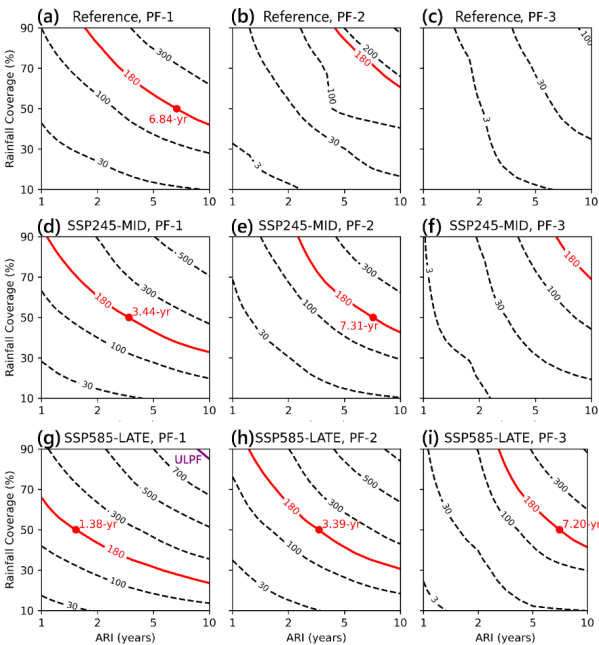


Figure 7. Contours of peak discharge (m^3/s) of simulated floods produced by design storms of varying average recurrence intervals (ARI) and rainfall coverages (from 10% to 90%) during the first three postfire (PF) years for reference and future scenarios at the CDO watershed. The thick red contours represent the 100-year flood ($180 \text{ m}^3/\text{s}$), as derived from StreamStats (<https://www.usgs.gov/streamstats>; Paretti et al., 2014). Red dots indicate the ARIs of the storms that can produce a 100-year flood

Deleted: Figure 8

event when the spatial extent of rainfall is equal to half of the watershed area. Note the upper limit (909 m³/s) for postfire flood discharge (ULPF; Ebel, 2024) can only be produced by rainstorms with an ARI exceeding 8-years that cover more than 82% of the watershed under the late 21st century SSP585 scenario.

We present contours delineating peak discharge (m³/s) associated with rainstorms that cover 10%, 30%, 50%, 70% and 90% of the CDO watershed for 1-, 2-, and 5-year ARIs over the initial three postfire years in the reference and the two projected future scenarios at the CDO watershed (Figure 7). Peak discharge increases with ARI, more extreme emissions pathways, and the extent of rainfall coverage within the watershed. In postfire year 1 under the reference climate scenario, a rainstorm with a roughly 7-yr ARI that covers 50% of the watershed would be needed to generate the discharge associated with the 100-yr flood (180 m³/s), as derived from StreamStats (<https://www.usgs.gov/streamstats>; Paretti et al., 2014). Under the SSP245 mid-century scenario, the same rainstorm characterized by an ARI of roughly 7 years with 50% coverage across the watershed would produce a peak discharge equivalent to the 100-yr flood even if it occurred during postfire year 2. Similarly, this same rainstorm would produce a discharge equivalent to that of the 100-yr flood during postfire year 3 under the SSP585 late-century scenario. Simulations therefore demonstrate an increased persistence of postfire flood hazards under future climate scenarios due to rainfall intensification.

Additionally, a rainstorm with 50% coverage across the watershed can produce a peak discharge equivalent to that of the 100-year flood with an ARI as short as 1.4 years in the SSP585 late-century scenario. The upper limit of peak discharge for a postfire flood (ULPF) in the CDO (909 m³/s), based on watershed area (Ebel, 2024), can be produced by rainstorms that have an ARI of approximately 10 years and a rainfall coverage percentage close to 90% in the first postfire year under the SSP585 late century scenario (Figure 7g). No simulated rainstorms were capable of producing discharges that approached the ULPF (909 m³/s) under the reference or SSP245 scenarios.

5 Discussion

5.1 Event selection and runoff generation mechanism

This study uses K2 model calibration to examine the temporal change in watershed-scale hydrologic model parameters following a fire. This methodology, which has been utilized in similar hydrological studies within burned watersheds (Chen et al., 2013; Liu et al., 2021), provides insights into postfire hydrological dynamics and watershed recovery. In past work using the K2 model to infer temporal changes in hydrologic parameters following fire (Liu et al., 2021), rainfall-runoff events were preferentially selected based on whether or not they exhibited characteristics consistent with infiltration-excess runoff, which aligns well with the K2 model's strength in capturing the dynamics of infiltration-excess overland flow using the Parlange et al. (1982) approximation. However, the model's effectiveness in simulating baseflow and subsurface flow is limited, leading to potential inaccuracies in representing watershed conditions when runoff is not primarily infiltration-excess dominated.

Deleted: Figure 8

Deleted: Figure 8

390 Therefore, K2 model performance is likely to decrease when simulating events dominated by saturation excess overland flow. Further, inferred variations in model parameters from one event to another may be driven by a need to compensate, to varying degrees, for saturated-excess runoff generation processes not represented by the model rather than reflecting changes in fire effects.

395 Among the 12 simulated events in this study, five (events 6-10) exhibit initial soil saturation (SAT, defined as soil moisture divided by porosity) equal to or greater than 0.55, or rainfall durations exceeding 7.6 hours. Under these conditions, infiltration-excess overland flow is less likely to be the dominant runoff-generated mechanism. The model performance of these events is, as expected, relatively poor compared with other events (Figure 4). We therefore excluded events 6-10 from our efforts to use K2 to quantify changes in soil hydrologic and hydraulic roughness parameters as a function of time since fire. The apparent
400 shift from flood generation due primarily to infiltration-excess to saturation-excess overland flow, or a mix of the two mechanisms, in less than two years following fire is consistent with the relatively rapid increase in soil infiltration capacity inferred from model calibration of events 1-5 (Figure 4; Table 3). This implies wildfire impacts persist for a limited period, defining a 'window of disturbance' during which altered soil hydraulic properties significantly influence watershed runoff responses.

405 Postfire floods can stem from various overland flow generation mechanisms, including saturation-excess overland flow, subsurface storm flow, or combinations thereof (Ebel et al., 2012; Ebel, 2024). Runoff events excluded in this study, specifically events 6-10, are more likely to arise from a mixture of these runoff-generation mechanisms. Utilizing a hydrological model capable of capturing both surface and subsurface flow dynamics, such as ParFlow (e.g., Atchley et al.,
410 2018), holds the potential to enhance data interpretation through continuous simulation, thereby allowing for the inference of temporal changes in watershed hydrological properties. This comprehensive approach could enable simulation of the full spectrum of streamflow generation mechanisms, offering more general insights into the full range of flood generation processes prevalent to wildfire-prone, mountainous regions like the western United States. Such modeling efforts not only facilitate the understanding of large postfire floods under the assumption of infiltration-excess mechanisms but also provide crucial
415 information for predicting baseflow and ecological flow. These insights could be informative for effective water resources management in burned watersheds.

5.2 Postfire trajectories of model parameters

Infiltration tends to decrease immediately after moderate and high severity fire (e.g., Ebel and Martin, 2017; Ebel, 2019), but there is substantial site-to-site variability (McGuire et al., 2024). In some cases, saturated hydraulic conductivity may increase
420 or remain unchanged following fire (e.g., Rodríguez-Alleres et al., 2013; Raymond et al., 2020; McGuire et al., 2024). We infer the lowest values of K_{sp} from the first event immediately following the Bighorn Fire (Fig 4a). Subsequently, we observe an increase in K_{sp} over time, with an average over three events of 11 mm/hr in the first postfire year, 29 mm/hr in the second

postfire year, and greater than 60 mm/hr in postfire year three (Table 3). This increase, averaging 24 mm/hr per year, represents a more pronounced trend compared to estimates obtained from field measurements using tension infiltrometers (TI) following the Bighorn Fire. Estimates of field-saturated hydraulic conductivity derived from TIs across 35 study plots within the Bighorn Fire indicated relatively minimal change from 2021 to 2023 when data were separated by ecosystem type (Barra et al., 2025). In particular, there were no significant changes in field-saturated hydraulic conductivity between 2021 and 2023 in any of the three ecosystem groups, namely Madrean Pine-Oak woodlands, ponderosa pine and Emory oak forests, and mixed conifer forests. All three of these ecosystem groups are represented within the CDO watershed, with elevation being a primary control on vegetation species. We interpret estimates of K_{sp} inferred from the model as representing changes in this parameter within areas burned at moderate to high severity, though Barra et al. (2025) did not analyse trends in field-saturated hydraulic conductivity across all ecosystem types from 2021 to 2023 in areas burned at moderate to high severity. These data do indicate an increase in the geometric mean of field-saturated hydraulic conductivity from 20 mm/h to 28 mm/h from 2021 to 2023, which is substantially less than what we infer with event-scale hydrologic modeling. Variations between estimates of K_{sp} inferred from the model and from TI measurements could be attributed to methodological differences. Estimates from TI measurements represent soil hydraulic properties associated primarily with the soil matrix while estimates inferred from watershed-scale modeling represent both matrix and macropore flow. The more substantial postfire increases in K_{sp} inferred from the model could therefore indicate an increase in macropore flow with time since fire (e.g., Nyman et al., 2014) that is not captured as well by the TI measurements.

Other studies of postfire changes in field-saturated hydraulic conductivity in the southwest US demonstrate substantial site-to-site variability. For instance, TI-derived estimates of field-saturated hydraulic conductivity from a forested area in New Mexico burned at moderate to high severity indicated an increase from 7 mm/h in the months following the fire to 42 mm/h in the third postfire year (Hoch et al., 2021). Similar measurements following the Pinal Fire in central Arizona demonstrated a decrease in field-saturated hydraulic conductivity from 36 mm/h to 15 mm/h between the first and fourth postfire years (Hoch et al., 2021). Liu et al. (2021) used the same approach applied here based on watershed-scale model calibration to infer an increase in K_{sp} from roughly 7 mm/h to 24 mm/h over a four-year time period following a moderate-high severity fire in the Arroyo Seco watershed in the San Gabriel Mountains. Variations in the magnitude of fire-driven reductions to K_{sp} and subsequent rate of change in K_{sp} with time since fire could result from either different physiographic feature of these sites, such as soil and dominant vegetation types, or the different methods used to constrain K_{sp} (Ebel et al., 2019).

The trend of increasing net capillary drive (G_p) inferred from our model calibrations is generally consistent with other studies in the southwest US that have documented relatively low values in G_p immediately after fire followed by subsequent increases over time (McGuire et al., 2021; Hoch et al., 2021). TI-derived estimates of sorptivity following the Bighorn Fire, for example, suggest increases in infiltration capacity associated with changes in capillarity with time since fire (Barra et al., 2025). Barra et al. (2025) observed an increasing trend between sorptivity and time since the 2020 Bighorn Fire (i.e., from 2021 to 2023) in

both Madrean Pine-Oak woodlands and ponderosa pine and Emory oak forests. A synthesis study of soil hydraulic parameters in fire-affected soils found that sorptivity and wetting front potential were significantly lower in burned soils compared to unburned soils (Ebel and Moody, 2017). Liu et al. (2021), however, found no relationship between G_p and time since fire in their study of the Arroyo Seco watershed in southern CA. The lack of a trend in G_p as a function of time since fire (e.g., Liu et al, 2021) may be at least partially attributed to the more minor role that G_p appears to play in watershed-scale runoff responses based on relative importance of this parameter in the events modeled in this study (Figure 4).

In contrast to several past studies in the southwest US, which have generally found that hydraulic roughness is lowest immediately following fire and then increases with time (Canfield et al., 2005; Liu et al., 2021), we found that hydraulic roughness was relatively constant with time since fire. Liu et al. (2021) inferred an increase in n_c from roughly 0.09 to 0.3 over a time period of roughly two years after a fire in the San Gabriel Mountains, CA. Postfire dry ravel is common in the San Gabriel Mountains and can load channels with substantial amounts of relatively fine hillslope sediment, decreasing grain roughness in channels immediately after fire. We did not observe any evidence of widespread dry ravel in the CDO following the Bighorn Fire, which could account for the more muted change in n_c as a function of time since fire compared to that found by Liu et al. (2021). Increases in hydraulic roughness as a function of time since fire could also result more generally from preferential transport of fine sediment and the exposure of cobbles and boulders (Rengers et al., 2016), regardless of whether postfire dry ravel is an active process. We hypothesize that such a trend may also have been less pronounced at our site due to preferential transport of fines following the fire in 2003.

Our findings support those of previous studies that have documented fire-induced reductions in soil infiltration capacity (e.g. due to reductions in K_{sp} and G_p). Our findings provide more detailed information, however, for the expected magnitude of fire-driven changes in common hydrologic model parameters and the rates at which they change as a function of time since fire. These findings provide valuable guidance for applying hydrologic models to simulate postfire runoff and related hydrologic hazards in similar infiltration-excess dominated settings. We hypothesize that the postfire trajectories of the hydrologic model parameters inferred here depend on canopy and ground cover dynamics, soil physical and chemical properties, soil water repellency, and postfire hydroclimate conditions, including drought (Larson-Nash et al., 2018) and soil moisture (Barra et al., 2025). Barra et al. (2025) found that soil water repellency played an influential role in controlling field-saturated hydraulic conductivity and sorptivity roughly one year following the Bighorn Fire (i.e., in 2021). Since soil water repellency was not an influential control on either of these two soil hydraulic properties in 2023 (Barra et al., 2025), transient fire-driven changes to soil water repellency can provide one explanation for the model-inferred increases in G_p and K_{sp} . A positive relationship between exchangeable Calcium, which can enhance soil aggregation (Muneeer and Oades, 1989), and field-saturated hydraulic conductivity following the Bighorn Fire in 2023 could also point to postfire changes in soil structure as a factor driving variations in soil hydraulic properties with time since fire (Barra et al., 2025). Further investigation is warranted to unravel the

490 intricate mechanisms driving postfire changes to soil physical and chemical properties across different geographical regions
and how they relate to changes in hydrologic model parameters (Vieira et al., 2022; Nyman et al., 2014; Cai & Wang, 2025).

The model-inferred minimum in soil infiltration capacity during the fire postfire year is consistent with observations that the
probability and severity of postfire flood and debris flow hazards are greatest during the first postfire rainy season.
495 Consequently, it is crucial to closely monitor and assess the potential risks to downstream areas during this period. For instance,
the first runoff event following the Bighorn Fire was produced by a rainstorm with a peak *I15* of 12 mm/h and a duration of
44 minutes. It led to a flood with a peak discharge of 35 m³/s (equivalent to a 5-year return period) at the outlet of the CDO
watershed. In contrast, there was no measurable flow during event pre-10, which occurred in the third postfire year and had
peak *I15* of 31 mm/h and a duration of 71 minutes. This difference in response between the first and third rainy season
500 following the fire underscores the significant impact of immediate postfire conditions on flood severity.

In this study, the persistence of fire-driven reductions to infiltration capacity could continue to promote increases in hydrologic
hazards throughout the first 1-2 years after fire. Understanding these dynamics is essential for implementing effective
mitigation strategies and informing land management decisions in fire-prone areas, especially in the context of a warming
505 future with anticipated increases in short-duration, high-intensity rainfall (e.g., Martel et al., 2021; Westra et al., 2014; Fowler
et al., 2021).

5.3 Effects of rainfall intensification

The likelihood and magnitude of floods and debris flows can be substantially influenced by reductions in soil infiltration
capacity and hydraulic roughness caused by fires (Liu et al., 2022). The watershed response to rainfall intensification is non-
510 linear, particularly in burned areas where infiltration capacity is reduced. Intensified rainfall generates rapid runoff responses
and more pronounced peak discharges, further enhanced by concentrated flow along preferential pathways created or
accentuated by fire effects. These effects are expected to be exacerbated by the intensification of rainfall due to future warming.
Amplification of postfire flow hazards may manifest as an increase in flow magnitude and/or a higher probability of
occurrence. In this study, under the four future warming scenarios, peak flow rates are projected to be 2.1-3.6 times greater
515 than the reference levels given a specific ARI of rainfall in the first year following the fire (Figure 6). The increase in peak
flow response can be driven by increased spatial rainfall coverage as well as warming-induced rainfall intensification due to
greenhouse gas emissions (Figure 7). The effect of the spatial variation and rainfall coverage on runoff does not apply to
smaller, low-order small watershed (less than 1 km²). Currently, a 100-year flood necessitates approximately a 7-year rainstorm
covering 50% of the CDO watershed in the first postfire year. However, under the SSP245 scenario, a similar flood could be
520 triggered by a 3.4-year rainstorm by mid-century, effectively doubling the likelihood of a 100-year flood under a medium
pathway of greenhouse gas emissions with climate protection measures. In the scenario with the highest greenhouse gas
emissions, such floods could become even more frequent, occurring with a 1.4-year rainstorm by the end of the century (7g).

Deleted: 7

Deleted: Figure 8

Deleted: Figure 8

The maximum postfire flood, as defined by the postfire flood envelope curve under current climate conditions (Ebel, 2024), could be triggered by a 10-year rainstorm covering most of the watershed by late century under the highest greenhouse gas emissions scenario (SSP585). Warming-related rainfall intensification is similarly expected to increase the frequency of significant postfire debris flows, such as those experienced in Montecito, California, in 2018 (Kean & Staley, 2021).

Another critical aspect is the duration of flow amplification following a fire across various future warming scenarios. To answer this question, it at least requires understanding and quantifying 1) the temporal changes in runoff production within burned watersheds, 2) the magnitude of warming-related rainfall intensification, and 3) an effective tool, such as a hydrological model, to integrate the effects of the watershed's fire-altered function and intensified rainfall. We assessed the trajectory of watershed scale soil infiltration capacity and channel roughness following a fire, as discussed in Section 5.2. We used a method adapted from Martel et al (2021), which is widely used in other studies and governmental practices worldwide (e.g., Bao et al., 2017; Cannon & Innocenti, 2019), to represent rainfall intensification across various future warming scenarios based on CMIP6-derived LOCA2 data. We calibrated a K2 hydrological model, recognized for its efficacy in semi-arid and arid watershed rainfall-runoff processes (Smith et al., 1995; Goodrich et al., 2012), to estimate the runoff response to intensified rainfall in each postfire year in the studied watershed.

Our findings indicate that amplified peak flows with magnitudes currently expected only in the first postfire year could be met or exceeded even in the second postfire year under future climate scenarios due to rainfall intensification (Figure 6, Figure 7). This conclusion is based on a rainfall coverage of 50% across the studied watershed, or nearly 25 km². We chose this specific coverage because the area enclosed by isohyets for intense, convective rainfall in the southwestern United States shows a scale change near 25 km² (Osborn & Reynolds, 1963; Osborn et al., 1979), akin to the average storm size enclosed by median rainfall intensity isohyets for all 12 events occurring in the three years postfire (Table 1). Storm size could also be affected by a warming future (Bao et al., 2024), which suggests avenues for further investigation. Furthermore, our simulations indicate that floods in the first two postfire years are predominantly characterized by infiltration-excess overland flow, occurring when rainfall rates surpass effective soil infiltration capacity.

6 Conclusions

In this study, we used the K2 hydrologic model to simulate infiltration excess overland flow at the watershed scale (49.4 km²) in response to several rainstorms during the first three years following the 2020 Bighorn Fire in the Santa Catalina Mountains in southern Arizona, USA. Results indicate soil saturated hydraulic conductivity (K_{sp}) and net capillary drive (G_p) are lowest immediately following fire and increase with time since fire, while channel roughness (n_c) remains relatively constant. Specifically, K_{sp} and G_p both increased from postfire minima of 11 mm/h and 19 mm, respectively, in the first year after the fire to more than 60 mm/h and 19 mm by the third year after the fire. Based on this postfire trajectory, we estimated peak flows

Deleted: 7

Deleted: 8

560 in response to design rainstorms derived from historic data and intensified rainstorms under four future climate scenarios, namely SSP245 and SSP585 both at mid- and late-century. We found that the likelihood of a 100-yr flood will double by mid-century in the studied watershed under the medium emissions path (SSP245). Postfire flood maxima under the historical climate condition will be triggered by a 10-yr rainstorm covering most of the watershed under the high emissions pathway (SSP585) by the late century. The amplification of peak flows is expected to persist during the first two postfire years under both the medium emissions pathway by late century and the high emissions pathway from mid-century onwards. These results improve understanding of postfire watershed hydrologic dynamics and provide information for assessing postfire hydrologic hazards, which can inform mitigation strategies and adaptive planning to address the challenges posed by increasing fire activity and rainfall intensification.

Code/Data availability

570 The KINEROS2 model simulation data used for analysis and visualization are available for research purposes at <https://doi.org/10.5281/zenodo.12803607>.

Competing Interests

The authors have no relevant financial or non-financial interests to disclose.

Author Contributions

- 575 Conceptualization: T.L., L.A.M., A.M.Y.
Data curation: T.L., L.A.M., A.M.Y.
Formal analysis: T.L., L.A.M.
Funding acquisition: L.A.M., A.M.Y., C.J.A.
Investigation: T.L., L.A.M., A.M.Y., C.J.A.
580 Methodology: T.L., L.A.M.
Supervision: L.A.M., A.M.Y.
Validation: T.L., C.J.A., A.L.A.
Visualization: T.L.
Writing – original draft: T.L.
585 Writing – review & editing: T.L., L.A.M., A.M.Y., C.J.A., A.L.A.

- Deleted:** Tao Liu
Deleted: Luke A. McGuire
Deleted: Ann M. Youberg
Deleted: Tao Liu
Deleted: Luke A. McGuire
Deleted: Ann M. Youberg
Deleted: Tao Liu
Deleted: Luke A. McGuire
Deleted: Luke A. McGuire
Deleted: Ann M. Youberg
Deleted: Charles J. Abolt
Deleted: Tao Liu
Deleted: Luke A. McGuire
Deleted: Ann M. Youberg
Deleted: Charles J. Abolt
Deleted: Tao Liu
Deleted: Luke A. McGuire
Deleted: Luke A. McGuire
Deleted: nn,
Deleted:
Deleted: ouberg
Deleted: Tao Liu
Deleted: Charles J. Abolt
Deleted: Adam
Deleted:
Deleted: tchley
Deleted: Tao Liu
Deleted: Tao Liu
Deleted: Tao Liu
Deleted: Luke A. McGuire
Deleted: Ann M. Youberg
Deleted: Charles J. Abolt
Deleted: Adam
Deleted: Atchley

620 **Acknowledgements**

This material is based upon work supported by the U.S. Geological Survey under Grant/Cooperative Agreement No. G23AC00447-00, the Pima County Regional Flood Control District under Grant Agreement No. RFCD-2020-003, and the Laboratory Directed Research and Development program of Los Alamos National Laboratory under project number 20240448ER. We thank Lynn Orchard and Alireza Arabzadeh from the Pima County Regional Flood Control District for their
625 assistance with rainfall and runoff data.

References

Abatzoglou, J. T. (2011). Development of gridded surface meteorological data for ecological applications and modelling. *International Journal of Climatology*, 33(1), 121–131. <https://doi.org/10.1002/joc.3413>

Atchley, A. L., Kinoshita, A. M., Lopez, S., Trader, L., & Middleton, R. H. (2018). Simulating Surface and Subsurface
630 Water Balance Changes Due to Burn Severity. *Vadose Zone Journal*, 17(1), 1–13.
<https://doi.org/10.2136/vzj2018.05.0099>

Bao, J., Sherwood, S. C., Alexander, L. V., & Evans, J. P. (2017). Future increases in extreme precipitation exceed observed
scaling rates. *Nature Climate Change*, 7(2), 128–132. <https://doi.org/10.1038/nclimate3201>

Bao, J., Stevens, B., Lukas Kluft, & Muller, C. (2024). Intensification of daily tropical precipitation extremes from more
635 organized convection. *Science Advances*, 10(8). <https://doi.org/10.1126/sciadv.adj6801>

Barra, C., Fule, M., Beers, R., McGuire, L., Youberg, A., Falk, D., & Rasmussen, C. (2025). Soil biogeochemical and
hydraulic property response to wildfire across forested ecosystems of the Santa Catalina Mountains, Arizona, USA.
CATENA, 250, 108802–108802. <https://doi.org/10.1016/j.catena.2025.108802>

Boer, M. M., Bowman, D. M. J. S., Murphy, B. P., Cary, G. J., Cochrane, M. A., Fensham, R. J., Krawchuk, M. A., Price, O.
640 F., De Dios, V. R., Williams, R. J., & Bradstock, R. A. (2016). Future changes in climatic water balance determine
potential for transformational shifts in Australian fire regimes. *Environmental Research Letters*, 11(6), 065002.
<https://doi.org/10.1088/1748-9326/11/6/065002>

Cai, L. & Wang, M. (2025). Simulating watershed hydrological response following a wildfire in southeast China with
consideration of land cover changes. *Catena* 250, 108755, <https://doi.org/10.1016/j.catena.2025.108755>

645 Campbell, R. E., B.Baker, J. M., Ffolliott, P. F., Larson, F. R., & Avery, C. C. (1977). Wildfire effects on a ponderosa pine
ecosystem: An Arizona case study. USDA For. Serv. Res. Pap. RM-191. Fort Collins, CO: U.S. Department of
Agriculture, Forest Service, Rocky Mountain Forest and Range Experimental Station. 12 P., 191.
<https://research.fs.usda.gov/treesearch/29380>

Canadell, J. G., Meyer, C. P. (Mick), Cook, G. D., Dowdy, A., Briggs, P. R., Knauer, J., Pepler, A., & Haverd, V. (2021).
650 Multi-decadal increase of forest burned area in australia is linked to climate change. *Nature Communications*, 12(1).
<https://doi.org/10.1038/s41467-021-27225-4>

- Canfield, H. E., Goodrich, D. C., & Burns, I. S. (2005). Selection of Parameters Values to Model Post-Fire Runoff and Sediment Transport at the Watershed Scale in Southwestern Forests. *Managing Watersheds for Human and Natural Impacts*. [https://doi.org/10.1061/40763\(178\)48](https://doi.org/10.1061/40763(178)48)
- 655 Cannon, A. J., & Innocenti, S. (2019). Projected intensification of sub-daily and daily rainfall extremes in convection-permitting climate model simulations over North America: implications for future intensity–duration–frequency curves. *Natural Hazards and Earth System Sciences*, 19(2), 421–440. <https://doi.org/10.5194/nhess-19-421-2019>
- Cannon, S. H., Gartner, J. E., Wilson, R. C., Bowers, J. C., & Laber, J. L. (2008). Storm rainfall conditions for floods and debris flows from recently burned areas in southwestern Colorado and southern California. *Geomorphology*, 96(3-4), 250–269. <https://doi.org/10.1016/j.geomorph.2007.03.019>
- 660 Chen, L., Berli, M., & Chief, K. (2013). Examining Modeling Approaches for the Rainfall-Runoff Process in Wildfire-Affected Watersheds: Using San Dimas Experimental Forest. *Journal of the American Water Resources Association*, 49(4), 851–866. <https://doi.org/10.1111/jawr.12043>
- Cydzik, K., & Hogue, T. S. (2009). Modeling Postfire Response and Recovery using the Hydrologic Engineering Center Hydrologic Modeling System (HEC-HMS). *JAWRA Journal of the American Water Resources Association*, 45(3), 702–714. <https://doi.org/10.1111/j.1752-1688.2009.00317.x>
- Ebel, B. A. (2019). Measurement Method Has a Larger Impact Than Spatial Scale For Plot-Scale Field-Saturated Hydraulic Conductivity (Kfs) After Wildfire and Prescribed Fire in Forests. *Earth Surface Processes and Landforms*, 44(10), 1945–1956. <https://doi.org/10.1002/esp.4621>
- 670 Ebel, B. A. (2020). Temporal evolution of measured and simulated infiltration following wildfire in the Colorado Front Range, USA: Shifting thresholds of runoff generation and hydrologic hazards. *Journal of Hydrology*, 585, 124765. <https://doi.org/10.1016/j.jhydrol.2020.124765>
- Ebel, B. A. (2024). Upper limits for post-wildfire floods and distinction from debris flows. *Science Advances*, 10(8). <https://doi.org/10.1126/sciadv.adk5713>
- 675 Ebel, B. A., & Moody, J. A. (2017). Synthesis of soil-hydraulic properties and infiltration timescales in wildfire-affected soils. *Hydrological Processes*, 31(2), 324–340. <https://doi.org/10.1002/hyp.10998>
- Ebel, B. A., Moody, J. A., & Martin, D. A. (2012). Hydrologic conditions controlling runoff generation immediately after wildfire. *Water Resources Research*, 48(3). <https://doi.org/10.1029/2011wr011470>
- Esposito, G., Gariano, S. L., Masi, R., Alfano, S., & Giannatiempo, G. (2023). Rainfall conditions leading to runoff-initiated post-fire debris flows in Campania, Southern Italy. *Geomorphology*, 423, 108557. <https://doi.org/10.1016/j.geomorph.2022.108557>
- 680 Fowler, H. J., Lenderink, G., Prein, A. F., Westra, S., Allan, R. P., Ban, N., Barbero, R., Berg, P., Blenkinsop, S., Do, H. X., Guerreiro, S., Haerter, J. O., Kendon, E. J., Lewis, E., Schaer, C., Sharma, A., Villarini, G., Wasko, C., & Zhang, X. (2021). Anthropogenic intensification of short-duration rainfall extremes. *Nature Reviews Earth & Environment*, 2(2), 107–122. <https://doi.org/10.1038/s43017-020-00128-6>
- 685

- Gorr, A. N., McGuire, L. A., Youberg, A. M., Beers, R., & Liu, T. (2023). Inundation and flow properties of a runoff-generated debris flow following successive high-severity wildfires in northern Arizona, USA. *Earth Surface Processes and Landforms*, 49(2), 622–641. <https://doi.org/10.1002/esp.5724>
- Gupta, H. V., Kling, H., Yilmaz, K. K., & Martinez, G. F. (2009). Decomposition of the mean squared error and NSE performance criteria: Implications for improving hydrological modelling. *Journal of Hydrology*, 377(1-2), 80–91. <https://doi.org/10.1016/j.jhydrol.2009.08.003>
- Hoch, O. J., McGuire, L. A., Youberg, A. M., & Rengers, F. K. (2021). Hydrogeomorphic Recovery and Temporal Changes in Rainfall Thresholds for Debris Flows Following Wildfire. *Journal of Geophysical Research: Earth Surface*, 126(12). <https://doi.org/10.1029/2021jf006374>
- Kean, J. W., & Staley, D. M. (2021). Forecasting the Frequency and Magnitude of Postfire Debris Flows Across Southern California. *Earth's Future*, 9(3). <https://doi.org/10.1029/2020ef001735>
- Kean, J. W., Staley, D. M., Lancaster, J. T., Rengers, F. K., Swanson, B. J., Coe, J. A., Hernandez, J. L., Sigman, A. J., Allstadt, K. E., & Lindsay, D. N. (2019). Inundation, flow dynamics, and damage in the 9 January 2018 Montecito debris-flow event, California, USA: Opportunities and challenges for post-wildfire risk assessment. *Geosphere*, 15(4), 1140–1163. <https://doi.org/10.1130/ges02048.1>
- Lancaster, J. T., Swanson, B. J., Lukashov, S. G., Oakley, N. S., Lee, J. B., Spangler, E. R., Hernandez, J. L., Olson, B. P. E., DeFrisco, M. J., Lindsay, D. N., Schwartz, Y. J., McCrear, S. E., Roffers, P. D., & Tran, C. M. (2021). Observations and Analyses of the 9 January 2018 Debris-Flow Disaster, Santa Barbara County, California. *Environmental and Engineering Geoscience*, 27(1), 3–27. <https://doi.org/10.2113/eeg-d-20-00015>
- Li, C., Handwerger, A. L., Wang, J., Yu, W., Li, X., Finnegan, N. J., Xie, Y., Buscarnera, G., & Horton, D. L. (2022). Augmentation of WRF-Hydro to simulate overland-flow- and streamflow-generated debris flow susceptibility in burn scars. *Natural Hazards and Earth System Sciences*, 22(7), 2317–2345. <https://doi.org/10.5194/nhess-22-2317-2022>
- Liu, T., McGuire, L. A., A. Youberg, Gorr, A., & Rengers, F. K. (2023). Guidance for parameterizing post-fire hydrologic models with in situ infiltration measurements. *Earth Surface Processes and Landforms*, 48(12), 2368–2386. <https://doi.org/10.1002/esp.5633>
- Liu, T., McGuire, L. A., Oakley, N., & Cannon, F. (2022). Temporal changes in rainfall intensity–duration thresholds for post-wildfire flash floods in southern California. *Natural Hazards and Earth System Sciences*, 22(2), 361–376. <https://doi.org/10.5194/nhess-22-361-2022>
- Liu, T., McGuire, L. A., Wei, H., Rengers, F. K., Gupta, H., Ji, L., & Goodrich, D. C. (2021). The timing and magnitude of changes to Hortonian overland flow at the watershed scale during the post-fire recovery process. *Hydrological Processes*, 35(5). <https://doi.org/10.1002/hyp.14208>
- Larson-Nash, S. S., Robichaud, P. R., Pierson, F. B., Moffet, C. A., Williams, C. J., Spaeth, K. E., Brown, R. E., & Lewis, S. A. (2018). Recovery of small-scale infiltration and erosion after wildfires. *Journal of Hydrology and Hydromechanics*, 66(3), 261–270. <https://doi.org/10.1515/johh-2017-0056>

- 720 Martel, J.-L., Brissette, F. P., Lucas-Picher, P., Troin, M., & Arsenault, R. (2021). Climate Change and Rainfall Intensity–
Duration–Frequency Curves: Overview of Science and Guidelines for Adaptation. *Journal of Hydrologic
Engineering*, 26(10), 03121001. [https://doi.org/10.1061/\(asce\)he.1943-5584.0002122](https://doi.org/10.1061/(asce)he.1943-5584.0002122)
- McGuire, L.A., Ebel, B.A., Rengers, F.K. Vieira, D.C.S., Nyman, P. (2024). Fire effects on geomorphic processes. *Nat Rev
Earth Environ.* <https://doi.org/10.1038/s43017-024-00557-7>
- 725 McGuire, L. A., Rengers, F. K., Oakley, N., Kean, J. W., Staley, D. M., Tang, H., de Orla-Barile, M., & Youberg, A. M.
(2021). Time Since Burning and Rainfall Characteristics Impact Post-Fire Debris-Flow Initiation and Magnitude.
Environmental and Engineering Geoscience, 27(1), 43–56. <https://doi.org/10.2113/eeg-d-20-00029>
- McLin, S. G., Springer, E. P., & Lane, L. J. (2001). Predicting floodplain boundary changes following the Cerro Grande
wildfire. *Hydrological Processes*, 15(15), 2967–2980. <https://doi.org/10.1002/hyp.385>
- 730 Meles, M. B., Goodrich, D. C., Unkrich, C. L., Gupta, H. V., I. Shea Burns, Hirpa, F. A., Razavi, S., & D. Phillip Guertin.
(2024). Rainfall distributional properties control hydrologic model parameter importance. *Journal of Hydrology.
Regional Studies*, 51, 101662–101662. <https://doi.org/10.1016/j.ejrh.2024.101662>
- Moody, J. A., Ebel, B. A., Nyman, P., Martin, D. A., Stoof, C., & McKinley, R. (2016). Relations between soil hydraulic
properties and burn severity. *International Journal of Wildland Fire*, 25(3), 279–293. <http://doi.org/10.1071/wf14062>.
- 735 Moody, J. A., & Martin, D. A. (2001a). Initial hydrologic and geomorphic response following a wildfire in the Colorado
Front Range. *Earth Surface Processes and Landforms*, 26(10), 1049–1070. <https://doi.org/10.1002/esp.253>
- Moody, J. A., & Martin, D. A. (2001b). Post-fire, rainfall intensity-peak discharge relations for three mountainous
watersheds in the western USA. *Hydrological Processes*, 15(15), 2981–2993. <https://doi.org/10.1002/hyp.386>
- Moody, J. A., Shakesby, R. A., Robichaud, P. R., Cannon, S. H., & Martin, D. A. (2013). Current research issues related to
740 post-wildfire runoff and erosion processes. *Earth-Science Reviews*, 122, 10–37.
<https://doi.org/10.1016/j.earscirev.2013.03.004>
- Muneer, M., & Oades, J.M., 1989. The role of Ca-organic interactions in soil aggregate stability. III. Mechanisms and
models. *Aust. J. Soil Res.* 27 (2), 411–423. <https://doi.org/10.1071/Sr9890411>.
- Noske, P. J., Nyman, P., Lane, P. N. J., & Sheridan, G. J. (2016). Effects of aridity in controlling the magnitude of runoff
745 and erosion after wildfire. *Water Resources Research*, 52(6), 4338–4357. <https://doi.org/10.1002/2015wr017611>
- Nyman, P., Sheridan, G. J., Smith, H. G., & Lane, P. N. J. (2011). Evidence of debris flow occurrence after wildfire in
upland catchments of south-east Australia. *Geomorphology*, 125(3), 383–401.
<https://doi.org/10.1016/j.geomorph.2010.10.016>
- Nyman, P., Sheridan, G. J., Smith, H. G. & Lane, P. N. J. (2014). Modeling the effects of surface storage, macropore flow
and water repellency on infiltration after wildfire. *J. Hydrol.* 513, 301–313.
- 750 O'Neill, B. C., Tebaldi, C., van Vuuren, D. P., Eyring, V., Friedlingstein, P., Hurtt, G., Knutti, R., Kriegler, E., Lamarque, J.-
F., Lowe, J., Meehl, G. A., Moss, R., Riahi, K., & Sanderson, B. M. (2016). The Scenario Model Intercomparison
Project (ScenarioMIP) for CMIP6. *Geoscientific Model Development*, 9(9), 3461–3482. <https://doi.org/10.5194/gmd->

[9-3461-2016](#)

- 755 Oakley, N. S. (2021). A Warming Climate Adds Complexity to Post-Fire Hydrologic Hazard Planning. *Earth's Future*, 9(7).
<https://doi.org/10.1029/2021ef002149>
- Osborn, H. B., Renard, K. G., & Simanton, J. R. (1979). Dense networks to measure convective rainfall in the southwestern United States. *Water Resources Research*, 15(6), 1701–1711. <https://doi.org/10.1029/wr015i006p01701>
- 760 Osborn, H. B., & Reynolds, W. N. (1963). Convective storm patterns in the southwestern United States. *International Association of Scientific Hydrology. Bulletin*, 8(3), 71–83. <https://doi.org/10.1080/02626666309493339>
- Paretti, N. V., Kennedy, J. R., Turney, L. A., & Veilleux, A. G. (2014). *Methods for estimating magnitude and frequency of floods in Arizona, developed with unregulated and rural peak-flow data through water year 2010, 2014-5211* (pp. 1–61). Geological Survey Scientific Investigations Report. <https://doi.org/10.3133/sir20145211>
- Parlange, J. Y., Lisle, I., Braddock, R. D., & Smith, R. E. (1982). THE THREE-PARAMETER INFILTRATION EQUATION. *Soil Science*, 133(6), 337–341. <https://doi.org/10.1097/00010694-198206000-00001>
- 765 Parson, A., Robichaud, P. R., Lewis, S., Napper, C., & Clark, J. (2010). *Field guide for mapping post-fire soil burn severity*. U.S. Department of Agriculture, Forest Service, Rocky Mountain Research Station. <https://doi.org/10.2737/rmrs-gtr-243>
- Perica, S., S. Dietz, S. Heim, L. Hiner, K. Maitaria, D. Martin, S. Pavlovic, I. Roy, C. Trypaluk, and D. Unruh (2011), NOAA Atlas 14 precipitation-frequency Atlas of the United States volume 6 version 2.0, California, US Department of Commerce, National Oceanic and Atmospheric Administration, National Weather Service, Silver Spring, Md.
- 770 Perkins, J. P., Carlos, D., Skye, C., Corina, C., Stock, J., Prancevic, J. P., Micheli Elisabeth, & Jay, J. (2022). Multi-Stage Soil-Hydraulic Recovery and Limited Ravel Accumulations Following the 2017 Nuns and Tubbs Wildfires in Northern California. *Journal of Geophysical Research: Earth Surface*, 127(6). <https://doi.org/10.1029/2022j006591>
- 775 Pierce, D. W., Cayan, D. R., Feldman, D. R., & Risser, M. D. (2023). Future Increases in North American Extreme Precipitation in CMIP6 Downscaled with LOCA. *Journal of Hydrometeorology*, 24(5), 951–975.
<https://doi.org/10.1175/jhm-d-22-0194.1>
- Prein, A. F., Rasmussen, R. M., Ikeda, K., Liu, C., Clark, M. P., & Holland, G. J. (2016). The future intensification of hourly precipitation extremes. *Nature Climate Change*, 7(1), 48–52. <https://doi.org/10.1038/nclimate3168>
- 780 Razavi, S., & Gupta, H. V. (2015). What do we mean by sensitivity analysis? The need for comprehensive characterization of “global” sensitivity in Earth and Environmental systems models. *Water Resources Research*, 51(5), 3070–3092.
<https://doi.org/10.1002/2014wr016527>
- Razavi, S., & Gupta, H. V. (2016a). A new framework for comprehensive, robust, and efficient global sensitivity analysis: 1. Theory. *Water Resources Research*, 52(1), 423–439. <https://doi.org/10.1002/2015wr017558>
- 785 Razavi, S., & Gupta, H. V. (2016b). A new framework for comprehensive, robust, and efficient global sensitivity analysis: 2. Application. *Water Resources Research*, 52(1), 440–455. <https://doi.org/10.1002/2015wr017559>
- Robichaud, P. R., Wagenbrenner, J. W., Pierson, F. B., Spaeth, K. E., Ashmun, L. E., & Moffet, C. A. (2016). Infiltration

and interrill erosion rates after a wildfire in western Montana, USA. *CATENA*, 142, 77–88.
<https://doi.org/10.1016/j.catena.2016.01.027>

790 Saxe, S., Hogue, T. S., & Hay, L. (2018). Characterization and evaluation of controls on post-fire streamflow response
across western US watersheds. *Hydrology and Earth System Sciences*, 22(2), 1221–1237.
<https://doi.org/10.5194/hess-22-1221-2018>

Schmidt, K. M., Hanshaw, M. N., Howle, J. F., Kean, J. W., Staley, D. M., Stock, J. D., & Bawden, G. W. (2011).
Hydrologic conditions and terrestrial laser scanning of post-fire debris flows in the San Gabriel Mountains, CA,
795 U.S.A.

Schneider, D. P., Deser, C., Fasullo, J., & Trenberth, K. E. (2013). Climate Data Guide Spurs Discovery and Understanding.
Eos, Transactions American Geophysical Union, 94(13), 121–122. <https://doi.org/10.1002/2013eo130001>

Senande-Rivera, M., Insua-Costa, D., & Miguez-Macho, G. (2022). Spatial and temporal expansion of global wildland fire
activity in response to climate change. *Nature Communications*, 13(1), 1208. [https://doi.org/10.1038/s41467-022-](https://doi.org/10.1038/s41467-022-28835-2)
800 [28835-2](https://doi.org/10.1038/s41467-022-28835-2)

Shakesby, R., & Doerr, S. (2006). Wildfire as a hydrological and geomorphological agent. *Earth-Science Reviews*, 74(3-4),
269–307.

Sheikholeslami, R., & Razavi, S. (2017). Progressive Latin Hypercube Sampling: An efficient approach for robust sampling-
based analysis of environmental models. *Environmental Modelling & Software*, 93, 109–126.
805 <https://doi.org/10.1016/j.envsoft.2017.03.010>

Singleton, M. P., Thode, A. E., Sánchez Meador, A. J., & Iniguez, J. M. (2019). Increasing trends in high-severity fire in the
southwestern USA from 1984 to 2015. *Forest Ecology and Management*, 433, 709–719.
<https://doi.org/10.1016/j.foreco.2018.11.039>

Staley, D. M., Kean, J. W., Cannon, S. H., Schmidt, K. M., & Laber, J. L. (2012). Objective definition of rainfall intensity–
810 duration thresholds for the initiation of post-fire debris flows in southern California. *Landslides*, 10(5), 547–562.
<https://doi.org/10.1007/s10346-012-0341-9>

Stoof, C. R., Vervoort, R. W., Iwema, J., van den Elsen, E., Ferreira, A. J. D., & Ritsema, C. J. (2012). Hydrological
response of a small catchment burned by experimental fire. *Hydrology and Earth System Sciences*, 16(2), 267–285.
<https://doi.org/10.5194/hess-16-267-2012>

815 Tang, H., McGuire, L. A., Rengers, F. K., Kean, J. W., Staley, D. M., & Smith, J. B. (2019). Developing and Testing
Physically Based Triggering Thresholds for Runoff-Generated Debris Flows. *Geophysical Research Letters*, 46(15),
8830–8839. <https://doi.org/10.1029/2019gl083623>

Thomas, M. A., Rengers, F. K., Kean, J. W., McGuire, L. A., Staley, D. M., Barnhart, K. R., & Ebel, B. A. (2021).
Postwildfire Soil-Hydraulic Recovery and the Persistence of Debris Flow Hazards. *Journal of Geophysical Research:*
820 *Earth Surface*, 126(6). <https://doi.org/10.1029/2021jf006091>

Vieira, D.C.S., Basso, M., Nunes, J.P., Keizer, J.J., Baartman, J.E.M. (2022). Event-based quickflow simulation with

OpenLISEM in a burned Mediterranean forest catchment. *Int. J. Wildland Fire* 31, 670–683.

Westra, S., Fowler, H. J., Evans, J. P., Alexander, L. V., Berg, P., Johnson, F., Kendon, E. J., Lenderink, G., & Roberts, N. M. (2014). Future changes to the intensity and frequency of short-duration extreme rainfall. *Reviews of Geophysics*, 52(3), 522–555. <https://doi.org/10.1002/2014rg000464>

825 Woolhiser, D. A., & Liggett, J. A. (1967). Unsteady, one-dimensional flow over a plane-The rising hydrograph. *Water Resources Research*, 3(3), 753–771. <https://doi.org/10.1029/wr003i003p00753>

Wu, J., Nunes, J. P., Baartman, J. E. M., & Faúndez Urbina, C. A. (2021). Testing the impacts of wildfire on hydrological and sediment response using the OpenLISEM model. Part 1: Calibration and evaluation for a burned Mediterranean forest catchment. *CATENA*, 207, 105658. <https://doi.org/10.1016/j.catena.2021.105658>

830 Xu, Z., Zhang, Y., Günter Blöschl, & Piao, S. (2023). Mega Forest Fires Intensify Flood Magnitudes in Southeast Australia. *Geophysical Research Letters*, 50(12). <https://doi.org/10.1029/2023gl103812>

Yu, G., Liu, T., McGuire, L. A., Wright, D. B., Hatchett, B. J., Miller, J. J., Berli, M., Giovando, J., Bartles, M., & Floyd, I. E. (2023). Process-Based Quantification of the Role of Wildfire in Shaping Flood Frequency. *Water Resources Research*, 59(12). <https://doi.org/10.1029/2023wr035013>

835