



Monte-Carlo based sensitivity analysis of the RIM2D hydrodynamic model for the 2021 flood event in Western Germany

Shahin Khosh Bin Ghomash¹, Patricio Yeste², Heiko Apel¹, and Viet Dung Nguyen¹

¹Section Hydrology, GFZ German Research Centre for Geoscience, Potsdam (Germany)

²Institute of Environmental Science and Geography, University of Potsdam, Karl-Liebknecht-Straße 24–25, 14476 Potsdam, Germany

Correspondence: Shahin Khosh Bin Ghomash (shahin@gfz-potsdam.de)

Abstract. Hydrodynamic models are crucial for flood forecasts and early warnings, particularly in response to events such as the devastating floods in Germany's Ahr region in July 2021. However, several uncertainties can be present in these models stemming from various sources, such as model structure, parameters, and boundary conditions. In this study, we aim to address these uncertainties and enhance the existing RIM2D hydrodynamic model introduced by Apel et al. (2022) for the Ahr region. The goal is to fortify its robustness and reliability for inundation simulations in the area. For this, we employ a large number of Monte Carlo simulations, assessing the effects of various model elements, such as floodplain and channel roughness coefficients, as well as terrain resolution, on river dynamics and inundation.

Our findings emphasize the critical role of proper parameter assignment in attaining optimal simulation results. The results show that sensitivity to input factors varies depending on the used performance metrics and the predicted output. We demonstrate that for simulating flow formation and water level in the river channel, the roughness parameter of the river channel and the model's resolution are paramount. On the other hand, for simulating flood extent and the distribution of water depth across the domain, even coarser resolutions prove adequate and, due to their reduced computation time, might be better suited for early warning systems. Furthermore, our findings suggest that the differences observed between finer and coarser resolution models may stem from the varying representations of the river channel and buildings within the model. Ultimately, this work provides a guideline for the parameterization of RIM2D and similar physically-based fluvial models tailored to the Ahr region, offering valuable insights for future hydrodynamic modeling endeavors in the area.

1 Introduction

The changing climate leads to an increased occurrence and intensity of extreme weather events, which leads to more often and more intense floods. In order to estimate the impact of the floods, hydrodynamic models are becoming more important (Li et al., 2019; Wu et al., 2017). Hydrodynamic models are used for flood management planning and risk assessments (Merz et al., 2020), but the need for the use of hydrodynamic modelling in operational flood forecast system has been shown in recent flood events and is thus advocated for by both the scientific community and flood managers (Šakić Trogrlić et al., 2022; Apel et al., 2022).



The critical importance of these models was highlighted by the devastating floods in Germany's Ahr region in July 2021 (Schäfer et al., 2021). In the aftermath of this disaster, Apel et al. (2022) established and presented a flood inundation model designed for the region. This model was built upon the RIM2D hydrodynamic model, specifically customized for swiftly simulating inundations in the affected region. Although the RIM2D model, primarily parameterized based on the modeller's expertise and standard hydraulic roughness values, demonstrated commendable accuracy in capturing the inundation dynamics, there remains room for refining and enhancing its precision and dependability, as it is common in initial modeling efforts.

Various uncertainties in hydrodynamic modeling can arise from different sources, including the model structure, parameters, and boundary conditions. These uncertain elements can have a substantial impact on the reliability and accuracy of the model's performance (Caviedes-Voullième et al., 2020; Alipour et al., 2022). Model structure uncertainty pertains to the inherent imperfections in the underlying equations and numerical schemes of a hydrodynamic model when simulating the physical processes within a river system. The primary parameters influencing hydrodynamic models are the river bathymetry and surface roughness coefficients (Khanarmuei et al., 2020). The selection of roughness coefficient values for both floodplain and channel, along with the resolution and accuracy of the Digital Elevation Model (DEM), can substantially influence the results of the hydrodynamic model (Pappenberger et al., 2006; Dung et al., 2011; Khosh Bin Ghomash et al., 2019; Alipour et al., 2022). To fully address the uncertainties inherent in hydrodynamic modeling and to obtain best possible model results, a calibration and validation process is typically applied (Fabio et al., 2010). This requires a large number of model runs (Alipour et al., 2022), but also sufficient data for evaluating the model performance. With sufficient data at hand, a large obstacle for hydraulic model calibration are the typically long simulation runtimes, which hinders the evaluation of a large number of model runs with different parameterisation. With the advancement of 2D shallow Water solvers like RIM2D, utilizing High Performance Computing (HPC) facilities like scientific-grade Graphic Processor Units (GPU), the evaluation of a large number of simulation runs became feasible. This allows for thorough model calibration and enhancement of the model's predictive capabilities, as well as the identification of optimal model parameters. With this in mind, our research aims to re-evaluate and calibrate the existing RIM2D model for the Ahr river, making it more robust and reliable for inundation simulations for the region. This is possible because of the comparatively well documented flood event in 2021, for which sets of different data for model evaluation are available.

In this study, we conduct an Monte-Carlo analysis to evaluate the spatio-temporal performance of RIM2D across varying resolutions and manning roughness parameters. The Monte Carlo simulation encompasses 3,000 Latin Hypercube samples (Iman and Conover, 1982) of varying roughness parameters for different land use classes, and different spatial resolutions. To evaluate the performance of RIM2D, we utilize post-event inundation maps, observed water levels throughout the study area, and reconstructed water level hydrographs at gauging stations.

Firstly we introduce the study area and the datasets utilized. Subsequent sections will elaborate our research methods, the results obtained, and an in-depth discussion of these findings. The paper will conclude by exploring the implications of our work and its potential applications for future hydrodynamic modeling endeavors.



2 Case Study

The Ahr River, an 86 km long tributary of the Rhine River, is situated in the federal states of Rhineland-Palatinate and North Rhine-Westphalia of Germany. Our study area (Figure 1) concentrates on the downstream segment of the Ahr River, spanning about 30 km from the towns of Altenahr to Sinzig, where the valley remains relatively enclosed in the first third of the reach, after which the valley widens and extends downstream to the Rhine.

This area predominantly comprises rural landscapes, with a few small settlements and the comparatively larger urban area of Bad Neuenahr-Ahrweiler, with a population of approximately 26,500 (Truedinger et al., 2023). The region's average annual precipitation level is below the German average, measuring around 675 mm (Truedinger et al., 2023).

In mid-July 2021, heavy rainfall events in Western and Central Europe caused severe and abrupt flooding, particularly impacting Belgium, the Netherlands, and Germany (Schäfer et al., 2021). The Ahr Valley was among the severely affected areas, accounting for an overall 70 percent of all fatalities in the country (Truedinger et al., 2023). Various factors contributed to this extreme impact. The Ahr Valley, characterized by steep slopes and narrow valleys in a low mountain terrain, has been extensively settled and cultivated over an extended period in history, leading to a concentration of both population and structures in vulnerable zones. Consequently, such areas are inherently prone to hazards like rapid flow concentration, mass movement, erosion, and substantial debris accumulation.

During the flood event on July 14, 2021, water levels in the Ahr reached their highest values at the existing gauging stations since the beginning of their measurements reaching about 10 m water depth at gauge Altenahr (Mohr et al., 2022), although the exact water levels remain unknown due to damage or destruction of most gauging stations during the event (Schäfer et al., 2021).

3 Methods

3.1 Hydrodynamic model RIM2D

RIM2D (Rapid Inundation Model 2D) is a 2D raster-based hydrodynamic model developed by the Section Hydrology at the German Research Centre for Geoscience (GFZ) in Potsdam, Germany. Employing the local inertia approximation to the shallow water equations (Bates et al., 2010), a method well-established for fluvial floodplain inundation applications (Falter et al., 2014; Neal et al., 2011; Apel et al., 2022), RIM2D offers a robust computational framework.

In essence, the local inertia formulation provides a more accurate description of flood dynamics compared to more simplified versions of the shallow water equations, such as the diffusive wave model (De Almeida and Bates, 2013; Caviedes-Voullième et al., 2020). This approach introduces an additional term to represent the rate of change of local fluid momentum, influencing the progression of fluid momentum from one time step to the next. In practical terms, this implies that the fluid's momentum in a given time step informs the subsequent step, necessitating an acceleration of the flow from its previous state. Consequently, in describing physically shallow water flows, the local inertial formulation bridges the gap between the diffusion wave approximation and the comprehensive full-dynamic equations.



While the original numerical solution proposed by (Bates et al., 2010) is susceptible to instabilities under near-critical to
90 super-critical flow conditions and for small grid cell sizes (De Almeida and Bates, 2013), RIM2D incorporates the numerical
diffusion method suggested by De Almeida et al. (2012) to address these issues.

RIM2D is coded in Fortran and ported to GPUs using NVIDIA CUDA Fortran libraries, enabling massive parallelization of
numerical computations at a lower cost compared to large multi-core computing clusters. It's important to note that, at present,
RIM2D exclusively supports computations on a single GPU, which limits the amount of parallel computations to about 1-2
95 millions depending on the GPU type. However, a multi-GPU version will be available in the near future.

3.2 Data and model setup

The model setup utilized the DGM1 product, a digital elevation model (DEM) with a resolution of $dx = 1$ meter, provided by the
Landesamt für Umwelt (LfU) of the Federal State of Rhineland-Palatinate. DGM1 was created through LiDAR (Light Detection
and Ranging) mapping of the region in 2016. In this study, simulations were conducted using two resolutions, namely $dx = 5$
100 meters (5.6 million cells) and 10 meters (1.4 million cells). Each DEM employed in the simulations resulted from aggregating
the DGM1 product through the averaging method. The resulting DEMs were directly used as the foundation for the simulations
without undergoing any additional alterations. Consequently, the simulations may not accurately represent the riverbed but
instead depict the average water surface in the Ahr river, typically measuring less than 1 meter (Apel et al., 2022). This
approach is justified as RIM2D operates based on water levels as boundary conditions rather than water depths and discharge.
105 Thus, even with the presumed bed elevation, the water levels at the model boundary consistently remain accurate, ensuring
over-bank flow and floodplain inundation occur in the correct locations and at the appropriate times. Building footprints in the
simulation domain were excluded from the two DEMs based on building shape files provided by OpenStreetMap. An example
of this is shown in Figure 1 (white coloring in the lower figure). This means that buildings act as closed reflective boundaries
for the flow in the simulations, just as in reality.

110 Manning roughness values were assigned to the domain based on the 2020 Germany land cover classification derived from
Sentinel-2 data (Riembauer et al., 2021). The data basis for the classification includes atmospherically corrected Sentinel-2
satellite data (MAJA algorithm; data provided by EOC Geoservice of the German Aerospace Centre – DLR), training data
from reference data (e.g., OpenStreetMap), and the Sentinel-2 scenes themselves. This land cover was chosen for its relatively
high grid resolution (10 meters). Additionally, the main Ahr river channel in the domain was incorporated into the land cover
115 raster as a new land category. The land cover is depicted in Figure 1.

Subsequently, the land cover is divided into seven main categories which are presented in Table 1. After an extensive
literature review, a diverse set of Manning value ranges was selected for each land category based on (Te Chow, 1959; Arcement
et al., 1989; Goodchild et al., 1993). The lower and upper boundaries of the Manning roughness values for each land category
are detailed in Table 1. Additionally, the coverage percentages of each land category concerning the entire domain and the
120 observed 2021 flood extent are presented in Table 1. The Manning values assigned to each land-cover are then varied during
the Monte Carlo analysis as described in Section 3.3. Given their location mainly downstream near the Rhine River, water



bodies are anticipated to have minimal impact on the model results. As a result, our analysis focuses on the impact of six categories: 'Forest', 'Vegetation', 'Built-up', 'Bare soil', 'Agriculture', and 'River channel'.

The water level data (in meters above sea level) at Altenahr and Bad-Bodendorf gauges, officially reconstructed by the LfU
125 Rhineland-Palatinate, were employed in this study (Mohr et al., 2022). The time series reconstruction was necessary because
the gauges were destroyed during the 2021 event. The reconstruction relied on hydraulic simulations, which has to be taken
into account when assessing the model performance. The Altenahr time series was used as input forcing for the models and
the Bad-Bodendorf gauge time-series was used for validation. For model setup, observed Altenahr water levels were assigned
to the inflow cells in the domain, selected along the river channel on the west boundary of the domain. To account for over-
130 bank flow into the domain, cells neighboring the river channel with elevations below the maximum water level of the flood
hydrograph were also selected as boundary cells. Water depths were assigned to the chosen cells only when the river water
levels exceeded the cell elevation. Other data sources employed to validate the results in this study encompass the documented
flood extent in 2021 (supplied by the German State Agency for the Environment, LfU - Landesamt für Umwelt) and water
depths derived from 65 high water marks (Figure 1) reported by residents, facilitating the evaluation of simulated water depths.

135 3.3 Monte-Carlo based sensitivity analysis

A Monte-Carlo based sensitivity analysis over the roughness parameterization was conducted in order to explore the spatio-
temporal performance of RIM2D at 5m and 10m resolution and test its predictive capability for the flood event in the Ahr
valley in 2021. The uncertainty analysis was founded on a Monte Carlo simulation comprising 3,000 Latin Hypercube (LH)
samples (Iman and Conover, 1982) of the roughness parameter space defined by the roughness ranges indicated in Table 1.
140 The performance of RIM2D was assessed using observations available for the flood event under study according to the fol-
lowing procedure: 1) the in-channel flood dynamics were evaluated against the reconstructed water level time series at the Bad
Bodendorf gauge, 2) the simulated inundation extent was compared with the post-event map of the inundated area, and 3) the
simulated water depths were compared against the 65 high water marks at buildings reported by the inhabitants.

The performance of RIM2D for the in-channel flood dynamics was determined through the root-mean-square error (RMSE)
145 and the Kling-Gupta efficiency (KGE, Gupta et al., 2009) applied to the water level at the river gauge. RMSE and KGE do not
present an upper and a lower limit, respectively, with $RMSE = 0$ and $KGE = 1$ indicating a perfect match. The performance
for inundation extent was assessed through four metrics commonly used to evaluate hydrodynamic models (e.g., Bryant et al.,
2024; Wing et al., 2017): the hit rate (H), the false alarm ratio (F), the critical success index (C) and the error bias (E). These
metrics are based on a binary comparison of wet and dry cells according to a classification into false positives (i.e., wet cells
150 in model corresponding to dry cells in observations), false negatives (i.e., dry cells in model corresponding to wet cells in
observations), true positives (i.e., wet cells both in model and observations) and true negatives (i.e., dry cells both in model
and observations). H measures the tendency of the model to underpredict the inundation extent and ranges from 0 (no true
positives) to 1 (no false negatives). F indicates the tendency of the model to overpredict the inundation extent, ranging from
0 (no false positives) to 1 (no true positives). C reports on both underprediction and overprediction and also ranges from 0
155 (no true positives) to 1 (no false positives and no false negatives, which corresponds to a perfect match between the simulated



and the observed inundation extent). C is the most commonly used performance criteria for comparing mapped and simulated inundation extent, because it combines H and F . E assesses the tendency of the model to underpredict or overpredict, with $E = 1$ indicating no bias, $0 \leq E < 1$ suggesting a tendency towards underprediction and $E > 1$ toward overprediction. Lastly, RMSE and the bias (i.e., mean observed water depth minus mean simulated water depth) were selected as the performance metrics for the distributed water depths derived from the high water marks.

A final selection of the best-performing roughness sets representing the overall model performance was carried out according to a Euclidean distance (ED) definition applied to KGE, C and RMSE for the distributed water depths after normalising the metrics between 0 and 1 as follows:

$$ED = \sqrt{(1 - KGE_n)^2 + (1 - C)^2 + (1 - RMSE_n)^2} \quad (1)$$

where KGE_n and $RMSE_n$ are the normalised KGE and RMSE for the distributed water depths, respectively, as given by:

$$KGE_n = (2 - KGE)^{-1} \quad (2)$$

$$RMSE_n = \left(1 + \frac{RMSE}{\bar{d}_{obs}}\right)^{-1} \quad (3)$$

where \bar{d}_{obs} is the mean observed water depth for all the high water marks.

On the basis of Eq. 1 a total of 150 sets (5% of the 3000 sample parameter sets) corresponding the lowest ED to the ideal solution (1, 1, 1) were selected and their corresponding parameter distributions were compared to evaluate the commonalities and differences between the $dx = 10m$ and $dx = 5m$ simulations in terms of multi-criteria model performance. The roughness ranges associated to the selected roughness sets can be considered as representative of the optimal RIM2D performance and provide generalizable recommendations for flood inundation studies using 2D raster-based hydrodynamic models.

4 Results and Discussion

4.1 Simulating water level at the Bad-Bodendorf gauge

Figure 2 illustrates the simulated water levels at the Bad-Bodendorf gauge station in simulations with spatial resolutions of $dx = 10 m$ (a) and $dx = 5 m$ (b). The black line represents the officially reconstructed water level during the 2021 flood event at the gauge, serving as a validation reference. In general, the simulated water levels exhibit a consistent overall shape with the validation curve. The peaks and recessions align perfectly, but differences emerge in the rising limbs.

Specifically, the $dx = 5 m$ simulations demonstrate a better capture of the onset compared to the $dx = 10 m$ simulations. The latter exhibits a delay in the rising limb relative to both the validation curve and the $dx = 5 m$ simulations. This suggests that simulation resolution directly influences the onset of the curves and the establishment of the flow. This delay in the onset has to be attributed to the inadequacy of the coarser resolution DEM in accurately depicting the river channel within the



185 domain. The width of the Ahr river channel is typically 10 m at max, thus at 10 m resolution the river banks might not be properly represented and parts of the floodplains "leak" into the river channel as represented in the 10 m DEM, reducing the conveyance in the channel. As a consequence, the water flow in the channel is not be properly simulated, leading to a delay in the establishment of channel flow. This delay, in turn, contributes to the sudden spike observed in the hydrograph onset. This observation aligns with findings from prior studies which also noted delays in runoff onset with coarser DEM resolutions under
190 pluvial rainfall/runoff simulations (Caviedes-Voullième et al., 2012; Khosh Bin Ghomash et al., 2019).

To assess how the simulated water levels compare with the reconstructed water level time series at the Bad-Bodendorf gauge, Figure 3 illustrates the RMSE and KGE indicators for simulations with grid resolutions of $dx = 10$ m (a) and $dx = 5$ m (b). The metrics specific to each land cover class within the simulated area are depicted to analyze the influence of each class on the outcomes.

195 Examining the RMSE, it is evident that variations in the Manning values for forest and river channel classes have the most significant impact on model accuracy with both model resolutions. Lower Manning values for the river channel and higher Manning values for the forest land cover lead to the highest model accuracy in the $dx = 5$ m setup. This pattern also holds true for the river land cover in the $dx = 10$ m simulation cases, but not for the forest land cover. Within the Forest class, noticeable differences exist between the $dx = 10$ m and $dx = 5$ m setups. The $dx = 10$ m setup consistently leans towards smaller
200 roughness values, approximately 0.1, signifying an increased sensitivity to variations in roughness. In contrast, the $dx = 5$ m setup demonstrates an inclination for higher roughness values, typically around 0.25, indicating an alternative sensitivity pattern within this particular land use class. Interestingly, the model accuracy in simulating the water level at the Bad-Bodendorf gauge appears to be relatively unaffected by changes in the Manning values of other land cover categories. From the perspective of the KGE indicator, no dominant trend is observed among the Manning value ranges of different land covers, except for the
205 river channel category in the $dx = 5$ m simulations. Here, lower Manning values result in a superior KGE value, aligning with the observations from the RMSE indicator.

Concerning resolution, it is evident that, overall, setups with a higher resolution ($dx = 5$ m) achieve greater accuracy in simulating the water level at the Bad-Bodendorf gauge compared to the coarser setups with $dx = 10$ m. This is reflected in their superior RMSE and KGE scores, as also seen in Figure 2. Notably, setups with higher resolutions demonstrate increased
210 sensitivity to Manning roughness values, evident in relatively broader spreads in RMSE and KGE scores compared to setups with coarser $dx = 10$ m. This emphasizes the significance of carefully selecting roughness values in such setups. According to our analysis, predicting water level dynamics is predominantly influenced by the resolution of the Digital Elevation Model (DEM). Modelers have various methodologies at their disposal to improve the representation of small-scale features in coarser DEMs, thereby achieving the most accurate depiction of topography (Fewtrell et al., 2008). The significance of DEM resolution
215 has also been underscored in other studies that explored the sensitivity of water level and inundation area to hydrodynamic model factors (Khosh Bin Ghomash et al., 2019; Oubennaceur et al., 2019).



4.2 Skill for the simulated inundation extent

Figure 4 depicts the model performance metrics, including Hit Rate (H), False Alarm ratio (F), Critical Success Index (C), and Error Bias (E), evaluating the efficacy of simulations at resolutions of $dx = 10$ (a) and 5 (b) meters in reproducing the inundation extent observed during the 2021 flood event. These metrics offer insights into the accuracy of simulated inundation extents compared to actual inundated areas. Furthermore, the metrics are analyzed with respect to different land cover categories within the simulated region to discern the influence of each land type on the fidelity of simulated inundation areas.

Generally, it is evident that RIM2D demonstrates the ability to simulate flood extent with remarkable accuracy across various resolutions and nearly all roughness settings. This is indicated by the consistently scores indicating good performing across almost all metrics. Of particular importance is the Critical Success Index (C), as it combines matches and mismatches in one metric. The obtained values cluster around $C = 0.9$, which is exceptionally high in simulations of flood extent. The most distinct contrast in the accuracy of the simulated flood extents between the two resolutions becomes evident through the Error Bias metric. An Error Bias value of 1 suggests an unbiased result, with scores closer to 0 indicating under-prediction. It becomes apparent that in the coarser $dx = 10\text{m}$ configurations, the scores tend to be higher, approaching values closer to 1, while in the $dx = 5\text{m}$ setups, there is a tendency towards underestimating the flooded regions compared to the coarser setup. This discrepancy in flooded area sizes observed between coarser and finer simulations might stem from artificially extended flooded regions with shallow depths in the larger cells of the coarser grids, contrasting with the smaller flood extents characterized by deeper water in the finer grid configurations.

Regarding the influence of land classes, the H, F, and C metrics display limited sensitivity to changes in Manning values associated with each land category, with indicators generally remaining within the same range. However, the Error Bias indicator reveals a broader dispersion in results, indicating that changes in roughness Manning values may exert a more pronounced effect on the error bias of simulated flood extents across the domain. Overall, while no clear trend emerges regarding the impact of roughness Manning values on different land classes, the Error Bias indicator highlights the sensitivity of flood extent accuracy to such variations in the domain.

4.3 Comparison to water marks

Figure 5 illustrates the Root Mean Square Error and bias metrics, comparing simulated water depths to observed water marks during the 2021 flood event with grid spacing of $dx = 10\text{ m}$ (a) and $dx = 5\text{ m}$ (b). Each land cover class within the simulated area is analyzed separately.

In general, it is evident that the coarser $dx = 10\text{m}$ setup tends to yield better scores across the two indicators in contrast to the finer setups when simulating water depths at various locations within the domain. This is primarily due to the worse scores observed at points farther from the river channel in the finer resolution setups. In these cases, because of the smaller simulated flood extent (as discussed in Figure 4), less water reaches these points, resulting in more significant discrepancies compared to the coarser $dx = 10\text{m}$ simulations. Additionally, the finer resolution setups demonstrate a heightened sensitivity to changes in the Manning values, resulting in wider spreads in their scores, underscoring the importance of selecting appropriate roughness



250 Manning values for these setups (also seen in Figure 3. These results underscore the suitability of $dx = 10$ m resolution for flood inundation modeling and early warning systems, providing sufficient accuracy for simulating water depths across the domain.

In respect to the Manning values assigned to different land classes, a slight trend is noticed in the river channel class across both resolutions. Lower roughness Manning values are associated with higher simulation accuracy, which is in line with the observations from Figure 3 regarding water levels at the Bad-Bodendorf gauge. In contrast, the Built-up class, comprising the largest proportion of the flooded area in 2021 (Table 1), shows a tendency toward higher Manning values in the $dx = 10$ m setups, while this trend is less evident in the finer $dx = 5$ m setup. This finding points towards less realistic representation of the built-up structure in the 10 m DEM resolution, in which buildings with footprints smaller than 10 m might disappear during rasterization of the OSM vector files. The impact of rasterization is evident in Figure 6, wherein the coarser DEM (a) fails to depict smaller buildings, typically smaller in length compared to the DEM resolution. Consequently, fewer obstacles obstruct the flow, attributable to the reduced level of detail in the representation of buildings in the coarser DEM. In order to compensate for the missing buildings as obstacles to the flow, higher roughness values are selected to capture the mapped inundation depths in the urban areas. A similar, albeit less pronounced, trend is observable within the Forest class, where lower Manning values correspond to reduced errors. Conversely, Vegetation, Bare soil, and Agriculture classes appear relatively insensitive to changes in roughness Manning values, with no clear trend discernible.

4.4 Best overall performance

Figure 7a shows the parameter distribution of the 150 best-performing parameter sets according to the overall performance as estimated by the Euclidean distance (ED, see Eq. 1). ED is a comprehensive metric for simulating the in-channel flood dynamics, inundation extent, and distributed water depths across the domain. Figure 7b, c, d display the probability density of the top performers for KGE values of the simulated water level at the Bad-Bodendorf gauge, the C indicator for the simulated inundation extent, and the RMSE values for the simulated water depths compared to the observed water marks, respectively. It is important to mention that the values presented in the figure are based on the 150 best-performing Latin Hypercube (LH) samples for each individual performance metric and for each land use class. Detailed information regarding the optimal roughness ranges based on the best overall performance for every land class is also provided in Table 2.

275 In terms of best overall performance as indicated by ED and shown in Figure 7a, it is observed that both resolution setups tend to favor relatively similar ranges of Manning values for each land class. However, the coarser $dx = 10$ m setup exhibits a more concentrated distribution and smaller spreads throughout the classes, except for the river channel class. Within the River Channel class, the better performing $dx = 5$ m simulations tend to focus on a narrower range of Manning values compared to the coarser setups. This highlights the increased importance of assigning appropriate Manning values to the river channel in finer resolution simulations. At coarser resolution, in which the channel is less realistically represented, the channel roughness is of lesser importance. Following the river channel, the Forests and Built-up classes (which are the predominant land use classes surrounding the river channel) display a narrower range of Manning values, underscoring their significant influence on the simulation outcomes. This provides experimental evidence for the theoretically reasonable importance of Manning



roughness values for land use types that have substantial impact on the flood propagation, i.e. those classes predominant in the
285 floodplains. In order to better understand the differences between both resolution setups, the RIM2D simulations corresponding
to the lowest ED are shown in Figure 8. Consistently with our previous analysis, it can be appreciated that the $dx = 5m$ setup
performs better for the water levels at the Bad-Bodendorf and the inundation extent, whereas the $dx = 10m$ setup achieved
better performance for the distributed water depths.

Concerning the KGE indicator for the simulated in-channel flood dynamics (Figure 7b), there are relatively similar trends
290 and ranges of Manning values observed compared to the ED indicator. Notable differences arise in the river channel class,
where the coarser simulations exhibit a broader spread compared to the finer setups. This highlights the impact of inadequate
representation of the river channel in these simulations, particularly for modeling water level dynamics (i.e. timing) along the
course of the river channel. Additionally, discrepancies are evident in the preferred Manning values within the Forest class.
The finer setups tend to favor higher Manning values around 0.25, whereas the coarser simulations lean more towards lower
295 values. This observation aligns with the findings in Figure 3 as well.

The general patterns and Manning roughness ranges observed in the preceding two indicators are also consistent with
the C values (Figure 7c). The sole deviation arises in the Vegetation category, where higher Manning values are favored to
achieve improved inundation extents. This differs from the preferred Manning values used to simulate water levels at the
Bad-Bodendorf gauge, which can be attributed to the significant presence of Vegetation class within the observed inundated
300 areas and its distribution not solely along the river channel but at some distance in the inundated areas (see also Table 1 and
Figure 1). Consequently, the Manning values assigned to this category play a more crucial role in simulating flood extents in
the simulations. Another noteworthy observation from the figure is that the most effective Manning values for simulating water
levels in the river may not always yield the most accurate simulated flood extent. This offers essential insight that when fine-
tuning hydrodynamic models for flood inundation modeling, solely calibrating the model based on the water level or discharge
305 time series at one point in the river—often a common practice—is inadequate. Such calibration methods do not necessarily lead
to the most precise simulated flood extent. However, in this evaluation it has to be noted that the time series used for evaluating
the in-river water level is also a simulation product. This means that the reconstruction is also prone the above mentioned errors
and thus is likely not absolutely correct, which weakens the finding drawn from our experiments to some extent.

The RMSE values corresponding to the distributed observed water depths exhibit patterns and Manning ranges akin to
310 those observed in the C indicator for the best inundation extents (Figure 7d). For instance, the Manning ranges favored for
the Vegetation class align closely with the optimal C range, as opposed to the range for the preferred Manning values used in
simulating water levels at the Bad-Bodendorf gauge. This underlines the significance of Manning values assigned to land-use
classes situated away from the river channel when modeling variables such as flood extent and water depths outside the river
channel itself.



315 5 Conclusions

Decisions made by modelers during the setup phase significantly shape the outcome of the model, leading to dependable and efficient flood risk simulations. Understanding the model's behavior is crucial in gauging how the definition of its factors influences the desired output. For hydraulic models the model setup and the definition of the hydraulic roughness is the most important model parameter to influence the model results. This study employed 6000 different model setups and roughness parameterizations to assess the impact on the performance of the RIM2D Ahr valley hydrodynamic model, differentiated in several aspects. A variety of performance metrics were implemented to assess the quality of the simulated river water levels, flood extent, and distributed water depths in the simulation domain compared to the observed data from the 2021 Ahr flood.

With the comprehensive analysis, we observed that the sensitivity to different model resolutions and roughness combinations varies depending on the scale of sensitivity, the type of performance measure used, and the predicted output. For simulating the dynamics of water levels in the river channel, we found that the most crucial factors are the roughness parameters designated for both the river channel itself and the land classes bordering the channel, as well as the spatial resolution of the model setup. Specifically, the resolution plays a pivotal role in the initial stages of flow formation, where coarser resolutions result in a delay in the onset of runoff compared to finer resolutions. This delay can primarily be attributed to the inadequate representation of the river channel in the coarser setups, emphasizing the significance of considering this aspect when configuring models for simulating water levels in the river channel.

In terms of flood extent dynamics, which are arguably a more crucial aspect in flood inundation modeling and subsequent calculations of flood damages and risks, the findings of this study suggest that a coarser resolution DEM with $dx = 10$ m is perfectly adequate for generating satisfactory flood extent representations. This insight is particularly valuable for establishing early warning systems using such physically-based models, where the computational burden of simulations typically influences the choice of model parameters. Furthermore, it is demonstrated that, in the case of simulated flood extent, besides the Manning values of the river channel and its surrounding land categories, the Manning values assigned to the predominant land classes in the domain also significantly impact the accuracy of flood extent simulations. These assigned Manning values are crucial for achieving adequate flood extent simulations, a finding that holds true for the simulation of distributed water depths throughout the domain as well. We could show that the already well performing, but un-calibrated model of Apel et al. (2022) can be further improved using the identified best performing roughness parameter sets in this study.

Additionally, an important observation from this study is that the optimal parameters for simulating water levels along the river channel may not necessarily align with the indicators necessary to achieve the best flood extent. In other words, calibrating such models based solely on water level or discharge time series at one point along the river is insufficient for optimizing a model for flood inundation calculation and subsequent damage and risk assessments.

Overall, this study provides distinct outlines and recommendations for configuring physically-based hydrodynamic models for fluvial floods in the Ahr area in Germany. It delineates the best-performing ranges of roughness Manning values for the domain (as detailed in Table 2) and offers guidance on selecting the model resolution, contingent upon the overarching modeling



objectives. Because of the physically based foundation of RIM2D, these findings should also be transferable beyond the scope of the presented flood example.

350 *Code availability.* RIM2D is open-source for scientific use under the EUPL1.2 license. Access is granted upon request. The simulations were performed with version 0.2.

Author contributions. SKBG: Conceptualisation, Methodology, Investigation, Simulation, Software, Analysis, Visualisation, Writing; PY, VDN: Conceptualisation, Methodology, Analysis, Visualisation, Writing; HA: RIM2D Software, Conceptualisation, Writing; All authors: Discussion and Writing.

355 *Competing interests.* The authors declare no conflicts of interests.

Acknowledgements. This research was performed within the frame of the DIRECTED project (<https://directedproject.eu/>). Funding of the DIRECTED project within the European Union's Horizon Europe – the Framework Programme for Research and Innovation (grant agreement No. 101073978, HORIZON-CL3-2021-DRS-01) is gratefully acknowledged.



References

- 360 Alipour, A., Jafarzadegan, K., and Moradkhani, H.: Global sensitivity analysis in hydrodynamic modeling and flood inundation mapping, *Environmental Modelling & Software*, 152, 105 398, 2022.
- Apel, H., Vorogushyn, S., and Merz, B.: Brief communication: Impact forecasting could substantially improve the emergency management of deadly floods: case study July 2021 floods in Germany, *Natural Hazards and Earth System Sciences*, 22, 3005–3014, <https://doi.org/10.5194/nhess-22-3005-2022>, 2022.
- 365 Arcement, G. J., Schneider, V. R., et al.: Guide for selecting Manning’s roughness coefficients for natural channels and flood plains, vol. 2339, US Government Printing Office Washington, DC, 1989.
- Bates, P. D., Horritt, M. S., and Fewtrell, T. J.: A simple inertial formulation of the shallow water equations for efficient two-dimensional flood inundation modelling, *Journal of Hydrology*, 387, 33–45, <https://doi.org/10.1016/j.jhydrol.2010.03.027>, 2010.
- Bryant, S., Schumann, G., Apel, H., Kreibich, H., and Merz, B.: Technical Note: Resolution enhancement of flood inundation grids, *Hydrology and Earth System Sciences*, 28, 575–588, <https://doi.org/10.5194/hess-28-575-2024>, 2024.
- 370 Caviedes-Voullième, D., García-Navarro, P., and Murillo, J.: Influence of mesh structure on 2D full shallow water equations and SCS Curve Number simulation of rainfall/runoff events, *Journal of hydrology*, 448, 39–59, 2012.
- Caviedes-Voullième, D., Fernández-Pato, J., and Hinz, C.: Performance assessment of 2D Zero-Inertia and Shallow Water models for simulating rainfall-runoff processes, *Journal of hydrology*, 584, 124 663, 2020.
- 375 De Almeida, G. A. and Bates, P.: Applicability of the local inertial approximation of the shallow water equations to flood modeling, *Water Resources Research*, 49, 4833–4844, 2013.
- De Almeida, G. A., Bates, P., Freer, J. E., and Souvignet, M.: Improving the stability of a simple formulation of the shallow water equations for 2-D flood modeling, *Water Resources Research*, 48, 2012.
- Dung, N. V., Merz, B., Bárdossy, A., Thang, T. D., and Apel, H.: Multi-objective automatic calibration of hydrodynamic models utilizing
380 inundation maps and gauge data, *Hydrology and Earth System Sciences*, 15, 1339–1354, <https://doi.org/10.5194/hess-15-1339-2011>, 2011.
- Fabio, P., Aronica, G. T., and Apel, H.: Towards automatic calibration of 2-D flood propagation models, *Hydrology and Earth System Sciences*, 14, 911–924, 2010.
- Falter, D., Dung, N., Vorogushyn, S., Schröter, K., Hundecha, Y., Kreibich, H., Apel, H., Theisselmann, F., and Merz, B.: Con-
385 tinuous, large-scale simulation model for flood risk assessments: proof-of-concept, *Journal of Flood Risk Management*, 9, 3–21, <https://doi.org/10.1111/jfr3.12105>, 2014.
- Fewtrell, T., Bates, P. D., Horritt, M., and Hunter, N.: Evaluating the effect of scale in flood inundation modelling in urban environments, *Hydrological Processes: An International Journal*, 22, 5107–5118, 2008.
- Goodchild, M. F., Steyaert, L. T., and Parks, B. O.: GIS and environmental modeling, Fort Collins: GIS World Books, 1993.
- 390 Gupta, H. V., Kling, H., Yilmaz, K. K., and Martinez, G. F.: Decomposition of the mean squared error and NSE performance criteria: Implications for improving hydrological modelling, *Journal of Hydrology*, 377, 80–91, <https://doi.org/10.1016/j.jhydrol.2009.08.003>, 2009.
- Iman, R. L. and Conover, W. J.: A distribution-free approach to inducing rank correlation among input variables, *Communications in Statistics - Simulation and Computation*, 11, 311–334, <https://doi.org/10.1080/03610918208812265>, 1982.
- Khanarmuei, M., Suara, K., Sumihar, J., and Brown, R. J.: Hydrodynamic modelling and model sensitivities to bed roughness and bathymetry
395 offset in a micro-tidal estuary, *Journal of Hydroinformatics*, 22, 1536–1553, 2020.



- Khosh Bin Ghomash, S., Caviedes-Voullieme, D., and Hinz, C.: Effects of erosion-induced changes to topography on runoff dynamics, *Journal of Hydrology*, 573, 811–828, 2019.
- Li, W., Lin, K., Zhao, T., Lan, T., Chen, X., Du, H., and Chen, H.: Risk assessment and sensitivity analysis of flash floods in ungauged basins using coupled hydrologic and hydrodynamic models, *Journal of Hydrology*, 572, 108–120, 2019.
- 400 Merz, B., Kuhlicke, C., Kunz, M., Pittore, M., Babeyko, A., Bresch, D. N., Domeisen, D. I., Feser, F., Koszalka, I., Kreibich, H., et al.: Impact forecasting to support emergency management of natural hazards, *Reviews of Geophysics*, 58, e2020RG000 704, 2020.
- Mohr, S., Ehret, U., Kunz, M., Ludwig, P., Caldas-Alvarez, A., Daniell, J. E., Ehmele, F., Feldmann, H., Franca, M. J., Gattke, C., et al.: A multi-disciplinary analysis of the exceptional flood event of July 2021 in central Europe. Part 1: Event description and analysis, *Natural Hazards and Earth System Sciences Discussions*, 2022, 1–44, 2022.
- 405 Neal, J., Schumann, G., Fewtrell, T., Budimir, M., Bates, P., and Mason, D.: Evaluating a new LISFLOOD-FP formulation with data from the summer 2007 floods in Tewkesbury, UK, *Journal of Flood Risk Management*, 4, 88–95, <https://doi.org/10.1111/j.1753-318x.2011.01093.x>, 2011.
- Oubennaceur, K., Chokmani, K., Nastev, M., Gauthier, Y., Poulin, J., Tanguy, M., Raymond, S., and Lhissou, R.: New sensitivity indices of a 2D flood inundation model using gauss quadrature sampling, *Geosciences*, 9, 220, 2019.
- 410 Pappenberger, F., Matgen, P., Beven, K. J., Henry, J.-B., Pfister, L., et al.: Influence of uncertain boundary conditions and model structure on flood inundation predictions, *Advances in water resources*, 29, 1430–1449, 2006.
- Riembauer, G., Weinmann, A., Xu, S., Eichfuss, S., Eberz, C., and Neteler, M.: Germany-wide Sentinel-2 based land cover classification and change detection for settlement and infrastructure monitoring, in: *Proceedings of the 2021 Conference on Big Data from Space*, Virtual, pp. 18–20, 2021.
- 415 Šakić Trogrlić, R., van den Homberg, M., Budimir, M., McQuistan, C., Sneddon, A., and Golding, B.: Early warning systems and their role in disaster risk reduction, pp. 11–46, 2022.
- Schäfer, A., Mühr, B., Daniell, J., Ehret, U., Ehmele, F., Küpfer, K., Brand, J., Wisotzky, C., Skapski, J., Rentz, L., et al.: Hochwasser Mitteleuropa, Juli 2021 (Deutschland), CEDIM Forensic Disaster Analysis Group Bericht, 2021.
- Te Chow, V.: *Open channel hydraulics*, 1959.
- 420 Truedinger, A. J., Jamshed, A., Sauter, H., and Birkmann, J.: Adaptation after Extreme Flooding Events: Moving or Staying? The Case of the Ahr Valley in Germany, *Sustainability*, 15, 1407, 2023.
- Wing, O. E., Bates, P. D., Sampson, C. C., Smith, A. M., Johnson, K. A., and Erickson, T. A.: Validation of a 30 m resolution flood hazard model of the conterminous United States, *Water Resources Research*, 53, 7968–7986, <https://doi.org/10.1002/2017WR020917>, 2017.
- 425 Wu, X., Wang, Z., Guo, S., Liao, W., Zeng, Z., and Chen, X.: Scenario-based projections of future urban inundation within a coupled hydrodynamic model framework: a case study in Dongguan City, China, *Journal of Hydrology*, 547, 428–442, 2017.

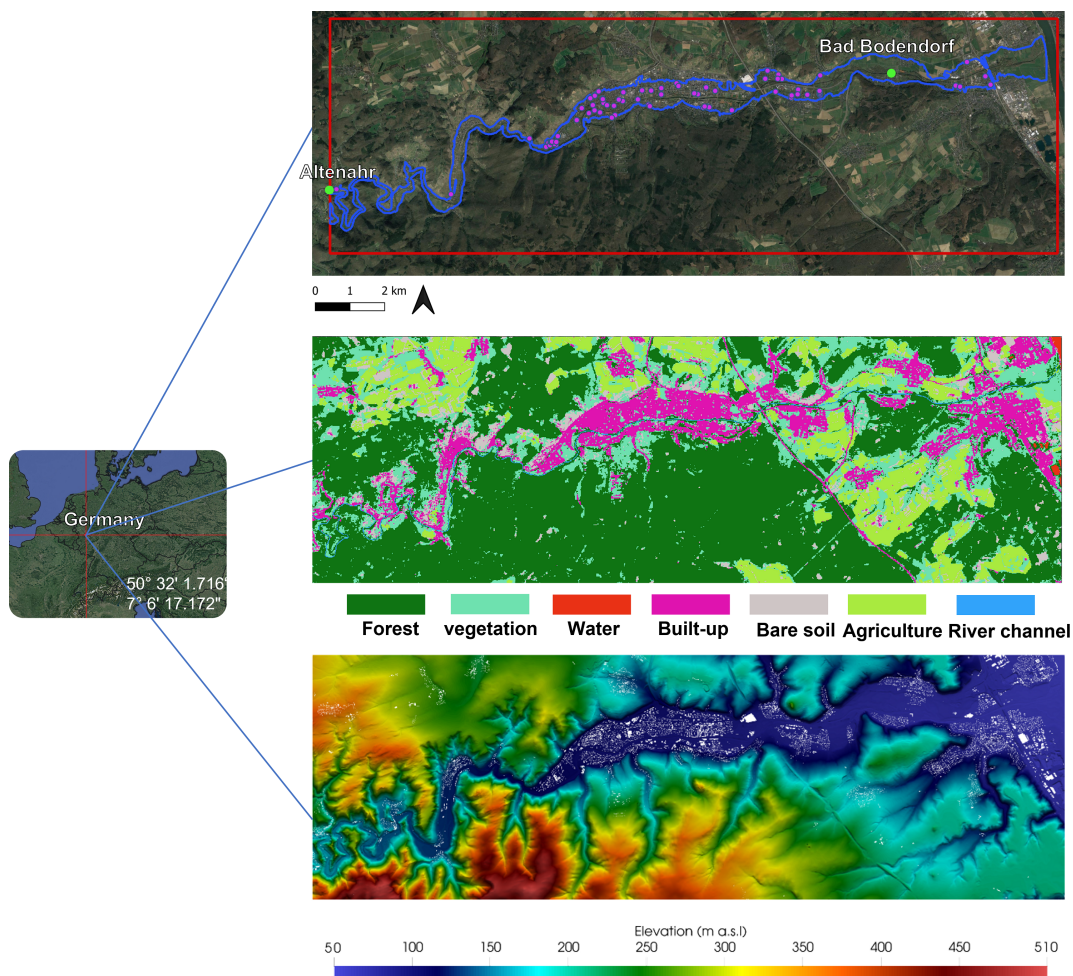


Figure 1. The simulation domain's boundary is indicated by the red line in upper figure, the middle figure depicts the land classes and the lower figure illustrates the topography. In the upper figure, the positions of the Altenahr and Bad-Bodendorf gauge stations are denoted by green points. The maximum observed flood extent during the 2021 flood event is represented by the blue line. The purple points represent the locations of the observed water marks during the 2021 flood event. Satellite imagery: © Google Earth 2024

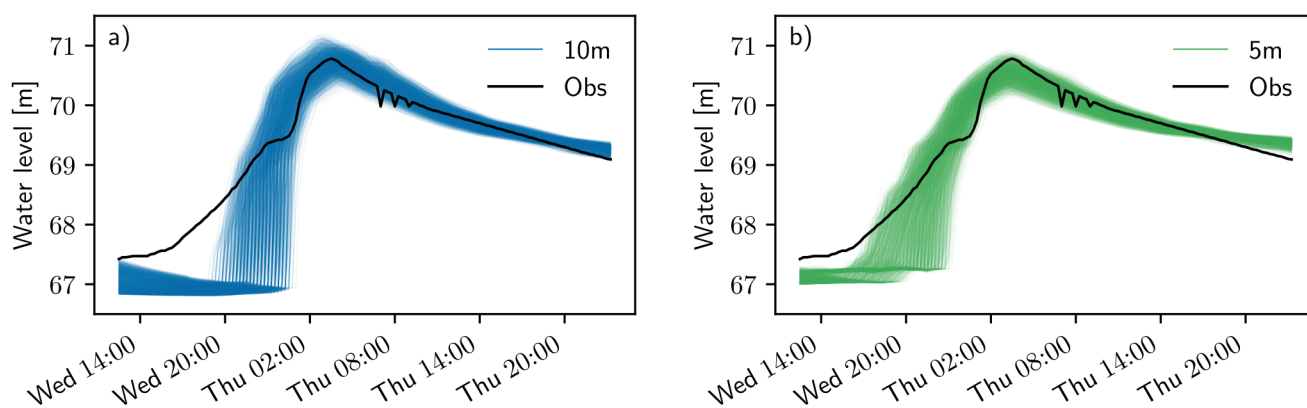


Figure 2. Monte Carlo simulation of the in-channel flood dynamics (i.e., water level) at the Bad-Bodendorf gauge station for the (a) $dx = 10\text{m}$ and (b) $dx = 5\text{m}$ simulations. The black line represents the official reconstructed water level during the 2021 flood event at the gauge.

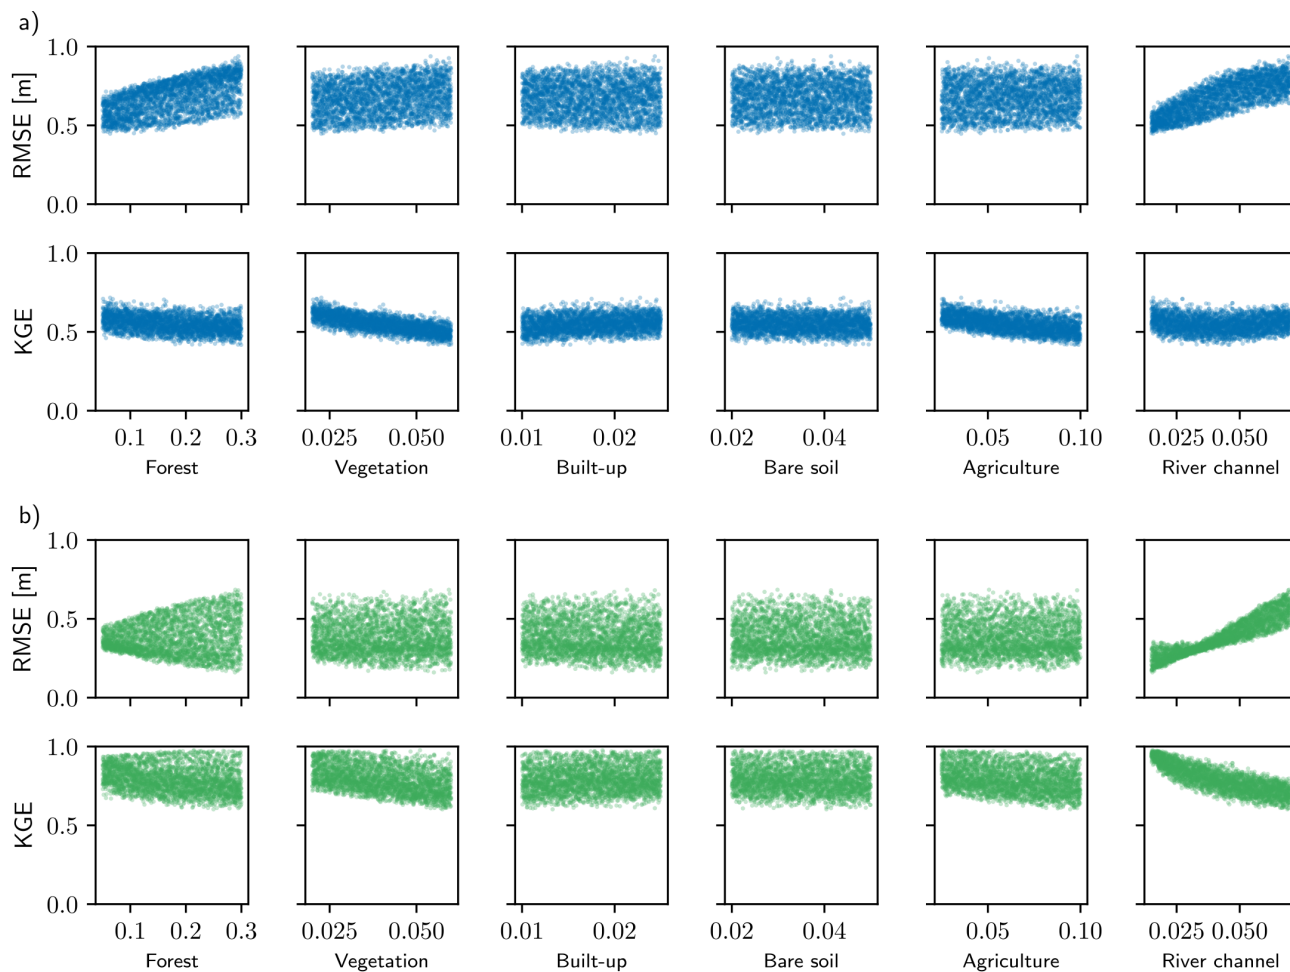


Figure 3. Root-Mean-Square Error (RMSE) and Kling-Gupta Efficiency (KGE) for the (a) $dx = 10\text{m}$ and (b) $dx = 5\text{m}$ simulations calculated for the in-channel flood dynamics at the Bad-Bodendorf gauge. The metrics specific to each land cover category within the simulated area are plotted.

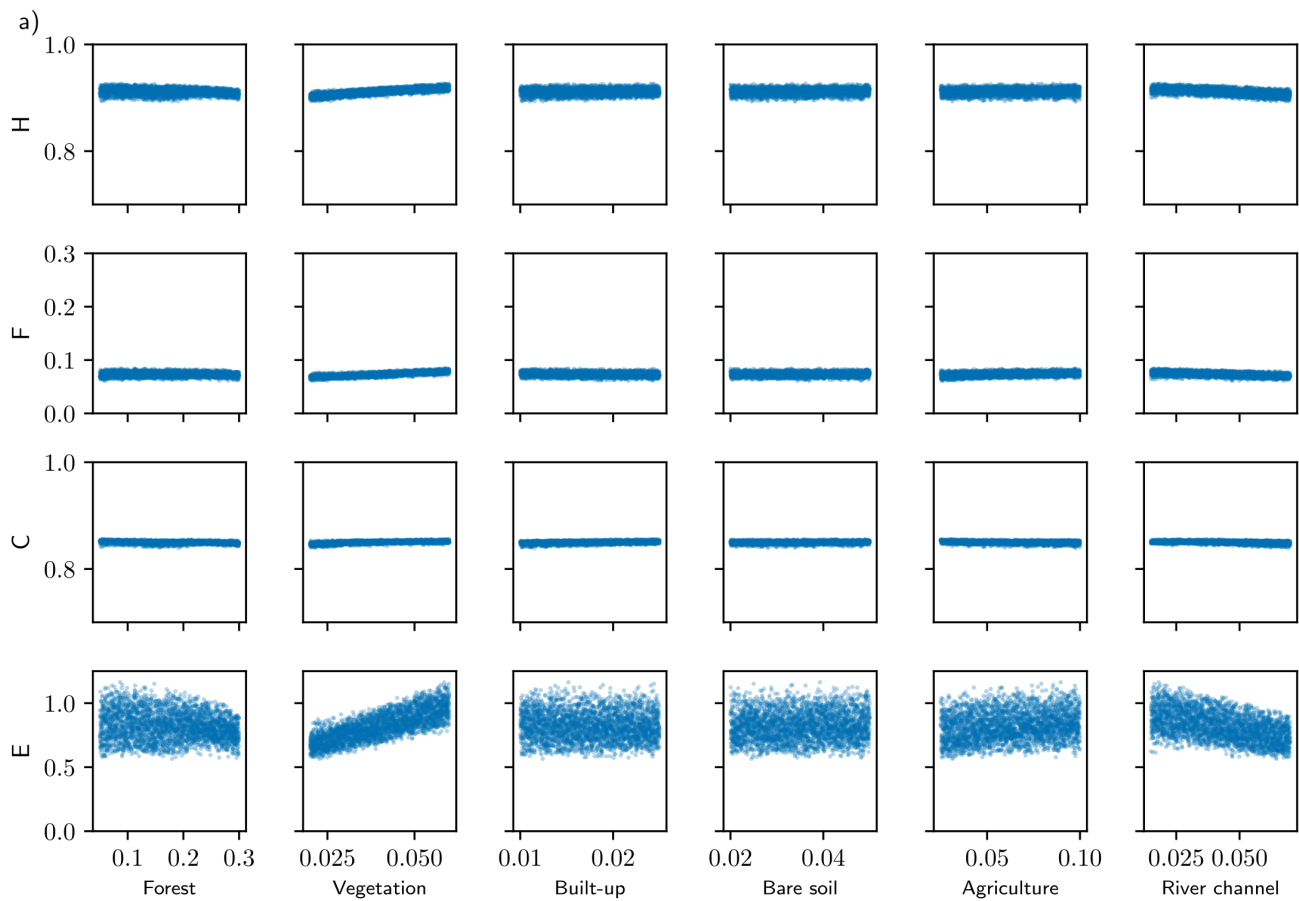


Figure 4. Hit rate (H), false alarm ratio (F), Critical Success Index (C) and error bias (E) for the (a) $dx = 10m$ and (b) $dx = 5m$ simulations calculated for the inundated extent. The metrics specific to each land cover category within the simulated area are plotted.

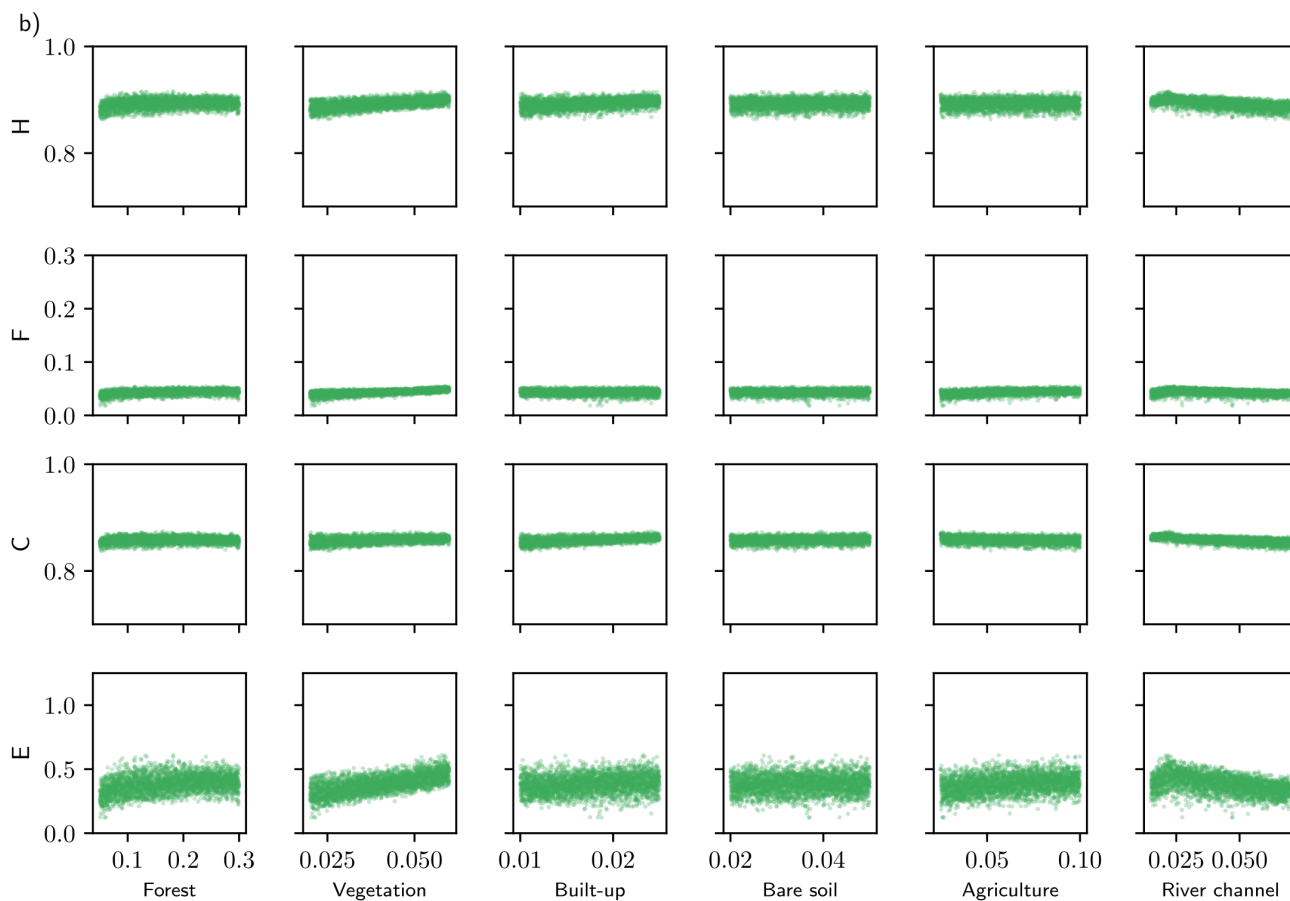


Figure 4. Continued.

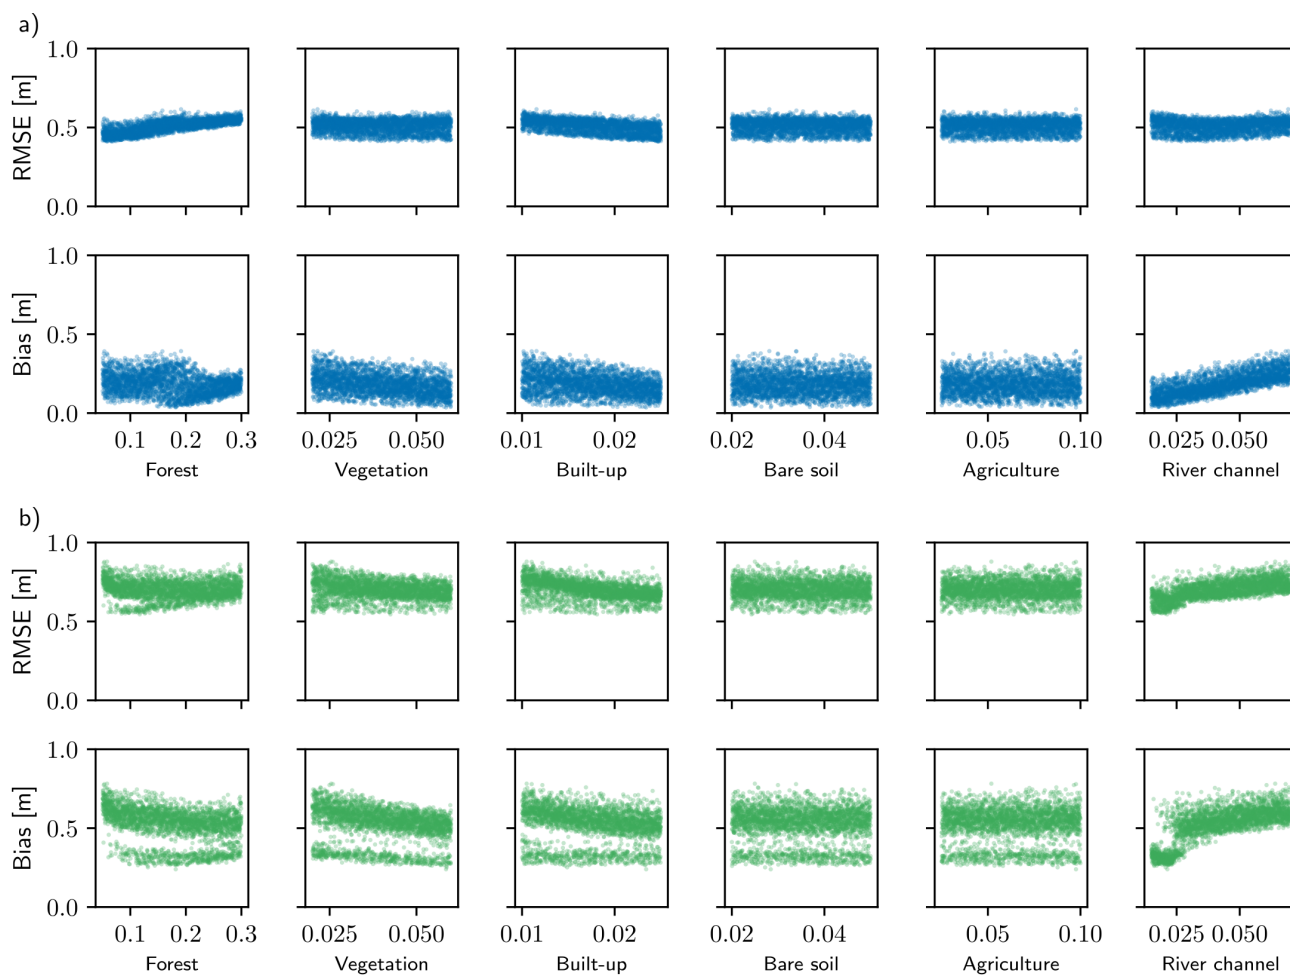


Figure 5. Root-Mean-Square Error (RMSE) and bias for the (a) $dx = 10\text{m}$ and (b) $dx = 5\text{m}$ simulations calculated for the distributed water depths at the high water marks. The metrics specific to each land cover category within the simulated area are plotted.


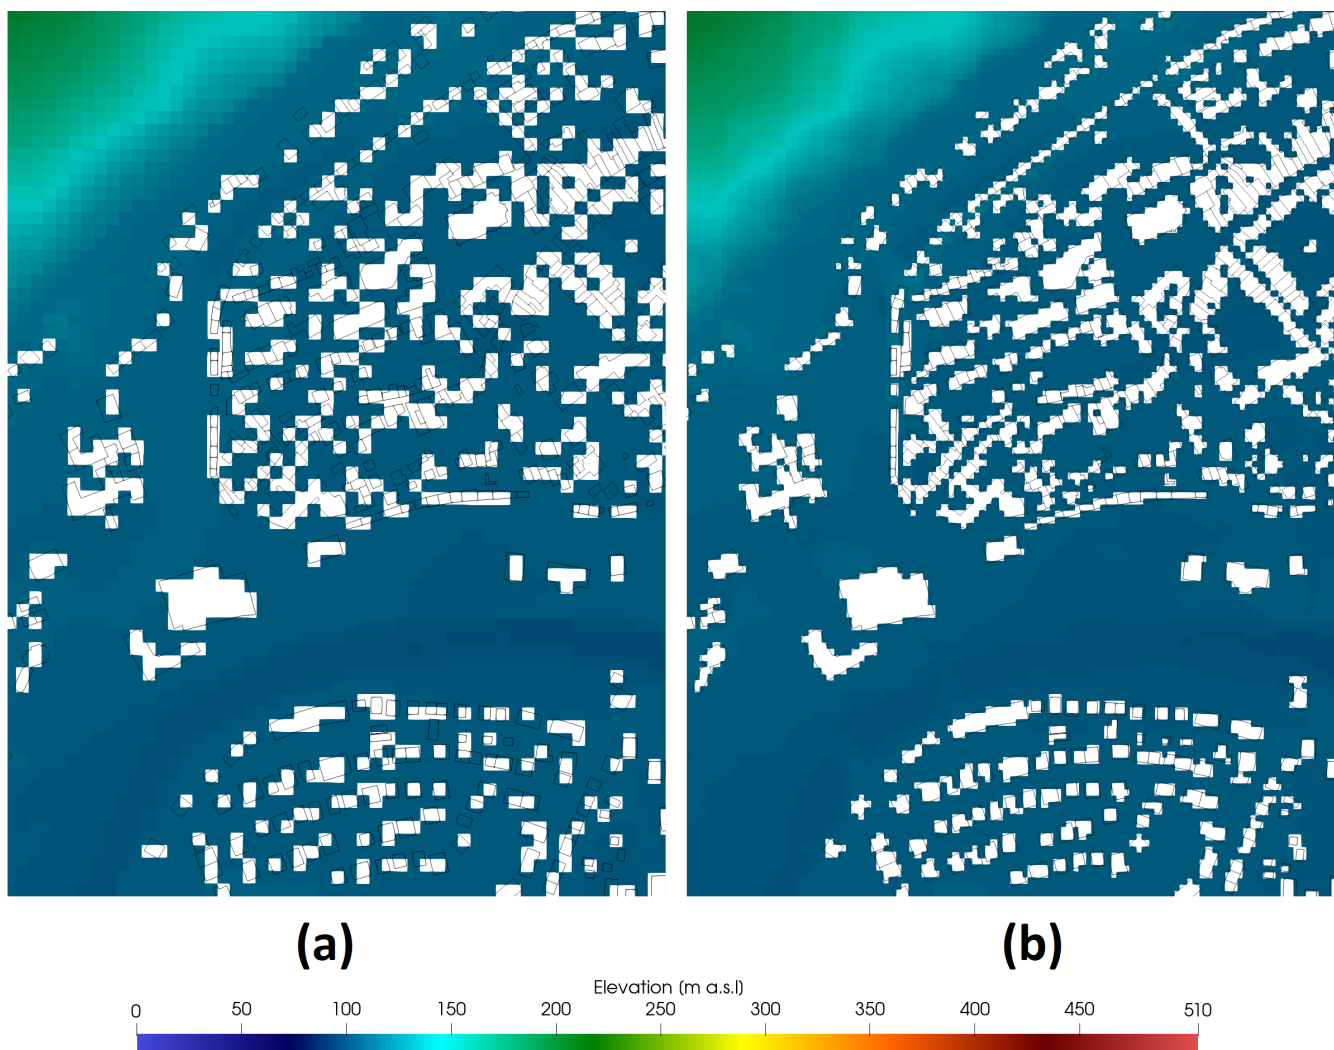



Figure 6. OSM footprint of buildings (black lines) and areas of DEM cutouts (white) in the $dx = 10$ m (a) and 5 m (b) DEMs.




a) Best-performing roughness sets for overall performance (Euclidean distance)

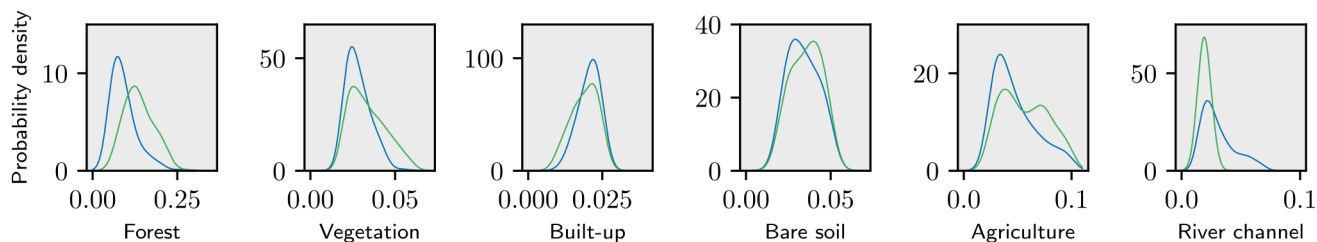

b) Best-performing roughness sets for in-channel flood dynamics (KGE)

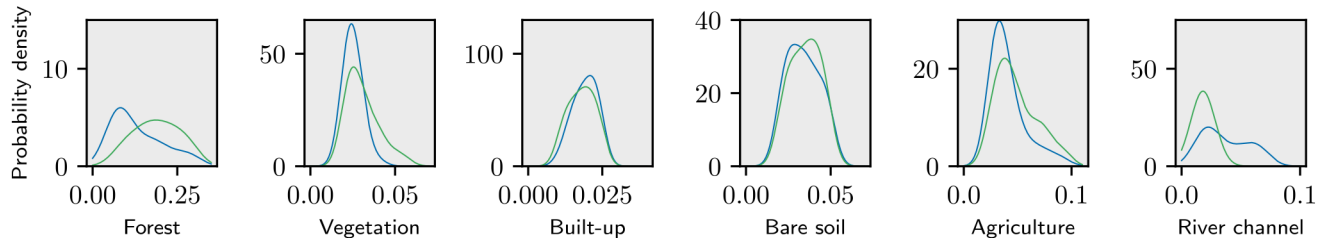

c) Best-performing roughness sets for inundation extent (C)

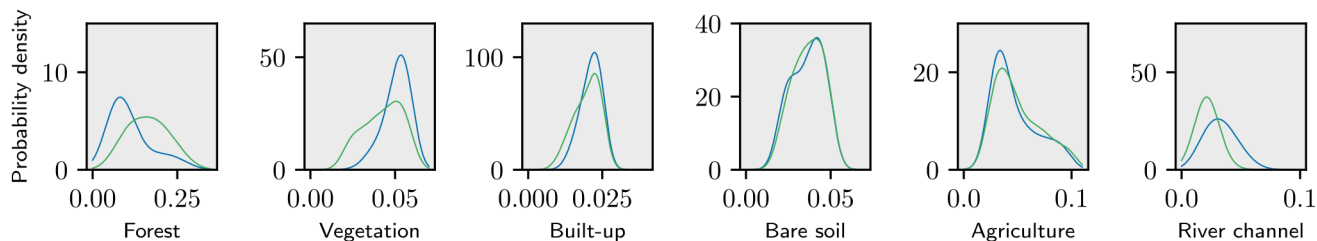

d) Best-performing roughness sets for distributed water depths (RMSE)

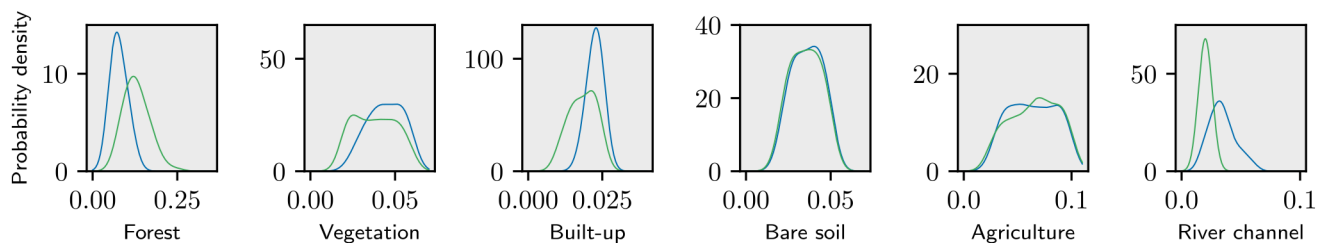


Figure 7. Parameter distributions corresponding to the 150 best-performing roughness sets for the $dx = 10\text{m}$ (blue lines) and $dx = 5\text{m}$ (green lines) simulations according to (a) overall performance (i.e., Euclidean distance), (b) in-channel flood dynamics (i.e., KGE), (c) inundation extent (i.e., C') and (d) distributed water depths (i.e., RMSE for distributed water depths). The metrics specific to each land cover category within the simulated area are plotted. The parameter distributions were obtained using a kernel density estimation with varying bandwidths.

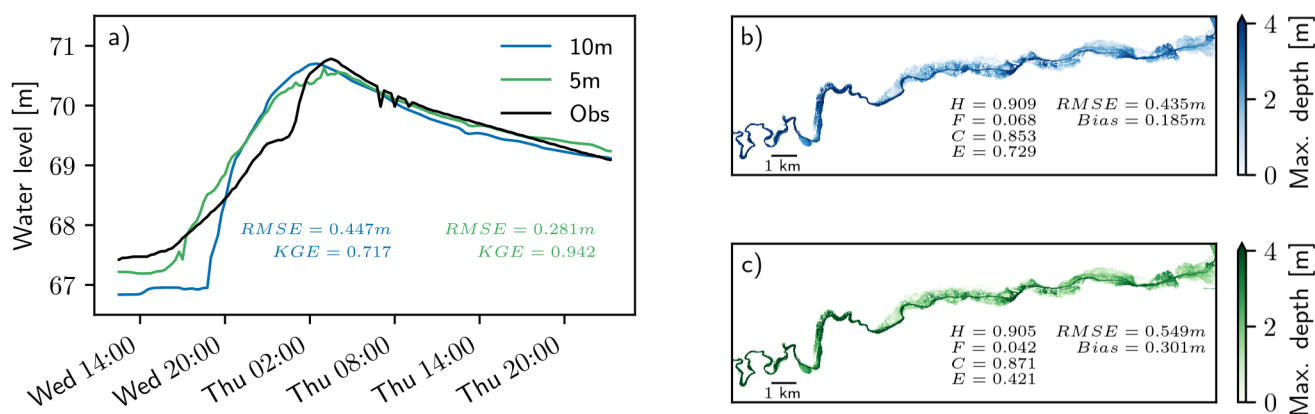


Figure 8. Simulations corresponding to the roughness set with the best overall performance (i.e., lowest Euclidean distance) both for $dx = 10\text{m}$ (in blue) and $dx = 5\text{m}$ (in green). (a) Simulated water levels at the Bad-Bodendorf gauge station. (b) Simulated inundation extent and water depth for the $dx = 10\text{m}$ simulation. (c) Simulated inundation extent and water depth for the $dx = 5\text{m}$ simulation.



Table 1. Land cover categories within the simulation domain, along with the lower and upper bounds of Manning roughness values employed in the simulations. The coverage percentages of these categories across the entire simulation domain and within the observed 2021 flood extent are also presented in the last two columns.

| Land cover category | Lower bound | Upper bound | Coverage percentage [%] | Coverage percentage of the observed flood extent [%] |
|-----------------------|-------------|-------------|-------------------------|--|
| Forest | 0.050 | 0.300 | 52.17 | 14.94 |
| Vegetation | 0.020 | 0.060 | 18.82 | 35.05 |
| Built-up/Sealed areas | 0.010 | 0.025 | 11.37 | 36.33 |
| Bare soil | 0.020 | 0.050 | 4.82 | 2.68 |
| Agriculture | 0.025 | 0.100 | 11.86 | 5.55 |
| River channel | 0.015 | 0.070 | 0.44 | 5.43 |
| Water bodies | - | - | 0.52 | 0.03 |



Table 2. Optimal RIM2D roughness ranges estimated as the 5-95 percentile ranges corresponding to the 150 best-performing roughness sets according to overall performance (i.e., Euclidean distance) for the $dx = 10m$ and $dx = 5m$ simulations.

| Land cover category | $dx = 10m$ | | $dx = 5m$ | |
|-----------------------|-------------|-------------|-------------|-------------|
| | Lower bound | Upper bound | Lower bound | Upper bound |
| Forest | 0.053 | 0.164 | 0.076 | 0.211 |
| Vegetation | 0.020 | 0.041 | 0.021 | 0.053 |
| Built-up/Sealed areas | 0.015 | 0.025 | 0.011 | 0.024 |
| Bare soil | 0.021 | 0.048 | 0.022 | 0.048 |
| Agriculture | 0.026 | 0.091 | 0.027 | 0.094 |
| River channel | 0.016 | 0.059 | 0.016 | 0.025 |