



# A methodological workflow for the identification of earthquake sources from macroseismic data

Veronica Gironelli, Lucia Luzi, Andrea Antonucci, and Andrea Rovida

Istituto Nazionale di Geofisica e Vulcanologia (INGV), Milano, Italy

**Correspondence:** Veronica Gironelli (veronica.gironelli@ingv.it)

Received: 23 April 2026 – Discussion started: 11 May 2026

Revised: 30 June 2026 – Accepted: 10 August 2026 – Published: 24 September 2026

**Abstract.** Macroseismic intensity data are a fundamental source of information for characterising historical earthquakes. This study presents a methodology to constrain the sources of large earthquakes through the analysis and modelling of macroseismic intensity data. The proposed workflow consists of three main stages: (1) the identification and removal of outlier intensity data points; (2) the revision of macroseismic earthquake parameters (epicentral location and magnitude); and (3) the construction of three-dimensional (3D) seismogenic sources, simulation of ground shaking including site effects, and a subsequent residual analysis. The key novelty lies in the detection of intensity outliers through residual analysis between observed and predicted macroseismic intensities using an intensity prediction equation (IPE). The application of this workflow to a set of case studies from the parametric catalogue of Italian earthquakes demonstrates that the implemented approach allows the identification of seismogenic sources for large to moderate magnitude events, which are consistent with macroseismic data, geological structures and ground motion data, when available. The results of this study can have direct implications for seismic hazard assessment and shaking scenario modelling. The proposed workflow can be systematically applied to reconstruct the seismogenic sources of the strongest Italian historical earthquakes ( $M_w \geq 5.5$ ).

MSK, Medvedev et al., 1964; EMS-98, Grünthal, 1998). Among these, the Mercalli–Cancani–Sieberg (MCS) scale and the European Macroseismic Scale 1998 (EMS-98) are the most widely adopted in Italy. These scales consist of twelve intensity degrees, each representing increasing severity of ground shaking based on observed effects. Macroseismic intensity is associated with a specific earthquake and site through geographic coordinates and constitutes a macroseismic Intensity Data Point (IDP).

Macroseismic observations are widely used in earthquake engineering applications for vulnerability modelling and for the calibration of Intensity Prediction Equations (hereafter, IPEs, e.g., Pasolini et al., 2008; Sørensen et al., 2009; Bindi et al., 2011; Rotondi et al., 2016; Gomez-Capera et al., 2024; Lolli et al., 2024), which estimate the expected macroseismic intensity at any site based on parameters such as epicentral distance and magnitude. Similarly, these data are used as input to develop Ground Motion to Intensity Conversion Equations for a specific region (GMICEs, e.g., Gomez-Capera et al., 2020; Oliveti et al., 2022), which relate ground motion Intensity Measures (IMs) to macroseismic intensities or vice versa. In this framework, macroseismic data are also used as a reference for reconstructing the ground shaking distribution of pre-instrumental events (e.g., Allen et al., 2008; Faenza et al., 2013; Oliveti et al., 2024; Gironelli et al., 2023; Munafò et al., 2024; Volatili et al., 2025). Moreover, the spatial distribution of IDPs (i.e., the macroseismic field) enables the estimation of key earthquake parameters such as epicentral location, magnitude, and depth (e.g., Gasperini and Ferrari, 1995, 2000; Bakun and Wentworth, 1997; Pettenati et al., 1999; Gasperini et al., 1999, 2010; Provost and Scotti, 2020; Sbarra et al., 2019, 2023).

## 1 Introduction

Macroseismic intensity is used to classify the level of shaking caused by earthquakes based on qualitative observations of its effects on people, buildings, and the environment, using standardised intensity scales (e.g., MCS, Sieberg, 1932;

The physical dimensions and orientation of seismogenic sources associated with large historical events can also be inferred from the spatial distribution of IDPs. For Italy, apart from the quantitative approach proposed by Gasperini et al. (1999), which estimates source orientation and dimensions from the spatial distribution of intensity data points (IDPs), the association between historical earthquakes and their seismogenic sources is generally based on qualitative interpretations (e.g., Albini and Rovida, 2010; Galli et al., 2010; Galli and Pallone, 2019). The Database of Italian Seismogenic Sources (DISS; Basili et al., 2008; DISS Working Group, 2025) provides hypotheses on the association between potential seismogenic sources and historical earthquakes reconstructed from geological and macroseismological data.

A few recent studies focus on individual earthquakes, comparing shaking scenarios generated by known fault ruptures with the macroseismic evidence of major historical events (e.g., Visini et al., 2009; Sgobba and Pacor, 2023; Munafo et al., 2024). The limitation of the existing studies is the lack of a validation with both macroseismic observations and geological constraints, and the analysis is restricted to individual earthquakes without proposing a standardised approach that can be systematically applied to an entire catalogue of historical events. In contrast, we propose a methodological workflow that can be systematically applied to investigate all the Italian past events, independently of their size.

In Italy, IDPs are collected and organised in the Italian Macroseismic Database (Database Macrosismico Italiano – DBMI15; Locati et al., 2022), to provide a homogeneous dataset for assessing earthquake parameters and compiling the Italian Parametric Earthquake Catalogue (Catalogo Parametrico dei Terremoti Italiani – CPTI15; Rovida et al., 2020, 2022). In the CPTI15 catalogue, the parameterization of historical events is based on the intensity dataset selected among those archived in the Italian Archive of Historical Earthquake Data (ASMI; Rovida et al., 2017, 2025) according to quality criteria such as: (i) the completeness and spatial distribution of IDPs; (ii) the methodological robustness of the original study; and (iii) the reliability of the event interpretation (Locati et al., 2022). Given the extensive availability of high-quality macroseismic data in Italy, this study leverages these records to implement a comprehensive workflow for historical seismic source identification. This workflow includes a pre-processing step followed by three stages: (i) reconstruction of seismogenic sources; (ii) ground shaking simulations; and (iii) validation through residual analysis. The pre-processing step detects possible outliers in macroseismic intensity distributions to better constrain the reconstruction of earthquake seismogenic sources.

The complete workflow is tested on three instrumental earthquakes with different characteristics to explore the overall applicability of the method. These events are the 1984 Monti della Meta ( $M_w$  5.8), the 1989 Prealpi Vicentine ( $M_w$  4.85), and the 2008 Parmense ( $M_w$  5.36) earthquakes.


Subsequently, the approach is applied to a historical earthquake, the 3 June 1781 Cagli earthquake (Central Apennines). For this event, seismogenic sources are reconstructed from two alternative, but plausible and reliable, macroseismic fields: the intensity distribution in DBMI15 (Monachesi, 1987) and the dataset from Guidoboni et al. (2018). This allows a quantitative evaluation of the impact of different datasets in terms of earthquake parameterisation and source geometries.

The results of this study emphasise that the proposed workflow, including the initial pre-processing of macroseismic fields, can be a useful tool for reconstructing seismogenic sources consistent with macroseismic data and for generating realistic shaking scenarios, especially for past events.

## 2 Data selection and pre-processing

In the CPTI15 catalogue, the parametrisation of historical earthquakes is performed using the Boxer code (Gasperini et al., 1999, 2010), which is applied to the macroseismic field, hereinafter referred to as the preferred dataset, provided in DBMI15. Specifically, macroseismic epicentres and magnitudes are estimated using the “Method 0” implemented in Boxer. This approach determines the epicentral location as the barycentre of the sites experiencing the highest intensities, and the magnitude is inferred as the average of the magnitude estimates, for each intensity class, computed from the area of the circular isoseismal with radius equivalent to the average epicentre-to-site distance for that intensity level. These magnitude values are calculated with the IPE by Sibol et al. (1987), which also considers epicentral intensity. The final magnitude is then obtained as a weighted trimmed mean of the independent estimates derived from all intensity classes (see Gasperini et al., 2010, for further details). This parametrisation strongly depends on the quantity and spatial distribution of the input macroseismic data. In this work, a set of 191 earthquakes was selected from CPTI15 as a test dataset, with moment magnitudes ( $M_w$ ) ranging between 5.5 and 7.0, occurring in the period 1117–2017 (Fig. 1a). This magnitude threshold was chosen to focus on events associated with seismogenic sources capable of generating substantial ground shaking. The events selection was based on the following criteria: (i) at least three associated IDPs, to exclude poorly constrained macroseismic fields; (ii) inland epicentres, as offshore events typically produce asymmetric intensity distributions; and (iii) events occurred in areas where the seismogenic layer is shallower than 35 km, consistent with the applicability range of the adopted IPE (Gomez-Capera et al., 2024), which is calibrated for shallow crustal earthquakes. Overall, the final dataset comprises 31 656 macroseismic observations, forming the basis for the subsequent analysis.

Only a subset of 24 recent events has instrumental estimates of epicentre and magnitude, available in the CPTI15

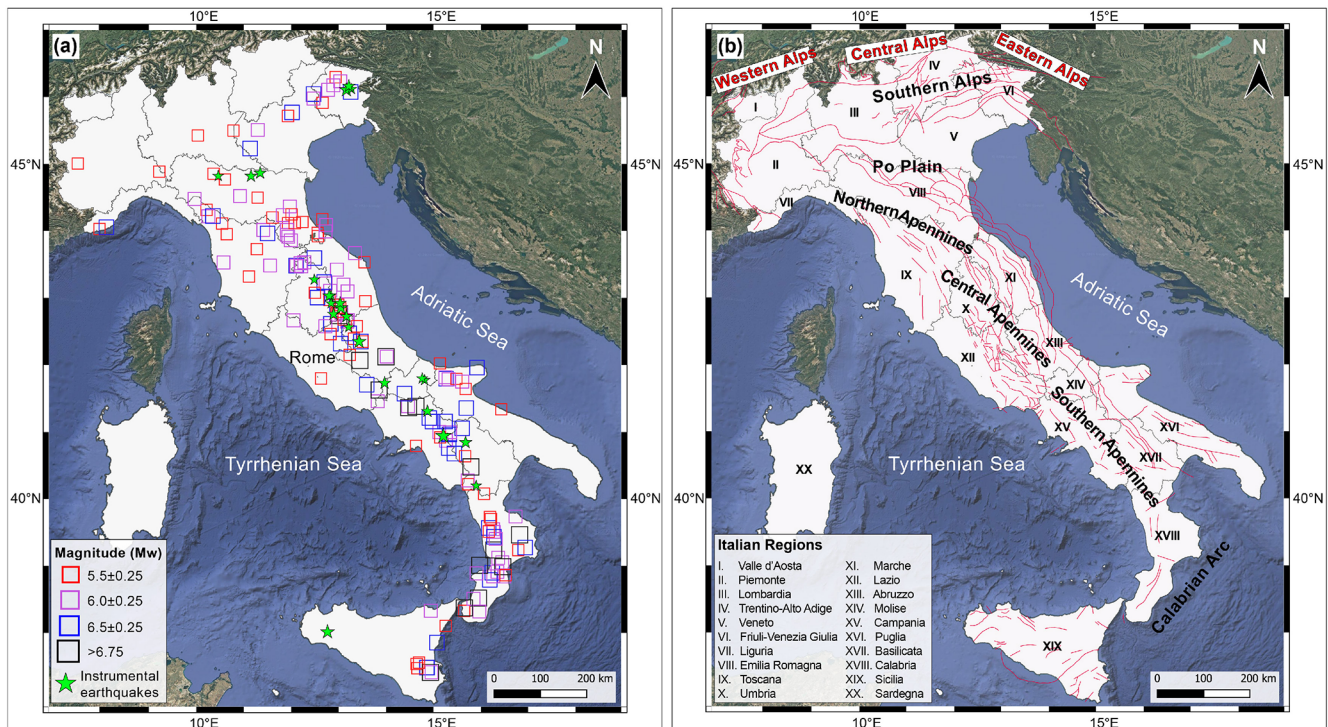

**Figure 1.** (a) Selected dataset of 191 earthquakes with  $M_w \geq 5.5$  from the CPTI15 catalogue (Rovida et al., 2022). Square colours and sizes are proportional to the earthquake magnitude. Green stars indicate the subset of 24 earthquakes for which instrumental solutions are available. (b) Map of the main physiographic structures and tectonic lineaments of Italy (Bigi et al., 1989) cited in the text. Roman numerals (I to XX) refer to the Italian administrative regions with the names detailed in the legend. Basemap source: Google Satellite imagery. Map data © 2015 Google.

or in ASMI; these events therefore provide a benchmark for testing the methodology (Fig. 1a).

Before applying the methodology, we note that the input dataset may include outliers, i.e., intensity observations that are anomalously high or low with respect to the expected attenuation pattern. To address this issue, a pre-processing step was implemented to identify and remove such outliers using the IPE proposed by Gomez-Capera et al. (2024). Intensity data exceeding three standard deviations of the model ( $3\sigma \approx 2.25$  intensity units) are classified as outliers and discarded, and the resulting macroseismic dataset is considered (hereinafter referred to as the *revised* dataset). We adopted a  $3\sigma$  criterion to ensure a conservative filtering of macroseismic observations, aimed at identifying only the largest discrepancies between observed and those predicted by the model, while minimising the exclusion of potentially reliable intensity data. This choice also considers the inherent uncertainty associated with macroseismic intensity, i.e. one intensity degree, and related to its ordinal nature. The outlier removal is necessary since the best-fitting fault is identified through the analysis of residuals between observed and predicted intensity values (based on the median predictions of the adopted model). In this context, the presence of outliers in the macroseismic dataset may systematically bias the

residual distribution and, consequently, the inferred fault geometry.

To ensure the overall consistency of our procedure, we recompute earthquake parameters of the analysed earthquake with the Boxer code, with the same settings as in CPTI15 (described in Rovida et al., 2020), starting from the revised dataset. First, we tested the results of this pre-processing by computing the earthquake parameters both including and excluding the identified outliers. For the subset of 24 events with instrumental parameters, the difference between macroseismic and instrumental magnitudes is  $-0.12$  for the preferred dataset and  $-0.13$  for the revised dataset. Differences between macroseismic and instrumental epicentral locations are, on average, negligible.

The same analysis, performed on the full dataset of 191 earthquakes, shows that the two epicentral estimates are generally consistent, with an average difference of approximately 3 km. The comparison between magnitudes from the preferred and revised macroseismic fields shows a mean decrease of 0.15 magnitude units, within the uncertainty range of the Boxer estimates (e.g., 0.26 for pre-1900 events). These results align with Antonucci et al. (2025), who demonstrated that randomly varying intensities in the macroseismic fields of DBMI15 by  $\pm 1$  intensity degree, Boxer locations remain

very stable with locations within 10 km in 83 % of cases and magnitude differences within  $\pm 0.3$  units in 87 % of the cases. However, significant variations in earthquake location and magnitude estimates (e.g.,  $> 20$  km and  $> 0.3$  magnitude units) may lead to markedly different constraints on both the spatial position and the extent of the causative rupture. With this perspective, the pre-processing proves particularly effective in identifying macroseismic fields that require closer scrutiny or, in some cases, exclusion from the analysis. For completeness, Table S1 in the Supplement summarises the comprehensive details for each selected event and the results of the comparisons between solutions for the entire dataset.


The earthquakes that occurred on 25 December 1222, 4 September 1293, and 5 May 1990 show the largest epicentral shifts of approximately 20, 30, and 43 km, respectively. The 1222 and 1293 events are characterised by very few and uncertain macroseismic effects distributed over wide areas, maximum intensities documented at considerable distances from the inferred source, and large azimuthal gaps.

We consider the 1990 Potenza earthquake as a clear example of how IDPs identified as outliers can lead to a large epicentral shift (43 km). Similarly, we consider the well-documented 24 August 2016 Amatrice earthquake, characterised by well-constrained instrumental parameters and a documented seismogenic source (Tinti et al., 2016; DISS Working Group, 2025).

The 5 May 1990 Potenza earthquake struck the Southern Apennines with a  $M_w$  5.8 from the Global Centroid Moment Tensor (GCMT; Dziewonski et al., 1981; Ekström et al., 2012; <http://www.globalcmt.org/CMTsearch.html>, last access: 10 September 2026). The Revised Bulletin of the International Seismological Centre (ISC, 2025, <http://www.isc.ac.uk>, last access: 10 September 2026) locates the epicentre slightly north of Potenza at  $[40.756^\circ \text{N}, 15.843^\circ \text{E}]$  and the Italian Seismic Bulletin (Bollettino Sismico Italiano, BSI; <http://bollettinosismico.rm.ingv.it/>, last access: 10 September 2026) at  $[40.682^\circ \text{N}, 15.848^\circ \text{E}]$ , while the CPTI15 adopts the location at  $[40.738^\circ \text{N}, 15.741^\circ \text{E}]$  of the previous version of the ISC Bulletin (Fig. 2c). These differences in instrumental locations, compared with more recent events, are likely due to the limited density and heterogeneous configuration of the Italian National Seismic Network at the time of the 1990 event, which was still under development and only partially digitalised. The Boxer method, applied to the macroseismic field from DBMI15 (Gasparini et al., 1991b; Fig. 2a), estimates the epicentral location and magnitude as  $[40.710^\circ \text{N}, 15.299^\circ \text{E}]$  and  $M_w$  5.37, respectively. These solutions do not match any of the available instrumental locations, and for this reason it is not included in CPTI15. The pre-processing identified 116 intensity outliers within the macroseismic field (Fig. 2b). Specifically, positive residuals exceeding 3 standard deviations were concentrated in the Neapolitan area, very far from the instrumental locations, in correspondence with the highest intensity values ( $I = 6\text{--}7$  and 7). According to An-

tonucci et al. (2026), these IDPs were overestimated due to the cumulative damage caused by the 23 November 1980 earthquake ([https://emidius.mi.ingv.it/CPTI15-DBMI15/eq/19801123\\_1834\\_000](https://emidius.mi.ingv.it/CPTI15-DBMI15/eq/19801123_1834_000), last access: 10 September 2026). Negative residuals were identified at large distances from the epicentre, particularly in southern Abruzzo, Molise, and Calabria regions (Fig. 1b). After removing these outliers, the recalculated macroseismic epicentre  $[40.591^\circ \text{N}, 15.785^\circ \text{E}]$  shows a significant improvement, reducing the misfit with the CPTI15-ISC2016 instrumental location from 37.3 km to only 16.7 km, relocating the epicentre near the city of Potenza (Fig. 2c). The recalculated macroseismic magnitude ( $M_w$  5.4) is significantly lower than the instrumental one but higher than the  $M_w$  5.19 estimated by Antonucci et al. (2026).

A second example is the 24 August 2016 Amatrice earthquake, the triggering event of the Central Italy seismic sequence. The event was located by the BSI at  $[42.698^\circ \text{N}, 13.233^\circ \text{E}]$ . Different moment magnitude estimates are available:  $M_w$  6.2 from the Regional Centroid Moment Tensor (RCMT; Pondrelli, 2002; Pondrelli et al., 2002) and GCMT, and  $M_w$  6.0 from the Time Domain Moment Tensor (TDMT INGV; Scognamiglio et al., 2006, <http://terremoti.ingv.it/>, last access: 10 September 2026). The adopted macroseismic field in DBMI15, derived from the field survey described in Rossi et al. (2019; ROSAL019), consists of 221 IDPs with intensities ranging from  $I = 2\text{--}3$  up to  $I \geq 9$  in the EMS-98 scale (Fig. 3a). From this macroseismic field the Boxer epicentral location and magnitude estimates are  $[42.683^\circ \text{N}, 13.277^\circ \text{E}]$  and  $M_w$  6.46, as reported in CPTI15. The pre-processing identified 8 intensity outliers: two with positive residuals and six with negative ones (Fig. 3b). After removing these outliers, the recalculated macroseismic epicentre is  $[42.658^\circ \text{N}, 13.288^\circ \text{E}]$ . Both macroseismic epicentres are consistent with the BSI instrumental location, differing by just 3.9 and 6 km, respectively. This slight shift is related to the removal of the IDP at Pescara del Tronto ( $I = 10$ ), where the observed damage was amplified due to the location on pre-existing landslide deposits. Conversely, an improvement is observed in the magnitude estimate: the recalculated value ( $M_w$  6.26) is notably lower and more consistent with the instrumental ones. This difference in magnitude has significant implications for the reconstruction of the seismic source, since a magnitude of  $M_w$  6.46 would imply a rupture area of approximately 270 km<sup>2</sup>, which is inconsistent with the portion of the fault system activated during the mainshock, and with structural-geological data and DInSAR modelling ( $\sim 180$  km<sup>2</sup>; Lavecchia et al., 2016), as well as with the observed rupture length of 20–25 km (Chiaraluce et al., 2017).

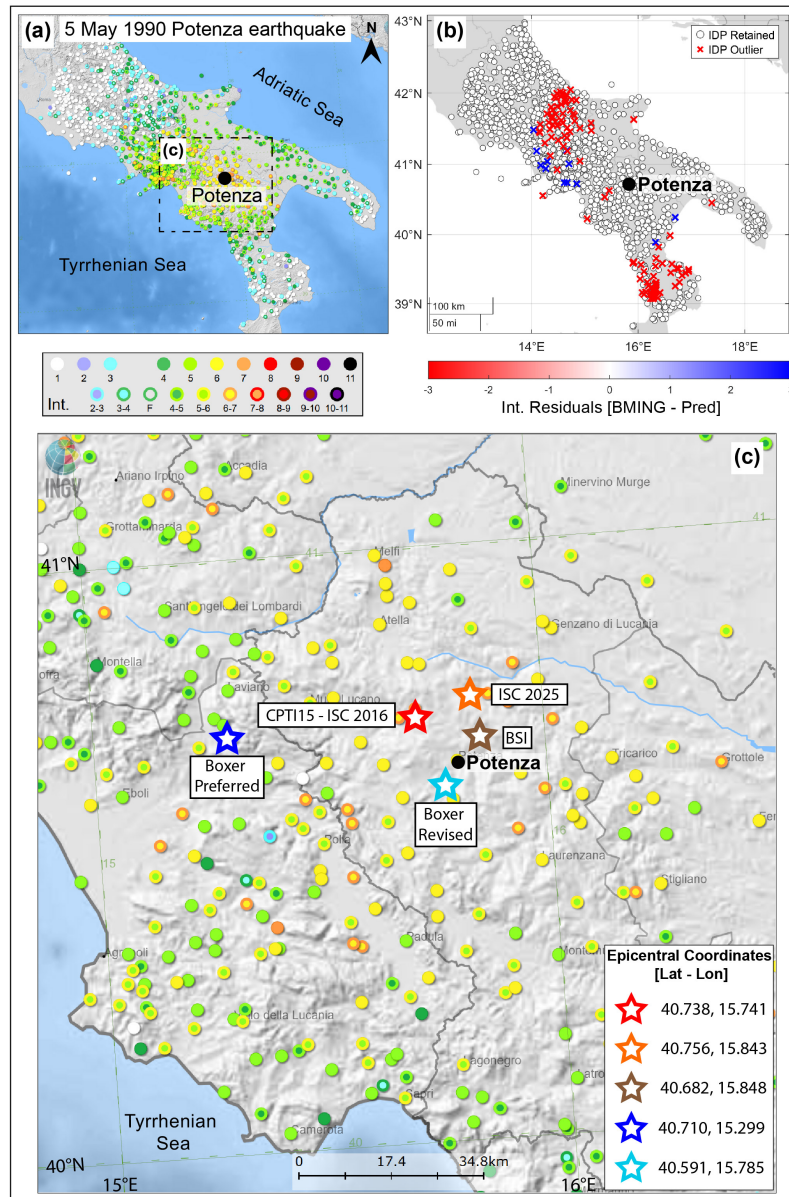


**Figure 2.** The 5 May 1990 ( $M_w$  5.8) Potenza earthquake. (a) Macroscopic intensity distribution of the BMING dataset (Bollettino Macro-sismico ING) from Gasparini et al. (1991b). (b) Intensity residuals (blue = positive; red = negative) between BMING observations and predictions from the IPE of Gomez-Capera et al. (2024), where crosses indicate the 116 identified outliers. (c) Comparison of epicentral locations: red, orange, and brown stars represent the instrumental epicentral solutions from CPTI15-ISC 2016 (International Seismological Centre, 2016), ISC 2025 (International Seismological Centre, 2025), and BSI, respectively. Blue and light blue stars indicate the macroseismic epicentres derived with Boxer from the preferred (BMING) and revised macroseismic fields. Maps in panels (a) and (c) are derived from the CPTI15-DBMI15 catalogue, which uses the TINITALY Digital Elevation Model as background. CPTI15-DBMI15 data courtesy of INGV. © INGV. All rights reserved.

### 3 Seismogenic source reconstruction: methodological workflow

This section describes the integrated methodological workflow for seismogenic source reconstruction, which follows the initial pre-processing step and consists of three stages, as summarised in Fig. 4. In stage 1, we estimated earth-

quake parameters using the Boxer code (Gasparini et al., 1999, 2010) based on the revised macroseismic fields, and in stage 2, we used these parameters to reconstruct the seismogenic sources. Fault dimensions (length and width) are calibrated according to the scaling relationships by Wells and Coppersmith (1994). Although these empirical relations are widely adopted, source dimensions are indirectly inferred

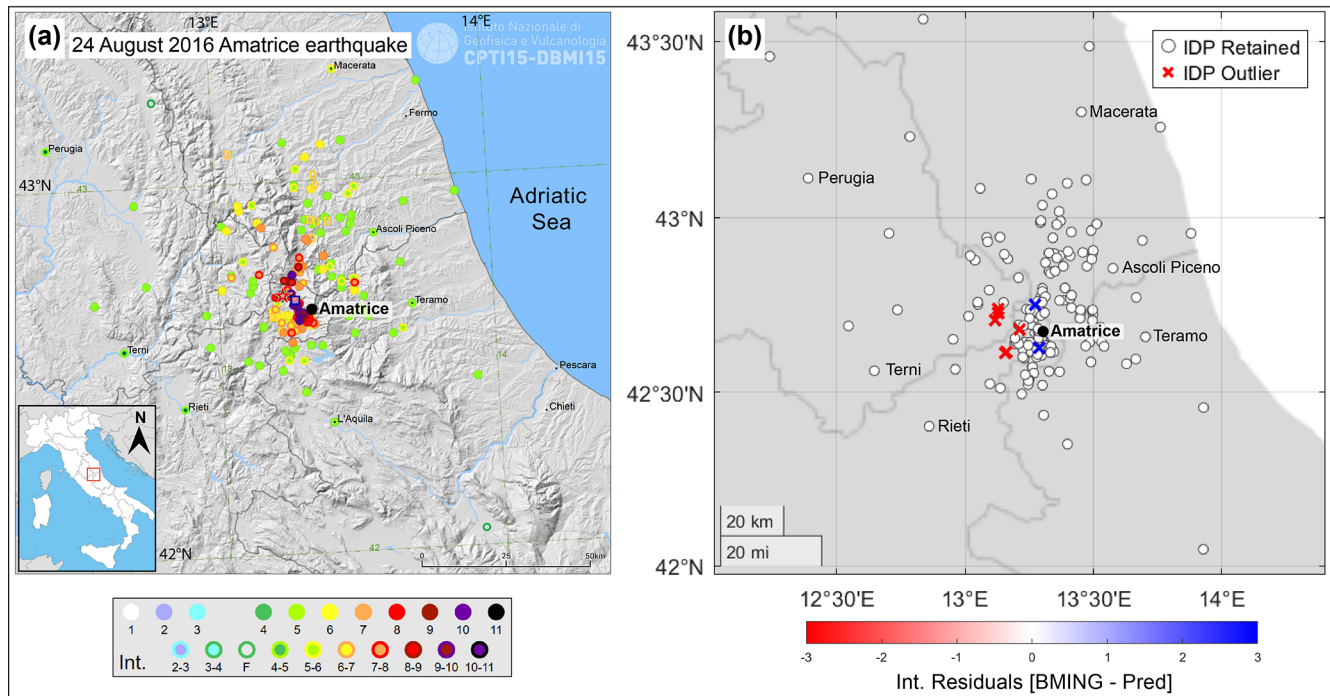

**Figure 3.** The 24 August 2016 ( $M_w$  6.18) Amatrice earthquake. **(a)** Macroseismic intensity distribution of the ROSAL019 dataset from Rossi et al. (2019). **(b)** Intensity residuals between ROSAL019 observations and predictions from the adopted IPE. Blue crosses indicate intensity outliers with positive residuals (Pescara del Tronto and Amatrice,  $I = 10$ ), whereas red crosses indicate outliers with negative residuals (Terracina,  $I = 5$ –6; Castel S. Maria, Cittareale, Savelli, and Valcaldara,  $I = 5$ ). The map in panel **(a)** is derived from CPTI15-DBMI15 and uses the TINITALY DEM as background. CPTI15-DBMI15 data courtesy of INGV. © INGV. All rights reserved.


from estimated macroseismic magnitudes and may be affected by the intrinsic variability of the scaling relationships. In addition, for each source geometry, we defined credible parameters (e.g., strike, dip, rake, focal depth, and rupture vertices) by integrating data from several authoritative repositories: the Italian Seismic Bulletin (BSI; BSI Working Group, 2015), the Catalogue of Absolute Locations (CLASS; Latorre et al., 2022, 2023), the Engineering Strong-Motion Database (ESM; Luzi et al., 2020), the DISS database (Basili et al., 2008; DISS Working Group, 2025, version 3.3.1), and the ITaly HAZard from CApable faults catalogue (ITHACA Working Group, 2019).

The 3D source geometries are modelled as rectangular planes centred on the hypocentre. We simulate ground shaking including site effects using the ITA18 Ground Motion Model (GMM; Lanzano et al., 2019) by hypothesising variable hypocentral depths and considering the rupture distance ( $R_{rup}$ ) as the source-to-site metrics. The resulting ground motion parameters (peak ground acceleration, PGA, and peak ground velocity, PGV), expressed in  $\log_{10}$  units, are then converted into intensity values using two distinct GMICES: Gomez-Capera et al. (2020; GOM20) and Oliveti et al. (2022; OLI22).

While both equations generally align with the observed data, the quadratic formulations of OLI22 equations tend to

exhibit a flattening effect of the regression curves for PGV greater than  $5 \text{ cm s}^{-1}$  and PGA larger than  $100 \text{ cm s}^{-2}$ , which may lead to a systematic underestimation of the highest macroseismic degrees than GOM20 (see Figs. 6 and 7 in Oliveti et al., 2022).

To identify the “best-fitting” seismogenic source (stage 3), we perform residual analyses of observed and predicted intensities (or PGA/PGV values when accelerometric recordings are available). Specifically, we compute the residuals for intensities derived from PGV, as this measure correlates most effectively with damage distribution and macroseismic intensity (Akkar and Özen, 2005; Munafò et al., 2024; Tang et al., 2019; Gomez-Capera et al., 2020). Finally, the best-fitting source is the one that minimises the mean of the residuals (Between-Event, BE) and their root-mean-square error (RMSE). Thresholds of  $\pm 0.5$  for the BE and 1 for the RMSE are identified in intensity units to consider a source as reliable. These thresholds are chosen to maintain an acceptable comparison between observed and predicted intensity values and considering the intrinsic uncertainty of macroseismic intensity data ( $\pm 1$  intensity degree). A BE error of  $\pm 0.5$  represents a conservative criterion, corresponding to a maximum discrepancy of only half an intensity degree compared to the observed value.

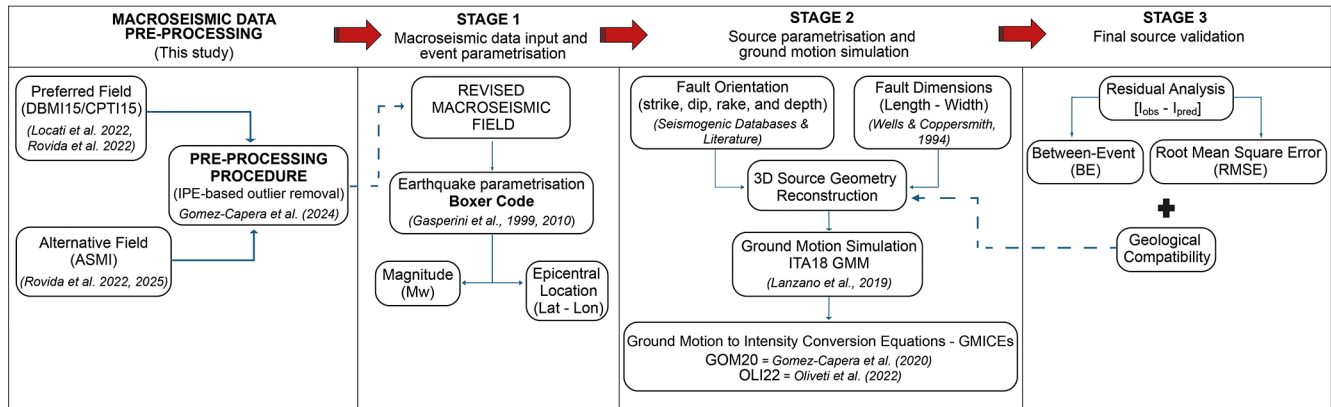

**Figure 4.** Schematic representation of the integrated workflow adopted for seismogenic source reconstruction, including the macroseismic data pre-processing step. Dashed blue arrows indicate that the revised macroseismic field serves as the primary input to Stage 1, while the results from Stage 3 are iteratively used to validate and refine the 3D source geometry. Notes: GMM, Ground Motion Model; GMICES, Ground Motion to Intensity Conversion Equations; BE, Between-Event error; RMSE, Root Mean Square Error; GOM20, conversion equation by Gomez-Capera et al. (2020); OLI22, conversion equation by Olivetti et al. (2022).

This approach allows us to generate multiple shaking scenarios and evaluate their consistency against three key benchmarks: (i) the observed macroseismic field; (ii) recorded instrumental data (when available); and (iii) geological evidence.

### 3.1 Test on instrumental events

To evaluate the effectiveness and robustness of the workflow of Fig. 4, we applied and tested it on three events characterised by instrumental metadata, chosen for their different characteristics. Specifically, the selected case studies are characterised by different magnitudes, robust macroseismic fields (> 50 IDPs), and debated or poorly constrained seismogenic sources. These events include the 1984 Monti della Meta earthquake with  $M_w$  5.86, ([https://emidius.mi.ingv.it/CPTI15-DBMI15/eq/19840511\\_1042\\_000](https://emidius.mi.ingv.it/CPTI15-DBMI15/eq/19840511_1042_000), last access: 10 September 2026), the 1989 Prealpi Vicentine with  $M_w$  4.85 ([https://emidius.mi.ingv.it/CPTI15-DBMI15/eq/19890913\\_2153\\_000](https://emidius.mi.ingv.it/CPTI15-DBMI15/eq/19890913_2153_000), last access: 10 September 2026), and the 2008 Parmense earthquakes ( $M_w$  5.36; [https://emidius.mi.ingv.it/CPTI15-DBMI15/eq/20081223\\_1524\\_000](https://emidius.mi.ingv.it/CPTI15-DBMI15/eq/20081223_1524_000), last access: 10 September 2026).

For the 1984 and the 2008 earthquakes, our analysis is also supported by accelerometric recordings from the Italian Accelerometric Archive (ITACA) v4.0 (Felicetta et al., 2023), which provide a further validation for the reconstructed seismogenic sources in addition to macroseismic and geologic constraints. The main features of these analysed events are summarised in Table 1.

#### 3.1.1 The 1984 Monti della Meta earthquake

The 7 May 1984 earthquake was the mainshock of a seismic sequence that affected the Abruzzo–Lazio area


(Fig. 1b). The instrumental epicentral location and magnitude reported by the CPTI15 catalogue for this event are [41.665° N, 13.820° E] and  $M_w$  5.86, based on CSTI1.1 (<https://doi.org/10.13127/csti.1.1>, Gruppo di Lavoro CSTI, 2005) and GCMT, respectively. CPTI15 also reports the macroseismic epicentral location and magnitude, which are [41.667° N, 14.057° E] and  $M_w$  5.73, respectively.

The preferred macroseismic field in DBMI15, derived from the Catalogue of Strong Earthquakes in Italy (CFTI4med, Guidoboni et al., 2007), consists of 911 IDPs with intensities ranging from 2–3 to 8 MCS (Fig. 5a). The application of the pre-processing procedure on the preferred macroseismic field identified and removed 30 outliers, reducing the dataset to 881 IDPs. In this case, the recalculated parameters after the pre-processing remain unchanged, as the removed IDPs correspond to the lowest observed intensities. Although this event was instrumentally recorded, the hypocentral parameters reported by different seismic catalogues vary considerably. The macroseismic epicentre estimate differs by about 20 km from the instrumental locations provided by CSTI1.1, CLASS, and the Italian Seismicity Catalogue (Catalogo della Sismicità Italiana – CSI1.1; Castello et al., 2006, <https://csi.rm.ingv.it/>, last access: 10 September 2026). Conversely, the estimated macroseismic magnitude ( $M_w$  5.73) is consistent with the instrumental estimates.

To identify the best-fitting seismogenic source (i.e., the fault plane that minimises the misfit between observed and predicted intensities), we generated a set of 9 alternative sources by combining the instrumental solutions provided by CPTI15 (from CSTI1.1) and CLASS and the macroseismic location and magnitude estimate, with three different hypocentral depths: 6.5 km (CLASS), 11.20 km (CPTI15), and 20.5 km (CSI1.1), as shown in Table 2. For each configu-

**Table 1.** Summary of the selected case studies. Event ID, Event date, Time, and Epicentral Area are obtained from the CPTI15 catalogue (Rovida et al., 2022). Instrumental data indicate the availability of independent instrumental parameters (M = instrumental magnitude; H = hypocentral depth; W = accelerometric recordings). Focal mechanism indicates the fault kinematics (NF = normal fault; TF = thrust/reverse fault; SS = strike-slip fault).

| Event ID          | Event date        | Time (UTC) | Epicentral Area   | Instrumental data | Focal mechanism |
|-------------------|-------------------|------------|-------------------|-------------------|-----------------|
| 19840507_1749_000 | 7 May 1984        | 17:50:–    | Monti della Meta  | M/H/W             | NF              |
| 19890913_2153_000 | 13 September 1989 | 21:54:01   | Prealpi Vicentine | M/H               | SS              |
| 20081223_1524_000 | 23 December 2008  | 15:24:21   | Parmense          | M/H/W             | TF              |

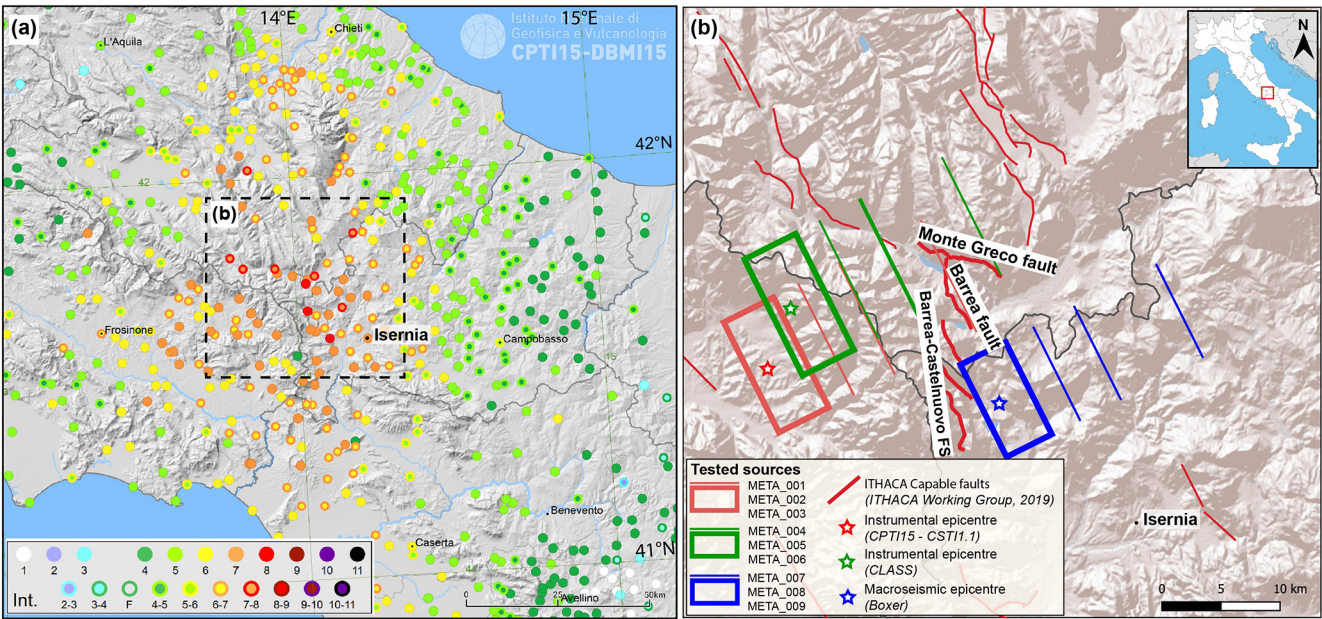

**Figure 5.** The 7 May 1984 ( $M_w$  5.86) Monti della Meta earthquake. (a) Macroseismic intensity distribution of the CFTI4med dataset from Guidoboni et al. (2007). (b) Tested fault geometries as coloured rectangles; Red lines represent capable faults from the ITHACA database (ITHACA Working Group, 2019). Red, green, and blue stars represent the instrumental epicentral solutions from CPTI15 (CSTI1.1), CLASS, and the macroseismic epicentre, respectively. The map in panel (a) is derived from the CPTI15-DBMI15 catalogue, which uses the TINITALY DEM as background, whereas panel (b) is generated using the Esri Shaded Relief basemap. Sources: Esri | Powered by Esri.

ration, we constructed a virtual box representing the 3D seismogenic source, assuming a NW–SE-oriented, W-dipping normal fault, in agreement with the literature (e.g., Westaway et al., 1989; Boncio et al., 1998).

At this stage, the workflow consists of generating shaking scenarios for each source using the ITA18 GMM (Lanzano et al., 2019) to predict PGA and PGV. The simulated PGV values were converted into macroseismic intensity using the GOM20 and OLI22 equations. Subsequently, we compared the observed macroseismic intensities with the predicted ones by computing the BE residuals and their (RMSE). Additionally, since accelerometric recordings are available for this earthquake, we also calculated the residuals between the predicted ground motion parameters (PGA and PGV, in log10 units) and the logarithm of the values recorded at stations reported in ITACA (Felicetta et al., 2023).

The results of these residual analyses are summarised in Table 3. Among the tested source configurations, the one that minimises residuals in terms of macroseismic intensities corresponds to the code META\_004, that is generated using the CLASS hypocentral location and the GCMT moment magnitude and has a length of 10.9 km, and a width of 7.5 km (Table 2 and Fig. 5b). This solution is further supported by the validation performed against accelerometric recordings; specifically, we observed that the  $RMSE_{LogPGA}$  of 0.33 is of the same order as the standard deviation of the ITA18 GMM (e.g., 0.336), the same occurs for  $BE_{LogPGA}$  (e.g., 0.16 in ITA18),  $RMSE_{LogPGV}$  (e.g., 0.29 in ITA18),  $BE_{LogPGV}$  (e.g., 0.13 in ITA18).

The source META\_004 also exhibits the best overall agreement with the geological lineaments mapped in the study area, since its surface projection aligns with the

**Table 2.** Instrumental earthquake parameters for the 1984 Monti della Meta earthquake, derived from CPTI15 (Rovida et al., 2022) and CLASS (Latorre et al., 2022) catalogues, and macroseismic estimates derived using Boxer (Gasparini et al., 2010). The tested seismogenic source configurations based on different parameter combinations are also reported.

| Reference earthquake parameters          | Data Type    | Epicentre [Lat, Lon]               | $M_w$            | Strike/Dip/Rake (°) | Length (km) | Width (km) | Depth (km) | Tested Source |
|------------------------------------------|--------------|------------------------------------|------------------|---------------------|-------------|------------|------------|---------------|
| CPTI15<br>(Rovida et al., 2022)          | Instrumental | [41.665° N, 13.820° E]<br>CSTI1.1  | 5.86<br>GCMT     | 145/50/−90          | 10.4        | 7.3        | 6.5        | META_001      |
|                                          |              |                                    |                  |                     |             |            | 11.2       | META_002      |
|                                          |              |                                    |                  |                     |             |            | 20.5       | META_003      |
| CLASS<br>(Latorre et al., 2022)          | Instrumental | [41.713° N, 13.833° E]             | 5.90<br>GCMT     | 145/50/−90          | 10.9        | 7.5        | 6.5        | META_004      |
|                                          |              |                                    |                  |                     |             |            | 11.2       | META_005      |
|                                          |              |                                    |                  |                     |             |            | 20.5       | META_006      |
| Boxer method<br>(Gasparini et al., 2010) | Macroseismic | [41.667° N, 14.057° E]<br>Pref/Rev | 5.73<br>Pref/Rev | 145/50/−90          | 8.7         | 6.6        | 6.5        | META_007      |
|                                          |              |                                    |                  |                     |             |            | 11.2       | META_008      |
|                                          |              |                                    |                  |                     |             |            | 20.5       | META_009      |

**Table 3.** Residual analysis for the tested seismogenic sources, relevant to the 1984 Monti della Meta earthquake. Between-Event error ( $BE_I$ ) and the root-mean-square error ( $RMSE_I$ ) are obtained from PGV using the GOM20 and OLI22 conversion equations.  $BE_{LogPGA}$ ,  $RMSE_{LogPGA}$ ,  $BE_{LogPGV}$ , and  $RMSE_{LogPGV}$  are calculated as the mean difference between the base-10 logarithms of observed and predicted peak ground acceleration and velocity. The asterisk indicates the best-fitting seismogenic source.

| Reference parameters | Source    | $BE_I$ – $RMSE_I$<br>(GOM20) | $BE_I$ – $RMSE_I$<br>(OLI22) | $BE_{LogPGA}$<br>( $cm\ s^{-2}$ ) | $RMSE_{LogPGA}$<br>( $cm\ s^{-2}$ ) | $BE_{LogPGV}$<br>( $cm\ s^{-1}$ ) | $RMSE_{LogPGV}$<br>( $cm\ s^{-1}$ ) |
|----------------------|-----------|------------------------------|------------------------------|-----------------------------------|-------------------------------------|-----------------------------------|-------------------------------------|
| CPTI15               | META_001  | 0.41–0.80                    | 0.64–0.92                    | −0.20                             | 0.37                                | −0.08                             | 0.34                                |
|                      | META_002  | 0.45–0.79                    | 0.67–0.93                    | −0.23                             | 0.37                                | −0.11                             | 0.33                                |
|                      | META_003  | 0.55–0.83                    | 0.76–1.00                    | −0.30                             | 0.39                                | −0.17                             | 0.34                                |
| CLASS                | META_004* | 0.35–0.74                    | 0.57–0.86                    | −0.19                             | 0.33                                | −0.07                             | 0.32                                |
|                      | META_005  | 0.39–0.74                    | 0.61–0.88                    | −0.22                             | 0.33                                | −0.09                             | 0.32                                |
|                      | META_006  | 0.48–0.79                    | 0.69–0.95                    | −0.28                             | 0.37                                | −0.15                             | 0.33                                |
| Boxer<br>(Pref/Rev)  | META_007  | 0.54–0.89                    | 0.76–1.02                    | −0.35                             | 0.45                                | −0.24                             | 0.39                                |
|                      | META_008  | 0.58–0.88                    | 0.8–1.04                     | −0.37                             | 0.46                                | −0.26                             | 0.40                                |
|                      | META_009  | 0.69–0.95                    | 0.89–1.11                    | −0.43                             | 0.50                                | −0.31                             | 0.42                                |


Barrea–Castelnuovo fault system, as mapped in the ITHACA database of capable faults (<https://sgi.isprambiente.it/ithaca/viewer/>, last access: 10 September 2026), and agrees with previous studies of the 1984 Abruzzo–Lazio seismic sequence (Boncio et al., 1998; Pace et al., 2002). Among the sources derived from macroseismic parameters (Table 2), the META\_007 source exhibits the lowest BE error ( $BE_I = 0.54$ ) and  $RMSE_I$  (0.89). Although these values are broadly consistent with the adopted thresholds for selecting the best-fitting source, the surface projection of the META\_007 fault trace shows poor consistency with the known geological structures in the area.

### 3.1.2 The 1989 Prealpi Vicentine earthquake

The 13 September 1989 earthquake occurred north of Schio in the Veneto region (Northern Italy; Fig. 1b). The instrumental location and magnitude provided by CPTI15 for this event are [45.882° N, 11.264° E], based on OGS-BFVG (Bollettino della Rete Sismometrica del Friuli Venezia Giu-

lia, <http://www.crs.inogs.it/bollettino/RSFVG/>, last access: 10 September 2026) and a  $M_w$  4.85 (RCMT; Pondrelli et al., 2006). In addition, the Boxer-derived epicentral location is [45.870° N, 11.172° E] and the  $M_w$  equal to 4.99, respectively. The adopted macroseismic field consists of 779 IDPs spread over a wide area covering the southern Alps, Veneto and the Po plain (see Fig. 1b), with the light damage reported at two villages, Posina and Besenello, evaluated as intensity of 6–7 MCS (Bollettino Macrosismico ING; Gasparini et al., 1991a; Fig. 6a–b). The application of the pre-processing to this macroseismic field reduced the dataset to 766 IDPs. The removed outliers do not significantly affect the computation of epicentral location and magnitude. The Boxer-derived earthquake parameters remain unchanged in terms of magnitude ( $M_w$  4.99), while the epicentral location shifts by about 4 km to [45.896° N, 11.215° E].

From a seismotectonic perspective, the 1989 earthquake was the largest instrumentally recorded event that occurred along the Schio–Vicenza Fault System (SVFS) in North-

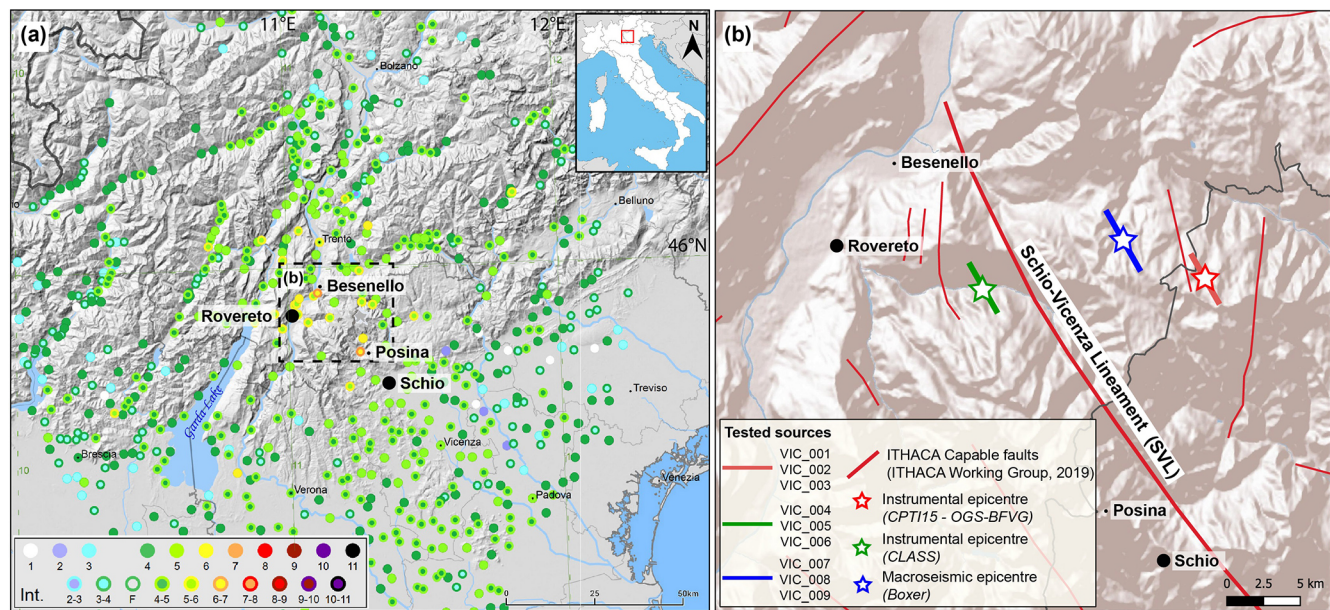

**Figure 6.** The 13 September 1989 ( $M_w$  4.85) Prealpi Vicentine earthquake. **(a)** Macroseismic intensity distribution of the BMING dataset from Gasparini et al. (1991a). **(b)** Tested source configurations (coloured lines) corresponding to vertical fault planes (dip = 90°). Red lines represent capable faults from ITHACA database. Red, green, and blue stars represent the instrumental epicentral solutions from CPTI15 (OGS-BFVG), CLASS, and the macroseismic epicentre, respectively. The map in panel **(a)** is derived from the CPTI15-DBMI15, which uses the TINITALY DEM, whereas panel **(b)** is generated using the Esri Shaded Relief basemap. Sources: Esri | Powered by Esri.

**Table 4.** Instrumental earthquake parameters for the 1989 Prealpi Vicentine earthquake, derived from CPTI15 and CLASS catalogues, and macroseismic estimate derived using Boxer. The tested seismogenic sources are also reported.

| Reference earthquake parameters          | Data Type    | Epicentre [Lat, Lon]               | $M_w$        | Strike/Dip/Rake (°) | Length (km) | Width (km) | Depth (km) | Tested Source |
|------------------------------------------|--------------|------------------------------------|--------------|---------------------|-------------|------------|------------|---------------|
| CPTI15<br>(Rovida et al., 2022)          | Instrumental | [45.882° N, 11.264° E]<br>OGS-BFVG | 4.85<br>RCMT | 146/90/−179         | 2.6         | 3.4        | 9.0        | VIC_001       |
|                                          |              |                                    |              |                     |             |            | 12.3       | VIC_002       |
|                                          |              |                                    |              |                     |             |            | 25.0       | VIC_003       |
| CLASS<br>(Latorre et al., 2022)          | Instrumental | [45.874° N, 11.134° E]             | 4.85<br>RCMT | 146/90/−179         | 2.6         | 3.4        | 9.0        | VIC_004       |
|                                          |              |                                    |              |                     |             |            | 12.3       | VIC_005       |
|                                          |              |                                    |              |                     |             |            | 25.0       | VIC_006       |
| Boxer method<br>(Gasparini et al., 2010) | Macroseismic | [45.896° N, 11.215° E]<br>Rev      | 4.99<br>Rev  | 146/90/−179         | 3.2         | 3.8        | 9.0        | VIC_007       |
|                                          |              |                                    |              |                     |             |            | 12.3       | VIC_008       |
|                                          |              |                                    |              |                     |             |            | 25.0       | VIC_009       |

ern Italy, a complex transverse structure composed of a set of NW–SE-trending and NE-dipping high-angle faults. The main fault of the SVFS is the Schio-Vicenza Lineament (SVL; Fig. 6b), a NW–SE, 120 km-long, subvertical strike-slip fault, which bounds to the east the Southern Alps (e.g., Castaldini and Panizza, 1991; Viganò et al., 2008; Vannoli et al., 2015; Zampieri et al., 2021). As reported by Vannoli et al. (2015) and Zampieri et al. (2021), the source of this event could be associated with a segment of the northern portion of the SVL. This is also supported by the focal mechanism from the RCMT (Pondrelli et al., 2006), which indicates a right-lateral strike-slip motion with strike (146°; 56°), dip (90°;

89°), and rake (− 178°; 0°). Although the scientific community generally agrees on the kinematics and the associated seismogenic source of this event, several instrumental solutions are available from different catalogues. For this reason, we tested several earthquake parametrisations to identify the source configuration that best fits the observed data and the geological fault system identified in the literature. We generated 9 alternative seismogenic sources by considering both the instrumental solutions and the Boxer-derived macroseismic estimate. Specifically, we selected as representative solutions the instrumental locations provided by CPTI15 (from OGS) and CLASS, together with the moment

**Table 5.** Residual analysis ( $BE_I$  and  $RMSE_I$ ) for the tested seismogenic sources of the 1989 Prealpi Vicentine earthquake. The asterisk indicates the best-fitting seismogenic source among the considered models.

| Reference parameters | Source   | $BE_I$ – $RMSE_I$<br>(GOM20) | $BE_I$ – $RMSE_I$<br>(OLI22) |
|----------------------|----------|------------------------------|------------------------------|
| CPTI15               | VIC_001  | 0.88–1.04                    | 0.87–1.01                    |
|                      | VIC_002  | 0.91–1.06                    | 0.89–1.02                    |
|                      | VIC_003  | 1.05–1.16                    | 1.01–1.11                    |
| CLASS                | VIC_004  | 0.90–1.05                    | 0.90–1.02                    |
|                      | VIC_005  | 0.92–1.06                    | 0.92–1.04                    |
|                      | VIC_006  | 1.04–1.14                    | 1.02–1.12                    |
| Boxer (Rev)          | VIC_007* | 0.69–0.88                    | 0.74–0.89                    |
|                      | VIC_008  | 0.72–0.89                    | 0.76–0.90                    |
|                      | VIC_009  | 0.87–0.99                    | 0.89–0.99                    |

magnitude ( $M_w$  4.85) from the RCMT. For each configuration, we assumed a strike-slip fault geometry (strike =  $146^\circ$ , dip =  $90^\circ$ , rake =  $-179^\circ$ ), and three different hypocentral depths: 9 km (OGS), 12.3 km (CLASS), and 25 km to explore a deeper source (Table 4).

Since no accelerometric recordings are available for this event in the ITACA database, the analysis was therefore based only on the comparison between observed and predicted macroseismic data. Sources based on the CLASS instrumental parameters (e.g., VIC\_004, VIC\_005, and VIC\_006) exhibit the largest  $BE_I$  and  $RMSE_I$  values, while the sources based on the instrumental parameters provided by the CPTI15 (i.e., OGS) provide intermediate results. In addition, an increase in  $BE_I$  and  $RMSE_I$  values is observed for source geometries with hypocentral depths larger than 15 km (e.g., VIC\_003, VIC\_006, and VIC\_009), suggesting that this event could be originated at relatively shallow depths ( $\sim 9$ – $12$  km). The sources derived from the Boxer macroseismic estimation show generally lower  $BE_I$  and  $RMSE_I$  values for both the GOM20 and OLI22 conversion equations.

From a geological perspective, among the tested source configurations, both the solutions based on CLASS instrumental parameters and those derived from macroseismic data are located close to the Schio–Vicenza Lineament, as mapped in the ITHACA database (Fig. 6b), which has been proposed in the literature as the potential causative structure for this event (e.g., Zampieri et al., 2021).

Although none of these sources fully satisfy the adopted selection thresholds, the lowest residuals are obtained for sources VIC\_007 and VIC\_008, corresponding to Boxer-derived epicentral location and magnitude with hypocentral depths of 9 and 12.3 km, respectively (Table 5). Despite the  $BE_I$  being slightly higher than the adopted threshold ( $BE_I = 0.69$ ) and the  $RMSE_I$  being close to 1 ( $RMSE_I = 0.88$ ), we identified the VIC\_007 geometry as the best-fitting source.

### 3.1.3 The 2008 Parmense earthquake


The 23 December 2008 Parmense earthquake struck the Emilia Romagna region (see Fig. 1b) between the provinces of Reggio Emilia and Parma (Fig. 7a). The instrumental location and magnitude provided by CPTI15 for this event are [ $44.544^\circ$  N,  $10.345^\circ$  E], based on BSI (<http://bollettinosismico.rm.ingv.it>) and a  $M_w$  5.36, based on TDMT INGV (<https://doi.org/10.13127/TDMT>, Scognamiglio et al., 2006), harmonised to RCMT according to Lolli et al. (2020). The macroseismic epicentre and magnitude provided by CPTI15 are [ $44.609^\circ$  N,  $10.261^\circ$  E] and  $M_w$  5.17, respectively. The adopted macroseismic field (Ercolani et al., 2009), consists of 291 IDPs with intensities ranging from 2 to 6–7 in the MCS scale (Fig. 7a). The application of the pre-processing did not modify the dataset; therefore, the Boxer-derived earthquake parameters remain unchanged.

From a seismotectonic perspective, this earthquake affected a sector of northern Apennines (see Fig. 1b) characterised by compressional tectonics and by a relatively high seismicity rate. In this region, shallow earthquakes are generally located along the highest peaks of the range, while deeper events ( $> 10$  km) occur in the outer sectors. According to BSI, the hypocentre of this event was located at a depth of about 23 km. Regarding the seismogenic source of the event, the DISS database attributed it to an Individual Seismogenic Source (ISS) labelled “ITIS135 Neviano degli Arduini”. This ISS represents a reverse faulting (strike =  $98^\circ$ , dip =  $55^\circ$ , and rake =  $79^\circ$ ) based on the focal mechanism solution from the RCMT (Pondrelli et al., 2006).

For this event, the hypocentral parameters reported by BSI and CLASS are overall consistent in terms of location, magnitude, and depth. The instrumental locations differ by only 2 km, and the corresponding hypocentral depths are 22.9 km (BSI) and 19.6 km (CLASS). Additionally, ground motion recordings are available at 35 stations from the ITACA database (Felicetta et al., 2023). Despite this general agreement among the instrumental solutions, the application of our workflow allows us to explore which source configuration is most consistent with the available accelerometric recordings, macroseismic data, and geological constraints.

In this case, we generated three virtual seismogenic sources by considering the instrumental parameters provided by CPTI15 (from BSI) and CLASS, together with the macroseismic estimate (Table 6). For each source configuration, we assumed a S-dipping reverse source geometry, consistent with the “ITIS135” proposed by the DISS database.

The results of the residual analyses (Table 7) show that both PARM\_001 and PARM\_002 satisfy the adopted thresholds for the identification of the best-fitting source. PARM\_001 is based on the CPTI15–BSI instrumental solution, whereas PARM\_002 derives from the CLASS solution. Both configurations minimise the residuals for macroseismic intensities, indicating a good agreement between ob-

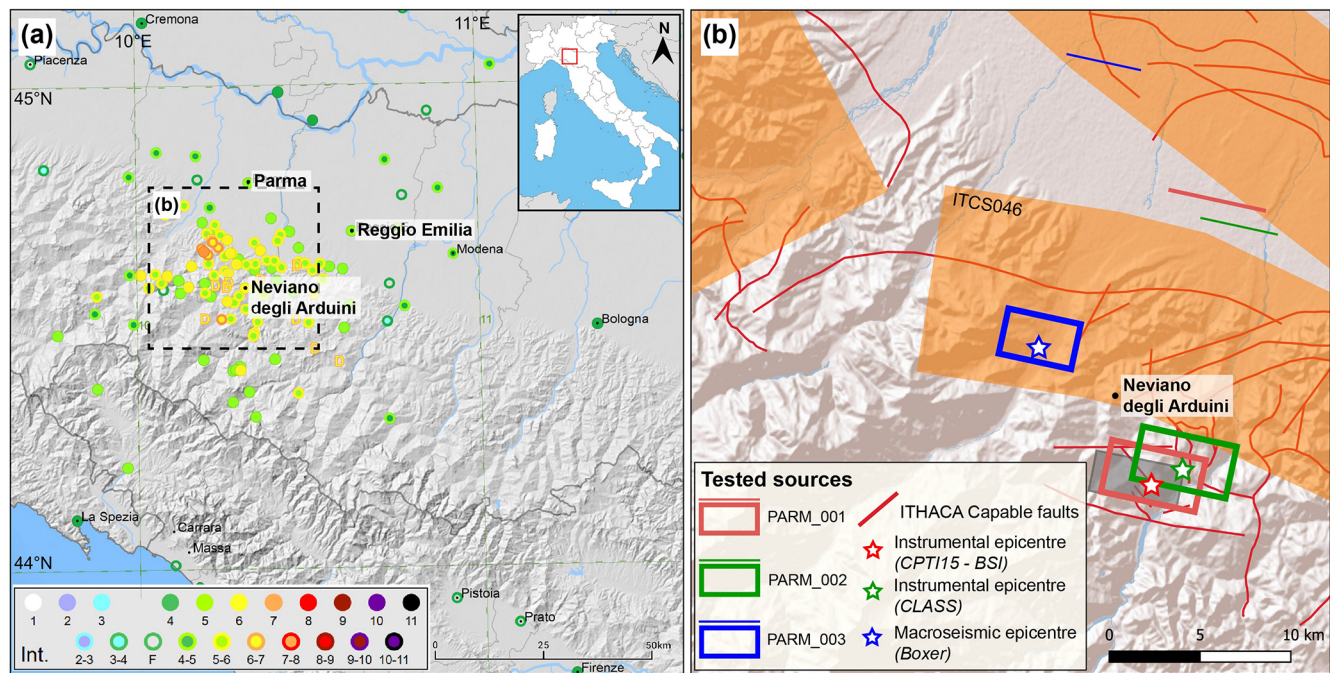

**Figure 7.** The 23 December 2008 ( $M_w$  5.36) Parmense earthquake. **(a)** Macroseismic intensity distribution of the ERCAL009 dataset from Ercolani et al. (2009). **(b)** Tested source configurations (coloured rectangles). Red lines represent capable faults from ITHACA. The orange shaded area represents the Composite Seismogenic Source (CSS) “ITCS046”, while the grey rectangle represents the “ITIS135 Neviano degli Arduini” proposed by the DISS database (DISS Working Group, 2025). Red, green, and blue stars represent the instrumental epicentral solutions from CPTI15 (BSI), CLASS, and the macroseismic epicentre, respectively. The map in panel (a) is derived from the CPTI15-DBMI15, which uses the TINITALY DEM, whereas panel (b) is generated using the Esri Shaded Relief basemap. Sources: Esri | Powered by Esri.

**Table 6.** Instrumental earthquake parameters for the 2008 Parmense earthquake, derived from CPTI15 and CLASS catalogues, and macroseismic estimate derived using Boxer. The tested seismogenic source configurations are also reported.

| Reference earthquake parameters       | Data Type    | Epicentre [Lat, Lon]               | $M_w$            | Strike/Dip/Rake (°) | Length (km) | Width (km) | Depth (km) | Tested Source |
|---------------------------------------|--------------|------------------------------------|------------------|---------------------|-------------|------------|------------|---------------|
| CPTI15 (Rovida et al., 2022)          | Instrumental | [44.544° N, 10.345° E]<br>BSI      | 5.36<br>TDMT     | 98/55/79            | 5.2         | 5.0        | 22.9       | PARM_001      |
| CLASS (Latorre et al., 2022)          | Instrumental | [44.552° N, 10.366° E]             | 5.36<br>TDMT     | 98/55/79            | 5.2         | 5.0        | 19.6       | PARM_002      |
| Boxer method (Gasperini et al., 2010) | Macroseismic | [44.609° N, 10.261° E]<br>Pref/Rev | 5.17<br>Pref/Rev | 98/55/79            | 4.0         | 4.4        | 22.9       | PARM_003      |

**Table 7.** Residual analysis ( $BE_I$  and  $RMSE_I$ ) for the tested seismogenic sources of the 2008 Parmense earthquake. The table also reports the BE, calculated as the mean difference between the base-10 logarithms of observed and predicted peak ground motions, and RMSE from the validation against instrumental recordings. The asterisk indicates the best-fitting seismogenic source among the considered models.

| Reference parameters | Source    | $BE_I$ – $RMSE_I$ (GOM20) | $BE_I$ – $RMSE_I$ (OLI22) | $BE_{LogPGA}$ ( $cm\ s^{-2}$ ) | $RMSE_{LogPGA}$ ( $cm\ s^{-2}$ ) | $BE_{LogPGV}$ ( $cm\ s^{-1}$ ) | $RMSE_{LogPGV}$ ( $cm\ s^{-1}$ ) |
|----------------------|-----------|---------------------------|---------------------------|--------------------------------|----------------------------------|--------------------------------|----------------------------------|
| CPTI15               | PARM_001* | 0.53–0.78                 | 0.64–0.80                 | –0.05                          | 0.34                             | 0.00                           | 0.26                             |
| CLASS                | PARM_002  | 0.45–0.76                 | 0.54–0.75                 | –0.04                          | 0.34                             | 0.01                           | 0.26                             |
| Boxer (Pref/Rev)     | PARM_003  | 0.85–1.01                 | 0.84–0.96                 | –0.22                          | 0.39                             | –0.19                          | 0.30                             |

served and predicted data. Consistently, the comparison between predicted ground motion parameters and recorded accelerometric data (PGA and PGV, in log10 units) shows comparable results for both source configurations. In particular,  $RMSE_{LogPGV}$  and  $RMSE_{LogPGA}$  values are 0.26 and 0.34, respectively, which are in line with the standard deviation of the ITA18 GMM (0.29 for PGV and 0.33 for PGA). However, PARM\_001 is selected as the best-fitting seismogenic source, as it is consistent with the seismogenic source “ITIS135 Neviano degli Arduini” reported in the DISS database (Fig. 7b). In contrast, the PARM\_003 source geometry, derived from macroseismic data, does not satisfy the adopted thresholds for either of the tested conversion equations ( $BE_I > 0.5$  and  $RMSE_I > 1$ ; Table 7), indicating a poorer agreement between observed and predicted intensities.

### 3.2 Application to a historical event: The 1781 Cagli earthquake

For the application of the proposed workflow to a historical event, we selected the 3 June 1781 Cagli earthquake ([https://emidius.mi.ingv.it/CPTI15-DBMI15/eq/17810603\\_0000\\_000](https://emidius.mi.ingv.it/CPTI15-DBMI15/eq/17810603_0000_000), last access: 10 September 2026). This earthquake was one of the largest and most damaging events that affected the Marche internal region in the last centuries (Fig. 1a–b).

Among the historical earthquakes included in our dataset, this event is characterised by the absence of a clear and unique seismotectonic interpretation. For this reason, it represents an appropriate case study to illustrate the application of the workflow to a historical event, i.e., where instrumental data are unavailable. In addition, it offers the opportunity to explore the influence of an alternative macroseismic field selected from those archived in the Italian Archive of Historical Earthquake Data (ASMI; Rovida et al., 2017, 2025) on the identification of the best seismogenic source.


According to CPTI15, the Boxer-derived epicentral location and magnitude of the 1781 Cagli earthquake are  $[43.596^\circ \text{ N}, 12.512^\circ \text{ E}]$  and  $M_w$  6.51, respectively. These estimates were obtained from the macroseismic field adopted as the preferred in DBMI15. This intensity dataset (Monachesi, 1987; hereafter MONA987) consists of 157 IDPs with intensities ranging from 3–4 to 10 MCS (Fig. 8a). The alternative macroseismic field considered in this analysis was compiled by Guidoboni et al. (2018), hereafter CFTI5med. This dataset presents a slightly different spatial distribution of intensities and consists of 151 IDPs, ranging from 2–3 to 10 MCS (Fig. 8c). The macroseismic epicentre calculated from this dataset at  $[43.576^\circ \text{ N}, 12.548^\circ \text{ E}]$  results shifted to 3.6 km SE with respect to that from MONA987, and the corresponding magnitude estimate is  $M_w$  6.33. The application of the pre-processing on both the preferred and the alternative macroseismic field do not affect the macroseismic parameters.

From a geological perspective, the 1781 Cagli earthquake is located between the northern-central Apennine fold-and-thrust belt, in a zone currently undergoing crustal extension. However, according to the literature, outcropping active faults capable of producing an event such as the 1781 earthquake are not mapped in this sector of the Apennines (Fig. 8b–d).

Despite the absence of documented capable faults or clear geological evidence, the DISS database suggests that the causative source of the 1781 Cagli earthquake is located on the Montiego thrust (Fig. 8b–d), a segment of a major thrust reactivated under the current extensional regime and emerging along the Adriatic coastline. Based on this interpretation and the macroseismic parameters proposed by CPTI15, the event is associated with the ISS labelled “ITIS047 Cagli”. This ISS represents a SW-dipping structure (strike =  $134^\circ$ , dip =  $30^\circ$ , and rake =  $-90^\circ$ ), with the strike consistent with the general orientation of the frontal thrusts of the Apennines in this sector (Fig. 8b–d), while the rake reflects regional geodynamic considerations. Conversely, De Donatis et al. (2020) documented the presence of a fault system in the Monte Nerone area (Fig. 8b–d). Specifically, this NW–SE to WNW–ESE striking system of shallow normal faults shows stratigraphic, structural, and geomorphological evidence of extensional tectonics, and they suggested that this fault system may be capable of generating large earthquakes, as the 1781 Cagli event. However, no capable faults are currently mapped in the Monte Nerone area in the ITHACA database (Fig. 8b–d).

To identify the best seismogenic source for this event, we applied the proposed workflow considering both the seismotectonic interpretations described above and the two alternative macroseismic fields. Specifically, we generated four alternative source configurations (Table 8): two (CAGLI\_001 and CAGLI\_003) consistent with the orientation of the DISS hypothesis (ITIS047 Cagli) and two (CAGLI\_002 and CAGLI\_004) consistent with the orientation of the fault system described by De Donatis et al. (2020). For the latter two source hypotheses, we assumed a normal fault (strike =  $110^\circ$ , dip =  $55^\circ$ , and rake =  $-90^\circ$ ). Each virtual source was constructed around the hypocentre, with rupture length and width derived from the magnitude estimates using Wells and Coppersmith (1994). The location and the dimensions of CAGLI\_001 and CAGLI\_002 are derived from the parameters obtained with the MONA987 intensity dataset, those of CAGLI\_003 and CAGLI\_004 with the macroseismic field from CFTI5med. For all source configurations, a fixed hypocentral depth of 10 km was assumed, consistent with the average depth of earthquakes in the area.

The results of the analysis are summarised in Table 9. The residuals obtained with the GOM20 model exhibit negative  $BE_I$  values for all tested source configurations, indicating a general overestimation of the observed intensities. In contrast, the residuals obtained with OLI22 indicate overestimation for the CAGLI\_001 and CAGLI\_002 sources (Ta-

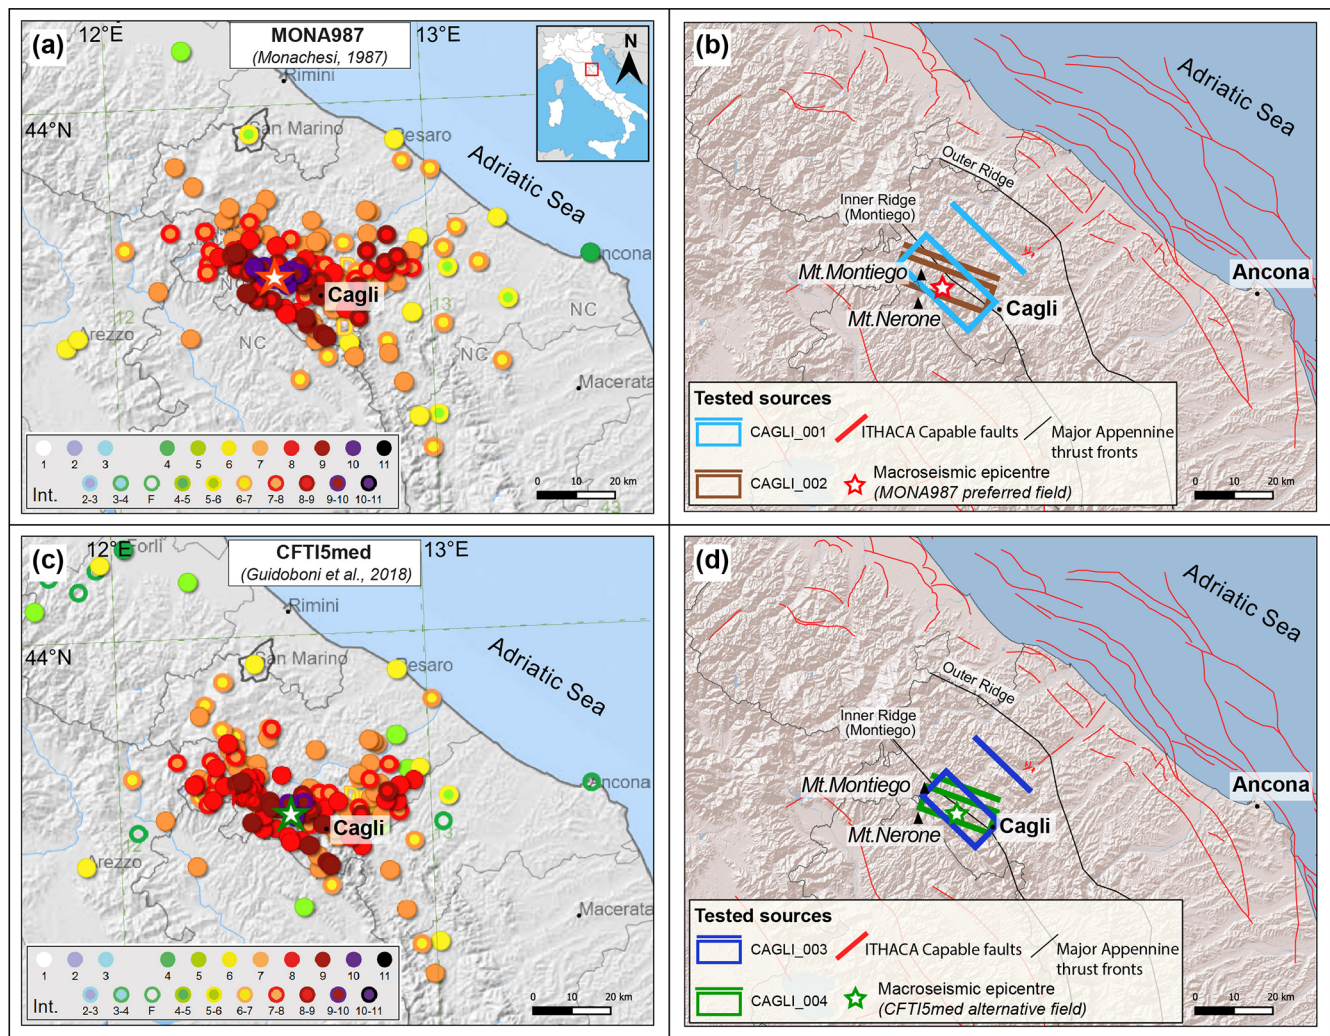

**Figure 8.** The 3 June 1781 Cagli earthquake. (a) Macroseismic intensity distribution of the MONA987 dataset from Monachesi (1987). (b) Tested source configurations (CAGLI\_001 and CAGLI\_002). (c) Macroseismic intensity distribution of the CFTI5med dataset from Guidoboni et al. (2018). (d) Tested source configurations (CAGLI\_003 and CAGLI\_004). Red lines represent capable faults from the ITHACA database, while black lines indicate the main frontal thrusts of the Apennines, including the Montiego thrust cited in the text. Red and green stars represent the macroseismic epicentre derived from MONA987 and CFTI5med datasets, respectively. The maps in panels (a) and (c) is derived from the CPTI15-DBMI15, which uses the TINITALY DEM, whereas panels (b) and (d) are generated using the Esri Shaded Relief basemap. Sources: Esri | Powered by Esri.

**Table 8.** Tested sources for the 1781 Cagli earthquake. Source geometries (strike, dip, and rake) for CAGLI\_001 and CAGLI\_003 are based on ITIS047 Cagli (Diss Working Group, 2025), whereas those for CAGLI\_002 and CAGLI\_004 are based on the orientation of the Mt. Nerone fault system (De Donatis et al., 2020).

| Reference earthquake parameters   | Epicentre [Lat, Lon]   | $M_w$ | Strike/Dip/<br>Rake (°) | Length<br>(km) | Width<br>(km) | Depth<br>(km) | Tested<br>Source |
|-----------------------------------|------------------------|-------|-------------------------|----------------|---------------|---------------|------------------|
| MONA987 (Monachesi, 1987)         | [43.596° N, 12.512° E] | 6.51  | 134/30/−90              | 24.8           | 11.7          | 10            | CAGLI_001        |
| MONA987 (Monachesi, 1987)         | [43.596° N, 12.512° E] | 6.51  | 110/55/−90              | 24.8           | 11.7          | 10            | CAGLI_002        |
| CFTI5med (Guidoboni et al., 2018) | [43.576° N, 12.548° E] | 6.33  | 134/30/−90              | 10.1           | 10.1          | 10            | CAGLI_003        |
| CFTI5med (Guidoboni et al., 2018) | [43.576° N, 12.548° E] | 6.33  | 110/55/−90              | 10.1           | 10.1          | 10            | CAGLI_004        |

**Table 9.** Residual analysis for the tested seismogenic sources of the 1781 Cagli earthquake.  $BE_I$  and  $RMSE_I$  values are obtained from PGV using the GOM20 and OLI22 conversion equations.

| Test<br>macroseismic<br>field | Source    | $BE_I$ – $RMSE_I$<br>(GOM20) | $BE_I$ – $RMSE_I$<br>(OLI22) |
|-------------------------------|-----------|------------------------------|------------------------------|
| MONA987                       | CAGLI_001 | –0.71–1.22                   | –0.02–0.94                   |
| MONA987                       | CAGLI_002 | –0.91–1.37                   | –0.17–0.97                   |
| CFTI5med                      | CAGLI_003 | –0.37–1.01                   | 0.23–0.97                    |
| CFTI5med                      | CAGLI_004 | –0.56–1.10                   | 0.06–0.90                    |

ble 9 and Fig. 8b), and underestimation for CAGLI\_003 and CAGLI\_004 (Table 9 and Fig. 8d); nevertheless, they are significantly lower than those obtained with GOM20.

Overall, the lowest  $BE_I$  and  $RMSE_I$  values, for both the GOM20 and OLI22 conversion equations, are obtained for the CAGLI\_003 and CAGLI\_004 source configurations. Although the strike orientation of CAGLI\_003, consistent with the DISS source (ITIS047 CAGLI), is more compatible with the regional structural setting, both configurations provide a comparable fit to the observed macroseismic data. In particular, the predicted intensities derived from these fault models exhibit smaller residuals irrespective of the adopted GMICE. The comparison between the two macroseismic datasets indicates that the CFTI5med dataset (Guidoboni et al., 2018) systematically yields lower residuals than the MONA987 dataset (Monachesi, 1987), suggesting that a lower magnitude ( $M_w$  6.33) may be more consistent with this event.

#### 4 Discussion and conclusions

In Italy, a few methodological approaches have been proposed over the last decades for the reconstruction of historical earthquake sources. Such previous studies include the pioneering work of Gasperini et al. (1999) which presents the first attempt to infer source geometry directly from the spatial distribution of macroseismic observations, demonstrating that the elongation of the intensity field contains valuable information on source orientation and dimensions. Nevertheless, the methodology relies on simplifying assumptions. In particular, the orientation of the inferred source geometry is estimated from the azimuthal distribution of the highest intensity observations using a circular mean, providing a strike between 0 and 180° without resolving the fault dip direction. In addition, a fixed dip angle of 45° is assumed for all the seismogenic boxes, regardless of the geological characteristics of the candidate seismogenic structures.

Visini et al. (2009) demonstrated the potential of combining ground motion simulations with macroseismic data to evaluate competing seismogenic hypotheses for the 1693 Sicilian earthquake. Their approach evaluates a set of predefined fault models through synthetic ground motion simula-

tions and statistical comparison with the observed intensities. Nevertheless, the geometry of the analysed sources is assumed a priori from previously proposed tectonic models, rather than being derived from the earthquake magnitude. Furthermore, the conversion between simulated ground motion parameters and macroseismic intensity relied on empirical relations not calibrated on Italian earthquakes.

More recently, Sgobba and Pacor (2023) proposed a non-ergodic empirical framework for reconstructing shaking scenarios of historical earthquakes, accounting for source, path and site effects specifically of Central Italy, by incorporating spatially variable source, propagation and site corrections. However, the approach requires the earthquake magnitude and fault geometry (i.e., fault vertices, strike and rupture dimensions) to be defined a priori. Consequently, its applicability depends on the availability of an independently constrained seismogenic source, making it particularly suitable for well-characterised historical earthquakes but less appropriate when the source itself remains uncertain.

Nevertheless, a common limitation of these studies is the absence of standardised metrics for source validation. This study aims to fill this gap by proposing an integrated and reproducible workflow that combines geological constraints, empirical fault-scaling relationships, regionally calibrated intensity-to-ground-motion conversions, and ground motion simulations. Candidate seismogenic sources are objectively ranked through quantitative statistical metrics, including between-event (BE) residuals and RMSE values, allowing the identification of the best-fitting source according to predefined thresholds.

This approach integrates an initial pre-processing stage for the identification and removal of potential outliers, followed by three main stages: (i) earthquake parameter estimation using the Boxer code, (ii) seismogenic source reconstruction and ground-motion simulation, and (iii) validation of the inferred source geometries through residual analysis (see Sect. 3) and comparison with geologic lineaments.

The pre-processing procedure aims at identifying macroseismic fields that require closer scrutiny or, in some cases, exclusion from the analysis. Although the presence of some possible over- or underestimated intensity value does not significantly change the macroseismic location and magnitude obtained with the adopted Boxer method, it may significantly affect the analysis of the residuals and, consequently, the interpretation of the geometry and dimensions of the seismogenic source.

The application of the proposed workflow to the selected instrumental earthquakes shows that macroseismic-derived parameters can provide realistic seismogenic source geometries that are mostly consistent with those derived from instrumental solutions. The validation has been performed for a wide magnitude range and with the aid of accelerometric recordings and mapped geological structures (e.g., 1984 Monti della Meta, 1989 Prealpi Vicentine, and 2008 Parmense earthquakes). The reliability of these results is con-

firmed by the fact that the residual values (BE and RMSE) obtained from accelerometric data align closely with the standard deviation ( $\sigma$ ) of the adopted ITA18 GMM by Lanzano et al. (2019).

The application of the proposed workflow to the 1781 Cagli earthquake allows to select between alternative macroseismic fields for discriminating the best-fitting seismogenic source. Two alternative and reliable intensity datasets (Monachesi, 1987; Guidoboni et al., 2018) were simulated with four source hypotheses. The comparison of the residuals obtained from the simulations of the two datasets indicates that the seismogenic sources based on parameters derived from the CPTI5med dataset provide a better fit to the observed data in terms of BE<sub>I</sub> and RMSE<sub>I</sub> values.

The results further suggest that shaking scenarios simulated with a lower magnitude estimate (i.e.,  $M_w$  6.33) could be more consistent with this event. This implies that the coherence between intensity data points (IDPs), earthquake parameters, source geometry, and ground motion simulations can lead to a more comprehensive reconstruction of both the earthquake effects and the causative fault.

Based on the findings of this study, the workflow can be systematically applied to reconstruct the seismogenic sources of the strongest Italian historical earthquakes ( $M_w \geq 5.5$ ) reported in CPTI15-DBMI15, and for which consistent intensity distributions are available.

**Data availability.** The data used in this study are publicly available. The selected dataset and the reference macroseismic earthquake parameters are obtained from the Catalogo Parametrico dei Terremoti Italiani (CPTI15, version 4.0; <https://doi.org/10.13127/CPTI/CPTI15.4>, Rovida et al., 2022). The macroseismic data are retrieved from the Italian Macroseismic Database (DBMI15, version 4.0; <https://doi.org/10.13127/DBMI/DBMI15.4>, Locati et al., 2022) and the Italian Archive of Historical Earthquake Data (ASMI; <https://doi.org/10.13127/asmi>, Rovida et al., 2017, 2025). Instrumental earthquake parameters are obtained from both CPTI15 v4.0 and CLASS (Catalogue of Absolute Locations; <https://doi.org/10.13127/class.1.0>, Latorre et al., 2022). The DEM used in figures provided by the CPTI15-DBMI15 catalogue is the TINITALY, accessible at <https://doi.org/10.13127/tinitaly/1.1> (Tarquini et al., 2007, 2023). Other basemaps used in the figures include Google Satellite imagery (map data © 2015 Google) and Esri Shaded Relief basemaps (Sources: Esri | Powered by Esri). The revised macroseismic earthquake parameters, the epicentral distances (in km), and the magnitude differences between preferred and revised macroseismic estimates, as well as between macroseismic and instrumental solutions (when available), are reported in Table S1.

**Supplement.** The supplement related to this article is available online at <https://doi.org/10.5194/nhess-26-4569-2026-supplement>.

**Author contributions.** VG and LL conceptualized the study. VG developed the methodology, performed the analysis, and wrote the manuscript. LL, AA, and AR contributed to the interpretation of the results and critically revised the manuscript. All authors reviewed and approved the final version of the manuscript.

**Competing interests.** The contact author has declared that none of the authors has any competing interests.

**Disclaimer.** Publisher's note: Copernicus Publications remains neutral with regard to jurisdictional claims made in the text, published maps, institutional affiliations, or any other geographical representation in this paper. The authors bear the ultimate responsibility for providing appropriate place names. Views expressed in the text are those of the authors and do not necessarily reflect the views of the publisher.

**Acknowledgements.** We would like to express our gratitude to the editor Seda Yolsal-Çevikbilen, and to Josep Batlló and an anonymous reviewer for their valuable comments and suggestions, which allowed us to greatly improve the manuscript. We also thank the Copernicus editorial support for their assistance during the preprint publication process.

**Financial support.** The authors declare that this research was partially funded by the Consortium REDI (REducing risks of natural Disasters).

**Review statement.** This paper was edited by Seda Yolsal-Çevikbilen and reviewed by Josep Batlló and two anonymous referees.

## References

- Akkar, S. and Özen, Ö.: Effect of peak ground velocity on deformation demands for SDOF systems, *Earthquake Engng. Struct. Dyn.*, 34, 1551–1571, <https://doi.org/10.1002/eqe.492>, 2005.
- Albini, P. and Rovida, A.: The 12 May 1802 earthquake (N Italy) in its historical and seismological context, *J. Seismol.*, 14, 629–651, <https://doi.org/10.1007/s10950-010-9187-6>, 2010.
- Allen, T. I., Wald, D. J., Hotovec, A. J., Lin, K.-W., Earle, P. S., and Marano, K. D.: An atlas of ShakeMaps for selected global earthquakes, Open-File Report (No. 2008-1236), U.S. Geological Survey, <https://doi.org/10.3133/ofr20081236>, 2008.
- Antonucci, A., Augliera, P., Locati, M., and Rovida, A.: Impact of the intensity assessment on the macroseismic parameters of earthquakes in Italy, *Geophys. J. Int.*, 242, ggaf224, <https://doi.org/10.1093/gji/ggaf224>, 2025.
- Antonucci, A., Castellano, C., Cucci, L., and Tertulliani, A.: A thorough review of the 5 May 1990 Potenza (Southern Italy) earthquake: constraints from macroseismology and in-

- sights from hydrology, *Nat. Hazards Earth Syst. Sci.*, 26, 1105–1118, <https://doi.org/10.5194/nhess-26-1105-2026>, 2026.
- Bakun, W. H. and Wentworth, C. M.: Estimating earthquake location and magnitude from seismic intensity data, *B. Seismol. Soc. Am.*, 87, 1502–1521, 1997.
- Basili, R., Valensise, G., Vannoli, P., Burrato, P., Fracassi, U., Mariano, S., Tiberti, M. M., and Boschi, E.: The Database of Individual Seismogenic Sources (DISS), version 3: Summarizing 20 years of research on Italy's earthquake geology, *Tectonophysics*, 453, 20–43, <https://doi.org/10.1016/j.tecto.2007.04.014>, 2008.
- Bigi, G., Castellarin, A., Catalano, R., Coli, M., Cosentino, D., Dal Piaz, G. V., Lentini, F., Parotto, M., Patacca, E., Pratlun, A., Salvini, F., Sartori, R., Scandone, P., and Vai, G. B.: Synthetic structural-kinematic map of Italy, C.N.R., Progetto Finalizzato Geodinamica, SELCA, Firenze, Italy, <https://www.socgeol.it/438/structural-model-of-italy-scale-1-500-000.html> (last access: 9 September 2026), 1989.
- Bindi, D., Parolai, S., Oth, A., Abdrakhmatov, K., Muraliev, A., and Zschau, J.: Intensity prediction equations for Central Asia, *Geophys. J. Int.*, 187, 327–337, <https://doi.org/10.1111/j.1365-246X.2011.05142.x>, 2011.
- Boncio, P., Brozzetti, F., Di Matteo, P., Lavecchia, G., and Pace, B.: Il controllo dell'interazione fra strutture sismogenetiche: l'esempio della Val di Sangro (Abruzzo), *Atti del 17 Convegno G. N. G. T. S., GNGTS*, 1–7, ISBN 88-900385-0-0, 1998.
- BSI Working Group: Bollettino Sismico Italiano (BSI), Istituto Nazionale di Geofisica e Vulcanologia (INGV) [data set], <https://doi.org/10.13127/bsi>, 2015.
- Castaldini, D. and Panizza, M.: Inventario delle faglie attive tra i Fiumi Po e Piave e il Lago di Como (Italia Settentrionale), *Il Quaternario*, 4, 333–410, 1991.
- Castello, B., Selvaggi, G., Chiarabba, C., and Amato, A.: Catalogo della sismicità italiana (CSI) 1981–2002, Istituto Nazionale di Geofisica e Vulcanologia (INGV) [data set], <https://doi.org/10.13127/CSI.1.1>, 2006.
- Chiaraluce, L., Di Stefano, R., Tinti, E., Scognamiglio, L., Michele, M., Casarotti, E., Cattaneo, M., De Gori, P., Chiarabba, C., and Monachesi, G.: The 2016 central Italy seismic sequence: A first look at the mainshocks, aftershocks, and source models, *Seismol. Res. Lett.*, 88, 757–771, <https://doi.org/10.1785/0220160221>, 2017.
- De Donatis, M., Alberti, M., Cipicchia, M., Guerrero, N. M., Papafico, G. F., and Susini, S.: Workflow of Digital Field Mapping and Drone-Aided Survey for the Identification and Characterization of Capable Faults: The Case of a Normal Fault System in the Monte Nerone Area (Northern Apennines, Italy), *ISPRS Int. J. Geo-Inform.*, 9, 616, <https://doi.org/10.3390/ijgi9110616>, 2020.
- DISS Working Group: Database of Individual Seismogenic Sources (DISS), Version 3.3.1: A compilation of potential sources for earthquakes larger than M 5.5 in Italy and surrounding areas, Istituto Nazionale di Geofisica e Vulcanologia (INGV) [data set], <https://doi.org/10.13127/diss3.3.1>, 2025.
- Dziewonski, A. M., Chou, T.-A., and Woodhouse, J. H.: Determination of earthquake source parameters from waveform data for studies of global and regional seismicity, *J. Geophys. Res.*, 86, 2825–2852, <https://doi.org/10.1029/JB086iB04p02825>, 1981.
- Ekström, G., Nettles, M., and Dziewonski, A. M.: The global CMT project 2004–2010: Centroid-moment tensors for 13,017 earthquakes, *Phys. Earth Planet. Inter.*, 200–201, 1–9, <https://doi.org/10.1016/j.pepi.2012.04.002>, 2012.
- Ercolani, E., Rossi, A., Vecchi, M., Leschiutta, I., Bernardini, F., Del Mese, S., Camassi, R., Pondrelli, S., and Tertulliani, A.: Rilievo macrosismico del terremoto emiliano del 23 dicembre 2008, *Quad. Geofis.*, 71, Istituto Nazionale di Geofisica e Vulcanologia (INGV), Roma, 41 pp., <https://emidius.mi.ingv.it/ASMI/study/ERCAL009> (last access: 21 April 2026), 2009.
- Faenza, L., Pierdominici, S., Camassi, R., Michelini, A., Ercolani, E., and Lauciani, V.: The shakemap atlas for the city of Naples, Italy, *Seismol. Res. Lett.*, 84, 963–972, <https://doi.org/10.1785/0220130048>, 2013.
- Felicetta, C., Russo, E., D'Amico, M. C., Sgobba, S., Lanzano, G., Mascandola, C., Pacor, F., and Luzi, L.: Italian ACcelerometric Archive (ITACA), version 4.0, Istituto Nazionale di Geofisica e Vulcanologia (INGV), <https://doi.org/10.13127/itaca.4.0>, 2023.
- Galli, P. and Pallone, F.: Reviewing the intensity distribution of the 1933 earthquake (Maiella, central Italy): clues on the seismogenic fault, *Alp. Mediterr. Quat.*, 32, 93–100, <https://doi.org/10.26382/AMQ.2019.08>, 2019.
- Galli, P., Spina, V., Ilardo, I., and Naso, G.: Evidence of active tectonics in southern Italy: the Rossano Fault (Calabria), in: *Recent Progress on Earthquake Geology*, edited by: Vittori, E. and Comerci, V., ISPRA, Roma, 49–78, ISBN 978-1-60876-147-0, 2010.
- Gasparini, C., Tertulliani, A., Riguzzi, F., Anzidei, M., Maramai, A., Murru, M., De Rubeis, V., Vecchi, M., Del Mese, S., Vannucci, C., Conte, S., Massucci, A., and Saraceni, A. M.: Bollettino macrosismico 1989, Istituto Nazionale di Geofisica, Roma, 163 pp., <https://emidius.mi.ingv.it/ASMI/study/BMING991a> (last access: 21 April 2026), 1991a.
- Gasparini, C., Tertulliani, A., Riguzzi, F., Anzidei, M., Maramai, A., Murru, M., De Rubeis, V., Vecchi, M., Del Mese, S., Vannucci, C., Conte, S., Massucci, A., and Saraceni, A. M.: Bollettino macrosismico 1990, Istituto Nazionale di Geofisica, Roma, 210 pp., <https://emidius.mi.ingv.it/ASMI/study/BMING991b> (last access: 21 April 2026), 1991b.
- Gasparini, P. and Ferrari, G.: Stima dei parametri sintetici, in: *Catalogo dei forti terremoti in Italia dal 461 a.C. al 1980*, edited by: Boschi, E., Ferrari, G., Gasparini, P., Guidoboni, E., Smriglio, G., and Valensise, G., ING-SGA, Bologna/Rome, Italy, 96–111, ISBN 88-85213-07-3, 1995.
- Gasparini, P. and Ferrari, G.: Deriving numerical estimates from descriptive information: the computation of earthquake parameters, *Ann. Geophys.-Italy*, 43, <https://doi.org/10.4401/ag-3670>, 2000.
- Gasparini, P., Bernardini, F., Valensise, G., and Boschi, E.: Defining seismogenic sources from historical earthquake felt reports, *B. Seismol. Soc. Am.*, 89, 94–110, 1999.
- Gasparini, P., Vannucci, G., Tripone, D., and Boschi, E.: The Location and Sizing of Historical Earthquakes Using the Attenuation of Macroscopic Intensity with Distance, *B. Seismol. Soc. Am.*, 100, 2035–2066, <https://doi.org/10.1785/0120090330>, 2010.
- Gironelli, V., Volatili, T., Luzi, L., Brunelli, G., Zambrano, M., and Tondi, E.: Ground motion simulations of historical earthquakes: the case study of the Fabriano (1741, Mw = 6.1) and Camerino (1799, Mw = 6.1) earthquakes in central Italy, *Bull. Earthq. Eng.*, 21, 5809–5830, <https://doi.org/10.1007/s10518-023-01759-y>, 2023.

- Gomez-Capera, A. A., D'Amico, M., Lanzano, G., Locati, M., and Santulin, M.: Relationships between ground motion parameters and macroseismic intensity for Italy, *Bull. Earthq. Eng.*, 18, 5143–5164, 2020.
- Gomez-Capera, A. A., Santulin, M., D'Amico, M., D'Amico, V., Locati, M., Meletti, C., and Varini, E.: Macroseismic intensity attenuation models calibrated in  $M_w$  for Italy, *Bull. Earthq. Eng.*, 22, 795–843, <https://doi.org/10.1007/s10518-020-00905-0>, 2024.
- Grünthal, G. (Ed.): European Macroseismic Scale 1998, Vol. 13, Conseil de l'Europe, Cahiers du Centre Européen de Géodynamique et de Séismologie, Luxembourg, 99 pp., ISBN N2-87977-008-4, 1998.
- Gruppo di Lavoro CSTI: Catalogo Strumentale dei Terremoti Italiani dal 1981 al 1996 (Versione 1.1), Istituto Nazionale di Geofisica e Vulcanologia (INGV) [data set], <https://doi.org/10.13127/csti.1.1>, 2005.
- Guidoboni, E., Ferrari, G., Mariotti, D., Comastri, A., Tarabusi, G., and Valensise, G.: CFTI4Med, Catalogue of Strong Earthquakes in Italy (461 B.C.–1997) and Mediterranean Area (760 B.C.–1500), INGV-SGA, <https://storing.ingv.it/cfti/cfti4/> (last access: 10 September 2026), 2007.
- Guidoboni, E., Ferrari, G., Mariotti, D., Comastri, A., Tarabusi, G., Sgattoli, G., and Valensise, G.: CFTI5Med, Catalogo dei Forti Terremoti in Italia (461 a.C.–1997) e nell'area Mediterranea (760 a.C.–1500), Istituto Nazionale di Geofisica e Vulcanologia (INGV) [data set], <https://doi.org/10.6092/INGV.IT-CFTI5>, 2018.
- International Seismological Centre (ISC): On-line Bulletin, <http://www.isc.ac.uk> (last access: 21 September 2026), 2016.
- International Seismological Centre (ISC): On-line Bulletin, <https://doi.org/10.31905/D808B830>, 2025.
- ITHACA Working Group: ITHACA (ITaly HAZard from CAPable faulting), A database of active capable faults of the Italian territory, Version December 2019, ISPRA Geological Survey of Italy, <http://sgi2.isprambiente.it/ithacaweb/Mappatura.aspx> (last access 10 September 2026), 2019.
- Lanzano, G., Luzi, L., Pacor, F., Felicetta, C., Puglia, R., Sgobba, S., and D'Amico, M.: A revised ground-motion prediction model for shallow crustal earthquakes in Italy, *B. Seismol. Soc. Am.*, 109, 525–540, <https://doi.org/10.1785/0120180210>, 2019.
- Latorre, D., Di Stefano, R., Castello, B., Michele, M., and Chiaraluce, L.: Catalogo delle Localizzazioni ASSolute (CLASS): locations (Version 1), Istituto Nazionale di Geofisica e Vulcanologia (INGV) [data set], <https://doi.org/10.13127/class.1.0>, 2022.
- Latorre, D., Di Stefano, R., Castello, B., Michele, M., and Chiaraluce, L.: An updated view of the Italian seismicity from probabilistic location in 3D velocity models: The 1981–2018 Italian catalog of absolute earthquake locations (CLASS), *Tectonophysics*, 846, 229664, <https://doi.org/10.1016/j.tecto.2022.229664>, 2023.
- Lavecchia, G., Castaldo, R., Nardis, R. de, Novellis, V. D., Ferrarini, F., Pepe, S., Brozzetti, F., Solaro, G., Cirillo, D., Bonano, M., Boncio, P., Casu, F., Luca, C. D., Lanari, R., Manunta, M., Manzo, M., Pepe, A., Zinno, I., and Tizzani, P.: Ground deformation and source geometry of the 24 August 2016 Amatrice earthquake (Central Italy) investigated through analytical and numerical modeling of DInSAR measurements and structural-geological data, *Geophys. Res. Lett.*, 43, 12,389–12,398, <https://doi.org/10.1002/2016GL071723>, 2016.
- Locati, M., Camassi, R., Rovida, A., Ercolani, E., Bernardini, F., Castelli, V., Caracciolo, C. H., Tertulliani, A., Rossi, A., Az-zaro, R., D'Amico, S., and Antonucci, A.: Database Macroseismico Italiano DBMI15, versione 4.0, INGV [data set], <https://doi.org/10.13127/DBMI/DBMI15.4>, 2022.
- Lolli, B., Randazzo, D., Vannucci, G., and Gasperini, P.: The homogenized instrumental seismic catalog (HORUS) of Italy from 1960 to present, *Seismological Society of America*, 91, 3208–3222, <https://doi.org/10.1785/0220200148>, 2020.
- Lolli, B., Gasperini, P., and Vannucci, G.: Recalibration of the intensity prediction equation in Italy using the macroseismic dataset DBMI15 version 2.0, *Seismol. Res. Lett.*, 95, 2399–2408, <https://doi.org/10.1785/0220230212>, 2024.
- Luzi, L., Lanzano, G., Felicetta, C., D'Amico, M. C., Russo, E., Sgobba, S., Pacor, F., and ORFEUS Working Group: Engineering Strong Motion Database (ESM) (Version 2.0), Istituto Nazionale di Geofisica e Vulcanologia (INGV) [data set], <https://doi.org/10.13127/ESM.2>, 2020.
- Medvedev, S., Sponheuer, W., and Karník, V.: Neue seismische Skala Intensity scale of earthquakes, in: 7. Tagung der Europäischen Seismologischen Kommission vom 24.9. bis 30.9.1962, in Jena, Veröff. Institut für Bodendynamik und Erdbebenforschung in Jena, Deutsche Akademie der Wissenschaften zu Berlin, 77, 69–76, 1964.
- Monachesi, G. (Ed.): Revisione della sismicità di riferimento per i comuni di Cerreto d'Esi (AN), Esanatoglia (MC), Serra San Quirico (AN), Osservatorio Geofisico Sperimentale, Macerata, Internal report, 240 pp., 1987.
- Munafò, I., Akinci, A., Taroni, M., Faenza, L., Oliveti, I., Antonucci, A., Gomez-Capera, A. A., and Rovida, A.: Studying past earthquakes with modern techniques: Ground-motion simulations for the 11 January 1693 Noto earthquake in Italy, *Seismol. Res. Lett.*, 95, 3387–3405, <https://doi.org/10.1785/0220240105>, 2024.
- OGS-BFVG, Istituto Nazionale di Oceanografia e di Geofisica Sperimentale – Centro di Ricerche Sismologiche: Bollettino della Rete Sismometrica del Friuli Venezia Giulia, <http://www.crs.inogs.it/bollettino/RSFVG/>, last access: 21 April 2026.
- Oliveti, I., Faenza, L., and Michelini, A.: New reversible relationships between ground motion parameters and macroseismic intensity for Italy and their application in ShakeMap, *Geophys. J. Int.*, 231, 1117–1137, <https://doi.org/10.1093/gji/ggac245>, 2022.
- Oliveti, I., Faenza, L., Antonucci, A., Locati, M., Rovida, A., and Michelini, A.: The ShakeMap atlas of historical earthquakes in Italy: Configuration and Validation, *Seismol. Res. Lett.*, 95, 21–37, <https://doi.org/10.1785/0220230138>, 2024.
- Pace, B., Boncio, P., and Lavecchia, G.: The 1984 Abruzzo earthquake (Italy): an example of seismogenic process controlled by interaction between differently oriented synkinematic faults, *Tectonophysics*, 350, 237–254, [https://doi.org/10.1016/S0040-1951\(02\)00118-X](https://doi.org/10.1016/S0040-1951(02)00118-X), 2002.
- Pasolini, C., Albarello, D., Gasperini, P., D'Amico, V., and Lolli, B.: The Attenuation of Seismic Intensity in Italy, Part II: Modeling and Validation, *B. Seismol. Soc. Am.*, 98, 692–708, <https://doi.org/10.1785/0120070021>, 2008.

- Pettenati, F., Sirovich, L., and Cavallini, F.: Objective treatment and synthesis of macroseismic intensity data sets using tessellation, *B. Seismol. Soc. Am.*, 89, 1203–1213, 1999.
- Pondrelli, S.: European-Mediterranean Regional Centroid-Moment Tensors Catalog (RCMT) [Data set], Istituto Nazionale di Geofisica e Vulcanologia (INGV) [data set], <https://doi.org/10.13127/RCMT/EUROMED>, 2002.
- Pondrelli, S. and Salimbeni, S.: Italian CMT Dataset, Istituto Nazionale di Geofisica e Vulcanologia (INGV) [data set], <https://doi.org/10.13127/rcmt/italy>, 2006.
- Pondrelli, S., Morelli, A., Ekström, G., Mazza, S., Boschi, E., and Dziewonski, A. M.: European-Mediterranean regional centroid-moment tensors: 1997–2000, *Phys. Earth Planet. Inter.*, 130, 71–101, [https://doi.org/10.1016/S0031-9201\(01\)00312-0](https://doi.org/10.1016/S0031-9201(01)00312-0), 2002.
- Pondrelli, S., Salimbeni, S., Ekström, G., Morelli, A., Gasperini P., and Vannucci, G.: The Italian CMT dataset from 1977 to the present, *Phys. Earth Planet. Inter.*, 159, 286–303, <https://doi.org/10.1016/j.pepi.2006.07.008>, 2006.
- Provost, L. and Scotti, O.: QUake-MD: Open-Source Code to Quantify Uncertainties in Magnitude–Depth Estimates of Earthquakes from Macroseismic Intensities, *Seismol. Res. Lett.*, 91, 2520–2530, <https://doi.org/10.1785/0220200064>, 2020.
- Rossi, A., Tertuliani, A., Azzaro, R., Graziani, L., Rovida, A., Maramai, A., Pessina, V., Hailemichael, S., Buffarini, G., Bernardini, F., Camassi, R., Del Mese, S., Ercolani, E., Fodarella, A., Locati, M., Martini, G., Paciello, A., Paolini, S., Arcoraci, L., Castellano, C., Verrubbi, V., and Stucchi, M.: The 2016–2017 earthquake sequence in Central Italy: macroseismic survey and damage scenario through the EMS-98 intensity assessment, *Bull. Earthq. Eng.*, 17, 2407–2431, <https://doi.org/10.1007/s10518-019-00556-w>, 2019.
- Rotondi, R., Varini, E., and Brambilla, C.: Probabilistic modelling of macroseismic attenuation and forecast of damage scenarios, *Bull. Earthq. Eng.*, 14, 1777–1796, <https://doi.org/10.1007/s10518-015-9781-7>, 2016.
- Rovida, A., Locati, M., Antonucci, A., and Camassi, R. (Eds.): Archivio Storico Macrosismico Italiano (ASMI), Istituto Nazionale di Geofisica e Vulcanologia (INGV) [data set], <https://doi.org/10.13127/asmi>, 2017.
- Rovida, A., Locati, M., Camassi, R., Lolli, B., and Gasperini, P.: The Italian earthquake catalogue CPTI15, *B. Earthq. Eng.*, 18, 2953–2984, <https://doi.org/10.1007/s10518-020-00818-y>, 2020.
- Rovida, A., Locati, M., Camassi, R., Lolli, B., Gasperini, P., and Antonucci, A.: Catalogo Parametrico dei Terremoti Italiani (CPTI15), versione 4.0, Istituto Nazionale di Geofisica e Vulcanologia (INGV) [data set], <https://doi.org/10.13127/CPTI/CPTI15.4>, 2022.
- Rovida, A., Locati, M., Antonucci, A., and Camassi, R.: The Italian Archive of Historical Earthquake Data, ASMI, *Earth Syst. Sci. Data*, 17, 3109–3124, <https://doi.org/10.5194/essd-17-3109-2025>, 2025.
- Sbarra, P., Burrato, P., Tosi, P., Vannoli, P., e Rubeis, V., and Valensise, G.: Inferring the depth of pre-instrumental earthquakes from macroseismic intensity data: a case-history from Northern Italy, *Sci. Rep.*, 9, 1–13, <https://doi.org/10.1038/s41598-019-51966-4>, 2019.
- Sbarra, P., Burrato, P., De Rubeis, V., Tosi, P., Valensise, G., Vallone, R., and Vannoli, P.: Inferring the depth and magnitude of pre-instrumental earthquakes from intensity attenuation curves, *Nat. Hazards Earth Syst. Sci.*, 23, 1007–1028, <https://doi.org/10.5194/nhess-23-1007-2023>, 2023.
- Scognamiglio, L., Tinti, E., and Quintiliani, M.: Time Domain Moment Tensor (TDMT), Istituto Nazionale di Geofisica e Vulcanologia (INGV) [data set], <https://doi.org/10.13127/TDMT>, 2006.
- Sgobba, S. and Pacor, F.: An application of the NonErgodic ground ShaKing (NESK) approach to an historical earthquake scenario: The case-study of the 1915 Fucino earthquake (central Italy), *Soil Dyn. Earth. Eng.*, 164, 107622, <https://doi.org/10.1016/j.soildyn.2022.107622>, 2023.
- Sibol, M. S., Bollinger, G. A., and Birch, J. B.: Estimation of magnitudes in central and eastern North America using intensity and felt area, *B. Seismol. Soc. Am.*, 77, 1635–1654, 1987.
- Sieberg, A.: Die Erdbeben, in: *Handbuch der Geophysik, Erdbeben*, Sect. V, edited by: Gutenberg, B., Gebrüder Bornträger, Berlin, 527–686, 1932.
- Sørensen, M. B., Stromeyer, D., and Grunthal, G.: Attenuation of Macroseismic Intensity: A New Relation for the Marmara Sea Region, Northwest Turkey, *B. Seismol. Soc. Am.*, 99, 538–553, <https://doi.org/10.1785/0120080299>, 2009.
- Tang, Y., Lam, N., Tsang, H.-H., and Lumantarna, E.: Use of Macroseismic Intensity Data to Validate a Regionally Adjustable Ground Motion Prediction Model, *Geosciences*, 9, 422, <https://doi.org/10.3390/geosciences9100422>, 2019.
- Tarquini, S., Isola, I., Favalli, M., Mazzarini, F., Bisson, M., Pareschi, M. T., and Boschi, E.: TINITALY/01: a new Triangular Irregular Network of Italy, *Ann. Geophys.-Italy*, 50, 407–425, <https://doi.org/10.4401/ag-4424>, 2007.
- Tarquini, S., Isola, I., Favalli, M., Battistini, A., and Dotta, G.: TINITALY, a digital elevation model of Italy with a 10 m cell size, Version 1.1, Istituto Nazionale di Geofisica e Vulcanologia (INGV) [data set], <https://doi.org/10.13127/tinitaly/1.1>, 2023.
- Tinti, E., Scognamiglio, L., Michelini, A., and Cocco, M.: Slip heterogeneity and directivity of the ML 6.0 2016 Amatrice earthquake estimated with rapid finite-fault inversion, *Geophys. Res. Lett.*, 43, 10745–10752, <https://doi.org/10.1002/2016GL071263>, 2016.
- Vannoli, P., Burrato, P., and Valensise, G.: The seismotectonics of the Po Plain (Northern Italy): tectonic diversity in a blind faulting domain, *Pure Appl. Geophys.*, 172, 1105–1142, <https://doi.org/10.1007/s00024-014-0873-0>, 2015.
- Viganò, A., Bressan, G., Ranalli, G., and Martin, S.: Focal mechanism inversion in the Giudicarie-Lessini seismotectonic region (Southern Alps, Italy): Insights on tectonic stress and strain, *Tectonophysics*, 460, 106–115, <https://doi.org/10.1016/j.tecto.2008.07.008>, 2008.
- Visini, F., De Nardis, R., Barbano, M. S., and Lavecchia, G.: Testing the seismogenic sources of the January 11th 1693 Sicilian earthquake (Io X/XI): insights from macroseismic field simulations, *Boll. Soc. Geol. Ital.*, 128, 147–156, 2009.
- Volatili, T., Gironelli, V., Luzi, L., Galli, P., Carafa, M. M. C., and Tondi, E.: Elusive seismogenic sources of historical earthquakes: insights from the  $M_w$  6.8, 1706 Maiella earthquake (central Italy), *Bull. Earthq. Eng.*, 23, 1279–1296, <https://doi.org/10.1007/s10518-025-02110-3>, 2025.
- Wells, D. L. and Coppersmith, K. J.: New empirical relationships among magnitude, rupture length, rupture width, rupture area,

- and surface displacement, *B. Seismol. Soc. Am.*, 84, 974–1002, 1994.
- Westaway, R., Gawthorpe, R., and Tozzi, M.: Seismological and field observations of the 1984 Lazio–Abruzzo earthquakes: implications for the active tectonics of Italy, *Geophys. J.*, 98, 489–514, 1989.
- Zampieri, D., Vannoli, P., and Burrato, P.: Geodynamic and seismotectonic model of a long-lived transverse structure: The Schio–Vicenza Fault System (NE Italy), *Solid Earth*, 12, 1967–1986, <https://doi.org/10.5194/se-12-1967-2021>, 2021.