

This discussion paper is/has been under review for the journal Natural Hazards and Earth System Sciences (NHESS). Please refer to the corresponding final paper in NHESS if available.

Modeling volcanic ash resuspension – application to the 14–18 October 2011 outbreak episode in Central Patagonia, Argentina

A. Folch¹, L. Mingari^{2,3,5}, M. S. Osores^{3,4,5}, and E. Collini^{2,5}

1,

NHESSD

1, 4565-4603, 2013

Modeling volcanic ash resuspension

A. Folch et al.

Title Page

Abstract Introduction

Conclusions References

Tables Figures

I ◀ ▶I

Full Screen / Esc

Back

Close

Printer-friendly Version

Interactive Discussion



¹Barcelona Supercomputing Center – Centro Nacional de Supercomputación (BSC-CNS), Edificio NEXUS I, 2a planta c/ Gran Capitán 2-4 (08034), Barcelona, Spain

²Servicio de Hidrografía Naval (SHN), Av. Montes de Oca 2124 (1270), Ciudad Autónoma de Buenos Aires, Argentina

³Consejo Nacional de Investigaciones Científicas y Técnicas (CONICET), Av. Rivadavia 1917 (1033), Ciudad Autónoma de Buenos Aires, Argentina

⁴Comisión Nacional de Actividades Espaciales (CONAE), Av. Paseo Colón 751, (1063) Ciudad Autónoma de Buenos Aires, Argentina

⁵Servicio Meteorológico Nacional (SMN), 25 de Mayo 658 (1002), Ciudad Autónoma de Buenos Aires, Argentina

Correspondence to: A. Folch (arnau.folch@bsc.es)

Published by Copernicus Publications on behalf of the European Geosciences Union.

NHESSD

Discussion Paper

Discussion Paper

Discussion Paper

Discussion Paper

1, 4565-4603, 2013

Modeling volcanic ash resuspension

A. Folch et al.

Title Page

Abstract Introduction

Conclusions References

Tables Figures

I ◀ ▶I

Full Screen / Esc

 \triangleright

Close

◂

Back

Printer-friendly Version



Volcanic fallout deposits from the June 2011 Cordón Caulle eruption in Central Patagonia were remobilized in several occasions months after their emplacement. In particular, during 14–18 October 2011, an intense outbreak episode generated huge volcanic clouds that were dispersed across Argentina, causing multiple impacts in the environment, affecting the air quality and disrupting airports. Fine ash particles in volcanic fallout deposits can be resuspended under favourable meteorological conditions, particularly during strong wind episodes in arid environments having low soil moisture and poor vegetation coverage. In opposition to eruption-formed ash clouds, modeling of resuspension-formed ash clouds has received little attention. In consequence, there are no emission schemes specially developed and calibrated for volcanic ash, and no operational product exists to model and forecast the formation and dispersal of resuspension ash clouds. Here we implement three dust emission schemes of increasing complexity in the FALL3D tephra dispersal model and use the 14-18 October 2011 outbreak episode as a model test case. We calibrate the emission schemes and validate the results of the coupled WRF-ARW/FALL3D modeling system using satellite imagery and measurements of visibility (a quantity related to total suspended particle concentration at surface) and particulate matter (PM₁₀) concentration at several meteorological and air quality stations sparse across Argentina and Uruguay. Our final goal is to test the capability of the modeling system to become, in the near future, an operational forecast product for volcanic ash resuspension events.

1 Introduction

Resuspension and dispersal of volcanic ash by wind is of concern to human health and environment. Micron-size ash particles suspended at low atmospheric levels deteriorate the quality of air and cause severe impacts on local population and animals, causing irritation of mucosae, chronic respiratory symptoms resulting from inhalation of ı

Paper

Discussion Paper

Discussion Paper

Discussion

NHESSD

1, 4565-4603, 2013

Modeling volcanic ash resuspension

A. Folch et al.

Title Page
Abstract Inte

Introduction

Conclusions

References

Tables

Figures

I∢

►I

4

•

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Figures Tables [◀ ▶| Close Back Full Screen / Esc

ash, and dispersion of toxic chemicals (e.g. Baxter, 1999). Other hazards include affectation to ground transportation systems and disruption of airports (e.g. Guffanti et al., 2009). All these impacts can occur far away from the original deposit region because, like dust clouds, resuspended ash clouds can be dispersed at large distances. The lift of ash and subsequent formation of clouds is enhanced under particular meteorological (strong winds and surface friction velocities) and ambient (low soil moisture, no vegetation) conditions, and can occur in both fresh and relic ash fallout deposits. For example, a combination adequate meteorological conditions during 20-21 September 2003 originated continuous resuspension of relic volcanic ash from the Katmai volcano and formation of ash clouds that were transported up to 230 km into the Gulf of Alaska, affecting operations at Kodiak airport (Hadley et al., 2004). Other examples include resuspension of ash from fresh deposits of Mount St. Helens in US (Hobbs et al., 1983), Soufriere Hills in Montserrat (Hincks et al., 2006), Mount Hudson in Southern Patagonia (Wilson et al., 2011), Eyjafjallajökull in Iceland (Thorsteinsson et al., 2012; Leadbetter et al., 2012), or Cordón Caulle in Central Patagonia, which is addressed in this paper.

Modeling of atmospheric dispersal and sedimentation of ash clouds from volcanic eruptions has been an active topic of research during the last two decades, and very specially in the aftermath of the major civil aviation outbreaks following the 2010 Eyjafjallajökull and the 2011 Cordón Caulle eruptions. Several Tephra Transport and Dispersal Models (TTDM) (e.g. Folch, 2012) run operationally at the Volcanic Ash Advisory Centers (VAACs) and other institutions for forecasting purposes, and the underlaying modeling strategies are being substantially reviewed and improved (Bonadonna et al., 2011). In contrast, modeling of resuspended ash clouds has received little attention. This is surprising because, even if potentially less hazardous, resuspension-formed clouds can also trigger substantial impacts (see Sect. 4). In fact, modeling of resuspended ash has been recognized as a research priority during a recent joint WMO-VAAC modeling workshop (NOAA, Washington DC, 5-9 November 2012). At present, no TTDM is used operationally to forecast ash resuspension events. Regarding mod-

NHESSD

1, 4565–4603, 2013

Modeling volcanic ash resuspension

A. Folch et al.

Title Page

Abstract Introduction

Conclusions References

Printer-friendly Version

eling of resuspended ash clouds, the examples in literature are very scarce. Barsotti et al. (2010) proposed a simple fit based on data from Hincks et al. (2006) to estimate resuspended PM₁₀ surface concentrations at various populated locations around Etna volcano. More recently, Leadbetter et al. (2012) modelled resuspension events from the 2010 Eyjafjallajökull deposits using the UK Met Office Lagrangian dispersion model NAME-III. Given the similarities between volcanic ash and mineral dust, Leadbetter et al. (2012) considered a simple dust emission scheme to compute the mass flux of resuspended ash depending on the wind friction velocity.

The objective of this paper is to test different dust emission schemes of increasing complexity for implementation in volcanic ash transport models. To this purpose, we implement three different schemes in the FALL3D model (Costa et al., 2006; Folch et al., 2009) and consider the Cordón Caulle 14–18 October 2011 outbreak episode as a test case. We use a meteorological station located at Buenos Aires (1380 km from the volcano) to calibrate the emission of ash. This is necessary because uncertainties exist regarding the source strength for different reasons, including that the emission schemes have been originally developed for mineral dust rather than for volcanic ash, or poor constrains on the properties and grain size distribution of ash particles in the deposit. Once calibrated, we compare the model results with satellite retrievals and particulate matter surface concentrations inferred from observations at different meteorological and air quality stations across Argentina. The final goal is to test the modeling strategy before its implementation as an operational forecast product at the Argentinean National Meteorological Service (SMN) and Buenos Aires VAAC.

2 Previous considerations on modeling volcanic ash resuspension

Modeling of volcanic ash resuspension requires the implementation of emission schemes in TTDMs. Emission schemes give the mass flux of resuspended (ash) particles depending on meteorological conditions, soil moisture, terrain roughness, and characteristics of the fallout deposit (size and density of particles, grain-size distribu-

NHESSD

1, 4565–4603, 2013

Modeling volcanic ash resuspension

A. Folch et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

[◀

►I

■
Back

Close

Full Screen / Esc

Printer-friendly Version



tion, deposit thickness). Typically, soil moisture is obtained from the Numerical Weather Prediction (NWP) model driving the TTDM (WRF-ARW in our case). This can introduce a considerable uncertainty because NWP models do not include updated information about recent fallout deposits, which can alter substantially moisture and roughness of the original soil. On the other hand, fallout deposits are heterogeneous, introducing a second source of uncertainty regarding granulometric properties. Heterogeneities in grain-size distribution and particle properties exist because the variation of settling velocity with particle size and density (causing strong granulometric variations along the dispersal axis), occurrence of different eruptive phases (e.g. variable eruption rates, column heights, degree of magma fragmentation, etc.), or transport under unsteady heterogeneous wind fields. Moreover, even if a fallout deposit is well characterized through dedicated field studies information is rarely available in a regular grid, but rather across transects or along the most accessible parts of the deposit (e.g. along roads). It follows that, from a modeling perspective and in practical terms, an option to obtain the granulometric characteristics at all deposit grid points is to run a preliminary simulation for the fallout using the total grain size distribution, typically reconstructed from field

3 Dust emission schemes

data.

Saltation impact represents the most effective mechanism for resuspension of smaller-size particles in soils (Shao et al., 1993). When the intensity of wind blowing across a granular soil exceeds a certain threshold, grain particles begin to saltate. Experiments with sand-sized particles show that the impact of saltating mid-size grains (larger than about 50 µm) when falling back to ground breaks the cohesive forces of smaller particles enhancing their suspension. For this reason, the emission rate (vertical flux of particles), defined as the mass emitted per unit of area and time, strongly depends on the horizontal (saltation) flux of larger particles. In recent years, various emission schemes for mineral dust have been proposed and implemented in atmospheric trans-

NHESSD

1, 4565–4603, 2013

Modeling volcanic ash resuspension

A. Folch et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

I₫

►I

■
Back

Close

Full Screen / Esc

Printer-friendly Version



3.1 Threshold friction velocity

The threshold friction velocity, defined as the wind friction velocity at which soil erosion initiates, depends on properties of soil particles and on surface conditions such as soil moisture and roughness. Soil moisture reinforces soil particle cohesion and therefore inhibits erosion and resuspension. The presence of rough elements at ground (e.g. non erodible rocks, vegetation, etc.) also decreases the emission rate of particles because the elements act as wind shelters and absorb part of the momentum of wind. A precise quantification of the friction velocity is challenging and requires of data on soil properties and meteorological conditions which are often unavailable on a local scale.

Simplest dust emission schemes assume a constant threshold friction velocity over the region of interest regardless of the particle size. For example, Leadbetter et al. (2012) modelled the resuspension of ash after the 2010 Eyjafjallajökull eruption in Iceland assuming a threshold friction velocity of $0.4\,\mathrm{m\,s^{-1}}$ for all particle diameters in the range $1-10\,\mu\mathrm{m}$ combined with a precipitation rate cut-off of $0.01\,\mathrm{mm\,h^{-1}}$ (the cut-off accounts for a critical soil moisture above which the emission of particles is assumed to be inhibited). However, the constant friction velocity approach can be inadequate over large areas because particle properties and soil characteristics are likely to vary substantially in space. For example, in the particular case of volcanic deposits, a decrease in the mean particle size is expected as the distance to the volcano increases. In order to account for heterogeneous particle and soil characteristics, the threshold friction velocity u_{*t} can be expressed at each point as (Shao, 2001):

$$u_{*t}(d, w, \lambda) = u_{*ts}(d) f_w(w) f_{\lambda}(\lambda)$$
 (1)

NHESSD

1, 4565-4603, 2013

Modeling volcanic ash resuspension

A. Folch et al.

Title Page

Discussion Paper

Discussion Paper

Discussion Paper

Abstract

Introduction

Conclusions

References

Tables

Figures

I∢

►I

•

•

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



where $u_{*\rm ts}(d)$ is the threshold friction velocity on a bare dry surface for particles of size d (for irregular particles d is assumed to be the equivalent particle diameter), and $f_w(w)$ and $f_\lambda(\lambda)$ are correction functions for soil moisture w and surface roughness λ respectively ($f_w(w) \ge 1$ and $f_\lambda(\lambda) \ge 1$). A number of experimental and theoretical studies have determined parameterizations for threshold friction velocities on bare dry surfaces. Marticorena and Bergametti (1995) fitted experimental data obtained in wind tunnels involving various particle densities (from 210 to 1135 kg m $^{-3}$) and diameters (from 12 to 1290 µm) (Iversen and White, 1982) and derived the following expression for $u_{*\rm ts}$ depending on particle size and density:

$$u_{*ts} = \begin{cases} \frac{0.129K}{(1.928Re^{0.092} - 1)^{0.5}} & 0.03 < Re \le 10\\ 0.129K(1 - 0.0858e^{-0.0617(Re - 10)}) & Re > 10 \end{cases}$$
 (2)

with $K = \sqrt{\frac{\rho_{\rm p}gd}{\rho_{\rm a}}} \left(1 + \frac{0.006}{\rho_{\rm p}gd^{2.5}}\right)$ and $Re = 1331 \times d^{1.56}$ (the lower bound of the fit correspons to particles of $\approx 10\,\mu{\rm m}$ in size). In the expressions above, $\rho_{\rm p}$ and $\rho_{\rm a}$ are particle and air densities (expressed in g cm⁻³), g is gravity (in cm s⁻²), d is the particle size (in cm), Re is the Reynolds number parameterized as a function of the particle size, and $u_{*\rm ts}$ is given in cm s⁻¹. In turn, Shao and Lu (2000) derived an expression for $u_{*\rm ts}$ considering spherical particles with a cohesion force proportional to particle size:

$$u_{*ts} = \sqrt{0.0123 \left(\frac{\rho_{p}gd}{\rho_{a}} + \frac{\gamma}{\rho_{a}d}\right)}$$
 (3)

where γ is a parameter ranging between 1.65×10^{-4} and 5×10^{-4} kg s⁻² (a value of 3×10^{-4} kg s⁻² is assumed here).

Using experimental data from literature, Fecan et al. (1999) parameterized the increase in the threshold friction velocity due to soil moisture in arid and semi-arid re-

NHESSD

1, 4565-4603, 2013

Modeling volcanic ash resuspension

A. Folch et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

14

►I

•

Back

Close

Full Screen / Esc

Printer-friendly Version



$$f_{w}(w) = \begin{cases} 1 & w_{g} \le w' \text{ (dry soil)} \\ \sqrt{1 + 1.21(w_{g} - w')^{0.68}} & w_{g} > w' \text{ (wet soil)} \end{cases}$$
 (4)

where w' is the maximum amount of absorbed water (depending on soil texture) and w_q is the gravimetric soil moisture, $w_{\rm q} = w \rho_{\rm w}/\rho_{\rm b}$ with $\rho_{\rm w}$ and $\rho_{\rm b}$ being the water and soil bulk densities respectively, and w is the soil moisture in % (given by the NWP model). The value of w' ranges from 0% for sand to \approx 30% for pure clay (Fecan et al., 1999). It is difficult to give a value of w' for volcanic fallout deposits because the amount of water absorbed strongly depends on porosity which, in turn, depends on variable factors controlling tephra formation (e.g. magma rehology, degree of fragmentation, amount of volatiles in magma, etc). In this study we assume that w' = 10%. Figure 1 shows the dependency of the threshold friction velocity u,t on particle size with and without soil moisture correction. Note that particles more easily suspended by saltation are in the range 30-200 µm.

On the other hand, several parameterizations have been proposed for the so-called drag partition coefficient, the inverse of $f_1(\lambda)$ (e.g. Marticorena and Bergametti, 1995), depending on the roughness length over a smooth surface and the aeolian roughness length. However, it is very difficult to assess these parameters in the case of ash fallout deposits. An obvious difficulty is that the deposition of ash modifies the underlying surface (to an extent that depends on the thickness of deposit) affecting any information embedded in the land modules of NWP models (e.g. roughness length). For this reason the influence of terrain roughness on the threshold friction velocity will not be considered in this study.

Horizontal (saltation) flux

The horizontal flux of saltating particles, i.e. the stream-wise flux of saltating particles integrated along the vertical, measures the "intensity" of saltation, which strongly

NHESSD

1, 4565–4603, 2013

Modeling volcanic ash resuspension

A. Folch et al.

Title Page

Conclusions

Reference

Introduction

Tables

Abstract

Figures

Back

Close

Full Screen / Esc

Printer-friendly Version



$$F_{H}(d_{s}) = \begin{cases} 0 & u_{*} < u_{*t}(d_{s}) \\ c_{o} \frac{\rho_{a} u_{*}^{3}}{g} \left(1 - \frac{u_{*t}^{2}(d_{s})}{u_{*}^{2}} \right) & u_{*} \ge u_{*t}(d_{s}) \end{cases}$$
 (5)

where $F_{\rm H}$ is the horizontal (saltation) flux (units of kgm⁻¹ s⁻¹) of saltating particles of size $d_{\rm s}$, and $c_{\rm o}$ is an empirical dimensionless constant close to 1. A similar expression was proposed by Marticorena and Bergametti (1995) and Marticorena et al. (1997a) after the seminal work of White (1979):

$$F_{H}(d_{S}) = \begin{cases} 0 & u_{*} < u_{*t}(d_{S}) \\ c_{W} \frac{\rho_{a} u_{*}^{3}}{g} \left(1 + \frac{u_{*t}(d_{S})}{u_{*}}\right) \left(1 - \frac{u_{*t}^{2}(d_{S})}{u_{*}^{2}}\right) & u_{*} \ge u_{*t}(d_{S}) \end{cases}$$
(6)

with $c_w = 2.61$ according to the original wind tunnel experiments (White, 1979) and $c_w \approx 1$ according to successive corrections (Marticorena et al., 1997a).

3.3 Vertical flux (emission rate)

Simplest dust emission parameterizations depend only on meteorological conditions (typically on a power of the friction velocity). For example, Westphal et al. (1987) measured the vertical flux of aerosol dust particles ($< 10 \, \mu m$ radius) from sandy, loamy, and clay soils depending on the friction velocity and obtained the following least square fit:

$$F_{V} = \begin{cases} 0 & u_{*} < u_{*t} \\ 10^{-5} u_{*}^{4} & u_{*} \ge u_{*t} \end{cases}$$
 (7)

where F_V is the vertical flux (in kg m⁻² s⁻¹), occurring only above a (constant) threshold friction velocity of $u_{*t} = 0.3 \,\mathrm{m\,s}^{-1}$ in the particular experiment of Westphal et al. (1987).

NHESSD

1, 4565-4603, 2013

Modeling volcanic ash resuspension

A. Folch et al.

Title Page

Abstract Introduction

Conclusions References

Tables Figures

I₫

►I

■
Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



scussion Pa

A slightly more sophisticated approach consists on modeling the emission rate as a function of the difference between the friction velocity and the threshold friction velocity. This embeds all the information on soil properties within the threshold friction velocity and allows to compute fluxes depending on particle size. For example, from the parametrization in Marticorena et al. (1997b):

$$F_{V}(d) = \begin{cases} 0 & u_{*} < u_{*t}(d) \\ \frac{K\rho_{a}u_{*}}{q} \left(u_{*}^{2} - u_{*t}^{2}(d)\right) & u_{*} \ge u_{*t}(d) \end{cases}$$
(8)

where K is a soil texture coefficient equal to $K = 5.4 \times 10^{-4} \text{m}^{-1}$ from the experiments of Gillette et al. (1997). This parameterization has been used, among others, by Draxler et al. (2001) to simulate PM_{10} concentrations from dust storms using the HYSPLIT model.

Finally, more sophisticated emission schemes consider particle-particle interaction by saltation bombardment and, in some cases, by aggregates disintegration (e.g. Shao, 2001). Shao et al. (1993) considered that the vertical flux (emission rate) of particles of size d caused by the saltation bombardment of particles of size d_s ($d_s \ge d$) is proportional to the horizontal flux of saltating particles:

$$F_{V}(d, d_{s}) = \frac{\alpha(d, d_{s})}{u_{st}^{2}(d)} F_{H}(d_{s})$$
(9)

where α (units of m s⁻²) is a coefficient of blasting efficiency determined experimentally (Shao and Leslie, 1997; Shao, 2001):

$$\alpha(d, d_{s}) = (0.6\log(d_{s}) + 1.6)\exp(-140d)$$
(10)

iscussion

.

NHESSD

1, 4565–4603, 2013

Modeling volcanic ash resuspension

A. Folch et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

▶I

4

•

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



$$F_{V}(d) = \sum_{d_{c}=d_{max}}^{d_{s}=d_{max}} \frac{\alpha(d, d_{s})}{u_{*t}^{2}(d)} p(d_{s}) F_{H}(d_{s})$$
 (11)

where d_{max} is the maximum considered size (typically few hundreds of μ m). Note that, when $u_* \gg u_{*t}$, the vertical flux $F_V(d)$ becomes proportional to u_*^3 in both parameterizations (Eqs. 8 and 11) (with F_H given by either Eqs. 5 or 6).

3.4 Tested emission schemes

In this study we test three different emission schemes (of increasing sophistication) for the case of volcanic ash:

- Emission scheme 1, hereafter referred as the WE scheme. Consists on computing the emission rate using Eq. (7) and a threshold friction velocity u_{*t} independent of particle size (Westphal et al., 1987).
- Emission scheme 2, hereafter referred as the MB scheme. Consists on computing the emission rate using Eq. (8) and the threshold friction velocity $u_{*t}(d)$ using Eq. (2) (Marticorena and Bergametti, 1995; Marticorena et al., 1997a).
- Emission scheme 3, hereafter referred as the SH scheme. Consists on computing the emission rate using Eqs. (11) and (5) and the threshold friction velocity $u_{*t}(d)$ using Eq. (3) (Shao et al., 1993; Shao and Leslie, 1997; Shao and Lu, 2000).

Given that these schemes have been developed theoretically and calibrated experimentally for mineral dust rather than for volcanic ash, we multiply the emission rates by a correction factor ϕ that will be determined comparing model with observations, in our case form the Cordón Caulle 14–18 October 2011 outbreak episode.

1

NHESSD

1, 4565–4603, 2013

Modeling volcanic ash resuspension

A. Folch et al.

Title Page

Abstract Introduction

Conclusions

References

Tables

Figures

I∢

►I

•

Back

Discussion Paper

Discussion

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



The June 2011 eruption from Puyehue-Cordón Caulle Volcanic Complex (CCVC) in Chile blanketed with volcanic ash a vast area of the Argentinean Central Patagonia (Collini et al., 2013). Recurrent ash resuspension events occurred during the following months due to the strong (≈ 100 km h⁻¹) westerly and south-westerly winds that typically blow over Patagonia during the austral spring. The small villages sparse across the Patagonian steppe (e.g. Ing. Jacobacci in the Río Negro province, see Fig. 2) were highly affected by this phenomenon which hindered ordinary activities and forced inhabitants to remain indoors during the strongest wind episodes (Wilson et al., 2012).

By mid-October 2011, a particularly strong resuspension episode occurred during the passage of a south-western frontal system crossing northern Patagonia with surface wind speeds of 65–85 km h⁻¹ and maximum gusts of about 95 km h⁻¹. As a result, a huge ash cloud reaching the 850 hPa atmospheric level (1.5 km elevation roughly) was formed and dispersed rapidly east-northeast across Argentina (G. O. Damiani, personal communication, 2011). Impacts occurred at a national level. Main routes in northern Patagonia (e.g. the famous Route 40 linking Bariloche city with the Neuguén province) were closed during 15-16 October due to very low visibility and after the occurrence of accidents. This disruption hardly harmed the transportation of persons and goods in the southern part of the country. During and after 15 October afternoon, the ash cloud reached the provinces of Río Negro, La Pampa, and west of Buenos Aires. On 16 October early morning, a dense ash cloud was clearly visible over the sky of Ciudad Autónoma de Buenos Aires (CABA), at nearly 1375 km from CCVC, and a perceptible ash layer was deposited at ground, blanketing the city. The air quality stations of the Government of CABA (GCBA) registered the ash cloud from its arrival and measured a daily-averaged PM₁₀ level of 252 µg m⁻³. This largely exceeds the EPA NAAQS (National Ambient Air Quality Standard) as well as the national legislation standard (law 1356-GCBA) limit of 150 µg m⁻³ PM₁₀ concentration for 24 h exposure. For the first time since the June 2011 CCVC eruption, the national authorities

NHESSD

Paper

Discussion Paper

Discussion Paper

Discussion

1, 4565-4603, 2013

Modeling volcanic ash resuspension

A. Folch et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

I∢

▶I

4

•

Back

Close

Full Screen / Esc

Printer-friendly Version



Discussion Paper

issued warnings regarding transportation in the Buenos Aires province due to the low visibility owing to the presence of suspended ash at low atmospheric levels. Around midday, flights from Aeroparque Jorge Newbery and Ezeiza international airports were suspended, resulting in the cancellation of 146 flights only on Sunday 16th. The morning after, some scheduled flights began to depart after the cleaning of platforms and runaways but, nevertheless, the main commercial airlines did not resume their operations until Monday 17th afternoon. During this day, the ash cloud covered the south of Uruguay disrupting the Montevideo international airport (40 cancelled flights). Flight disruptions affected also the Argentinean airports of Córdoba, Mendoza and San Luis until 18 October afternoon because a branch of the ash cloud moved towards these inner provinces making the sky almost invisible.

5 Modeling strategy

We modelled the 14–18 October 2011 Cordón Caulle resuspension event using the FALL3D dispersal model (Costa et al., 2006; Folch et al., 2009) coupled off-line with the Weather Research and Forecasting (WRF-ARW) meteorological model (Skamarock et al., 2008). FALL3D uses 4-D meteorological fields furnished off-line and volcanological inputs to produce time-dependent variables like airborne ash concentration, ash cloud column load, or ground deposit thickness among others. The new version of the code (FALL3D-7.0) includes new capabilities to deal with a "continuum" of sources over a region, as opposed to a single point source or a set of vertical point sources typically considered for eruption columns. As already mentioned, our modeling strategy builds upon a preliminary eruption simulation run to characterize the deposit (extent, thickness and granulometry at each point) followed by the simulations of resuspension.

NHESSD

1, 4565–4603, 2013

Modeling volcanic ash resuspension

A. Folch et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

I

►I

•

•

Close

Back

Full Screen / Esc

Printer-friendly Version



As a starting point, we ran the WRF-ARF/FALL3D modeling system for the period 4-20 June 2011, during which most deposition of tephra from Cordón Caulle eruption occurred. We considered a Gaussian Total Grain Size Distribution (TGSD) discretized in 10 bins ranging from -1Φ (2 mm) to 8Φ (4 µm) and a linear dependency of particle density with diameter (end-member density values of 1000 and 2200 kg m⁻³). Note that the largest particles can not be transported substantially by resuspension but, nonetheless, we considered them because play a key role in the SH emission scheme (see Eq. 11). FALL3D-7.0 can handle ash aggregation phenomena but not particle desegregation, which typically occurs when (fragile) aggregates break when grounding. For this reason, and because our primary interest is to model subsequent resuspension, particle aggregation was not considered for the deposit simulation. This introduces some uncertainty because the real amount of fine particles in the proximal (originally fallen as aggregates and then desaggregated) can be larger than that predicted by the model. Eruption column heights in the model oscillate daily from around 10 km down to less than 3 km by 20 June 2011 (Collini et al., 2013). Figure 3 shows the modelled deposit that we consider as the potential source area for resuspension. Note that, as observed in the field, the main deposition lobe is directed SE.

5.2 Meteorological driver and emission schemes

We used the modelled deposit to initialize the resuspension simulations using a WRF-ARW run from 14 to 18 October 2011 as the meteorological driver. This WRF-ARW run uses 0.5° Global Forecast System (GFS) analysis and forecasts supplied by the National Centers for Environmental Prediction (NCEP) of the National Oceanic and Atmospheric Administration (NOAA) as initial and boundary conditions. The WRF-ARW model was configured with an horizontal resolution of 12 km, 38 vertical levels, the Ferrier scheme for microphysics, the Rapid Radiative Transfer Model (RRTM) for long wave radiation, the Dudhia model for short wave radiation, the NOAH Land surface

NHESSD

Discussion Paper

Discussion Paper

Discussion Pape

1, 4565-4603, 2013

Modeling volcanic ash resuspension

A. Folch et al.

Title Page

Abstract Introduction

Conclusions References

Tables Figures

Back Close

Full Screen / Esc

Interactive Discussion

Printer-friendly Version



Back

Interactive Discussion



model, the Betts–Miller–Janjic scheme for convection, and the Mellor–Yamada–Janjic for the Planetary Boundary Layer. The computational domain on the inner WRF-ARW nest spanned between 21° S–48° S; 30° W–90° W. For illustrative purposes, Fig. 4 compares the WRF-ARW predicted wind velocities (first model layer, 10 m above ground) with measurements at three different stations located at Bariloche (M1, 108 km from CCVC), Neuquén (M2, 386 km from CCVC) and Buenos Aires (Aeroparque airport, M13, 1379 km from CCVC). Note how two different velocity peaks, responsible for two resuspension events, are clearly visible at M1 and M2. The predictions of WRF-ARW at station M13, far from the ash emission region, show also a good agreement with measurements except during 16 October afternoon, where differences of up to 4 m s⁻¹ exist. This discrepancy might be due to the Río de la Plata breeze effects not well solved by the NWP model.

Figure 5 shows the emission rate integrated over the deposit as predicted by the three emission schemes along the 14–18 October 2011 period. Two major resuspension events are evident, the first starting on 14 October at around 18:00 UTC and the second, more intense, starting 24 h later. Note from Fig. 5a how these events coincide with values of $\langle u_* \rangle$ (spatially averaged u_*) above $0.4\,\mathrm{m\,s^{-1}}$ approximately. In the MB and SH schemes, u_{*t} results from emission model parameterizations, whereas in the WE scheme this quantity is an input to be defined (see Eq. 7). Based on this previous analysis we set $u_{*ts} = 0.25$ for the WE scheme that, once corrected for moisture, results in values of $u_{*t} \approx 0.4\,\mathrm{m\,s^{-1}}$. This agrees well with the value of $0.4\,\mathrm{m\,s^{-1}}$ used by Leadbetter et al. (2012) for Eyjafjallajökull in Iceland.

5.3 Ash transport modeling

For the resuspension runs, we set a FALL3D-7.0 domain spanning between 30° S–46° S and 49° W–73° W with an horizontal model resolution of 0.1° and 14 vertical levels ranging from 10 to 4000 m (model layers increase gradually in order to have better resolution within the atmospheric boundary layer, where the ash cloud was mostly confined). The ash emission schemes in FALL3D-7.0 assume that the ash is released

NHESSD

1, 4565–4603, 2013

Modeling volcanic ash resuspension

A. Folch et al.

Title Page

Abstract Introduction

Conclusions References

Tables Figures

l∢ ⊳l

→

Close

Full Screen / Esc

Discussion

Back

Interactive Discussion



homogeneously along the vertical up to a certain height fixed by the user. Here we assume a maximum injection height of 250 m. Particle granulometry changes at each deposit grid point, as determined by interpolating results of the preliminary eruption simulation. For resuspension, we consider the same 10 particle bins but fixing the maximum particle size that can be resuspended to 250 µm. This allows 7 particle classes to be resuspended and transported. Larger particles are kept because influence the emission rate in the SH scheme, but we assume that these can not travel significant distances. Finally, in order to perform the evaluation of the kinematic turbulent fluxes, the diagonal components of the eddy diffusivity tensor in FALL3D have been parametrized using the similarity theory option for the vertical component and the CMAQ model option for the horizontal diffusion (Byun and Schere, 2006).

Model calibration 5.4

Our first quantitative comparisons indicated that, in most cases, the simulations overestimated observed surface particle concentrations. There might be multiple reasons for this, including a poor characterization of the deposit, the non-consideration of the surface roughness in the computation of the threshold friction velocity, overestimation of the friction velocity by WRF-ARW, the inaccuracy of dust emission schemes when applied to volcanic ash, etc. In order to calibrate the emission rates we considered observations made at the M13 meteorological station (see Table 1), located in CABA. We determined the correction factor ϕ for each emission scheme fitting simulation results to observations on this particular station. Results are shown in Fig. 6 and Table 2. Note that $\phi > 1$ for the SH scheme and $\phi < 1$ for WE and MB, meaning that the original SH formulation underestimated source strength whereas WE and MB overestimated. Although the factor ϕ was specifically determined from measurements at CABA, the value found was consistent with observations in the rest of meteorological stations, except for those in the deposit region (see Sect. 6.2).

NHESSD

1, 4565–4603, 2013

Modeling volcanic ash resuspension

A. Folch et al.

Title Page

Abstract Introduction

Conclusions References

Figures Tables

[◀ **▶**

Close

Full Screen / Esc

Comparison with space-based measurements

In order to have a first qualitative verification of model results we used images from the Moderate Resolution Imaging Spectroradiometer (MODIS) sensor on board of AQUA/TERRA satellites using the Brightness Temperature Difference (BTD). The BTD algorithm, also known as the split window technique (Prata, 1989), computes the difference of brightness temperatures (derived from the inverse Plank's function) between the 10.7 µm and 12 µm frequency bands. Given the reverse absorption of volcanic ash particles (negative BTD), the technique allows discriminating between meteorological and volcanic ash clouds. The efficiency of detection increases when the ash cloud is not opaque, has low water/ice contents, and contains small particles (Prata et al., 2001). Additionally, we considered also Volcanic Ash Advisories (VAAs) issued by the Buenos Aires VAAC. These are text messages that identify the observed and forecasted positions of ash clouds (ICAO, 2011). In particular, we used Volcanic Ash Graphics (VAGs), a graphical depiction of the VAAs showing the edges of the polygons encompassing the ash cloud location. VAAs and VAGs from the Buenos Aires VAAC were based on observations from GOES-12 and NOAA-19 satellites (METAR and airline pilot reports were considered in some cases).

Figure 7 compares remote sensing observations and simulation results. The VAG polygons have been superimposed to the FALL3D predicted column mass at the appropriate times for both MB and SH schemes. Results for the WE emission scheme are very similar and are not shown. The model predicts well the formation and evolution of the cloud and show how the ash located in northern Patagonia is transported towards east and north-east reaching the coastal areas few hours after the passage of the frontal system. A large portion of central Argentina, Río de La Plata region and southern Uruquay are affected. Note from Fig. 7a how the emission of ash starts shortly after the simulation begins, as expected from our previous analysis (see Fig. 5). The larger area of the VAG polygon in Fig. 7a is explained by the occurrence of a previous

NHESSD

1, 4565–4603, 2013

Modeling volcanic ash resuspension

A. Folch et al.

Title Page

Conclusions

References

Introduction

Tables

Abstract

Figures

[■

▶

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



4582

Discussion Paper

Discussion Paper

Discussion Pape

Back



In general, we found a good qualitative agreement between model results and BTD images. The results of the different schemes are similar, although the SH scheme gives higher concentrations close to source region. It is interesting to note that, when the simulated cloud passes over the northeast of the Buenos Aires province (between 16 October at 19:00 UTC and 17 October at 01:00 UTC), the cloud is shifted ahead of the observed polygon (see Fig. 7d and e). These differences in cloud arrival times can be explained if one considers that WRF-ARW over predicts wind velocities during this period (see Fig. 4c). Finally, it is worth noting that the little triangle observed in deposit region does not correspond to any resuspension phenomenon but reflects little eruptive events from CCVC remaining at that time.

6.2 Comparison with ground-based measurements

In this section we compare ground measurements of total suspended particulate matter concentration and PM_{10} (denoted by C_{TSP} and $C_{PM_{10}}$, respectively) with the FALL3D values at the first model layer (10 m height). To this purpose, we decoded information of visibility, wind speed and direction, and present and past weather phenomena from the meteorological message SYNOP (surface synoptic observations) and METAR (Meteorological Aerodrome Report) issued by the stations of the Argentinean National Meteorological Service network and the National Direction of Meteorology of Uruguay (see Fig. 3 and Table 1). The SYNOP is a numerical code (called FM-12 by WMO) used for reporting weather observations made by manned and automated weather stations. We used the visibility observations to yield an estimation of the TSP (Total Suspended Particle) concentration using the following empirical relationship (Shao et al., 2003):

$$C_{\text{TSP}} = \begin{cases} 3802.29D^{-0.84} & D < 3.5 \,\text{km} \\ \exp(-0.11D + 7.62) & D \ge 3.5 \,\text{km} \end{cases}$$
 (12)

-

NHESSD

1, 4565-4603, 2013

Modeling volcanic ash resuspension

A. Folch et al.

Title Page

T Abstract

Introduction

Conclusions

References

Tables

Figures

I

►I

•

Back

Discussion Paper

Discussion Pape

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



where C_{TSP} is the TSP concentration (in μgm^{-3}) and D is the visibility in km. Besides this data, we also considered measurements of respirable suspended particulate matter (PM₁₀) from the EPA Air Quality Monitoring Stations Network (GCBA, 2013). This network consist of three stations located at the northeast (C1), downtown (C2), and southwest (C3) of CABA. The instruments installed at these stations are Thermo Model FH62 C14, which continuously measure the mass concentration of particulate utilizing a beta rays attenuation technique. The instruments meet US and International Particulate Monitoring Regulations and are US EPA certified to stick to the international air quality regulations. In the measurements, we subtracted a background value of $32\,\mu\text{gm}^{-3}$, corresponding to the averaged anthropogenic contribution recorded in October 2010, in order to estimate to contribution owing to the presence of ash. Additionally, we tried also other sources of data like LIDAR from CEILAP at Villa Martelli, province of Buenos Aires, and raw and processed data from the AERONET network but, because of the presence of clouds, we did not have good-quality data during the considered period.

Figure 8 shows a comparison between simulated $C_{\rm TSP}$ using the three different schemes and observations at 15 different stations. As observed from the figure, best quantitative agreement is obtained for stations registering the cloud arrival on 16 October (e.g. M4, M6 or M7). In contrast, for far-field stations (e.g. M10 or M17) where the plume arrived on 17 October, the model predicts correctly the arrival time but underestimates the observed values by a factor of 3–5. Conversely, in the stations close to the emission points (e.g. M1 at Bariloche or M2 at Neuquén, not shown) all the emission schemes overestimate substantially.

In order to evaluate if the cloud arrival times were correctly predicted by the model, we defined a characteristic event time as the time when C_{TSP} reaches half of its maximum value. The comparison between simulated and observed characteristic event times shows good agreement, as observed in Fig. 9 for the WE scheme. Because the arrival time is mainly controlled by the meteorological model, characteristic event times given by the other two schemes were similar.

NHESSD

1, 4565–4603, 2013

Modeling volcanic ash resuspension

A. Folch et al.

Title Page

Abstract Introduction

Conclusions References

Tables

Figures

I∢

►I

Back

Close

Full Screen / Esc

Back

Printer-friendly Version

Interactive Discussion



Figure 10 compares modelled and observed maxima of C_{TSP} (associated with the plume arrival at each station). Although some scattering exists, differences are in general within a factor of 2 (dashed line in Fig. 10). In order to quantify the performance of the different schemes, we define the residual of the ith observation as the difference between modelled and observed values of C_{TSP} , i.e. $e_i = C_{mi} - C_{oi}$. The mean $(\langle e_i \rangle)$ and root-mean-square $(\sqrt{\langle e_i^2 \rangle})$ of residuals are reported in Table 2 (note that $\langle e_i \rangle \neq 0$ is an indicator of model bias and $\langle e_i^2 \rangle$ quantifies the error). As shown in Fig. 10, C_{TSP} at points where the plume arrived on 17 October (triangles) are clearly underestimated by the model, contributing with negative residuals. From values in Table 2 we conclude that, for this particular episode, the WE and MB schemes give similar results, with WE showing the lower bias and error. In contrast, the SH scheme tends to overestimate C_{TSP} (higher mean residuals) and shows larger differences with observations. Additionally, and regarding PM₁₀ concentration, we observed that MB and SH widely underestimate measurements in CABA (stations C1, C2, and C3) whereas WE gives the right order of magnitude. These low values can be attributed to several factors but, in our opinion, are explained by an incorrect prediction of the threshold friction velocity, which in the MB and SH schemes depends on soil moisture provided by WRF-ARW. In fact, we checked that using the MB scheme without soil moisture correction gives much better results for PM₁₀ concentration in CABA (see Fig. 11).

Conclusions

We have implemented and tested three different dust emission schemes in the FALL3D-7.0 tephra dispersal model in order to simulate the 14-18 October 2011 ash resuspension events in Central Patagonia. The modeling strategy combines a preliminary simulation to characterize the fallout deposit followed by the simulations of resuspension using FALL3D driven off-line by WRF-ARW. Even if not specifically developed for volcanic ash, all the emission schemes give very promising results when comparNHESSD

1, 4565–4603, 2013

Modeling volcanic ash resuspension

A. Folch et al.

Title Page

Abstract Introduction

Conclusions Reference

> **Figures Tables**

[■

The three schemes present a similar qualitative behavior, but differ in the amount of emitted ash. Total resuspended mass is 8.4×10^{10} kg for SH; 7.7×10^{10} kg for MB and 3.3×10^{10} kg for WE. For comparison, Collini et al. (2013) estimated a total amount of erupted ash mass of $1-5 \times 10^{12}$ kg during the period 4–19 June 2011. This amount of mass can give an idea of the hazards and disturbances caused by resuspended ash transported during the period considered in this study.

Remarkably, we find better agreement with observations using the simplest emission scheme (WE), although MB and SH showed also a good agreement. This result highlights the role of the sensitivity of more complex emission schemes to input parameters. In fact, relevant magnitudes for the source strength in the MB and SH schemes, such as granulometry or soil moisture, were obtained from modeling and are subject to large uncertainties. On the other hand, the simplest WE scheme seems more attractive from an operational point of view given its versatility. For example, an operator could easily set u_{*ts} according to a specific situation in order to match partial observations with model results. Our next research steps are to explore how to better constrain inputs for more sophisticated schemes and to investigate how to improve model accuracy in the near-field areas.

Acknowledgements. This work has been partially funded by the Spanish Research Project "Atmospheric transport models and massive parallelism: applications to volcanic ash clouds and dispersion of pollutants at an urban micro-scale" (ATMOST, CGL2009-10244) and the CYTED thematic network "Red Iberoamericana para el monitoreo y modelización de cenizas y aerosoles volcánicos y su impacto en infraestructuras y calidad del aire" (CYTED, 410RT0392). The WRF/ARW-FALL3D modelling system ran in a server installed at the SMN with funds from the Argentinean project PIDDEF 41/10: "Pronóstico del tiempo para estudios de vulnerabilidad e impacto socioeconómico", which also supported partly this research and L. Mingari fellowship. We thank CONAE for postprocessing the MODIS images with the BTD algorithm. We also thank María Inés de Casas from GCBA for providing PM₁₀ data and M. Suaya from SMN for guidance on observational data. The SMN provided the SYNOP and METAR datasets and

NHESSD

1, 4565-4603, 2013

Modeling volcanic ash resuspension

A. Folch et al.

Title Page

Abstract Introduction

Conclusions References

Tables Figures

I ◀ ▶I

Discussion Paper

Printer-friendly Version

Full Screen / Esc

Back

Close

Interactive Discussion



Barsotti, S., Andronico, D., Neri, A., Carlo, P. D., Baxter, P. J., Aspinall, W. P., and Hincks, T.: Quantitative assessment of volcanic ash hazards for health and infrastructure at Mt. Etna (Italy) by numerical simulation, J. Volcanol. Geoth. Res., 192, 85–96, 2010. 4569

Baxter, P. J.: Impacts of eruptions on human health, in: Encyclopaedia of Volcanoes, edited by: Siggurdson, H., Academic Press, New York, 1035–1043, 1999. 4568

Bonadonna, C., Folch, A., Loughlin, S., and Puempel, H.: Future developments in modelling and monitoring of volcanic ash clouds: outcomes from the first IAVCEI-WMO workshop on Ash Dispersal Forecast and Civil Aviation, (Geneva, Switzerland, 18–20 October 2010), Short Scientific Communication, B. Volcanol., 74, 1–10, doi:10.1007/s00445-011-0508-6, 2011. 4568

Byun, D. and Schere, K. L.: Review of the governing equations, computational algorithms, and other components of the Models-3 Community Multiscale Air Quality (CMAQ) modeling system, Appl. Mech. Rev., 59, 51–77, 2006. 4581

Collini, E., Osores, M. S., Folch, A., Viramonte, J., Villarosa, G., and Salmuni, G.: Volcanic ash forecast during the June 2011 Cordón Caulle eruption, Nat. Hazards, 66, 389–412, doi:10.1007/s11069-012-0492-y, 2013. 4577, 4579, 4586

Costa, A., Macedonio, G., and Folch, A.: A three-dimensional Eulerian model for transport and deposition of volcanic ashes, Earth Planet. Sc. Lett., 241, 634–647, 2006. 4569, 4578

Darmenova, K., Sokolik, I. N., Shao, Y., Marticorena, B., and Bergametti, G.: Development of a physically based dust emission module within the Weather Research and Forecasting (WRF) model: assessment of dust emission parameterizations and input parameters for source regions in Central and East Asia, J. Geophys. Res., 114, D14201, doi:10.1029/2008JD011236, 2009. 4571

Draxler, R. R., Gillette, D. A., Kirkpatrick, J. S., and Heller, J.: Estimating PM₁₀ air concentrations from dust storms in Iraq, Kuwait, and Saudi Arabia, Atmos. Environ., 35, 4315–4330. 2001. 4575

Discussion

Paper

NHESSD

1, 4565–4603, 2013

Modeling volcanic ash resuspension

A. Folch et al.

Title Page

Discussion Paper

Discussion Paper

Discussion Paper

Conclusions

Tables

References Figures

Introduction

I₫

Abstract

▶1

Back

Close

Full Screen / Esc

Printer-friendly Version

Interactive Discussion



Discussion

Interactive Discussion



GCBA: Red de estaciones EPA de monitoreo atmosférico, www.buenosaires.gob.ar/areas/ med_ambiente/apra/calidad_amb (last accessed February 2013), 2013. 4584

Fécan, F., Marticorena, B., and Bergametti, G.: Parametrization of the increase of the aeolian erosion threshold wind friction velocity due to soil moisture for arid and semi-arid areas, Ann. Geophys., 17, 149-157, doi:10.1007/s00585-999-0149-7, 1999, 4572, 4573

Folch, A.: A review of tephra transport and dispersal models: evolution, current status, and future perspectives, J. Volcanol. Geoth. Res., 235-236, 96-15, 2012. 4568

Folch, A., Costa, A., and Macedonio, G.: FALL3D: a computational model for transport and deposition of volcanic ash, Comput. Geosci., 35, 1334-1342, 2009. 4569, 4578

Gillette, D. A., Fryrear, D. W., Gill, T. E., Ley, T., Cahill, T. A., and Gearhart, E. A.: Relation of vertical flux of PM₁₀ to total aeolian horizontal mass flux at Owens Lake, J. Geophys. Res., 102, 26009-26015, 1997, 4575

Guffanti, M., Mayberry, G. C., Casadevall, T. J., and Wunderman, R.: Volcanic hazards to airports, Nat. Hazards, 51, 287-302, 2009, 4568

Hadley, D., Hufford, G. L., and Simpson, J. J.; Resuspension of relic volcanic ash and dust from Katmai: still an aviation hazard, Weather Forecast., 19, 829-840, 2004. 4568

Hincks, T. K., Aspinall, W. P., Baxter, P. J., Searl, A., Sparks, R. S. J., and Woo, G.: Long term exposure to respirable volcanic ash on Montserrat: a time series simulation, B. Volcanol., 68, 266–284. doi:10.1007/s00445-005-0006-9, 2006. 4568, 4569

Hobbs, P. V., Hegg, D. A., and Radke, L. F.: Resuspension of volcanic ash from Mount St. Helens, J. Geophys. Res., 88, 3919-3921, 1983. 4568

Iversen, J. D. and White, B. R.: Saltation threshold on Earth, Mars, and Venus, Sedimentology, 29, 111–119, 1982, 4572

Kang, J.-Y., Yoon, S.-C., Shao, Y., and Kim, S.-W.: Comparison of vertical dust flux by implementing three dust emission schemes in WRF/Chem, J. Geophys. Res., 116, D09202, doi:10.1029/2010JD014649, 2011, 4571

Leadbetter, S. J., Hort, M. C., von Löwis, S., Weber, K., and Witham, C. S.: Modeling the resuspension of ash deposited during the eruption of Eyjafjallajökull in spring 2010, J. Geophys. Res., 117, D00U10, doi:10.1029/2011JD016802, 2012. 4568, 4569, 4571, 4580

Marticorena, B. and Bergametti, G.: Modeling the atmospheric dust cycle: 1. Design of a soil-derived dust emission scheme, J. Geophys. Res., 100, 16415-16430, doi:10.1029/95JD00690, 1995. 4572, 4573, 4574, 4576, 4593

NHESSD

1, 4565–4603, 2013

Modeling volcanic ash resuspension

A. Folch et al.

Title Page

Abstract Introduction

Conclusions References

> **Figures** Tables

[■ **▶**

Close

Back

Paper

- NHESSD
 - 1, 4565-4603, 2013
- Modeling volcanic ash resuspension
 - A. Folch et al.
- Title Page

 Abstract Introduction

 Conclusions References

 Tables Figures

 I ◀ ▶I

 Back Close

 Full Screen / Esc
 - Printer-friendly Version
 - Interactive Discussion
 - © **()**

- Marticorena, B., Bergametti, G., Aumont, B., Callot, Y., N'Doumé, C., and Legrand, M.: Modeling the atmospheric dust cycle 2. Simulation of Saharan dust sources, J. Geophys. Res., 102, 4387–4404, doi:10.1029/96JD02964, 1997a. 4574, 4576
- Marticorena, B., Bergametti, G., Gillette, D., and Belnap, J.: Factors controlling threshold friction velocity in semiarid and arid areas of the United States, J. Geophys. Res., 102, 23277–23287, 1997b. 4575
- ICAO: Manual of Aeronautical Meteorological Practice (Doc 8896), 9th Edn., 2011. 4582 Owen, P. R.: Saltation of uniform grains in air, J. Fluid Mech., 20, 225–242, 1964. 4574
- Prata, A. J.: Observations of volcanic ash clouds in the $10-12\,\mu m$ window using AVHRR/2 data, Int. J. Remote Sens., 10, 751–761, 1989. 4582
- Prata, A. J., Bluth, G., Rose, B., Schneider, D., and Tupper, A.: Comments on "failures in detecting volcanic ash from a satellite-based technique". Remote Sens. Environ., 78, 341–346, 2001. 4582
- Shao, Y.: A model for mineral dust emission, J. Geophys. Res., 106, 20239–20254, doi:10.1029/2001JD900171, 2001. 4571, 4575
- Shao, Y. and Leslie, L. M.: Wind erosion prediction over the Australian continent, J. Geophys. Res., 102, 30091–30105, 1997, 4575, 4576
- Shao, Y. and Lu, H.: A simple expression for wind erosion threshold friction velocity, J. Geophys. Res., 105, 22437–22443, doi:10.1029/2000JD900304, 2000. 4572, 4576, 4593
- Shao, Y., Raupach, M. R., and Findlater, P. A.: Effect of saltation bombardment on the entrainment of dust by wind, J. Geophys. Res., 98, 12719–12726, doi:10.1029/93JD00396, 1993. 4570, 4574, 4575, 4576
 - Shao, Y., Yang, Y., Wang, J., Song, Z., Leslie, L. M., Dong, C., Zhang, Z., Lin, Z., Kanai, Y., Yabuki, S., and Chun, Y.: Northeast Asian dust storms: real-time numerical prediction and validation, J. Geophys. Res., 108, 4691, doi:10.1029/2003JD003667, 2003. 4583
 - Skamarock, W. C., Klemp, J. B., Dudhia, J., Gill, D. O., Barker, D. M., Duda, M. G., Huang, X.-Y., Wang, W., and Powers, J. G.: A description of the advanced research WRF version 3, NCAR technical note, NCAR/TN–475+ STR, 2008. 4578
 - Thorsteinsson, T., Jóhannsson, J., Stohl, A., and Kristiansen, N. I.: High levels of particulate matter in Iceland due to direct ash emissions by the Eyjafjallajökull eruption and resuspension of deposited ash, J. Geophys. Res., 117, B00C05, doi:10.1029/2011JB008756, 2012. 4568

- Westphal, D. L., Toon, O. B., and Carlson, T. N.: A two-dimensional numerical investigation of the dynamics and microphysics of Saharan dust storms, J. Geophys. Res., 92, 3027–3049, 1987. 4574, 4576
- White, B. R.: Soil transport by winds on Mars, J. Geophys. Res., 84, 4643–4651, doi:10.1029/JB084iB09p04643, 1979. 4574
- Wilson, T. M., Cole, J. W., Stewart, C., Cronin, S. J., and Johnston, D. M.: Ash storms: impacts of wind-remobilised volcanic ash on rural communities and agriculture following the 1991 Hudson eruption, southern Patagonia, Chile, B. Volcanol., 73, 223–239, doi:10.1007/s00445-010-0396-1, 2011. 4568
- Wilson, T. M., Stewart, C., Bickerton, H., Baxter, P., Outes, V., Villarosa, G., and Rovere, E.: Impactos en la salud y el medioambiente producidos por la erupción del Complejo Volcánico Puyehue-Cordón Caulle del 4 de Junio de 2011: Informe de un equipo de investigación multidisciplinario, 2012. 4577

NHESSD

1, 4565–4603, 2013

Modeling volcanic ash resuspension

A. Folch et al.

Title Page

Abstract Introduction

Conclusions References

Tables Figures

l∢ ⊳i

→

Back Close

Full Screen / Esc

Printer-friendly Version



Discussion Paper

Modeling volcanic ash resuspension

NHESSD

1, 4565-4603, 2013

A. Folch et al.

Title Page				
Abstract	Introduction			
Conclusions	References			
Tables	Figures			
	►I			
I₫	►I			
 	►I			
I ∢ ■ Back	►I ► Close			
■ Back	>			

Printer-friendly Version

Interactive Discussion



Table 1. Stations list referred in the text. Meteorological stations (from M1 to M17) provide visibility and wind velocity measurements. Air quality stations (from C1 to C3) provide direct measurements of PM₁₀ concentration at CABA. All stations belong to Argentina, except M16 that is located in Uruguay.

Station ID	Station Name	Location	Latitude (°)	Longitude (°)	Altitude (m)	Distance to CCVC (km)
M1	Bariloche	Río Negro	-41.15		845	108
M2	Neuquén	Neuquen	-38.95	-68.13	270	386
M3	Santa Rosa	La Pampa	-36.57	-64.27	190	815
M4	Laboulaye	Córdoba	-34.13	-63.37	136	1053
M5	Río Cuarto	Córdoba	-33.12	-64.23	420	1084
M6	Venado Tuerto	Santa Fe	-33.67	-61.97	112	1182
M7	Junín	Buenos Aires	-34.55	-60.92	82	1192
M8	Pilar	Córdoba	-31.67	-63.88	338	1233
M9	Marcos Juárez	Córdoba	-32.70	-62.15	110	1246
M10	Córdoba	Córdoba	-31.32	-64.22	484	1248
M11	Rosario	Santa Fe	-32.92	-60.78	25	1319
M12	Ezeiza	Buenos Aires	-34.82	-58.53	20	1355
C1	Centenario	CABA	-34.61	-58.43	27	1376
M13	Aeroparque	CABA	-34.57	-58.42	6	1379
C2	Córdoba	CABA	-34.60	-58.39	35	1379
C3	La Boca	CABA	-34.63	-58.37	11	1380
M14	Punta Indio	Buenos Aires	-35.37	-57.28	16	1423
M15	Paraná	Entre Ríos	-31.78	-60.48	74	1428
M16	Carrasco	Montevideo	-34.83	-56.01	32	1551
M17	Concordia	Entre Ríos	-31.30	-58.02	35	1633

Table 2. Characteristic quantities for each emission scheme. The correction factor ϕ is adjusted to match the maximum measured concentration of $C_{TSP} = 3.91 \,\mathrm{mg}\,\mathrm{m}^{-3}$ in the M13 station. The total emitted mass, mean ($\langle e_i \rangle$) and root-mean-square ($\sqrt{\langle e_i^2 \rangle}$) of residuals at all stations (see Sect. 6.2) are also reported. These can be considered a measure of model to data bias and error respectively. Residuals are given in mg m⁻³.

Scheme	WE	MB	SH
$\overline{\phi}$	0.10	0.10	17
Total emission (×10 ¹⁰ kg)	3.3	7.7	8.5
PM ₁₀₀ emission (×10 ¹⁰ kg)	2.4	3.7	8.5
PM ₂₀ emission (×10 ¹⁰ kg)	1.4	0.26	0.012
PM ₁₀ emission (×10 ¹⁰ kg)	0.95	$\sim 10^{-4}$	$\sim 10^{-5}$
$\langle e_i \rangle$	-0.14	0.20	1.87
$\sqrt{\langle e_i^2 \rangle}$	2.08	2.82	5.72

1, 4565-4603, 2013

Modeling volcanic ash resuspension

A. Folch et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

I

▶I

Close

Back

Full Screen / Esc

Printer-friendly Version





Printer-friendly Version

Interactive Discussion



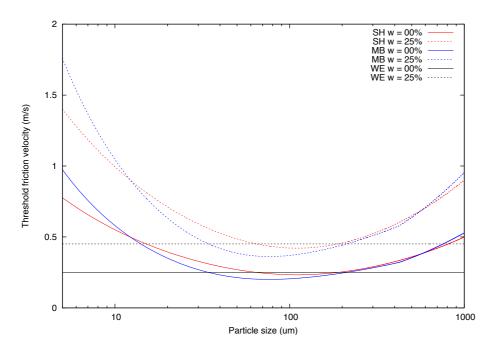


Fig. 1. Dependency of the threshold friction velocity u_{st} on particle size (in μ m) according to Shao and Lu (2000) (red line, Eq. 3) and Marticorena and Bergametti (1995) (blue line, Eq. 2). Solid lines are without moisture correction (w = 0). Dotted lines show the effect of moisture using Eq. (4) with w = 25% and w' = 10%. For comparison, the solid black line shows the constant threshold friction velocity $u_{*ts} = 0.25 \text{ ms}^{-1}$ used in WE scheme and the dotted black line its correction when a moisture of w = 25% is considered.

1, 4565-4603, 2013

NHESSD

Modeling volcanic ash resuspension

A. Folch et al.

Title Page **Abstract** Introduction Conclusions References

Tables Figures

[◀ **▶** Close Back

Full Screen / Esc



Modeling volcanic ash resuspension

NHESSD

1, 4565-4603, 2013

A. Folch et al.

Title Page Introduction Abstract References Conclusions **Tables Figures** 14 Close Back Full Screen / Esc Printer-friendly Version





Fig. 2. Map of central-south Argentina showing the provinces and localities mentioned in the text. The CCVC is indicated by a triangle.

Discussion Paper

Printer-friendly Version

Interactive Discussion



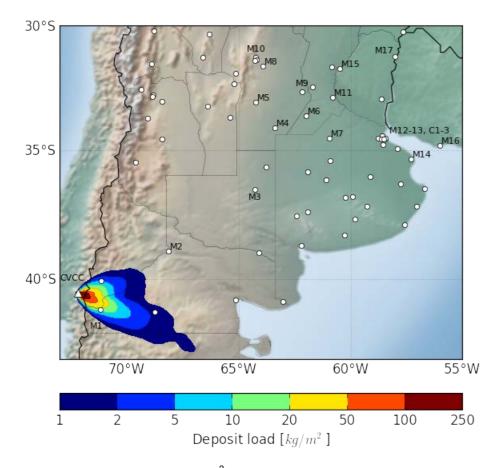


Fig. 3. Simulated deposit load (in kgm⁻³) used as the initial condition in the simulations of resuspension. The location of the CCVC is indicated by a triangle. Circles show the location of the ground stations of the Argentinean National Meteorological Service and EPA Air Quality Monitoring Stations Network used to validate the model results.

NHESSD

1, 4565-4603, 2013

Modeling volcanic ash resuspension

A. Folch et al.

Title Page

Abstract Introduction

Conclusions References

Tables Figures

14 **▶**

Close Back

Full Screen / Esc




Fig. 4. Comparison between WRF-ARW wind surface velocity (blue lines) and measurements (red lines) at 3 different meteorological stations (see Fig. 3 and Table 1): M1 (Bariloche), M2 (Neuquén) and M13 (Buenos Aires Aeroparque). Measurements were averaged every 3 h to match the WRF-ARW time output resolution.

NHESSD

1, 4565–4603, 2013

Modeling volcanic ash resuspension

A. Folch et al.

Printer-friendly Version



Discussion Paper



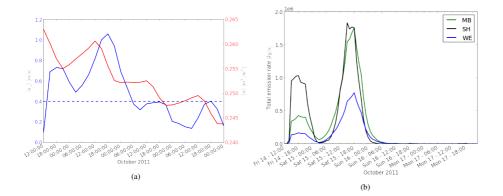


Fig. 5. (a) WRF-ARW friction velocity (blue, left axis) and soil moisture (red, right axis) spatiallyaveraged over the deposit along the period 14-18 October 2011. The discontinuous red line at $u_{\star} = 0.4 \,\mathrm{m\,s^{-1}}$ is shown for reference. **(b)** Ash emission rate (integrated over the deposit) for the three different emission schemes considering the soil moisture correction on the threshold friction velocity: WE (assuming $u_{*ts} = 0.25 \,\mathrm{m\,s}^{-1}$), MB and SH. Note how two resuspension events, a minor on 14 October at 18:00 UTC and a major 24 h later, are clearly predicted by all the emission schemes.

NHESSD

1, 4565-4603, 2013

Modeling volcanic ash resuspension

A. Folch et al.

Title Page Abstract Introduction

Conclusions References

> **Figures Tables**

[◀

Close Back

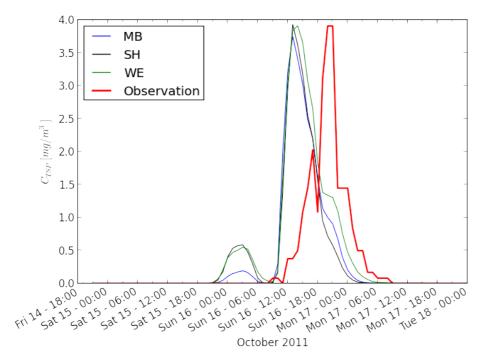


Fig. 6. Results for total suspended particle concentration (in mg m⁻³) at the M13 meteorological station after applying the correction factor ϕ to the different emission schemes. The resulting values for ϕ are given in Table 2.

NHESSD

1, 4565-4603, 2013

Modeling volcanic ash resuspension

A. Folch et al.

Title Page

Abstract Introduction

Conclusions References

Tables Figures

Close

Full Screen / Esc

Back

Printer-friendly Version



Discussion Paper

Interactive Discussion



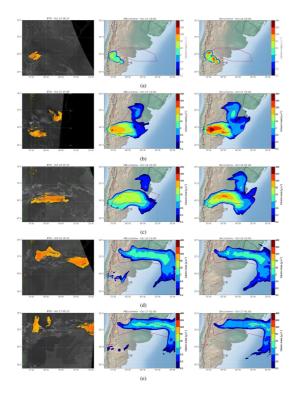


Fig. 7. Comparison between remote sensing observations and simulation results. The first column shows the MODIS images processed with the BTD algorithm. The second and third columns show FALL3D-7.0 results for the total cloud mass per unit area (vertical integration of concentration) using the MB and SH emission schemes respectively. On these pictures, the polygons of the VAG issued by the Buenos Aires VAAC are superimposed for reference. The VAG times in UTC are: (a) 14 October, 19:28, (b) 15 October, 19:28, (c) 16 October, 01:28, (d) 16 October, 19:28 and (e) 17 October, 01:15. Note how the presence of a band of middle and high altitude clouds impedes the complete visualization of the cloud by the satellite.

NHESSD

1, 4565–4603, 2013

Modeling volcanic ash resuspension

A. Folch et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

[◀

Discussion Paper

Printer-friendly Version

Interactive Discussion



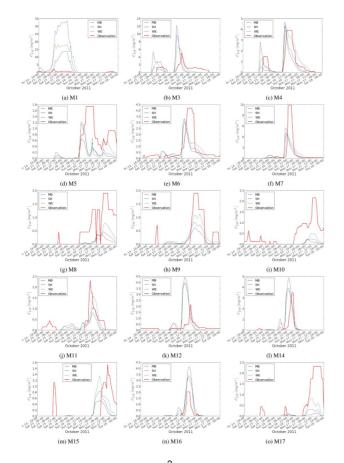


Fig. 8. Comparison between $C_{\rm TSP}$ (in mg m⁻³) computed using the three different emission schemes and measurements at 15 different stations. At stations M3 and M4, the two concentration peaks caused by the two resuspension events are clearly visible. In other cases, only the second event can be identified. Other small maxima correspond to different atmospheric phenomena like mist (e.g. the peak recorded on 15 October at station M11, located in Rosario).

NHESSD

1, 4565-4603, 2013

Modeling volcanic ash resuspension

A. Folch et al.

Title Page

Abstract

Introduction

Conclusions

References

Tables

Figures

I₫

►I

■
Back

Back



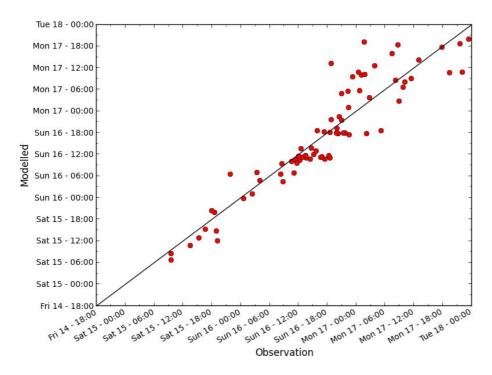


Fig. 9. Comparison between modelled and observed cloud arrival times at the considered stations. Note that model arrival times tend to be slightly ahead of observed during 17 October, presumably because WRF-ARW overestimates wind velocities. Results are shown only for the WE case, but similar results are observed for the MB and SH schemes.

NHESSD

1, 4565-4603, 2013

Modeling volcanic ash resuspension

A. Folch et al.

Title Page Abstract Introduction Conclusions References

Tables Figures

14



14






Fig. 10. Modelled versus observed maxima of C_{TSP} at the different stations and for the 3 emission schemes. Note that during 17 October (red triangles), the model underestimates regardless the emission scheme. However, observations and model estimations of maxima are, in general, within a factor of 2 (dashed line).

NHESSD

1, 4565-4603, 2013

Modeling volcanic ash resuspension

A. Folch et al.

Title Page Introduction Abstract References Conclusions **Tables**

Figures

▶I

Back Close

Full Screen / Esc

Printer-friendly Version





Full Screen / Esc

Back

Printer-friendly Version

Close

Interactive Discussion



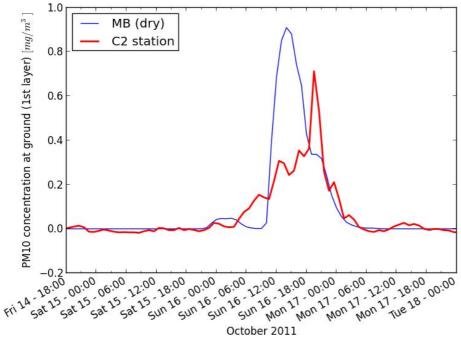


Fig. 11. Observed (red) and modelled PM₁₀ concentration at station C2 considering dry soil (no soil moisture correction) and the MB scheme.

NHESSD

1, 4565-4603, 2013

Modeling volcanic ash resuspension

A. Folch et al.

Title Page Abstract Introduction Conclusions References **Figures Tables** 14 **▶**