

Referee #1

Q1. I have carefully read the MS of Morales Marquez et al. The Manuscript is very interesting on both: methods and Results. An innovative approach was provided to estimate the storm impact along the Mediterranean beach. Furthermore new information on the morphodynamic behaviour of beaches stressed by storm groups was provided. Although the paper is very interesting some adjustments are required to improve the quality of this research.

Reply #1. We deeply thank Referee's comments and the effort that she/he made in reviewing carefully our work. We have introduced in the new version of the Manuscript (hereinafter Ms) all points raised in the review. We sincerely think that the new version of the Ms has been improved, thanks to this discussion.

GENERAL COMMENTS

Q2. The MS was perfectly inserted in one of the main fields of research of the morphodynamic of beaches, moreover the authors provide useful information on the Mediterranean beach response to storms. The Introduction chapter explored the scientific literature in a very deep way, but the objective is not very clear. Furthermore the authors stated that this method could be helpful for beach managers, but only little paragraph was present in the Discussion. The Methods section is, currently the section that should be improved. The main problem is that it is not clear the way that the authors used for the comparison of field data and Xbeach simulation.

Reply #2. We thank Referee comment. As suggested, we have rewritten the main objective of this contribution in lines #3-5 (page 3 new Ms.) as,

"The goal of this contribution is to study the effect of a storm group on the morphology of a beach system and to advance a multiplatform methodology for an effective decision-making regarding beach erosion management according to the available data and numerical models."

Also we have clarified the methodology stating that the different techniques addressed in the paper aimed to be complementary.

Q3. The authors did not explain if the Xbeach model was 1d or 2d. Further indication on Xbeach model setting should be given.

Reply #3. The XBeach simulation was 2d averaged in the vertical dimension.

Lines #24 (page 7 new Ms.) have been rewritten as,

"Here, we will apply the model to analyze the storm group period with the surfbeat mode that resolves the 2D averaged equations."

Q4. Regarding the waves, what are the values used for Xbeach model?

Reply #4. Input data for model simulations correspond to measured waves at 25m depth by the AWAC in the seaward front. In lines #27-28 (page 7) of the Ms, we can see the sentence,

"Hourly JONSWAP spectra measured with the AWAC".

Our study area has 550m in crossshore and 1960m alongshore. The depth in the seaward front is not constant since the XBeach model needs a rectangular grid.

Q5. The awac was at 25m depth and the profiles start at about 7m depth. Please clarify this aspect.

Reply #5. We consider the wave conditions of the AWAC located at 25m depth in the seaward boundary of the XBeach simulation. We show the profile until 7m depth since this is the

closure depth of the beach (Gómez-Pujol et al., 2011). For this reason, we only show the area where are morphodynamic changes.

Q6. Moreover, the reader did not well understand what are the profiles acquired by field activity and what are the profiles provided by Xbeach. Are only 9 profiles the results of each simulation of Xbeach models?

Reply #6. Modelled daily bathymetries are interpolated at the same locations than measured profiles (see Fig. 1) for comparison purposes.

Q7. It is not clear the procedure adopted to realize the DTM from the mentioned profiles and it is not clear in which way this bathymetry can be compared with the bathymetry obtained by Field activities. No information about the realization of each DTM was provided.

Reply #7. During Riskbeach experiment, on March 17th a complete bathymetry was done. In addition, between March 18th and 26th the bathymetric profiles were measured in the locations shown in Fig. 1 of MS. Both bathymetry and daily bathymetric profiles were made combining RTK and echosounding surveys. We compare measured profiles with model profiles interpolated at the same transects, as stated in Reply #6, in order to compare both approach (numerical modelling and field data).

This explanation appears in the new version of MS in lines #8-9 (page 6) as,

“On March 17th, an initial bathymetry was acquired. Besides, 9 cross-shore profiles were taken daily between March 18th and March 26th, (see Fig. 1). An additional bathymetry was performed on June 12th for control purposes.”

Q8. In order to give more importance to the presented data the authors should provide an error estimation on the estimation of sediment balances. In my opinion the Method section is the only section that should be deeply improved.

Reply #8. We insist along the Ms. that our analysis is focused on an approximation of the storm's effects in a microtidal beach. For this reason, the sediment balance is only an estimation. In addition, we do not provide any field bathymetry after the storms in order to calculate the sediment transport and to contrast it with our approximation.

Regarding the improving of the Methods section, we hope it will enhance after the introduced changes thanks this revision.

Q9. RESULT and DISCUSSION The results chapter suffer of the confusion on Methods section, once revised that chapter also the Results section will result more clear. In this Section the estimation of the error in estimation of sediment balances should be given.

Reply #9. We thank Referee comments. We edited the Method section as well as the Result and Discussion section.

As suggested by the Reviewer, the comparison between the field data and the simulated bathymetry by XBeach has been performed following Roelvink et al., 2009. In the new version of Ms., we show the correlation coefficient (R^2), the scatter index (SCI) and the relative bias (RB) for each profile (see Fig. 1 of the Ms.) in the new table 1. It is,

Table 1. Error statistics for the simulated profiles by XBeach compared with the measured profiles during Riskbeach.

Profile #	R^2 (%)	SCI	Relative bias
01	99.79 ± 0.08	0.07 ± 0.03	0.02 ± 0.04
03	99.77 ± 0.09	0.07 ± 0.03	-0.02 ± 0.03
05	99.48 ± 0.13	0.08 ± 0.01	0.01 ± 0.01
07	99.53 ± 0.08	0.09 ± 0.01	0.00 ± 0.03
09	99.31 ± 0.21	0.11 ± 0.02	0.03 ± 0.01
11	99.73 ± 0.18	0.06 ± 0.02	0.00 ± 0.01
13	99.72 ± 0.03	0.07 ± 0.01	0.02 ± 0.03
15	99.59 ± 0.49	0.08 ± 0.03	-0.03 ± 0.02
17	99.90 ± 0.04	0.04 ± 0.01	0.03 ± 0.02

SPECIFIC COMMENTS

Q10. Page 3. Ln3. The last part of the aim, is not sufficiently discussed in the Discussion section.

Reply #10. As suggested by the Reviewer, the discussion has been rewritten and lines #19-23 (page 10) read,

“The proposed approach aims to be a tool to assist to the beach management specially during adverse conditions, when field surveys are not possible. The combination of numerical models, video-monitoring and in situ data provide alternatives for the lack of data especially during adverse conditions. This approach follows the change in the paradigm in ocean studies where multiplatform approaches are being developed abroad the globe in order to fill spatial and temporal gaps in the measured time-series.”

Q11. Page 3. Ln9. Semi - stretched is not a common term on beach characterization. Can be changed in semi embayed?

Reply #11. This has been changed in the new version of the Ms.

Q12. Page 3. Ln14. Did you take in account the wave attenuation on the developing of the models?

Reply #12. Yes. Dissipation by the bottom friction and vegetation are taken into account in the model simulations.

Q13. Page 4. Ln22. Also the awac was dismantled?

Reply #13. No, it was not. The collected data are available in http://thredds.socib.es/thredds/catalog/mooring/waves_recorder/mobims_calamillor/L1/catalog.html (from 2011 to present, including all the experiment period).

Q14. Page 5. Ln20. Please could you explain the meaning of 'dense mapping'.

Reply #14. By means of dense mapping we mean that the survey for beach complete bathymetry try to cover all the surface between 0.5 to 10.0 m avoiding blanking zones between boat tracks. The density of depth points is close related to the sea depth, with minor number of points for shallow waters and larger number of points for depth ones. Nevertheless all the point cloud was interpolated (kriging) in order to have a depth value each meter.

Q15. Page 5. Ln21. Please could you provide more details on the bathymetric survey? What is the pattern of transects used to realize the bathymetry? Interpolation procedure was not reported.

Reply #15. The figure 1 of the Ms. has been changed. The new Figure shows details of the bathymetric survey (transects, the collection point of sediment, the bottom type at Cala Millor and the bathymetric RTK-GPS tracks). The interpolation was krigging.

Q16. Page 5. Ln21. please clarify this

Reply #16. During Riskbeach experiment, on March 17th a complete bathymetry done. In addition, between March 18th and 26th the bathymetric profiles were measured in the locations shown in Fig. 1 of MS. Both bathymetry and daily bathymetric profiles were made combining RTK and echosounding surveys. We compare measured profiles with model profiles interpolated at the same transects, as stated in Reply #6, in order to compare both approach (numerical modelling and field data).

Q17. Page 6. Ln21. is Figure 5b representing the described image?

Reply #17. This was a mistake in the original version. Reference to the Figure should be in line 25 of previous version.

Q18. Page 7. Ln14. these values derived from previous studies?

Reply #18. Yes, these are the default values for sandy beaches in XBeach model (Roelvink et al., 2010).

Q19. Page 7. Ln17. Please, can the authors specify the version of XBeach? and, please, the authors should specify if model was 1D or 2D. Thanks

Reply #19. The used version of XBeach is the 4920 for 64 bits supplying mpi and netcdf. The simulation is 2D depth averaged. In the new version of the MS, the model version is specified.

Q20. Page 7. Ln22. It is not clear if the field measurement of beach profiles can be compared with the xbeach profiles. Are, the field profiles, acquired daily? Please clarify.

Reply #20. As already stated in Reply #7, modelled daily bathymetries are interpolated at the same locations than measured profiles (see Fig. 1) for comparison purposes.

We clarify this aspect in the new version of MS.

Lines #8-9 (page 6) have been rewritten as,

“On March 17th, an initial bathymetry was acquired. Besides, 9 cross-shore profiles were taken daily between March 18th and March 26th, (see Fig. 1). An additional bathymetry was performed on June 12th for control purposes.”

And in the Bathymetry extraction from model and video images section, lines #10-11 (page 8),

“For each day, a model derived bathymetry is obtained and from it, 9 different profiles are extracted at the same locations of the measured cross-shore profiles.”

Q21. Page 7. Ln23. Please could uniform the terminology? Aerial beach and Emerged beach is the same sector of the beach, Please modify.

Reply #21. We thank Referee comments. The aerial and the emerged beach was referred to the dry part of the beach. This has been modified in the new version, the term “emerged” has been removed and. only aerial beach is addressed.

Q22. Page 7. Ln24. Why 7 meters? There are other study that indicated this depth or is a "morphological" closure (seagrass, rocky outcrops....). Please explain

Reply #22. The depth of closure in Cala Millor Beach according to the Hallermeier (1981) formulation is around 7 meters. This is the following one:

$$h^* = 1.75 \cdot H_{s,12} - 57.9 \cdot \left(\frac{H_{s,12}^2}{g \cdot T_{s,12}^2} \right);$$

Where $H_{s,12}$ is the significant wave height that exceeded 12 hours per year; $T_{s,12}$ is the wave period associated with this value of wave height; and g is the gravity. To clearly address the methodology this was the depth chosen for comparison.

Note also that the cameras set up cannot resolve accurately distances over 550 meters from the shore (corresponding approx. To 7 meters).

Q23. Page 7. Ln31. Were the instrumental errors, due to use of echo sounder and the DGPS, considered in this estimation? Please clarify.

Reply #23. The echo sounder and DGPS errors are for the horizontal accuracy, around 8 mm and for the vertical one, around 15 mm.

The new version of Ms. specifies that in lines #4-6 (page 6) as,

“The topographic surveys were performed from March 17th to March 26th using a DGPS-RTK with submetrical resolution (having a horizontal accuracy around 8 mm and a vertical accuracy around 15 mm) for both the aerial (the area located over the mean sea level) and the submerged beach (from deep waters up to 1 m depth).”

Q24. Page 8. Ln4. timestack

Reply #24. This has been fixed.

Q25. Page 8. Ln5. This is one of the most important results of this MS. But the authors should made an effort to better clarify the methods. In particular on the comparison between the field data and the Xbeach profiles and on the errors estimation during that comparison.

Reply #25. We thank Referee comment. As suggested by the Reviewer, the comparison between the field data and the simulated bathymetry by XBeach has been rewritten. We have estimated the errors according to the study of Roelvink et al., 2009. In this way, we show the correlation coefficient, the scatter index and the relative bias for each profile (see Fig. 1 of the Ms.) in the new table 1. It is,

Table 2. Error statistics for the simulated profiles by XBeach compared with the measured profiles during Riskbeach.

Profile #	R^2 (%)	SCI	Relative bias
01	99.79 ± 0.08	0.07 ± 0.03	0.02 ± 0.04
03	99.77 ± 0.09	0.07 ± 0.03	-0.02 ± 0.03
05	99.48 ± 0.13	0.08 ± 0.01	0.01 ± 0.01
07	99.53 ± 0.08	0.09 ± 0.01	0.00 ± 0.03
09	99.31 ± 0.21	0.11 ± 0.02	0.03 ± 0.01
11	99.73 ± 0.18	0.06 ± 0.02	0.00 ± 0.01
13	99.72 ± 0.03	0.07 ± 0.01	0.02 ± 0.03
15	99.59 ± 0.49	0.08 ± 0.03	-0.03 ± 0.02
17	99.90 ± 0.04	0.04 ± 0.01	0.03 ± 0.02

Q26. Page 8. Ln14. In the mentioned Figure there are images of the SIRENA video monitoring station.

Reply #26. We thank Referee comment. We forget explain this in the MS. The beach configuration that we obtained with XBeach model is consistent with the timex taken with SIRENA video monitoring station. For this reason, we use Fig. 7 to describe the simulated bathymetry of XBeach. In order to clarify this, the MS. has been rewritten.

Lines #10-13 (page 9) have been rewritten as,

“The initial bathymetry, performed before the storm group (on March 17th 2014), shows a sinuous-parallel and patchily bar at -1 m and a cross-shore profile with attenuated secondary forms with a mean slope of 2.6%, whereas the bathymetry obtained for April 8th 2014 from XBeach shows a marked dissipative configuration. This is consistent with the obtained timex through SIRENA video monitoring station (see Fig. A7).”

Q27. Page 8. Ln17. Could you briefly describe the methods used to estimate the volume of mobilized sediment?

Reply #27. The initial beach bathymetry is obtained through echosounding on March 17th. Afterwards (from March 17th to April 8th) bathymetries are inferred from bottom evolution using the numerical model. We computed the difference between daily bathymetries as the variation in depth at each spatial grid point. Finally, we sum all depth variation at each spatial point to obtain an approximated value of the sediment transport. The same methodology is followed in order to determine the sediment volume during the recovery beach, but in this case the initial bathymetry is the simulated by XBeach for April 8th and the final one is taken through a field campaign by SOCIB on June 12th.

Lines #17-22 (page 9) have been rewritten as,

“The sediment mobilized to the bar is around $2.69 \cdot 10^4 \text{ m}^3$ coming from the dry beach, where the volume loss is estimated as $3.01 \cdot 10^4 \text{ m}^3$. This approximation of the sediment transport is calculated as the variation in depth at each spatial grid point between the initial bathymetry on March 17th and the simulated bathymetry for April 8th. All gridpoints are finally summed to obtain an approximated value of the sediment transport. The same methodology is applied to determine the sediment volume during the recovery period, but in this case the initial bathymetry is the simulated by XBeach in April 8th and the final one is the one measured during June 12th.”

Q28. Page 9. Ln14. Some consideration on the benefits for the managers that this method could provide should be given

Reply #28. As suggested by the Reviewer, the discussion has been rewritten and #19-23 (page 10) read,

“The proposed approach aims to be a tool to assist to the beach management specially during adverse conditions, when field surveys are not possible. The combination of numerical models, video-monitoring and in situ data provide alternatives for the lack of data especially during adverse conditions. This approach follows the change in the paradigm in ocean studies where multiplatform approaches are being developed abroad the globe in order to fill spatial and temporal gaps in the measured time-series.”

Referee #2

GENERAL COMMENTS

Q1. The paper presents interesting scientific and technical aspects and an innovative approach in the study of an urban beach, located in NE coast of Mallorca Island, Mediterranean Sea. The paper describes the storms' impact on a biogenic carbonate sandy beach. The study is based on the analysis of profiles extracted from coastal video-monitoring techniques, RTK and echo-sounding surveys, current hydrodynamic measurements and the use of numerical models in order to infer gaps in the dataset. The main contribution of the study is to bring forward interesting data for a microtidal coast under low energetic conditions affected by storm events. In such way, the title should be more explicit, taking into account the oceanographic context. The introduction explores comprehensively the available literature although the objectives in mind are not very clear. Likewise the authors stated that this methodology could be helpful for beach managers, but only a short paragraph is present in the discussion section. Moreover some additional aspects should be addressed in the review process:

Reply #1. We thank reviewer for his/her positive comments. We try in this letter to answer all points raised. The new version of the Ms. includes clearer objectives, as lines #3-5 (page 3) read,

“The goal of this contribution is to study the effect of a storm group on the morphology of a beach system and to advance a multiplatform methodology for an effective decision-making regarding beach erosion management according to the available data and numerical models.

As suggested by the Reviewer, the discussion has been rewritten and lines #19-23 (page 10) read,

“The proposed approach aims to be a tool to assist to the beach management specially during adverse conditions, when field surveys are not possible. The combination of numerical models, video-monitoring and in situ data provide alternatives for the lack of data specially during adverse conditions. This approach follows the change in the paradigm in ocean studies where multiplatform approaches are being developed abroad the globe in order to fill spatial and temporal gaps in the measured time-series.”

Q2. (1) it is crucial to define the concept of shoreline used in this work;

Reply #2. In this study we can define the shoreline as the limit between dry and wet beach. We used the methodology explained in Álvarez-Ellacuria et al., (2011).

Q3. (2) the differences between storms and storm groups should be pointed out clearly;

Reply #3. We agree with Referee's comment. In the new version of the Ms. the lines #21-26 (page 5) read,

“We define here storm as sustained wave conditions during at least 6 hours with $H_s > 1m$ Gómez-Pujol et al. (2011) suggested this threshold as the condition required to generate a significant impact along beach morphology and sediment properties. When such an event is not isolated but becomes a succession of events, we are referring as a group of storms. These episodes can cause stronger damages in the beach with smaller wave heights, since the beach does not have enough time for recovering its initial morphodynamic state.”

Q4. (3) it is necessary to review the text and define morphodynamic zones and its limits, commonly used in this kind of studies (for example: what is a dry beach? The area always situated above the mean sea level, the zone limited by the mean high tide level or the area exposed in low tide conditions. . .); and

Reply #4. The dry beach in this study is the area located over the mean sea level taken into account in the XBeach simulation. To avoid confusion, the term "dry" has been removed from MS. and it has been substituted by “aerial”.

Q5 (4) some discussion relating the results and its future use to coastal management might be useful.

Reply #5. Following Reviewer comment, in the new version of the Ms. the next paragraphs have been included in lines #19-23 (page 10), as stated in Reply #1,

“The proposed approach aims to be a tool to assist to the beach management specially during adverse conditions, when field surveys are not possible. The combination of numerical models, video-monitoring and in situ data provide alternatives for the lack of data specially during adverse conditions. This approach follows the change in the paradigm in ocean studies where multiplatform approaches are being developed abroad the globe in order to fill spatial and temporal gaps in the measured time-series.

In the studied beach, the results show that the beach is able to recovery the lost sediment in a larger scale than the erosion and that is crucial to know the beach configuration at any time in order to know its evolution in front specific wave climate episodes.”

Q6. The Data and Methods section should be further developed. It is not specified the way the authors used for comparing field data with Xbeach simulation. For example, concerning the wave parameters, what are the values used in Xbeach model? Another issue is related with the beach profile: it is not clear what are the profiles acquired in field campaigns and what are the profiles provided by the model. It is not explained the process adopted to obtain the DTM from the topographic and bathymetric profiles. Would also be relevant to provide an error estimation on the estimation of sediment balances.

Reply #6. Some aspects to consider here:

During Riskbeach experiment, on March 17th a bathymetry was made in the whole study area. In addition, between March 18th and 26th the bathymetric profiles were measured in the locations that we can see in Fig. 1 of MS. On the other hand, we obtain a daily bathymetry for the whole simulation area using XBeach model. This bathymetry is interpolated to the profiles locations in order to compare both approach (numerical modelling and field data). The bathymetric data are explained in the new version of Ms, lines #8-9 (page 6) as,

“On March 17th, an initial bathymetry was acquired. Besides, 9 cross-shore profiles were taken daily between March 18th and March 26th, (see Fig. 1). An additional bathymetry was performed on June 12th for control purposes.”

And the obtained result of XBeach simulation are in lines #10-11 (page 8) as,

“For each day, a model derived bathymetry is obtained and from it, 9 different profiles are extracted at the same locations of the measured cross-shore profiles.”

Regarding the wave parameters that we use in XBeach model, the lines #27-28 (page 7) of the new version of Ms have been rewritten as,

“Hourly JONSWAP spectra measured with the AWAC at 25 m depth, are propagated from the seaward boundary to the coast”

Regarding the errors estimation, we have estimated the errors according to the study of Roelvink et al., 2009. In this way, we show the correlation coefficient, the scatter index and the relative bias for each profile (see Fig. 1 of the Ms.) in the new table 1.

Table 3. Error statistics for the simulated profiles by XBeach compared with the measured profiles during Riskbeach.

Profile #	$R^2(\%)$	SCI	Relative bias
01	99.79 ± 0.08	0.07 ± 0.03	0.02 ± 0.04
03	99.77 ± 0.09	0.07 ± 0.03	-0.02 ± 0.03
05	99.48 ± 0.13	0.08 ± 0.01	0.01 ± 0.01
07	99.53 ± 0.08	0.09 ± 0.01	0.00 ± 0.03
09	99.31 ± 0.21	0.11 ± 0.02	0.03 ± 0.01
11	99.73 ± 0.18	0.06 ± 0.02	0.00 ± 0.01
13	99.72 ± 0.03	0.07 ± 0.01	0.02 ± 0.03
15	99.59 ± 0.49	0.08 ± 0.03	-0.03 ± 0.02
17	99.90 ± 0.04	0.04 ± 0.01	0.03 ± 0.02

Q7. The Results and Discussion section needs to be reviewed and improved. I recommend the publication of the paper after revision addressing the comments above and the aspects summarized below.

Reply #7. We think that after this revision all points raised by the Reviewers have been clarified. We have also modified the “Results and Discussion” section, as suggested by the reviewer.

SPECIFIC ASPECTS

Q8. All figures in the paper are referred as Fig. A.1, Fig. A.2. . .and so one; What is the reason? It must be a mistake, nominally in the subtitles they are referred to as Fig. 1, Fig. 2

Reply #8. The reason why all the figures are named as Fig. A1, A2, etc. is because of the used template of the journal Natural Hazards and Earth System Sciences. The figure names are imposed automatically.

Q9. Identify for each situation A, B and C as referred to in the Fig. 2 subtitle

Reply #9. We edited the Fig.2 of the new version of Ms.

Q10. Fig.3: The workflow shows a spelling error; please note “Beach DM elaboration”. In the subtitle a) and b) should be in caps

Reply #10. This has been fixed.

Q11. 2 Field description. Regarding the content of this section, I have some doubts about the title; it seems to be more a presentation and description of the Study Area

Reply #11. We agree referee’s comment. In the new Ms. The title of the section is “Study Area”.

Q12. Page 3, line 15: What kind of sand bars are present? Are they longitudinal or transversal bars or another type?

Reply #12. Cala Millor beach is a sand beach with longitudinal sinuous-parallel bars. We can see this configuration in Fig. 7.

In order to clarify this concept, the lines #18-19 (page 3) of new version of Ms read,

“From a morphodynamic point of view, Cala Millor is an intermediate beach with a highly dynamic configuration of longitudinal sinuous-parallel bars and troughs, presenting intense variations in the bathymetry related to sandbar movement”

Q13. Page 3, line 20 and following: May the authors indicate also the period (T) for each situation described?

Reply #13. This is shown in the new Ms., lines #23-25 (page 3) as,

“Significant wave height (H_s) at deep waters is usually below 0.9 m with a peak period (T_p) between 4 s and 7 s, although frequent storms accounting 2 % of time increase H_s up to 5 m with a T_p higher than 10s”

Q14. 3 Data and methods - Page 4, lines 5 to 13: The text is not clear: the data presented are obtained from this study or are taken from others authors?

Reply #14. This is rewritten in the new version of Ms. The lines #8-9 (page 4) read as,

“In March 2014, just few days before the storm group event, a field experiment was carried out in Cala Millor in order to characterize the beach morphology.”

Q15. Page 4, line 20: Do you have also topographic surveys on the aerial beach zone? (in line 26, you referred DGPS-RTK surveys; in fact, this is only a methodology to obtain topographic data)

Reply #15. Yes, we have topographic data on the aerial beach zone having used the DGPS-RTK technology. This is explained in Beach morphology section.

Q16. Page 5, line 18: Specify “a submetrical resolution”

Reply #16. The resolution of the DGPS-RTK is specified in lines #4-6 (page 6) of the new version of Ms. as,

“The topographic surveys were performed from March 17th to March 26th using a DGPS-RTK with submetrical resolution (having a horizontal accuracy around 8 mm and a vertical accuracy around 15 mm) for both the aerial (the area located over the mean sea level) and the submerged beach (from deep waters up to 1 m depth).”

Q17. Page 5, line 19: It is not clear, again, what is considered aerial and submerged beach; what does it mean “up to 1 m depth”? It is in low or high tide conditions?

Reply #17. The aerial zone is that area which is located over the mean sea level (null elevation). All the points with positive elevation are placed in this zone. On the other hand, the submerged beach is the area with negative elevation (below mean sea level).

Regarding the elevation “up to 1m depth”, we mention the zone from deep waters to 1 m below mean sea level.

Regarding the tide, we have neglected it, because in the Mediterranean Sea the tidal amplitude is less than 0.25m. As we mention in the Study Area section.

Q18. Page 5, line 31: Why were the samples trapped for 24 hours?

Reply #18. We thank Referee comment. There was a mistake. We have changed “trapped” for “dried”.

Q19. Page 5, lines 31 and 32: “Sediment were analysed and grain size obtained using Gradistat software (Blott and Pye, 2001). The use of this software only allows to obtain statistical parameters.

Reply #19. We explain in this paragraph that we obtain the grain size and size distribution through a laser granulometer. And then, we calculate the granulometric descriptive parameters and all the method described by Folk and Ward (1957) and Gradistat software (Blott and Pye, 2001).

Q20. Page 7, line 14: Are the sample statistics calculated (ex. D50) consistent with previous works (i.e. Gómez-Pujol et al., 2011)?

Reply #20. Yes, both of them are consistent. We use the same methodology for taking the samples and calculating these parameters. Only, during Riskbeach experiment, a cross-shore profile is measured and in Gómez-Pujol et al., 2011 the whole beach was measured.

Q21. Are the sediment samples homogeneous along the cross-shore profiles? Were the porosity and the density of the sediments obtain by the authors? Why do authors say “porosity is about 30% and the density considered as 2650kg/m³”?

Reply #21. The sediment samples were collected along the transect showed in Fig. 1 of Ms. Those data were interpolated according to the depth along the sampled profile. And finally, those data were extrapolated, depending on the depth along-shore. This is explained better in the new version of Ms., lines #3-4 (page 8) read,

“Sediment characteristic measured before the experiment (D_{50} and D_{90}) are interpolated along the sampled profile and then they are extrapolated along-shore according to the depth of each grid point”

We consider the sediment porosity as 30% and its density, 2650kg/m³ because these are the default values for sandy beaches in XBeach model (Roelvink et al., 2010).

Q22. 4 Results and Discussion - Page 7, lines 23 and 24: Specify what is an “emerged beach”.

Reply #22. The emerged beach is the zone located over the mean sea level. It was also named as aerial zone or dry beach. However, to avoid confusion, the term “emerged” has been removed. In the new Ms. only aerial beach is addressed.

Q23. Page 7, line 25: Please clarify “. . .attend ca. 1m. . .)

Reply #23. In this sentence, we refer to the maximum differences between the measured field bathymetry and the simulated with XBeach. Their values are around 1 m.

Q24. What is the maximum extension of beach profiles? Are the profile lengths (from model, video images and field campaigns) the same to all scenarios?

Reply #24. The maximum extension of the beach profile depends on the technique used. For the field campaign the maximum cross-shore distance is around 500 m from beach-boulevard. Regarding the XBeach simulation, all profiles are the same length of 550m. And finally, the video images cover a distance of 170 m along the showed transect in Fig. 6, a of Ms.

All of the obtained results by the different techniques can be compared since they are performed at the same spatial coordinates.

Q25. Page 7, lines 27 to 32: It would be interesting to discuss the beach zone were the differences are more important and to present a comparative example between the two methodologies. Can the authors specify if the differences are larger in the foreshore or in the shoreface?

Reply #25. The maximum differences are in a depth around -3 and -5m. We do not analyze the situation of the aerial beach with the video-monitoring technique because we infer the bathymetry using the lineal wave theory. Regarding the comparison between both methodologies, we consider that in situ the errors (field campaign) can be neglected but the obtained bathymetry through video-monitoring needs to be improved (ongoing work). This is a

first approximation in order to quantify the volume of sediment that is moved during storm events.

Q26. Page 8, lines 10 to 15: Is the bar described a shoreface or is it a lower foreshore bar? It looks like a ridge-channel system well developed between 400 and 900m along coast!

Reply #26. The presented bar is submerged longitudinal sinuous and parallel to the shore face. This is specified in the new version of Ms. in lines #18-19 (page 3) as,

“From a morphodynamic point of view, Cala Millor is an intermediate beach with a highly dynamic configuration of longitudinal sinuous-parallel bars and troughs, presenting intense variations in the bathymetry related to sandbar movement”

Q27. How was the mean slope calculated? What are the limits considered to obtain this value?

Reply #27. We approximated the central cross-shore profile as a lineal regression computing then the mean slope of the area.

Q28. Does the grey colour difference (timex images from fig. 7) indicate the tide level at each moment?

Reply #28. No. The different grey colors between subplots in Fig. 7 are due to the brightness difference of the day. And if we focus only in one subplot, the darker part is the water and the lighter one is the sand zone. The timex is the averaged image calculated from all images taken during 10 minutes with a frequency of 7.5 Hz.

Q29. Page 8, line 15: Dry beach, again! - Please, point out in the figures 8 and 10 subtitles what does it mean the black line. Is this the shoreline? How is it defined?

Reply #29. To avoid confusion, the term “dry beach” has been replaced by “aerial beach throughout the Ms.

Regarding Fig. 8 and 10, the black line is the shoreline on March 17th. We used it as a reference inside the beach, only for evaluating better the sediment movement. Shoreline is defined as the limit between dry and wet beach, and in order to know this boundary we used the explained methodology in Álvarez-Ellacuria et al. (2011).

Q30. Page 9, line 1: Check “. . .Mediterranean by. . .”

Reply #30. Fixed in the new Ms.

Q31. Page 9, lines 10 and 11: Have you some information about the influence of local longshore currents? It would be interesting to try seeing the influence of these currents on the distribution of sediments along the coastal stretch. It is obvious that in addition to the main transversal beach behaviour, there is also longitudinal transport.

Reply #31. We agree referee’s comment. The study of the local longshore currents’ effects on the beach would be enormously interesting and in some sense has been addressed in other works (e.g. Álvarez-Ellacuria et al., 2011). However, here we will explicitly address the use of combined techniques for beach management.

Q32. Page 9, line 14 and following: After the foreshore sand recovery, there are a significant difference between volumes. Have the authors any idea about the sediment circulation? Do the sediments go out from this littoral cell?

Reply #32. No. To date we still do not have this information. The work deals with bathymetric differences between the period storm group (erosion) and between mild conditions period (recovery). We only know the relative sediment movement.

Q33. References Please note the followings aspects: Page 11, line 19: the year of publication should be placed at the end of the reference Page 11, line 29: “and” is missing Page 12, line 10: remove “et al” Page

12, line 13: the year of publication should not be in italic Page 12, line 19: remove "pages" Page 13, line 11: remove "et al"

Reply #33. Fixed in the new Ms.

Referee #3

Q1. The paper presents the effects of a storm group formed by 3 storms on the morphology of Cala Millor, a beach in Majorca, Balearic Islands. The paper includes a review of the state of the art and previous references in the area, a field description of the study area, an analysis of the used and developed data (numerical modeling, video-monitoring and field campaign). As a result, interesting conclusions for the specific study are drawn, focused on presenting approaches to improve beaches management.

Reply #1. We sincerely thank reviewer for his/her comments and the effort that she/he made in reviewing carefully our work.

GENERAL COMMENTS

Q2. The paper is well-structured and its length is adequate. The topic is very interesting and suitable for the journal. I have, however, a few major concerns: some details are missed and a deeper explanation of some approaches are needed.

Reply #2. We thank reviewer for his/her positive comments. We hope that once we have introduced all the reviews in the Manuscript (hereinafter Ms), the new version will be significantly improved.

MAJOR COMMENTS

Q3. The analysis of the specific case of Cala Mijor is properly approached, reaching interesting results. It is a nice example of an application of several existing techniques. The scientific novelty is not evident, and although it can be inferred, it definitely needs to be highlighted, because it is really worth it.

Reply #3. In the new version of the Ms. we highlighted the novelty of the work both in terms of multiplatform and in the management assistance. We hope that with the several changes made the Referee will be satisfied.

Q4. The methodologies and instrumentation are well explained but they need more details and I mainly have doubts regarding the use of Xbeach. The application of the numerical model to assess the morphological changes after each storm needs more details in order to understand better the limitations of the results (grid size, bottom friction, etc.), as detailed in the following specific comments.

Reply #4. We agree referee's comment. For this reason, the "Numerical Model" section has been rewritten, including more details of the XBeach simulation.

SPECIFIC COMMENTS

Q5. Introduction: The goal of the paper can be elaborated, and some specific lines explaining the novelty of the work are needed.

Reply #5. As suggested, we have rewritten the main objective of this contribution in lines #3-5 (page 3) as,

"The goal of this contribution is to study the effect of a storm group on the morphology of a beach system and to advance a multiplatform methodology for an effective decision-making regarding beach erosion management according to the available data and numerical models."

Q6. Field description.

-In order to understand better the variability of D50, please, if available, include some details regarding the spatial variability along the beach.

Reply #6. We tried in the new version of the Ms. to specify the spatial variability of sediment size. Lines #12-14 (page 3) read as,

“Sediments are mainly composed of well-sorted medium to coarse biogenic carbonate sand with a grain diameter D_{50} between 0.3 and 0.6 m changing along the cross-shore distance, according to the depth”.

Q7. Field description.

- Include the reference of the tidal amplitude

Reply #7. A new reference Orfila et al., 2005 has been included.

Q8. Field description.

- Please, explain Fig. 2a: Vertical reference and what is being shown. In the marked storm, looks like if there is a global recovery of the beach. Why?

Reply #8. In Fig. 2, A we show the movement of the shoreline to the seaward (positive value) or its retreat to the landward (negative value) comparing its position in each time with the value of the shoreline in the previous time. With the dashed black lines, we show when the sea storm events are larger than 2 m. In the previous version, there was a black dashed line shifted. That line is edited in the new version of Ms.

There is a global recovery of the shoreline during the marked storm because Cala Millor beach was in a recovery period. However, we can see that after the occurrence of this storm group, the beach suffered an extreme behavior change.

Q9. Field description.

- In the same figure: Where is the origin? Is it the PROF#01? Then, why is it noted an advance of the beach in the South part, during the E or ESE storm?. Figure (A2, a) is called (2 A) in the Figure caption.

Reply #9. The origin (left bottom corner) corresponds to the left bottom corner of the Fig. 1. For this reason, this part is nearer profile #17. In any case, we do not plot the direction of the storm in this figure.

Q10. Data and methods.

- Is there a website or link to RiskBeach experiments where more details can be referred? Are these data available?

Reply #10. No, there is not any link with the RiskBeach data. Although, in SOCIB webpage there are the data of 25 m depth AWAC from 2011 to present, including all the experiment period (http://thredds.socib.es/thredds/catalog/mooring/waves_recorder/mobims_calamillor/L1/catalog.html).

Q11. Data and methods.

- Figure 3 demands a more detailed explanation due to its complexity. This chapter is a crucial part of the paper that needs some changes.

Reply #11. We deeply thank Referee's comment. As suggested, we have performed a more exhaustive explanation about Fig. 3 of the Ms in lines #28 (page 4) - 3 (page 5) of the new version as,

“Fig. 1 and Fig. 3 summarize the approach developed in this study showing data from instrumental approaches (direct measurements i.e. bathymetric and DGPS-RTK surveys) and data from numerical modelling and video images (indirect measurements). According to Fig. 3, wave field, sediment and beach morphology are required to initialize the numerical model before the storm. When measurements were possible numerical results are validated. Which ensures that the results obtained during the storm period are bearable as accurate. In addition, the acquired product by video-monitoring, once the cameras have been calibrated with field bathymetric data, provide a “proxy” of the measured data.

Results will be organized in two sections: first, profiles obtained by direct methods and, second, the results related to the use of these data sources for unraveling the beach erosion and recovery time scales.”

Q12. Data and methods.

- Wave conditions: Please, consider to include a brief explanation regarding why you consider that 3 hours is enough for this kind of study.

Reply #12. A short explanation has been included in lines #21-23 (page 5) of Ms. as,

“We define here storm as sustained wave conditions during at least 6 hours with $H_s > 1$ m. Gómez-Pujol et al., 2011, suggested this threshold as the conditions required to generate a significant impact along beach morphology and sediment properties.”

Q13. Data and methods.

- Fig4a. Put S1 over the corresponding blue shading part.

Reply #13. Fixed in the new Ms.

Q14. Data and methods.

- Pg5 line4. It says that offshore wave conditions (in 50m) show 3 storms and refers to Figure 4., but Figure 4 shows the graphs of intermediate waters (25m), as explained in previous lines and in the figure caption.

Reply #14. We thank Referee comment. We must note that the 25 m depth for normal wave regimen conditions is located in deep waters but for more extreme conditions will be found in intermediate waters. To avoid confusion, we have changed this in the new version of Ms. in lines #18-20 (page 5),

“During the experiment (March 17th to March 26th 2014), wave conditions were measured with an AWAC-system moored at deep waters (25 m depth) in the central part of the beach.

Deep waters wave conditions show three storms during the period of study (Fig. 4).”

Q15. Data and methods.

- Please, elaborate on how to interpret figure 5.

Reply #15. We have forgotten to mention that Fig. 5 is a zoom of a timestack. In the abscissa axis there should be 460 pixels and in the ordinate axis, 4500. However, we decided to show only this area to better illustrate the procedure. The Fig. 5 is explained in the following paragraph of the Ms.

“Timestack images (Fig. 5,a) are pre-processed to convert the RGB data to a tractable intensity matrix. First, original timestacks, with spatial and temporal dimensions $(n_x, n_t) = (650, 4500)$, are re-sampled by removing pixels at the dry beach as well as at the outer domain (intermediate waters) where each pixel corresponds to large distances being not useful to measure hydrodynamic processes. Final images have spatial and temporal dimensions of $(\hat{n}_x, n_t) = (460, 4500)$ (Fig. A5b). A quadratic filter with a time window of three seconds is applied to smooth the intensity timewise, and for each cross-shore position the temporal mean subtracted. From the intensity matrix $I(x, t)$, the wave frequency is obtained as the main component of the FFT in the time domain which is constant along the cross-shore dimension. A FFT is performed for each of the 460 cross-shore time series and the wave frequency, f , found as the mode of all resulting peaks.”

Q16. Data and methods. Numerical simulations:

...-The resolution of the grids for the Xbeach simulations is 15*7 m. Is that enough to include the influence of rock and Posidonia areas?

Reply #16. The area of interest is only composed by sand. We introduced the bottom drag for Posidonia starting at 7 m depths up to the offshore limit of the domain (the area is mainly covered with Posidonia Oceanica).

Q17. Data and methods. Numerical simulations:

...–In addition, the authors highlight the importance of the Posidonia, as it increases bottom roughness and attenuates the waves. Did xbeach modeling take this aspect into account? How?

Reply #17. Yes, XBeach model can consider the Posidonia effects through the seabed roughness coefficient.

Q18. Data and methods. Numerical simulations:

...–If incoming wave direction is perpendicular to the coast, the induced sediment transport should not be important. Did this occur in the simulations?

Reply #18. When the mean wave direction is perpendicular to the coast, the more relevant sediment transport in the embayed beach will occur at the cross-shore dimension with different behavior for wild (onshore) and severe (offshore) conditions. We can see as the mean wave direction during the storms (S1, S2 and S3) is perpendicular to the coast and the beach supported a greater morphodynamic change in its configuration.

Q19. Data and methods. Numerical simulations:

...–Were sediment characteristics interpolated for the whole grid from the samples obtained in just one profile?

Reply #19. Yes, the sediment characteristics are changing along the cross-shore distance, according to the depth. However, we have considered a homogenous distribution of them along-shore since we only have sediment data on #07 profile.

When we are talking about the simulation characteristics, we mention this fact in lines #12-14 (page 3) of the new version of Ms. as,

“Sediment characteristic measured before the experiment (D_{50} and D_{90}) are interpolated to the model grid points, according to their depth.”

Q20. Data and methods. Numerical simulations:

...–Why was the dimensionless porosity of the sediment set to 30%? Do the authors consider it as a common value or could provide a reference?

Reply #20. We consider the sediment porosity as 30% and its density, 2650kg/m^3 and these are the default values for sandy beaches in XBeach model (Roelvink et al., 2010).

Q21. Data and methods. Numerical simulations:

...–Please, explain the limitations of the application of the model and interpret its accuracy when comparing to other data.

Reply #21. The XBeach results are used as a proxy for the for the bottom evolution and thus for the sediment transport. It resolves with enough precision the propagation of the waves and it can take into account a lot of morphodynamic aspects. However, as far as we are concerned, it is advised only for short period simulations because it tries to stablish the beach profile in longer periods although the waves conditions are extreme. When we say a “proxy” we refer that although the model (as all energetic-based wave propagation models) is able to capture sediment transport under normal and extreme conditions the order of magnitude is still far to be exact (specially for long simulations). However, we have shown that compared with measurements this “proxy” is reliable enough to study and analyze erosion and accretion rates when complemented with additional measurements. This is indeed one aspect that has to be improved (numerical models) concerning sediment transport have to be better developed specially for these simulations and this is indeed a hot-topic in coastal studies.

In table 1, we can see the errors if we compare the obtained XBeach simulation results and the field bathymetric data. We have assumed the magnitude order of these errors because in this study we only need a suitable approximation of the beach state.

Q22. Results and discussion

-PG7 line 21: The given values are absolute? Positive or negative? I suggest to include variation ranges.

Reply #22. No, these maximum errors indicate that in all the maximum variation between the field bathymetric data and the obtained bathymetry by XBeach simulation, this last one is in upper elevations than the field bathymetry. However, the mean error values were calculated with the absolute difference between both approaches because in some days the negative values canceled the positive ones. In this way, we know what is the mean difference between both techniques and the maximum value of this difference occurs when the XBeach bathymetry is located in upper elevations than the field data.

In any case, the way to show the error has been changed in the new version of Ms.

Q23. Results and discussion

-PG7 line 24: How did you obtain the depth of closure?

Reply #23. To compute the depth of closure, we use the Hallermeier (1981) formulation:

$$h^* = 1.75 \cdot H_{s,12} - 57.9 \cdot \left(\frac{H_{s,12}^2}{g \cdot T_{s,12}^2} \right);$$

where $H_{s,12}$ is the significant wave height that exceeded 12 hours per year; $T_{s,12}$ is the wave period associated with this value of wave height; and g is the gravity.

Q24. Results and discussion

-In table 2 variation ranges of the profile would help to understand the profiles

Reply #24. We thank Referee comments. As suggested by the Reviewer, the comparison between the field data and the simulated bathymetry by XBeach has been performed following Roelvink et al., 2009. In the new version of Ms., we show the correlation coefficient (R^2), the scatter index (SCI) and the relative bias (RB) for each profile (see Fig. 1 of the Ms.) in the new table 1. It is,

Table 4. Error statistics for the simulated profiles by XBeach compared with the measured profiles during Riskbeach.

Profile #	R^2 (%)	SCI	Relative bias
01	99.79 ± 0.08	0.07 ± 0.03	0.02 ± 0.04
03	99.77 ± 0.09	0.07 ± 0.03	-0.02 ± 0.03
05	99.48 ± 0.13	0.08 ± 0.01	0.01 ± 0.01
07	99.53 ± 0.08	0.09 ± 0.01	0.00 ± 0.03
09	99.31 ± 0.21	0.11 ± 0.02	0.03 ± 0.01
11	99.73 ± 0.18	0.06 ± 0.02	0.00 ± 0.01
13	99.72 ± 0.03	0.07 ± 0.01	0.02 ± 0.03
15	99.59 ± 0.49	0.08 ± 0.03	-0.03 ± 0.02
17	99.90 ± 0.04	0.04 ± 0.01	0.03 ± 0.02

In addition, we have calculated the same estimated errors for the bathymetric inversion through timestacks. The obtained results are shown in Table 2 of the new version of Ms. It is,

Table 5. Error statistics for the estimated profile from timestacks compared with the measured profiles during Riskbeach.

R^2 (%)	SCI	Relative bias
97.95 ± 1.4	0.14 ± 0.07	0.04 ± 0.06

Q25. Results and discussion

-PG8 Line2-3: In some big areas a difference of 20cm can infer a large volume of sand. Please discuss why you consider the agreement between data as good.

Reply #25. We agree with Referee comment. However, we use the inferred bathymetry from the video images in order to have an approximation of the sediment movement. We have to note that the values of the sediment migration obtained in both techniques (numerical modelling and video-monitoring) are very similar.

Q26. Results and discussion

-PG 8 Line 10. Please refer the statement “Although the individual storms were not exceptional in terms of intensity”. Maybe to a previous figure or a previous work.

Reply #26. We can say that because two of these storms have as maximum wave height 1.2m. This value is very close to the storm wave height limit at this area, its occurrence probability is greater than storms with higher wave height. The conditions for considering if an event is a storm was provided in Gómez-Pujol et al., 2011. As we can find in the new version of Ms. in lines #21-23 (page 5),

“We define here storm as sustained wave conditions during at least 6 hours with $H_s > 1$ m. Gómez-Pujol et al., 2011, suggested this threshold as the conditions required to generate a significant impact along beach morphology and sediment properties.”

In addition, in lines #23-25 (page 3) of new version of Ms. we can read,

“Significant wave height (H_s) at deep waters is usually below 0.9 m although frequent storms accounting 2% of time increase H_s up to 5 m, with a return period of 1.5 years (Tintoré et al., 2009).”

Q27. Results and discussion

-PG8 lines 10-21. Did the sediment move just in the same profile? I miss the explanation of the functioning model that helps to explain where the sediment went.

Reply #27. In the XBeach simulation, the sediment has freedom for moving along all the directions. This migration depends on the main wave direction.

In Fig. 8, a, we can observe the differences between April 8th bathymetry (obtained by the XBeach simulation) and the March 17th field bathymetry. And in Fig. 8, b, there are the depth variation between June 12th field bathymetry and April 8th simulated bathymetry. In this way, we can know where there has been accretion and where there has been erosion during the storm events and during the following 2 months.

We only use the center profile for corroborating the situation of that section with the video-monitoring technique.

This is explained in the first paragraph of the “Beach morphological response to storms and recovery” section, which is re-written in lines #9-24 (page 9) of the new version of Ms. as,

“Although the individual storms are not exceptional in terms of intensity, their occurrence as a storm group has a significant imprint on the beach morphology. The initial bathymetry, performed before the storm group (on March 17th 2014), shows a sinuous-parallel and patchily bar at -1m and a cross-shore profile with attenuated secondary forms with a mean slope of 2.6%, whereas the bathymetry obtained for April 8th 2014 from XBeach shows a marked dissipative configuration. This is consistent with the obtained timex through SIRENA video monitoring station (see Fig. 7). The seabed variation after the

storm group (S1, S2 and S3, in Fig. 4,a) is presented in Fig. 8,a. This morphological change is obtained as the difference between the bathymetry obtained with XBeach after storm S3 (April 8th) and the initial bathymetry. The effect of consecutive storms is to erode mainly the aerial beach mobilizing the sediment from the berm to depths between -1m and -5m forming a bar (around 100m from the shoreline, Fig. 8,a). The sediment mobilized to the bar is around $2.69 \cdot 10^4 \text{ m}^3$ coming from the dry beach, where the volume loss is estimated as $3.01 \cdot 10^4 \text{ m}^3$. This approximation of the sediment transport is calculated as the variation in depth at each spatial grid point between the initial bathymetry on March 17th and the simulated bathymetry for April 8th. All gridpoints are finally summed to obtain an approximated value of the sediment transport. The same methodology is applied to determine the sediment volume during the recovery period, but in this case the initial bathymetry is the simulated by XBeach in April 8th and the final one is the one measured during June 12th. The redistribution can be also examined by analysing the profile at the center of the beach using video images. Fig. 9,a shows the beach profile change using video images from March 19th (the selection of the 19th is made since no images are available for the previous days) to April 8th (after S3)."

Q28. Results and discussion

-PG9 Line 4-5-6: Are you planning to integrate into your methodology the recovery time to apply it in the beach management? How would you do it?

Reply #28. Yes. The recovery (and erosion) times are indeed the key issue for beach management (specially in touristic spots). Storms with return periods less than 5 years can erode considerably the beach in a temporal scale that does not justify socially, economically and environmentally an action (soft or hard techniques). Knowing both (return period and recovery time) is crucial in order to take scientifically based management decisions. The presented "system" is providing continuous data that is delivered upon request for coastal management issues.

The results of this approach can be incorporated in a good practices management document in order to evaluate the need and applicability or beach nourishments projects that economically and environmentally expensive.

Q29. Conclusions: PG10 Line 6-8: Could you add a brief explanation of how this integration should be done? Or maybe an example of application.

Reply #29. After the storm group event here presented, the area was renourished through a sand by-pass. This actuation was effective only for a couple of months until a new "alone" storm affected the area recovering the beach in the following months. The result was a request of information on the response times of the beach that would have been provided thanks to the presented approach. The intention is to extend the methodology to other areas.

TECHNICAL CORRECTIONS

Q30. Some figures are named as A1, A2, etc, and then in the figures caption the "A" is not included. Please be consistent.

Reply #30. This issue is related with the template of the journal.

Q31. Some acronyms are not defined the first time they are used: RTK, AWAC

Reply #31. Fixed in the new Ms.

Q32. Verb tense. Sometimes past is used ("data was obtained", PG5 line19-20), others present ("Offshore wave conditions are obtained", PG4 line31-32) or future ("we will apply the model to analyze the storm group period", PG7 line5). Please be consistent.

Reply #32. Fixed in the new Ms.

Q33. PG2 line 10: at the end of the sentence the verb is missing.

Reply #33. Fixed in the new Ms.

Q34. PG9 line 1: Mediterran-ean

Reply #34. Fixed in the new Ms.

Q35. References: ...–the reference of Anderson et al 2010 is not in the text

Reply #35. Fixed in the new Ms.

Q36. References: ...–In the reference of Bosello et al (2012) the year of the publication is not at the end, as in the rest of the references

Reply #36. Fixed in the new Ms.

Q37. References: ...–In the reference of Jara et al. (2015) the year is in Italic.

Reply #37. Fixed in the new Ms.

Referee #4

Q1. The paper " Numerical and remote techniques for operational beach management under storm group forcing" attempts to describe the morphodynamic response of a microtidal beach under a storm group. The methodology incorporates a wide range of complementary methods to access beach morphodynamics and includes both crossshore and alongshore components.

The paper is interesting and deals with a topic of great importance and clearly within the scope of Nat. Hazards Earth Syst. Sci. Nevertheless, I have some critical comments that should be addressed: (1) definition of manuscript objectives needs to be improved; (2) model application should be more clearly explained; (3) validation methodology should be greatly developed, and (4) the work novelty needs to be highlighted.

Reply #1. We deeply thank Referee's comments and the effort that she/he made in reviewing carefully our work. We have introduced in the new version of the Manuscript (hereinafter Ms) all points raised in the review. We sincerely think that, thanks to this discussion, the new version of the Ms has been improved.

Regarding the improvement of the objectives, the last part of the Introduction section has been rewritten and the lines #3-5 (page 3) of the new version of the Ms, read,

"The goal of this contribution is to study the effect of a storm group on the morphology of a beach system and to advance a multiplatform methodology for an effective decision-making regarding beach erosion management according to the available data and numerical models."

We hope that with the new version of Ms. the model application, the validation methodology and the work novelty are much better enhanced.

Q2. The second objective stated in the paper "secondly to present a multiplatform approach to help beach managers to make an insight-driven decisions concerning beach erosion management through the use of the data available in the beach and the operational run of numerical models" is unintelligible. Moreover, in the present state of model/platform? development, its application to coastal management is still very unlikely. In this sense, sentences like "This allows a correct management of the beach avoiding unnecessary engineering works between touristic seasons." seems out of scope.

Reply #2. As suggested, we have rewritten the main objective of this contribution in lines #3-5 (page 3) as,

"The goal of this contribution is to study the effect of a storm group on the morphology of a beach system and to advance a multiplatform methodology for an effective decision-making regarding beach erosion management according to the available data and numerical models."

The showed sentence has been rewritten in lines #6-7 (page 9) of the new version of Ms, as

"This would allow a correct management of the beach avoiding unnecessary engineering works between touristic seasons."

Also in the discussion lines #19-23 (page 10) we stated:

"The proposed approach aims to be a tool to assist to the beach management specially during adverse conditions, when field surveys are not possible. The combination of numerical models, video-monitoring and in situ data provide alternatives for the lack of data especially during adverse conditions. This approach follows the change in the paradigm in ocean studies where multiplatform approaches are being developed abroad the globe in order to fill spatial and temporal gaps in the measured time-series."

Q3. 2) Description of model application should be sufficient clear to allow other researches to replicate the work and several methodological decisions require demonstration. For example:

- how were waves propagated from the AWAC to the offshore boundary of Xbeach? With 10 s waves it is expected that alongshore forcing was not uniform along the Xbeach offshore boundary – how was this accounted for?

Reply #3. We agree with you. We consider the wave conditions of the AWAC located at 25 m depth in the seaward boundary of the XBeach simulation, although our grid only goes to 15 m depth, we consider that waves have not been greatly affected between these two positions.

Q4. - Figure 1 (source and date of the image is missing) and other images at the internet suggests the existence of a rocky platform. Is this considered in the modelling approach? The figure should include bathymetric contours and the nature of the bottom (in case of the existence of a rocky bottom).

Reply #4. We thank the referee comment. Figure 1 has been edited in the new version of the Ms. showing all the required information.

Cala Millor is a sand beach where there is a reduced area with rocky outcrops. This zone was neglected because of its narrow dimensions.

Q5. - How was the closure depth computed? How far from the shore is it located?

Reply #5. The depth of closure in Cala Millor Beach is computed according to the Hallermeier (1981) formulation. This is the following one:

$$h^* = 1.75 \cdot H_{s,12} - 57.9 \cdot \left(\frac{H_{s,12}^2}{g \cdot T_{s,12}^2} \right);$$

where $H_{s,12}$ is the significant wave height that exceeded 12 hours per year; $T_{s,12}$ is the wave period associated with this value of wave height; and g is the gravity.

This depth is found between 300 and 400 m from Cala Millor beach-boulevard.

Q6. - Bathymetry inversion of the timestack used linear shallow water approximation in the breaker zone? Most works that have dealt with this problem showed that this approach does not give good results.

Reply #6. The cutting of the zone where the inversion bathymetry is carried out depends on the image. We remove the breaking zone and aerial beach, since there is a lot of noise in the images.

Q7. - Why the authors did not use intermediate depth approximation at larger depths? This would avoid the problem stated by the authors that “The largest differences tend to be located at deep profile positions where the model is known to perform worse since the accepted assumption on Eq. (1) only is valid for shallow waters”.

Reply #7. The maximum errors are in deeper depths because the cameras’ resolution is lower and the further is the pixel, more it will be distorted. We have not found great differences in this configuration using the shallow water or the intermediate water approximation but the shallow water reduces considerably the cost of the inversion.

Q8. - What is the line represented in figure 8? In this figure, the higher erosion values onshore (red pixels) seem to be connected with areas with no erosion (white pixels) suggesting therefore the generation of a beach scarp? Is this true? This feature was also observed on video images?

Reply #8. The black line in Fig. 8 is the shoreline on March 17th. We used it as a reference inside the beach, only for evaluating better the sediment movement.

In this figure the value of erosion is progressive, we can see red areas followed by yellow zones and then white zones (no erosion). This is consistent with the obtained erosion/accretion thanks to the video-monitoring approach, in Fig. 9.

Q9. 3) In my opinion, the validation methodology presented is the weakest element of the work. In fact, the presented information is very scarce and the approximation unconventional. The use of standard error

parameters is strongly suggested (see for example Roelvink et al. 2009). At least one figure with the comparison of estimated and measured data across a profile is also needed. Without that the reader cannot properly access results reliability and therefore can be skeptical about paper conclusions.

Reply #9. Following Reviewer comment, we include the statistical values for the comparison of model and measurements following Roelvink et al., 2009. In this sense, we show the correlation coefficient, the scatter index and the relative bias for each profile (see Fig. 1 of the Ms.) in the new table 1. It is,

Table 6. Error statistics for the simulated profiles by XBeach compared with the measured profiles during Riskbeach.

Profile #	$R^2(\%)$	SCI	Relative bias
01	99.79 ± 0.08	0.07 ± 0.03	0.02 ± 0.04
03	99.77 ± 0.09	0.07 ± 0.03	-0.02 ± 0.03
05	99.48 ± 0.13	0.08 ± 0.01	0.01 ± 0.01
07	99.53 ± 0.08	0.09 ± 0.01	0.00 ± 0.03
09	99.31 ± 0.21	0.11 ± 0.02	0.03 ± 0.01
11	99.73 ± 0.18	0.06 ± 0.02	0.00 ± 0.01
13	99.72 ± 0.03	0.07 ± 0.01	0.02 ± 0.03
15	99.59 ± 0.49	0.08 ± 0.03	-0.03 ± 0.02
17	99.90 ± 0.04	0.04 ± 0.01	0.03 ± 0.02

Q10. 4) Introduction is too large, and novelty of the work is not properly stressed. The introduction should also be more focused on paper objectives.

Reply #10. We have substantially changed the introduction stating more specifically the objectives followed in the paper.

Q11. Paper would also benefit from extensive editing work as a number of inaccuracies were detected that should be corrected by the authors (some examples are given below).

Reply #11. We careful review the new version.

Q12. -Abstract is very confusing and only describes the results and some conclusions; the abstract should be a shorth summary of the entire work: motivation, objectives, methods, results and conclusions.

Reply #12. We edited the abstract.

Q13. -Authors should make correct use of significant figures.

Reply #13. Typos have been addressed.

Q14. -Storm group should be clearly defined – the storm wave threshold is relative to offshore conditions and is independent of wave direction?

Reply #14. To clarify the concept of storm group, the lines #21-23 (page 5) have been rewritten in the new version of the Ms, as,

“We define here storm as sustained wave conditions during at least 6 hours with $\$H_s > 1$ m. Gómez-Pujol et al. (2011), suggested this threshold as the conditions required to generate a significant impact along beach morphology and sediment properties. When this event is not isolated but becomes a succession of events where the wave features are greater than storm condition ones, we are talking about a group of storms. These episodes can cause stronger damages in the beach with a wave height smaller, since the beach does not have enough time for recovering its initial morphodynamic state.”

The imposed threshold is independent of the main wave direction, although we can see that the most energetic event is perpendicular to the coastline, as the bibliography shows.

Q15. -Pg 1 - 114 – “all temporal scales” – specify – this includes thousands of years?

Reply #15. Following Reviewer comment, in the new version of the Ms., the lines 16-17 in page 1 has been rewritten as,

“Evolution of sandy coasts at temporal scales (from minutes to years) has been a topic of wide interest”.

Q16. -Pg 2 – 12 – “0.01 % of land surface? How was this figure computed? What is beach definition? It includes the submarine domain? the gross domestic product is produced by beaches?

Reply #16. We took the information from Yepes and Medina., 2005.

Q17. -Pg 2 – 16 what is “RTK and echosounding surveys”?

Reply #17. They are bathymetric surveys with GPS signal technology, where a single reference station provides corrections in real time, obtaining a submetric accuracy. In RiskBeach campaign, the horizontal accuracy was around 8 mm and the vertical one around 15 mm. The acronyms RTK are Real Time Kinematic.

To avoid confusions, we have rewritten the lines 5-9 (page 3) of the page 2 in the new version of Ms. as,

“Here, we present the explanation of temporal patterns of beach accretion and erosion under consecutive storm events at an intermediate microtidal carbonate beach by using the dataset available on the studied beach, high-frequency data on shoreline positions and crossshore profiles extracted from coastal videomonitoring techniques, Real Time Kinematic (RTK) and echosounding surveys, concurrent hydrodynamic measurements, and the use of numerical models widely validated in order to fill gaps in the dataset.”

Q18. -Pg. 2 – 112 – how was the beach area computed? Emerged? Above some datum? Up to the close depth? When the authors say “bottom colonized by the endemic *Posidonia oceanica* meadow at depths from 6 to 35 m”, this is also referring to the beach? The beach does not end at closure depth?

Reply #18. The beach area has been calculated by approximation through geometric shapes. We take into account all the beach, emerged and submerged (according to Álvarez-Ellacuria et al., 2011) to the closure depth (from +2 m depth to -7 m depth, approximately).

*Regarding the *Posidonia Oceanica* meadow, it extends from 6 to 35 m depth. This only is a date, our beach ends at closure depth, as Reviewer mentions.*

Q19. -Pg 7 –19 - the AWAC measured the “JONSWAP spectra”?

Reply #19. The JONSWAP spectra are generated with the measured AWAC data. For this reason, the lines 27-28 (page 7) in the new version of Ms., has been rewritten as,

“Hourly JONSWAP spectra, generated through the measured data with the AWAC.”

Q20. -Modelling domain should be display in figure 1.

Reply #20. It is shown in the new version of Ms., figure 1.

Q21. -A bathymetric map is missing.

Reply #21. It is shown in the new version of Ms., figure 1.

REFERENCES

- Álvarez-Ellacuria, A., Orfila, A., Gómez-Pujol, L., Simarro, G., & Obregon, N. (2011). Decoupling spatial and temporal patterns in short-term beach shoreline response to wave climate. *Geomorphology*, 128 (3-4), 199-208.
- Blott, S. J. and Pye, K.: Gradistat: a grain size distribution and statistics package for the analysis of unconsolidated sediments. *Earth Surface processes and Landforms*, 26(11):1237–1248, 2001.
- Folk, R. L. and Ward, W. C.: Brazos river bar: a study in the significance of grain size parameters. *Journal of Sedimentary Research*, 27(1):3–26, 1957.
- Galappatti, G., & Vreugdenhil, C. B. (1985). A depth-integrated model for suspended sediment transport. *Journal of Hydraulic Research*, 23 (4), 359-377.
- Hallermeier, R. J. (1981). Terminal settling velocity of commonly occurring sand grains. *Sedimentology*, 28 (6), 859-865.
- Orfila, A., Jordi, A., Basterretxea, G., Vizoso, G., Marbà, N., Duarte, C.M., Werner, F.E., Tintoré, J. (2005). Residence time and *Posidonia oceanica* in Cabrera Archipelago National Park, Spain. *Continental Shelf Research*, 25(11):1339 – 1352.
- Roelvink, D., Reniers, A., Van Dongeren, A. P., de Vries, J. V. T., McCall, R., & Lescinski, J. (2009). Modelling storm impacts on beaches, dunes and barrier islands. *Coastal engineering*, 56 (11-12), 1133-1152.
- Roelvink, D., Reniers, A. J. H. M., Van Dongeren, A., Van Thiel de Vries, J., Lescinski, J., & McCall, R. (2010). XBeach model description and manual. *Unesco-IHE Institute for Water Education, Deltares and Delft University of Technology. Report June, 21, 2010.*
- Yepes, V., & Medina, J. R. (2005). Land use tourism models in Spanish coastal areas. A case study of the Valencia region. *Journal of Coastal Research*, 83-88.

Numerical and remote techniques for operational beach management under storm group forcing

Verónica Morales-Márquez¹, Alejandro Orfila¹, Gonzalo Simarro², Lluís Gómez-Pujol³, Amaya Álvarez-Ellacuría¹, Daniel Conti¹, Álvaro Galán⁴, Andrés F. Osorio⁵, and Marta Marcos^{1,6}

¹IMEDEA (UIB-CSIC), Mediterranean Institute of Advanced Studies, St. Miquel Marquès 21, 07190, Esporles, (Illes Balears, Spain)

²ICM, Institute of Marine Sciences, Passeig Marítim de la Barceloneta 37-49, 08003 Barcelona, (Catalunya, Spain)

³ Earth Sciences Research Group, Department of Biology, University of the Balearic Islands, Ctra. Valldemossa km 7.5, 07122 Palma (Illes Balears, Spain)

⁴ETSI Caminos, Canales y Puertos, University of Castilla-La Mancha, Av. Camilo José Cela s/n, 13071 Ciudad Real, (Castilla-La Mancha, Spain)

⁵OCEANICOS Research Group. Universidad Nacional de Colombia Cr. 80, 65-223 (Medellin, Colombia)

⁶Department of Physics, University of the Balearic Islands, Ctra. Valldemossa km 7.5, 07122 Palma (Illes Balears, Spain)

Correspondence: Alejandro Orfila (aorfila@imedea.uib-csic.es)

Abstract. The morphodynamic response of a microtidal beach under a storm group is analyzed, and the effects of each individual event inferred from a numerical model, in situ measurements and video imaging. The combination of these approaches represent a multiplatform tool for beach management especially during adverse conditions. Here, the morphodynamic response is examined during a group of three storms period. The first storm, with moderate conditions ($H_s \sim 1$ m during 6 hours), erode the aerial beach and generate a submerged sandbar in the breaking zone. The bar is further directed offshore during the more energetic second event ($H_s = 3.5$ m and 53 hours). The third storm, similar to the first one, hardly affect the beach morphology, which stresses the importance of the beach configuration previous to a storm. The volume of sand mobilized during the storm group is around $17.65 \text{ m}^3/\text{m}$. During the following months, which are characterized by mild wave conditions, the aerial beach recovered half of the volume of sand that is transported offshore during the storm group ($\sim 9.27 \text{ m}^3/\text{m}$). The analysis of beach evolution shows two different characteristic time scales for the erosion and the recovery processes associated with storm and mild conditions respectively. Besides, the response depends largely on the previous beach morphological state. The work also stresses the importance of using different tools (video-monitoring, modeling and field campaign) to analyze beach morphodynamics.

Copyright statement.

15 1 Introduction

Evolution of sandy coasts at temporal scales (from minutes to years) has been a topic of wide interest over the past decades since sandy beaches and dune systems are the first natural lines of coastal defense against flooding and erosion hazards (Callaghan

and Roshanka, 2009; Hallegatte et al., 2013), being at the same time attractive environments in terms of leisure activities and tourism economy (e.g., Jiménez et al., 2011; Bosello et al., 2012; Luijendijk et al., 2018). The maintenance of these areas is crucial for the coastal defense and, at the same time, the coastal tourism seems to be one main target for beach erosion management (Semeoschenkova and Newton, 2015). For instance, in Spain, beaches represent only the 0.01% of the land surface, producing up to 10% of its gross domestic product (Yepes and Medina., 2005). Beach management tends to be reactive rather than proactive, solving the problems as they appear and without a long term planning.

Mitigation of coastal erosion and preservation of coastal areas represent essential aspects of the Protocol on Integrated Coastal Zone Management in the Mediterranean and is included into the objectives of most countries' national regulations and policies in Europe (Semeoschenkova and Newton, 2015). It is already known that decisions concerning coastal management actions should be based using the best available science, and developing new tools that take into account physical, natural and socio-economic characteristics of beaches (Ariza, 2010; Tintoré et al., 2009). This makes it necessary to transfer the knowledge from scientists to managers in an effective way, which is nowadays an challenging matter.

Regarding the management associated to coastal erosion issues, several purposes have recently arisen to improve the managers decisions or, at least, to provide them quality data of the areas of study (Ferreira et al., 2017). One of the main issues in coastal erosion is the response of coastlines to both individual storms and storm groups since the behaviors are quite different (Loureiro et al., 2012; Vousdoukas et al., 2012; Houser, 2013; Coco et al., 2014; Masselink and van Heteren, 2014; Senechal et al., 2015; Masselink et al., 2016, i.e.). Single storms can result in significant beach erosion within a few hours, whereas a sequence of storms can have a large and complex impact on beach morphology whose final effects remain difficult to quantify and to predict (Ferreira, 2005; Frazer et al., 2009).

Storm waves and their associated water-level conditions are key drivers in the shoreline dynamics. Shoreline response to successive storms can be dependent on storm energy thresholds as well as on the feedback mechanisms associated with the beach morphology and the presence or absence of former impacts (Ciavola and Stive, 2012). There are many examples that have shown that shorelines can recover relatively well from erosion triggered by storms and that this recovery can be quick, from few days or weeks (Birkemeier, 1979; Vousdoukas et al., 2012) to a couple of months (Wang et al., 2006). Therefore, the resilience of beaches, understood as their capacity to recover from a major storm, is related to the combination of sediment reservoirs, arrangement of three-dimensional beach morphology (i.e., sand bar type and location, beach slope, etc.) and to the beach memory (Jara et al., 2015).

Recent works, as the one by Vousdoukas et al. (2012), have shown that the observed morphological change during consecutive storms has a strong dependence on the initial beach morphology. These authors, departing from field experiments in southern Portugal, stated that beach recovery did not maintain the pace with storms frequency and that storms can have a dramatic impact on the erosion if they occur grouped. In addition, other works dealing with storm impact in shoreline dynamics in the Bay of Biscay (SE France) have suggested that energetic events are probably not the only drivers of erosion processes, since significant beach erosion has been characterized under very calm conditions following energetic events (Senechal et al., 2015). In a similar way, observations from a detailed field campaign involving daily beach surveys at Truc Vert beach (Bordeaux, France) during a sequence of storms demonstrated that a sequence of extreme storms does not necessarily result in cumulative

erosion, possibly because of the interplay between water levels, the angle of wave approach and the pre-existing beachface conditions (Coco et al., 2014).

The goal of this contribution is to study the effect of a storm group on the morphology of a beach system and to advance a multiplatform methodology for an effective decision-making regarding beach erosion management according to the available data and numerical models. Here, we present the explanation of temporal patterns of beach accretion and erosion under consecutive storm events at an intermediate microtidal carbonate beach by using the dataset available on the studied beach, high-frequency data on shoreline positions and crossshore profiles extracted from coastal videomonitoring techniques, Real Time Kinematic (RTK) and echosounding surveys, concurrent hydrodynamic measurements, and the use of numerical models widely validated in order to fill gaps in the dataset.

2 Study area

Cala Millor is a semi embayed beach 1.7km in length and ranging between 15 and 30m in beach width. It is located in the Northeastern coast of Mallorca Island (Western Mediterranean Sea, Fig. 1). Sediments are mainly composed of well-sorted medium to coarse biogenic carbonate sand with a grain diameter D_{50} between 0.3 and 0.6mm changing along the cross-shore distance, according to the depth (Gómez-Pujol et al., 2011). The beach area is around 1.4km² with a bottom colonized by the endemic *Posidonia oceanica* meadow at depths from 6 to 35 m (Infantes et al., 2009). This meadow increases bottom roughness reducing near bed velocity, modifying the sediment transport (Koch et al., 2007; Infantes et al., 2009, 2012) and increasing wave attenuation (Luhar et al., 2013).

From a morphodynamic point of view, Cala Millor is an intermediate beach with a highly dynamic configuration of longitudinal sinuous-parallel bars and troughs, presenting intense variations in the bathymetry related to sandbar movement (Álvarez-Ellacuría et al., 2011; Gómez-Pujol et al., 2011).

Tides are negligible (the tidal amplitude is less than 0.25m) although other surge components such as those induced by wind or atmospheric pressure can increase the sea level up to 1 m (Orfila et al., 2005). The beach is open to the East and, due to the semi-enclosed configuration, is well exposed to waves from the NNE to the SE (Enríquez et al., 2017). Significant wave height (H_s) at deep waters is usually bellow 0.9m with a peak period (T_p) between 4s and 7s, although frequent storms accounting 2% of time increase H_s up to 5m with a T_p higher than 10s, with a return period of 1.5 years (Tintoré et al., 2009).

Cala Millor is one of the most important tourist resorts created in the Eastern coast of Mallorca –more than 60,000 visitors during the summer period– and with a long history of sand nourishment and coastal management approaches (Tintoré et al., 2009).

Since November 2010 the Balearic Islands Coastal Observing and Forecasting System (SOCIB) is monitoring Cala Millor by means of coastal video monitoring, moored instruments and a periodic program of beach profile and sediment characterization (Tintoré et al., 2013). Along Cala Millor beach, over short temporal scales, shoreline position changes are not always homogeneous (Fig. 2, a) and it is possible to appreciate some different behaviors and responses to the wave climate. Cala Millor has experienced at least 19 events with significant wave height at 25m depth over 2m between November 2010 and

January 2017 (Fig. 2, b). Some of these events are isolated storms (e.g., April 2013) while others act in groups (e.g., January 2015). Fig. 2,a shows the alongshore anomaly of shoreline distances for the period between November 2010 to January 2017. The correlation between beach face response and sea conditions is not clear: there are storms that, even though Cala Millor is not a pocket beach, are giving rise to apparent temporary rotation, whereas others appear as a general shoreline advance or
5 retreat. Nevertheless, from the averaged alongshore shoreline width anomaly (Fig. 2, c) it can be inferred a clear change in beach behavior since April 2014, just after a group of storm events that will be analyzed below. Despite the beach eventually recovers the former alongshore width, it is observed a net shoreline recession.

In March 2014, just few days before the storm group event, a field experiment was carried out in Cala Millor in order to characterize the beach morphology. This experiment produced detailed bathymetries and beach profiles were measured before
10 the storms and also wave recorders were installed at different depths. Later, in June 2014, it was carried out another detailed beach survey and bathymetry belonging to the SOCIB's periodic beach monitoring program (Tintoré et al., 2013). Unfortunately, even though the April 2014 storm group seems to be critical for the beach width evolution, there are no bathymetric data available immediately after the storms. Nevertheless, the amount of available data before and after the storm group impacts makes this an opportunity to validate and generate numerical proxies that contribute to unravel the beach response to the storm
15 group.

3 Data and methods

This paper partially deals with datasets produced during the Riskbeach experiment, performed by the SOCIB, the Mediterranean Institute for Advanced Studies (IMEDEA) and the Institute of Marine Sciences (ICM-CSIC) in Cala Millor from March 17th to March 26th 2014. This experiment was designed to study the response and recovery of an intermediate beach
20 to usual (one year return period) storm conditions and the related sediment transport processes and morphological changes. During the experiment some instruments, detailed in Fig. 1, were installed in a central section of the beach to obtain high resolution sediment and hydrodynamical data. In this paper we employ the wave and currents recorder data (Acoustic Wave And Current Meter, AWAC) moored at 25m depth. Measurements are completed with bathymetric surveys, sediment samples and videomonitoring products. After the experiment (just from March 26th) large waves resulted in a significant morphological
25 change of the beach, once the field survey was finished and the echosounding equipment was dismantled. To assess the effects of these storms we combine numerical modelling with videomonitoring techniques to infer the beach profiles that help us to understand the changes in the beach morphology before and after the storm group.

Fig. 1 and Fig. 3 summarize the approach developed in this study showing which data are from different instrumental approaches (i.e., direct measurements from bathymetric and DGPS-RTK surveys) and which ones inferred from numerical
30 modelling and video images (indirect measurements). According to Fig. 3, field wave, sediment and beach morphology data, before storm event, are required in order to start up numerical model tools. The obtained results when field campaign data are available, have to be validated with field bathymetric data. The numerical model validation ensures that the results obtained during the storm period are bearable as accurate. In addition, the acquired product by video-monitoring, once the cameras have

been calibrated with field bathymetric data, will provide the “proxy” of the measured data. Results will be organized in two sections: first, profiles obtained by direct methods and, second, the results related to the use of these data sources for unraveling the beach erosion and recovery time scales.

We have wave mooring data that we use, through statistical analyses, in order to describe the wave climate and the storms that occurred in Cala Millor. We also have bathymetric data, obtained with DGPS-RTK and echosounding beach surveys. With the wave climate parameters, the bathymetric initial data of the beach and the grain size distribution (taken with sediment sampling), we can simulate the situation of the Cala Millor beach in the XBeach model. The obtained results must be validated with field bathymetric data during the period of time that we can recollect them. When the field campaign will be impossible, we will be able to know the situation of the beach thanks to the simulation of the XBeach (once it had been validated). In addition, we can have another source of data, as the video-monitoring. Through image analysis we can obtain the beach profile. Once this tool will be calibrated and validated with the other ones, it will act as an independent technique in order to know the state of the beach.

In this way, we can obtain an approximation of the sediment mass balance and the erosion and recovery time-scales of the beach.

15 3.1 Wave conditions

Offshore wave conditions (significant wave height, H_s , peak period T_p and wave direction at 50 m depth every three hours) are obtained from a reanalysis of a 60 years wave model output produced by the Spanish Harbor Authority (<http://www.puertos.es/es-es/oceanografia/Paginas/portus.aspx>). The mean H_s for the period of study is 0.9 m with a mean peak period (T_p) of 6 s. During the experiment (March 17th to March 26th 2014), wave conditions were measured with an AWAC-system moored at deep waters (25 m depth) in the central part of the beach.

Deep waters wave conditions show three storms during the period of study (Fig. 4). We define here storm as sustained wave conditions during at least 6 hours with $H_s > 1$ m. Gómez-Pujol et al. (2011) suggested this threshold as the condition required to generate a significant impact along beach morphology and sediment properties. When such an event is not isolated but becomes a succession of events, we are referring as a group of storms. These episodes can cause stronger damages in the beach with smaller wave heights, since the beach does not have enough time for recovering its initial morphodynamic state. The experiment started on March 17th after a period of moderate conditions with H_s close to 1 m that did not result in significant morphological changes. The first storm, S1 (see Fig. 4,a), occurred on March 26th, just after the instruments were moved away, with a maximum significant wave height $H_s = 1.5$ m and $T_p = 9.9$ s from the SE (Fig. 4,c) and a duration of 7 hours. The second storm, S2, beginning on March 28th, lasted 53 hours and peaked during the evening of March 29th with a maximum H_s of 3.4 m and T_p of 10.4 s. The estimated return period for S2 storm is around 1.2 years. Nevertheless, the return period just refers to the significant wave height threshold, despite the storm duration and persistence of wave height was 38 hours with $H_s > 2$ m which is unusual. Wave conditions started to build up again on April 2nd 2014 after a short period of relatively small waves ($H_s < 1$ m). The third storm, S3, April 2nd to 3rd, peaked 4 days after the former storm with maximum

H_s of 1.3 m and T_p of 7.8 s (Fig. 4,a and Fig. 4,b) during 48 hours. The following two months were characterized by mild conditions which will be used to study the beach recovery after the storm groups.

3.2 Beach morphology

The topographic surveys were performed from March 17th to March 26th using a DGPS-RTK with submetrical resolution (having a horizontal accuracy around 8 mm and a vertical accuracy around 15 mm) for both the aerial (the area located over the mean sea level) and the submerged beach (from deep waters up to 1 m depth). Additionally, for submerged beach, bathymetric data was obtained using a Biosonics DE-4000 echosounder with a DGPS which allowed dense mapping from 0.5 to 10. m in depth. On March 17th, an initial bathymetry was acquired. Besides, 9 cross-shore profiles were taken daily between March 18th and March 26th (see Fig. 1). An additional bathymetry was performed on June 12th for control purposes. Elevations were referenced to the Balearic Islands Ordinance Survey mean sea level and the horizontal position referenced to UTM coordinate systems (Gómez-Pujol et al., 2011). These data covers the area between the boulevard sea wall and the lower shoreface (ca. 8 m in depth).

3.3 Sediment characteristics

Sediment samples were collected from aerial beach (+2 m) to 6 m depth at one of the central cross-shore transects (profile #07, Fig. 1). Sediments in the aerial beach and up to 1 m depth were collected by dragging on the bottom a plastic bag inserted in an oval metallic frame being their vertical penetration about 2 – 4 cm and for greater depths, throwing a clamshell bucket from a boat. The weight of samples ranged from 200 to 500 g. After collection, samples were soaked in fresh water for 4 hours and drained before being dried for 24 hours. Sediment were analyzed using a laser granulometer and grain size obtained through the method described by Folk and Ward (1957) using Gradistat software (Blott and Pye, 2001).

3.4 Video monitoring

Coastal monitoring using video images is a practical and widely used technique since the advent of Argus (Holland et al., 1997). Since then, several systems (Cam-era, Horus, Cosmos, Beachkeeper, Ulises, etc.) mimic the Argus philosophy with the objective of providing continuous measurements of coastal processes in a non-supervised and autonomous procedure. Here, we use one of such approaches, SIRENA/Ulises (Nieto et al., 2010; Simarro et al., 2017), which has been operating since 2009 in Cala Millor. The system is composed of five charge-coupled device (CCD) cameras connected to a server acquiring daily images (Gómez-Pujol et al., 2013). The five cameras encompass an alongshore distance of around 1.7 km, largely including the monitored area. We use the timestacks, consisting of pseudo-images built with all pixel observation taken at 7.5 Hz at a predefined cross shore transect during the first 10 minutes of each hour, to infer the beach profile with the inversion of the wave dispersion relationship. The underlying idea in the inversion method is that the wave speed for progressive waves can be measured from its visible signature at consecutive snapshots to estimate the bathymetry using linear wave theory at the observed cross-shore transect (Stockdon and Holman, 2000).

Adopting the linear wave theory, the wave celerity c for shallow water waves ($kh < \pi/10$ where k is the wave number and h the local water depth) is

$$c^2 = g \cdot h, \quad (1)$$

where g is the gravitational acceleration.

5 Timestack images (Fig. 5,a) are pre-processed to convert the RGB data to a tractable intensity matrix. First, original timestacks, with spatial and temporal dimensions $(n_x, n_t) = (650, 4500)$, are re-sampled by removing pixels at the aerial beach as well as at the outer domain (intermediate waters) where each pixel corresponds to large distances being not useful to measure hydrodynamic processes. Final images have spatial and temporal dimensions of $(\hat{n}_x, n_t) = (460, 4500)$. A quadratic filter with a time window of 3s is applied to smooth the intensity timewise, and for each cross-shore position the temporal mean subtracted. From the intensity matrix $I(x, t)$, the wave frequency is obtained as the main component of the FFT in the time domain which is constant along the cross-shore dimension. A FFT is performed for each of the 460 cross-shore time series and the wave frequency, f , found as the mode of all resulting peaks (Fig. 5b).

Once f is known, the spatial component of the wave phase function (Fig. 5b), is evaluated following (Stockdon and Holman, 2000) as,

$$15 \quad \phi = \arctan \left\{ \frac{\text{Im}(I(x, \omega))}{\text{Re}(I(x, \omega))} \right\}, \quad (2)$$

and the wave celerity obtained as,

$$c = \frac{2\pi f}{\partial\phi/\partial x}. \quad (3)$$

The beach profile is finally obtained from Eq. (1).

3.5 Numerical modelling

20 Morphological evolution is assessed using the XBeach (eXtreme Beach behavior) model (Roelvink et al., 2009), which resolves the hydrodynamic processes of both the short waves (refraction, shoaling and breaking) and the long waves (generation, propagation and dissipation). The used version is the 4920 for 64 bits supplying mpi and netcdf. The model has been extensively validated with laboratory data as well as with field observations to study the morphological response of beach and sandy dunes, mostly under storm conditions. Here, we apply the model to analyze the storm group period with the surfbeat mode that
 25 resolves the 2D averaged equations.

The initial bathymetry (of March 17th) is discretized in an orthogonal rectangular grid evenly spaced with a resolution of $\Delta x = 7.44$ m in the cross-shore direction and with $\Delta y = 15.86$ m in the along-shore direction. Hourly JONSWAP spectra, generated through the measured data with the AWAC at 25 m depth, are propagated from the seaward boundary to the coast for the period of March 17th to April 8th, after S3 (summing up 528 runs of one hour of real time). The seaward boundary is
 30 imposed as absorbing-generating (weakly-reflective) boundary condition and the lateral boundaries as Neumann-type where the

longshore gradients are set to zero. The incoming wave directions in almost all simulations come from the East perpendicular to the shoreline (Fig. 4c).

Sediment characteristic measured before the experiment (D_{50} and D_{90}) are interpolated along the sampled profile and then they are extrapolated along-shore according to the depth of each grid point. The dimensionless porosity of the sediment is set to 30% and the density considered as 2650 kg/m^3 .

4 Results and Discussion

4.1 Bathymetry extraction from model and video images

The analyses based on XBeach and on timestacks are used to obtain the bathymetry and beach profiles to address changes in sediment mass balance. The initial bathymetry was measured before the storms (March 17th). The numerical model is run for the period between March 17th to April 8th, as stated. For each day a model derived bathymetry is obtained and 9 profiles extracted at the same locations of the measured cross-shore profiles. Table 1 shows the error parameters between measured profiles and the XBeach modeled profiles from March 17th to March 26th. The computed error parameters are the correlation coefficient (R^2), the Scatter Index (SCI) normalized with the maximum of the rms of the data and the absolute value of the mean of the data; and the Relative Bias (RB) normalized in the same way as the Scatter Index, used in Roelvink et al. (2009):

$$R^2 = \frac{\text{Cov}(m, c)}{\sigma_m \sigma_c}, \quad (4)$$

$$SCI = \frac{\text{rms}_{c-m}}{\max(\text{rms}_m, |\langle m \rangle|)}, \quad (5)$$

$$RB = \frac{\langle c - m \rangle}{\max(\text{rms}_m, |\langle m \rangle|)}, \quad (6)$$

being m the field data and c the modeled results.

The profiles derived from the model compare well with the measured ones from the aerial beach ($h = 2 \text{ m}$) to the depth of closure ($h = -7 \text{ m}$, according to Hallermeier (1981) formulation). Being the minimum R^2 of 99.31%, the maximum SCI of 0.11 and the maximum RB of 0.03 in the central profile. Therefore the modeled bathymetries (XBeach) can be considered as an efficient and reliable tool for unravelling the beach storm effects.

As an additional source of data, a cross-shore seabed profile in the SIRENA/Ulises central camera (Fig. 6) is obtained following the above described methodology. Table 2 compares the cross-shore profiles derived from timestacks against the instrumental measured profiles for the period between March 19th to April 26th (there are not timestacks available for March 17th and 18th). Since the timestack is defined in a cross-shore transect located between profiles #07 and #09, in situ measurements are daily interpolated to the timestack transect for comparison purposes. Error parameters from in situ measurements

and from video images are shown in Table 2, having R^2 a value of 97.95%, SCI of 0.14 and RB of 0.04. The largest differences tend to be located at deep profile positions where the model is known to perform worse since the accepted assumption on Eq. (1) only is valid for shallow waters. In general, there is a good agreement between both sets of data. Both comparisons, XBeach vs. instrumental and timestack vs. instrumental, present the same order of magnitude than the obtained in Roelvink et al. (2009). This allows us to compare beach sediment mass-balance before and after the storm group as well as during the longer period of calm after the storms using different datasets and different techniques. This would allow a correct management of the beach avoiding unnecessary engineering works between touristic seasons.

4.2 Beach morphological response to storms and recovery

Although the individual storms are not exceptional in terms of intensity, their occurrence as a storm group has a significant imprint on the beach morphology. The initial bathymetry, performed before the storm group (on March 17th 2014), shows a sinuous-parallel and patchily bar at -1 m and a cross-shore profile with attenuated secondary forms with a mean slope of 2.6%, whereas the bathymetry obtained for April 8th 2014 from XBeach shows a marked dissipative configuration. This is consistent with the obtained timex through SIRENA video monitoring station (see Fig. 7). The seabed variation after the storm group (S1, S2 and S3, in Fig. 4,a) is presented in Fig. 8,a. This morphological change is obtained as the difference between the bathymetry obtained with XBeach after storm S3 (April 8th) and the initial bathymetry. The effect of consecutive storms is to erode mainly the aerial beach mobilizing the sediment from the berm to depths between -1 m and -5 m forming a bar (around 100 m from the shoreline, Fig. 8,a). The sediment mobilized to the bar is around $2.69 \cdot 10^4$ m³ and coming from the aerial beach, where the volume loss is estimated as $3.01 \cdot 10^4$ m³. This approximation of the sediment transport is calculated as the variation in depth at each spatial grid point between the initial bathymetry on March 17th and the simulated bathymetry for April 8th. All gridpoints are finally summed to obtain an approximated value of the sediment transport. The same methodology is applied to determine the sediment volume during the recovery period, but in this case the initial bathymetry is the simulated by XBeach in April 8th and the final one is the one measured during June 12th. The redistribution can be also examined by analysing the profile at the center of the beach using video images. Fig. 9,a shows the beach profile change using video images from March 19th (the selection of the 19th is made since no images are available for the previous days) to April 8th (after S3).

Deepening in the beach response to the storm group, we analyze the differences between the initial bathymetry (March 17th 2014, previous to S1) and the bathymetries after storms S1, S2 and S3 (March 28th, April 1st and 8th respectively) obtained from XBeach. Fig. 10 shows the differences, i.e., the impact of each of the storms. The first storm, S1, with moderate H_s and short duration, produces erosion at the beach face (volume loss of $1.18 \cdot 10^4$ m³) accumulating large volumes of sand between -1 m and -2 m (not shown in Fig. 10). During the second storm, S2, which is the most energetic the beach-face suffers a new episode of intense erosion, with depth variations between 1 m and 1.5 m and moving the bar offshore (Fig. 10,b). The gain in volume in the bar zone is around $1.51 \cdot 10^4$ m³. Finally, the third storm (S3), with moderate wave heights but with large duration, continues eroding the aerial beach with little changes in the submerged beach (Fig. 10,c). This indicates that a sequence of storms does not necessarily result in cumulative erosion, supporting previous findings by Birkemeier et al. (1999)

and Coco et al. (2014). The eroded sediment that is transported offshore but not lost has the capacity to modify the cross-shore morphology and promotes the wave attenuation contributing to the sediment transport feedback.

The three-dimensional beach response to three successive storms highlights the importance of the storm duration in the sedimentary budget. This has been recently addressed in different studies (Ruiz de Alegria-Arzaburu and Masselink, 2010; Vousdoukas et al., 2012; Coco et al., 2014; Senechal et al., 2015, among others) and particularly for the Mediterranean by Jiménez et al. (2008). This scenario fits with the usual 'storm-post storm' behavior model (Stive et al., 2002; Archetti et al., 2016) and highlights the need of more research, especially in the physical description and numerical modeling, in order to improve our knowledge of the characterization of the temporal scales associated with the beach sedimentary budget. Here, we found evidences that recovery times, jointly with antecedent morphology, play a crucial role in shoreline and beach dynamics as stated by Senechal et al. (2015) or Jara et al. (2015).

After S3 storm the beach is under relatively calm conditions. A new bathymetry was done on June 12th 2014 allowing us to address the behavior of the beach during this period. Fig. 8,b shows the differences between the bathymetry at June 12th and the post-storm bathymetry obtained with numerical modeling for April 8th 2014. As seen, two months after the storm group, there is an opposite scenario. The sand reservoir below feeds up the shore-face again, but also redistribute sediment along the beach at different depths. The sand volume recovered at the aerial beach during this period is $1.58 \cdot 10^4 \text{ m}^3$ that is half of the volume lost during the storm period. This behavior is confirmed from the analysis of the beach cross-shore profile obtained from the timestack video image. Fig. 9,b shows the difference between the summer profile (June 12th 2014) and the beach profile after S3 (April 8th 2014) supporting a recovery of the upper part of the beach.

The proposed approach aims to be a tool to assist to the beach management especially during adverse conditions, when field surveys are not possible. The combination of numerical models, video-monitoring and in situ data provide alternatives for the lack of data especially during adverse conditions. This approach follows the change in the paradigm in ocean studies where multiplatform approaches are being developed abroad the globe in order to fill spatial and temporal gaps in the measured time-series.

In the studied beach, the results show that the beach is able to recovery the lost sediment in a larger scale than the erosion and that is crucial to know the beach configuration at any time in order to know its evolution in front specific wave climate episodes.

5 Conclusions

The response of a low energy microtidal beach in front of storm groups on time scales related to processes of beach erosion and accretion is studied. For this purpose, different techniques and approaches including DGPS-RTK and bathymetry surveys, modeling and video monitoring are combined. The observations confirm that the previous morphological conditions are crucial for controlling the sediment exchange and the morphological response of the beach.

Focusing on the effect of individual storms, the first one mobilizes sand mostly from the aerial area generating a parallel bar at depths $\sim 1 \text{ m}$ modifying the beach profile from near reflective to more dissipative. The effect of S2, lasting for more than 30

hours, is to mobilize a large volume of sediment redistributing the profile along all the beach and generating a large submerged sandbar at depths ~ -2.5 m (~ 100 m from the shoreline). This profile shows to be very efficient in protecting the beach from the third storm, which has a duration of 48 hours, being the sediment mobilized during this event, almost negligible. The largest changes in sediment mobilization occur in the transition from the reflective to the dissipative states, when the beach adjusts its profile to the incoming wave conditions. The combined effects of this storm group confirm that in low energy systems as the one here analyzed, it is necessary to know the previous morphological state in order to properly assess the new beach conditions.

Results highlight the well known different temporal scales for the erosion and accretion in low energetic systems. While offshore sand migration is produced at storm timescales, the onshore sediment transport has a much slower characteristic timescale. In particular, a group of relatively energetic storms has the capacity to generate significant erosion in three days. Despite the moderate conditions and the lack of storms during the next two months only half of the sediment is recovered. In this study the recovery of the beach is not documented, neither in sediment mass balance nor in shoreline width. Nevertheless from Fig. 2,a it can be appreciated that the aerial beach remains relatively stable and slightly increase the beach width at the end of 2014. Then in December 2014 and early January 2015, a new set of storm groups events affect the beach and since then the beach shoreline width has not recovered former conditions, despite punctually there has been some advance in shoreline position.

Time recovery after storms is a key issue for local beach managers who are pressed by touristic stakeholders to nourish the beach after energetic process in order to reach the quality standards required by beach users. The combined use of remote sensing data, in situ observations and numerical models, should already be integrated in management tools to take short term decisions, as beach nourishment, based on reliable physical data.

Data availability. All data are accessible from <http://www.socib.es>.

Author contributions. A.O. conceived the idea of the study with the support of V.M., L.G.P., G.S. and M.M.; A.O., G.S. and V.M. developed the methodology with the support of A.A. and D.C.; V.M. produced the results with the support of A.O. and D.C.; A.A. and G.S. and L.G.P. analyzed the results with the support of A.O and V.M. All authors contributed to write the MS.

Competing interests. AO is a member of the editorial board of Ocean Dynamics and Frontiers in Marine Sciences. MM is a member of the editorial board of Frontiers in Marine Sciences

Acknowledgements. This work has been possible thanks to IMEDEA-SOCIB collaboration. Authors acknowledge financial support from MINECO/FEDER through projects MORFINTRA/MUSA (CTM2015-66225-C2-2-P) and CLIMPACT (CGL2014-54246-C2-1-R). V. Morales-

Márquez is supported by an FPI grant from the Ministerio de Economía, Industria y Competitividad of the Spanish Government associated to MORFINTRA/MUSA. D. Conti is supported by a PhD fellowship (FPI/1543/2013) granted by the Conselleria d'Educació, Cultura i Universitats from the Government of the Balearic Islands co-financed by the European Social Fund. Authors thank valuable support from 4 anonymous referees.

References

- Álvarez-Ellacuría, A., Orfila, A., Gómez-Pujol, L., Simarro, G., and Obregon, N. : Decoupling spatial and temporal patterns in short-term beach shoreline response to wave climate. *Geomorphology*, 128(3):199–208, 2011.
- Archetti, R., Paci, A., Carniel, S., and Bonaldo, D. : Optimal index related to the shoreline dynamics during a storm: the case of Jesolo beach. *Natural Hazards and Earth System Sciences*, 16(5):1107–1122, 2016.
- Ariza, E.: An analysis of beach management framework in Spain. Study case: the Catalanian coast. *Journal of Coastal Conservation*, 15(4):445–455, 2010.
- Birkemeier, W. A.: *The effects of the 19 December 1977 coastal storm on beaches in North Carolina and New Jersey*, volume 47. Coastal Engineering Research Center, 1979.
- Birkemeier, W. A., Nicholls, R. J., and Lee, G.-H.: Storms, storm groups and nearshore morphologic change. In *Coastal Sediments*, pages 1109–1122. ASCE, 1999.
- Blott, S. J. and Pye, K.: Gradistat: a grain size distribution and statistics package for the analysis of unconsolidated sediments. *Earth surface processes and Landforms*, 26(11):1237–1248, 2001.
- Bosello, F., Nicholls, R. J., Richards, J., Roson, R., and Tol, R. S.: Economic impacts of climate change in Europe: sea-level rise. *Climatic Change*, 112(1):63–81, 2012.
- Callaghan, D. P. and Roshanka, R.: Quantifying the storm erosion hazard for coastal planning. *Coastal Engineering*, 56(1):90–93, 2009.
- Ciavola, P. and Stive, M.: Thresholds for storm impacts along European coastlines: introduction. *Geomorphology*, 143:1–2, 2012.
- Coco, G., Senechal, N., Rejas, A., Bryan, K., Capo, S., Parisot, J., Brown, J., and MacMahan, J.: Beach response to a sequence of extreme storms. *Geomorphology*, 204:493–501, 2014.
- Enríquez, A.R., Marcos, M., Álvarez-Ellacuría, A., Orfila, A., and Gomis, D.: Changes in beach shoreline due to sea level rise and waves under climate change scenarios: application to the Balearic Islands (western Mediterranean). *Natural Hazards and Earth System Sciences*, 17(7):1075, 2017.
- Ferreira, Ó.: Storm groups versus extreme single storms: predicted erosion and management consequences. *Journal of Coastal Research*, 42:221–227, 2005.
- Ferreira, Ó., Viavattene, C., Jimenez, J.A., Bolle, A., das Neves, L., Plomaritis, T.A., McCall, R., and van Dongeren, AR.: Storm-induced risk assessment: Evaluation of two tools at the regional and hotspot scale. *Coastal Engineering*, 134:241–253, 2017.
- Folk, R. L. and Ward, W. C.: Brazos river bar: a study in the significance of grain size parameters. *Journal of Sedimentary Research*, 27(1):3–26, 1957.
- Frazer, L. N., Anderson, T. R., and Fletcher, C. H.: Modeling storms improves estimates of long-term shoreline change. *Geophysical Research Letters*, 36(20), 2009.
- Gómez-Pujol, L., Orfila, A., Álvarez-Ellacuría, A., Terrados, J., and Tintoré, J.: *Posidonia oceanica* beach-cast litter in mediterranean beaches: a coastal videomonitoring study. *Journal of Coastal Research*, 2(65):1768–1773, 2013.
- Gómez-Pujol, L., Orfila, A., Alvarez-Ellacuría, A., and Tintoré, J.: Controls on sediment dynamics and medium-term morphological change in a barred microtidal beach (Cala Millor, Mallorca, Western Mediterranean). *Geomorphology*, 132(3–4):87 – 98, 2011.
- Hallegette, S., Green, C., Nicholls, R. J., and Corfee-Morlot, J.: Future flood losses in major coastal cities. *Nature Climate Change*, 3(9):802–806, 2013.
- Hallermeier, Robert J.: Terminal settling velocity of commonly occurring sand grains. *Sedimentology*, 28(6):859–865, 1981.

- Holland, K. T., Holman, R. A., Lippmann, T. C., Stanley, J., and Plant, N.: Practical use of video imagery in nearshore oceanographic field studies. *IEEE Journal of oceanic engineering*, 22(1):81–92, 1997.
- Houser, C.: Alongshore variation in the morphology of coastal dunes: Implications for storm response. *Geomorphology*, 199:48–61, 2013.
- Infantes, E., Terrados, J., Orfila, A., Cañellas, B., and Álvarez-Ellacuría, A.: Wave energy and the upper depth limit distribution of *Posidonia oceanica*. *Botanica Marina*, 52(5):419–427, 2009.
- Infantes, E., Orfila, A., Simarro, G., Terrados, J., Luhar, M., and Nepf, H.: Effect of a seagrass (*Posidonia oceanica*) meadow on wave propagation. *Marine Ecology Progress Series*, 456:63–72, 2012.
- Jara, M., González, M., and Medina, R.: Beach memory related to cross-shore processes. *Coastal Sediments 2015: The Proceedings of the Coastal Sediments*, 2015.
- 10 Jiménez, J. A., Gracia, V., Valdemoro, H. I., Mendoza, E. T., and Sánchez-Arcilla, A.: Managing erosion-induced problems in nw mediterranean urban beaches. *Ocean & Coastal Management*, 54(12):907–918, 2011.
- Jiménez, J. A., Guillén, J., and Falqués, A.: Comment on the article “Morphodynamic classification of sandy beaches in low energetic marine environment” by Gómez-Pujol, L., Orfila, A., Cañellas, B., Alvarez-Ellacuría, A., Méndez, FJ, Medina, R. and Tintoré, J. *Marine Geology*, 242, pp. 235–246, 2007. *Marine Geology*, 255(1):96–101, 2008.
- 15 Koch, E. W., Ackerman, J. D., Verduin, J., and van Keulen, M.: Fluid dynamics in seagrass ecology—from molecules to ecosystems. In *Seagrasses: biology, ecology and conservation*, 193–225. Springer, 2007.
- Loureiro, C., Ferreira, Ó., and Cooper, J. A. G.: Extreme erosion on high-energy embayed beaches: influence of megarips and storm grouping. *Geomorphology*, 139:155–171, 2012.
- Luhar, M., Infantes, E., Orfila, A., Terrados, J., and Nepf, H. M.: Field observations of wave-induced streaming through a submerged seagrass (*Posidonia oceanica*) meadow. *Journal of Geophysical Research: Oceans*, 118(4):1955–1968, 2013.
- 20 Luijendijk, A., Hagenaars, G., Ranasinghe, R., Baart, F., Donchyts, G. and Aarninkhof, S.: The State of the World’s Beaches. *Scientific reports*, 8, 2018.
- Masselink, G., Scott, T., Poate, T., Russell, P., Davidson, M., and Conley, D.: The extreme 2013/2014 winter storms: hydrodynamic forcing and coastal response along the southwest coast of England. *Earth Surface Processes and Landforms*, 41(3):378–391, 2016.
- 25 Masselink, G. and van Heteren, S.: Response of wave-dominated and mixed-energy barriers to storms. *Marine Geology*, 352:321–347, 2014.
- Nieto, M. A., Garau, B., Balle, S., Simarro, G., Zarruk, G. A., Ortiz, A., Tintoré, J., Álvarez-Ellacuría, A., Gómez-Pujol, L., and Orfila, A.: An open source, low cost video-based coastal monitoring system. *Earth Surface Processes and Landforms*, 35(14):1712–1719, 2010.
- Orfila, A., Jordi, A., Basterretxea, G., Vizoso, G., Marbà, N., Duarte, C.M., Werner, F.E. and Tintoré, J.: Residence time and *Posidonia oceanica* in Cabrera Archipelago National Park, Spain. *Continental Shelf Research*, 25(11):1339 – 1352, 2005.
- 30 Roelvink, D., Reniers, A., van Dongeren, A., van Thiel de Vries, J., McCall, R., and Lescinski, J.: Modelling storm impacts on beaches, dunes and barrier islands. *Coastal Engineering*, 56(11–12):1133 – 1152, 2009.
- Ruiz de Alegria-Arzaburu, A. and Masselink, G.: Storm response and beach rotation on a gravel beach, Slapton Sands, UK. *Marine Geology*, 278(1):77–99, 2010.
- Senechal, N., Coco, G., Castelle, B., and Marieu, V.: Storm impact on the seasonal shoreline dynamics of a meso-to macrotidal open sandy beach (Biscarrosse, France). *Geomorphology*, 228:448–461, 2015.
- 35 Semeoshenkova, V. and Newton, A.: Overview of erosion and beach quality issues in three Southern European countries: Portugal, Spain and Italy. *Ocean & Coastal Management* 118:12–21, 2015.

- Simarro, G., Ribas, F., Alvarez, A., Guillen, J., Chic, O., and Orfila, A.: Ulises: An open source code for extrinsic calibrations and planview generations in coastal video monitoring systems. *Journal of Coastal Research*, 33(5):1217–1227, 2017.
- Stive, M. J., Aarninkhof, S. G., Hamm, L., Hanson, H., Larson, M., Wijnberg, K. M., Nicholls, R. J., and Capobianco, M.: Variability of shore and shoreline evolution. *Coastal Engineering*, 47(2):211–235, 2002.
- 5 Stockdon, H. F. and Holman, R. A.: Estimation of wave phase speed and nearshore bathymetry from video imagery. *Journal of Geophysical Research: Oceans*, 105(C9):22015–22033, 2000.
- Tintoré, J., Medina, R., Gómez-Pujol, L., Orfila, A., and Vizoso, G.: Integrated and interdisciplinary scientific approach to coastal management. *Ocean & Coastal Management*, 52(10):493–505, 2009.
- Tintoré, Joaquín and Vizoso, Guillermo and Casas, Benjamín and Heslop, Emma and Pascual, Ananda and Orfila, Alejandro and Ruiz, Simón
10 and Martínez-Ledesma, Miguel and Torner, Marc and Cusí, Simó and others: Socib: The balearic islands coastal ocean observing and forecasting system responding to science, technology and society needs. *Marine Technology Society Journal*, 47(1):101–117, 2013.
- Vousdoukas, M. I., Almeida, L. P. M., and Ferreira, Ó.: Beach erosion and recovery during consecutive storms at a steep-sloping, meso-tidal beach. *Earth Surface Processes and Landforms*, 37(6):583–593, 2012.
- Wang, P., Kirby, J. H., Haber, J. D., Horwitz, M. H., Knorr, P. O., and Krock, J. R.: Morphological and sedimentological impacts of Hur-
15 ricane Ivan and immediate poststorm beach recovery along the Northwestern Florida barrier-island coasts. *Journal of Coastal Research*, 22(6):1382–1402, 2006.
- Yepes, V., and Medina, J.R.: Land use tourism models in Spanish coastal areas. A case study of the Valencia region *Journal of Coastal Research*, 83–88, 2005.

Table 1. Error statistics for the simulated profiles by XBeach compared with the measured profiles during Riskbeach.

Profile #	R^2 (%)	SCI	Relative bias
01	99.79 ± 0.08	0.07 ± 0.03	0.02 ± 0.04
03	99.77 ± 0.09	0.07 ± 0.03	-0.02 ± 0.03
05	99.48 ± 0.13	0.08 ± 0.01	0.01 ± 0.01
07	99.53 ± 0.08	0.09 ± 0.01	0.00 ± 0.03
09	99.31 ± 0.21	0.11 ± 0.02	0.03 ± 0.01
11	99.73 ± 0.18	0.06 ± 0.02	0.00 ± 0.01
13	99.72 ± 0.03	0.07 ± 0.01	0.02 ± 0.03
15	99.59 ± 0.49	0.08 ± 0.03	-0.03 ± 0.02
17	99.90 ± 0.04	0.04 ± 0.01	0.03 ± 0.02

Table 2. Error statistics for the estimated profile from timestacks compared with the measured profiles during Riskbeach.

$R^2(\%)$	SCI	Relative bias
97.95 ± 1.4	0.14 ± 0.07	0.04 ± 0.06

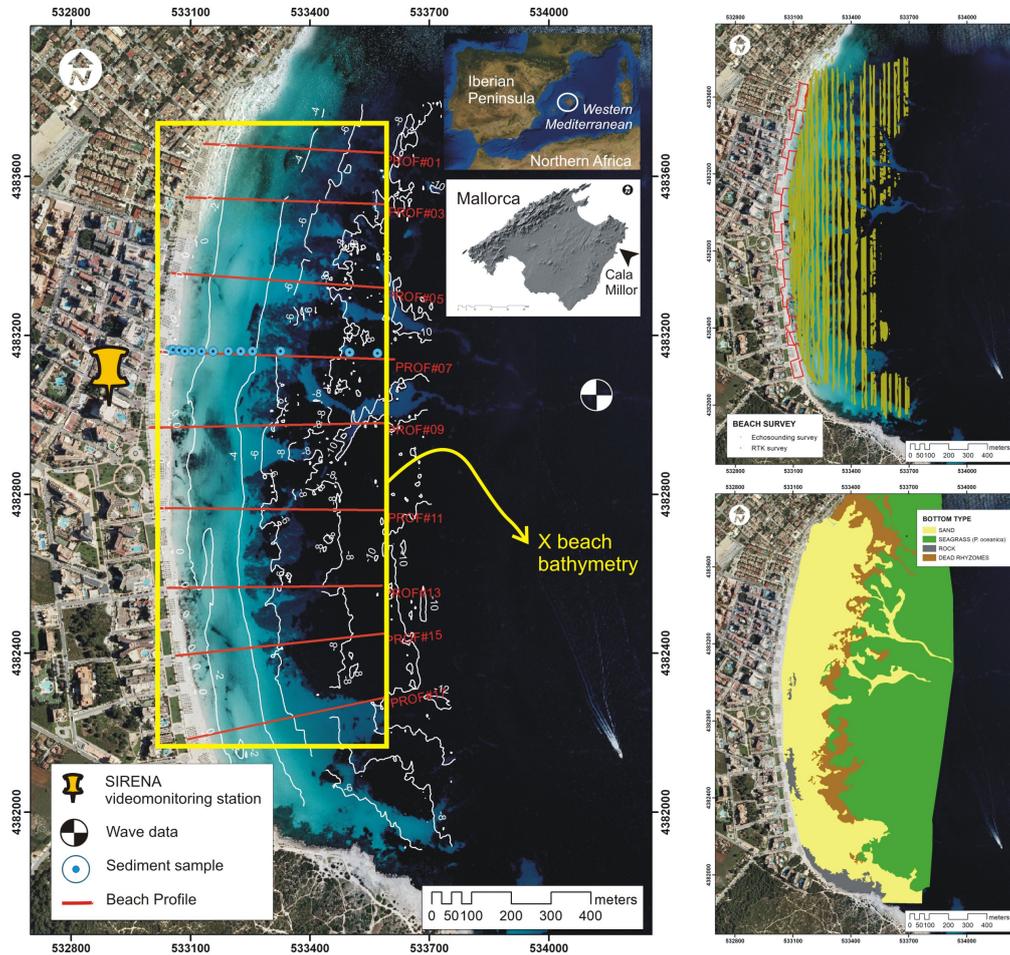


Figure 1. Study site location and major features of Cala Millor. Right panel: White dashed lines corresponds to bathymetric survey (isolines equistance 2 m); Yellow frame covers the bathymetry area obtained by means of Xbeach; and red lines to the beach profile described in text. The bottom orthophoto is provided by the Govern de les Illes Balears-SITIBSA (June 2008). Upper right panel shows the combination of multibeam bathymetric survey (green points) and RTK-GPS survey for dry beach and very shallow submerged beach (red points). Lower Right panel: bottom type at Cala Millor.

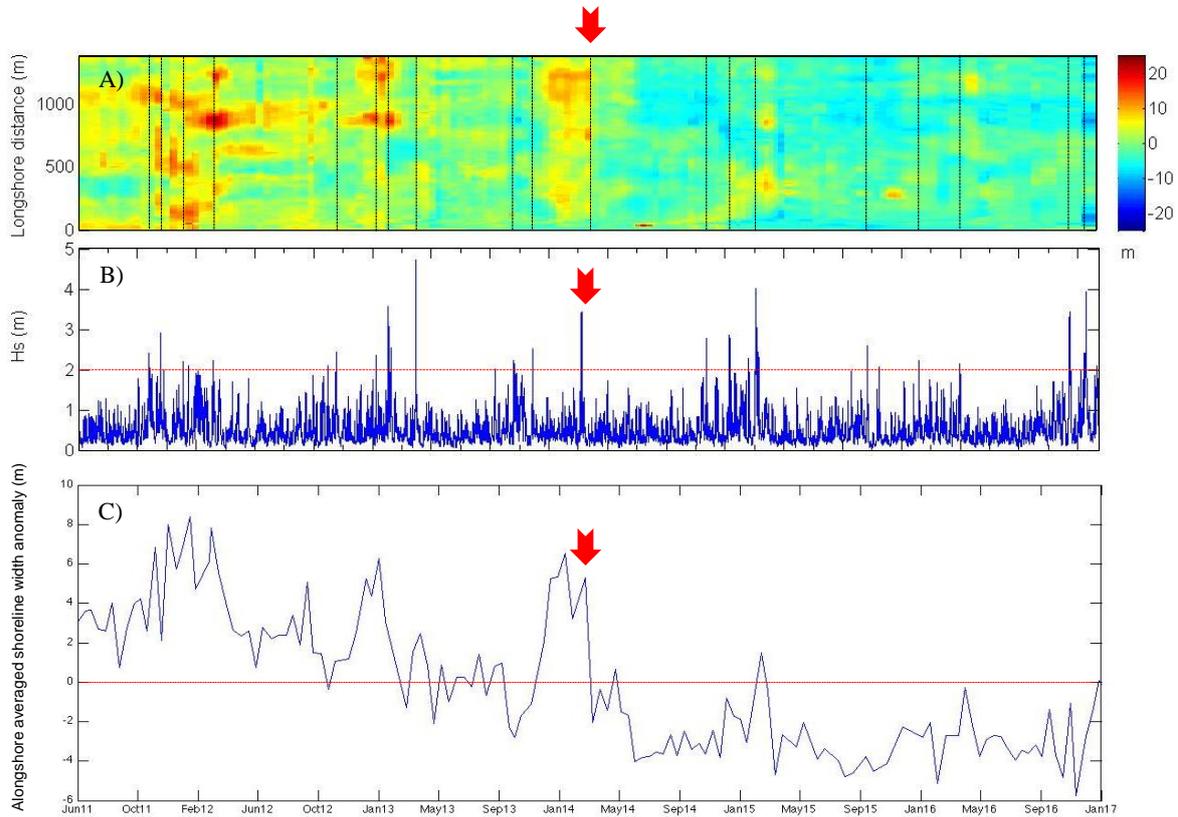


Figure 2. A) Alongshore shoreline width anomaly at Cala Millor from November 2010 to January 2017. Red colors indicate shoreline advance, whereas blue ones indicate shoreline recession. The dashed black lines show the sea storm events larger than 2 m. B) Wave significant height from a wave recorder located at -17 m in the middle of Cala Millor embayment. C) Alongshore averaged shoreline width anomaly at Cala Millor. The red arrows highlight the storm group event at April 2014.

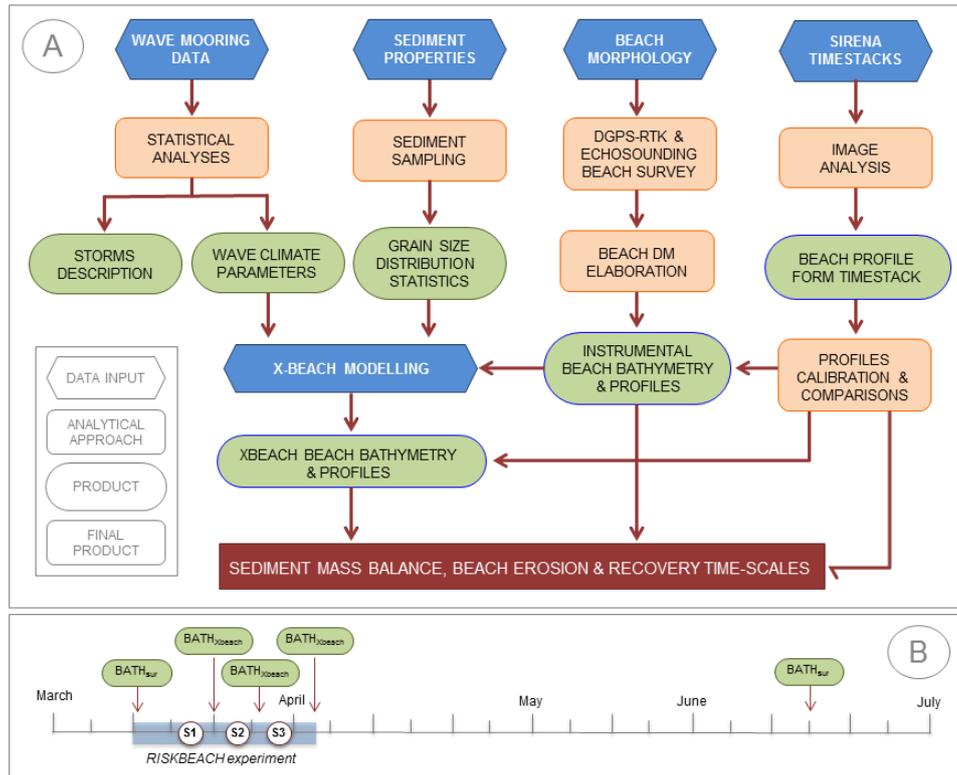


Figure 3. A) Workflow of the approach followed in the study. B) Calendar showing the date for the samples used in the study.

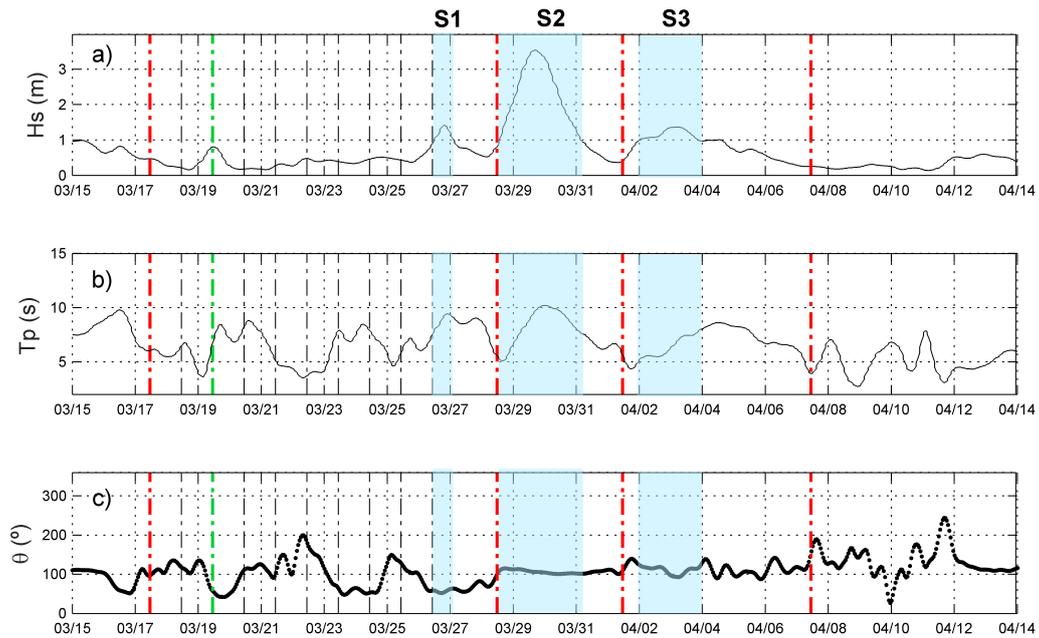


Figure 4. a) H_s (m) at 25m in Cala Millor between March 15th to April 14th 2014; b) T_p (s) and c) Wave direction. The blue shading shows the period corresponding of the storms. Vertical red dotted line indicates the initial bathymetry obtained while dash dotted lines indicate the dates when cross shore profiles where measured. Vertical green dotted line states the day where the model was validated using the corresponding shore profiles. Vertical red lines show the date when bathymetry inferred from Xbeach is used for comparison between storms.

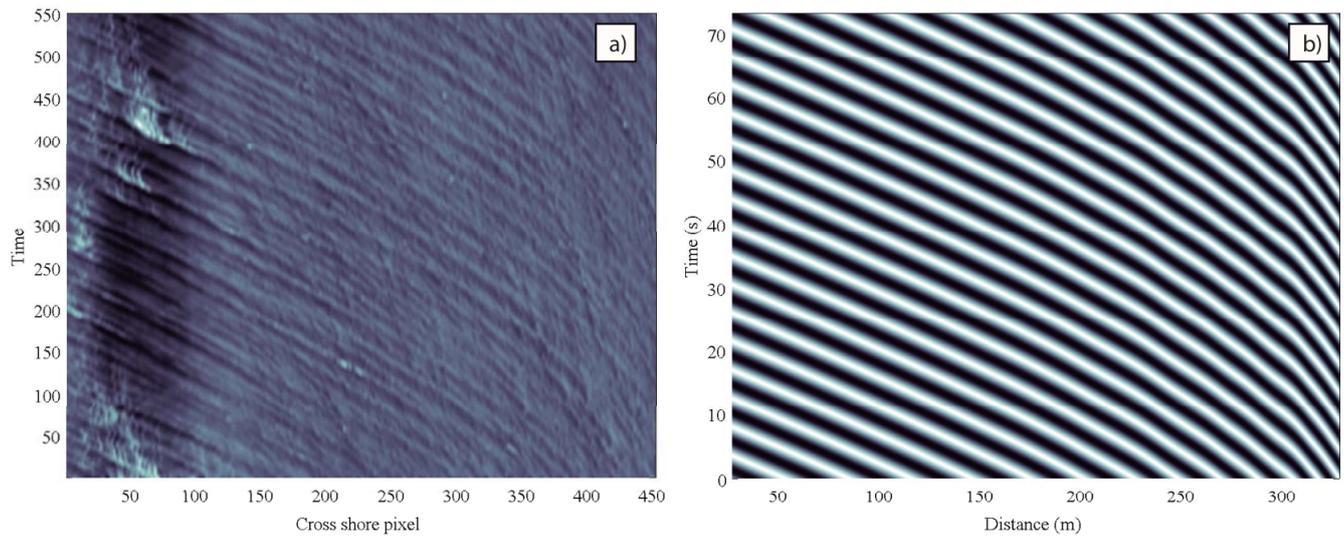


Figure 5. a) Timestack image for March 19th at 9.00 am for the central camera. The abscissa corresponds to the cross-shore direction and the ordinate for the time. b) Reconstruction for the same date assuming a constant wave height using the Fourier mode of the detected period (*i.e.* $\cos(\phi(x, f_w) - 2\pi f_w)$).

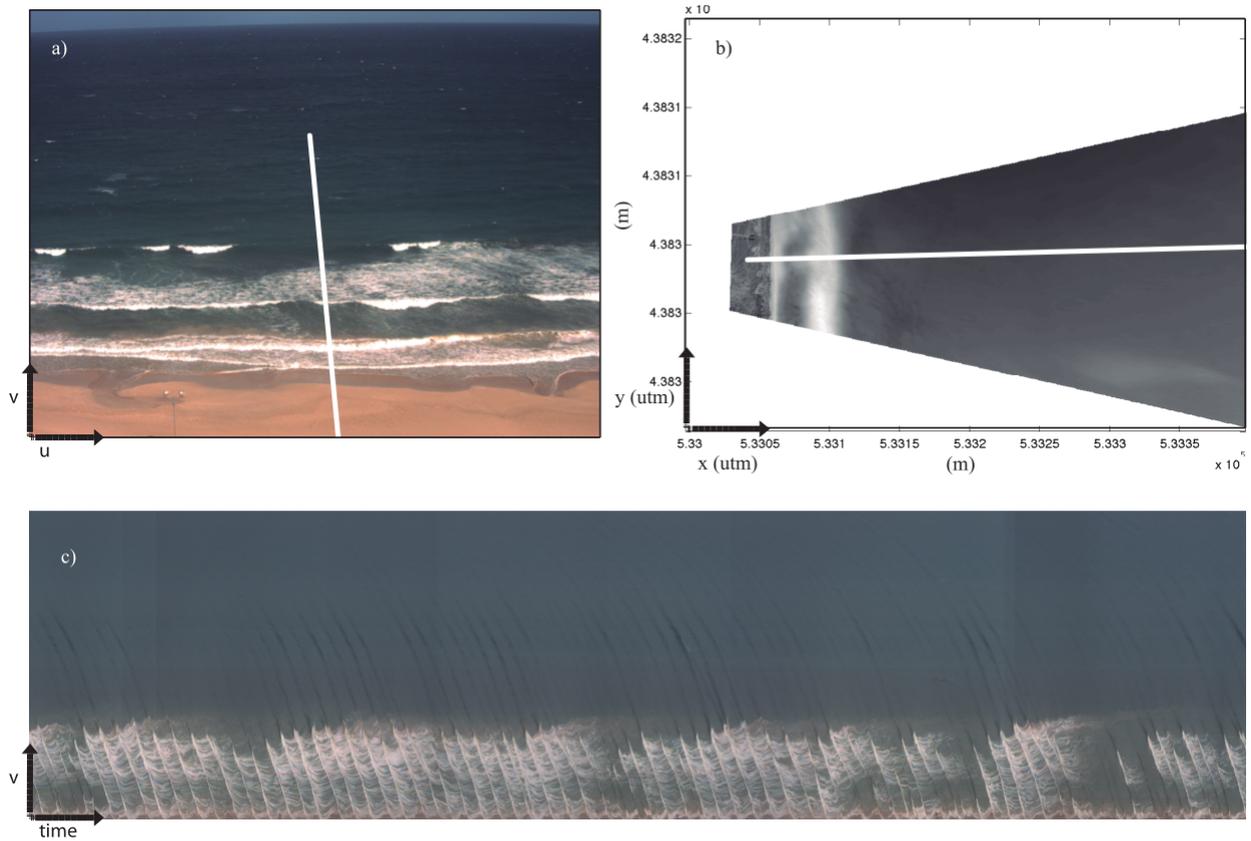


Figure 6. a) Cross-shore transect defined for the timelapse image on camera #3. The Figure shows the original image in the $(u, v) \equiv$ pixel coordinate system. b) The same after rectification in the $(x, y) \equiv$ UTM coordinate system. c) Resulting timelapse for March 19th at 10.00 am.

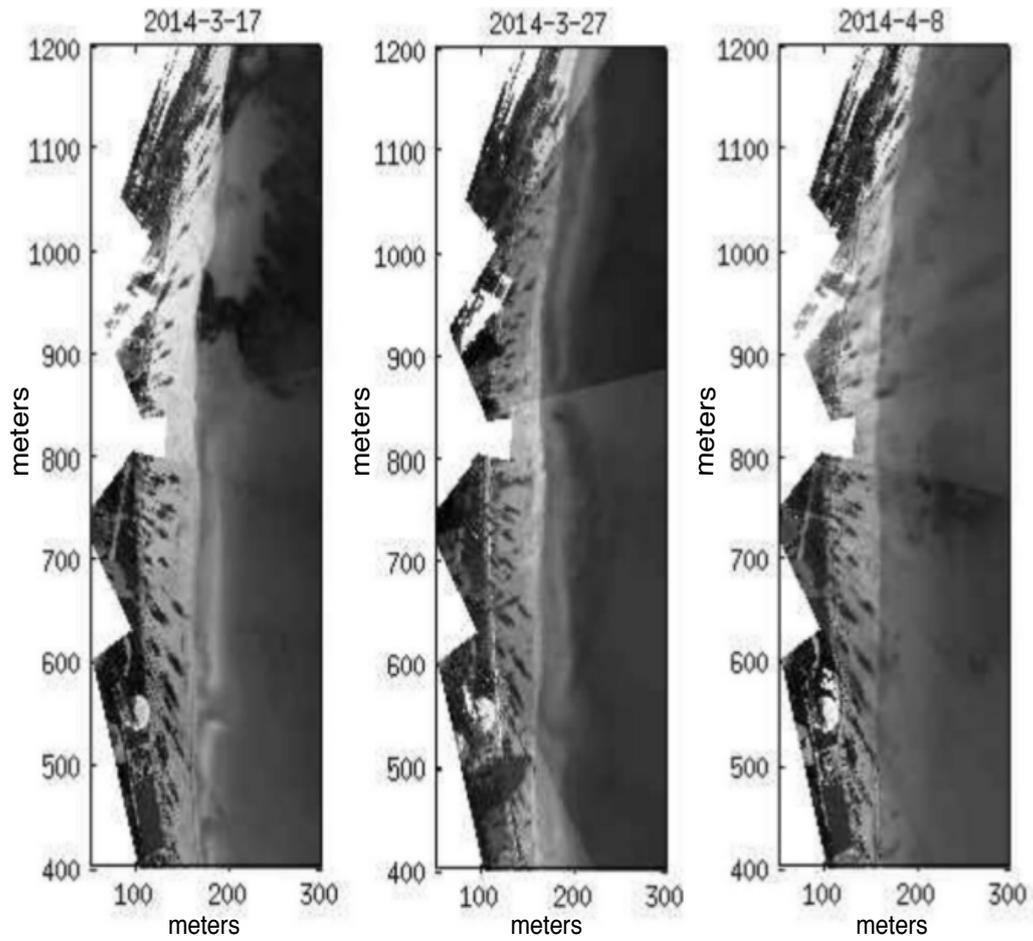


Figure 7. Timex images with dates referred in each image. Notice the intermediate configuration with a sinuous parallel bar along the coast (ca. 180 m) for March 17th and March 27th and the dissipative scenario without bar for April 8th.

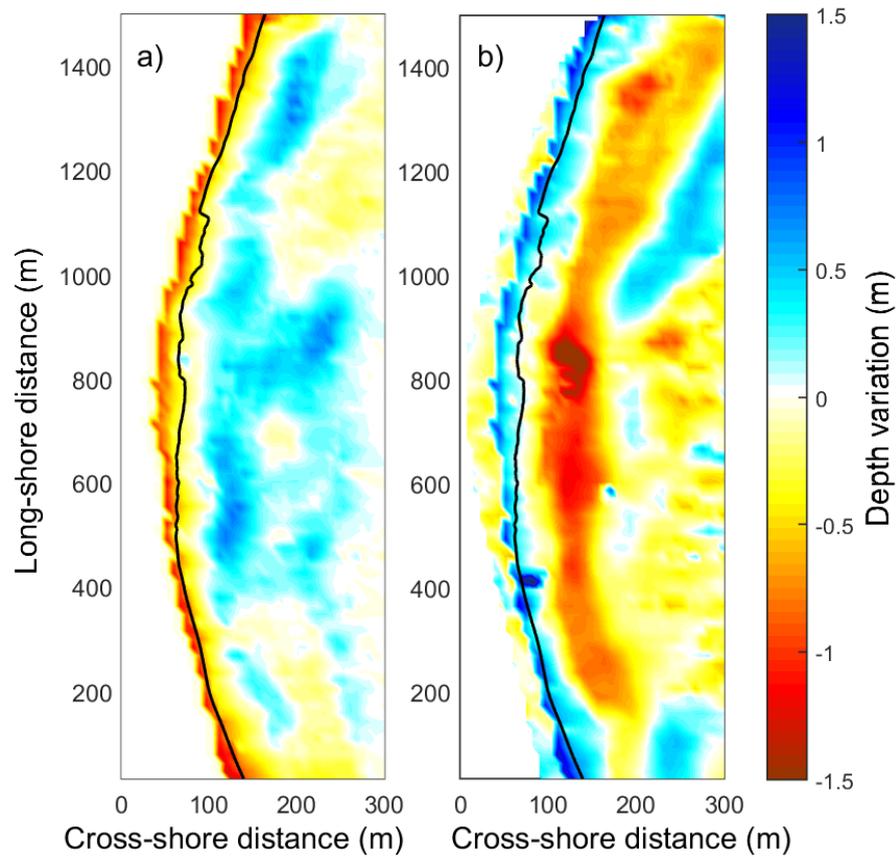


Figure 8. Depth variation estimated from XBeach and from measurements. a) Bottom variation during the storm group (March 17th to April 8th). b) Bottom variation for the period of calms (April 8th to June 12th).

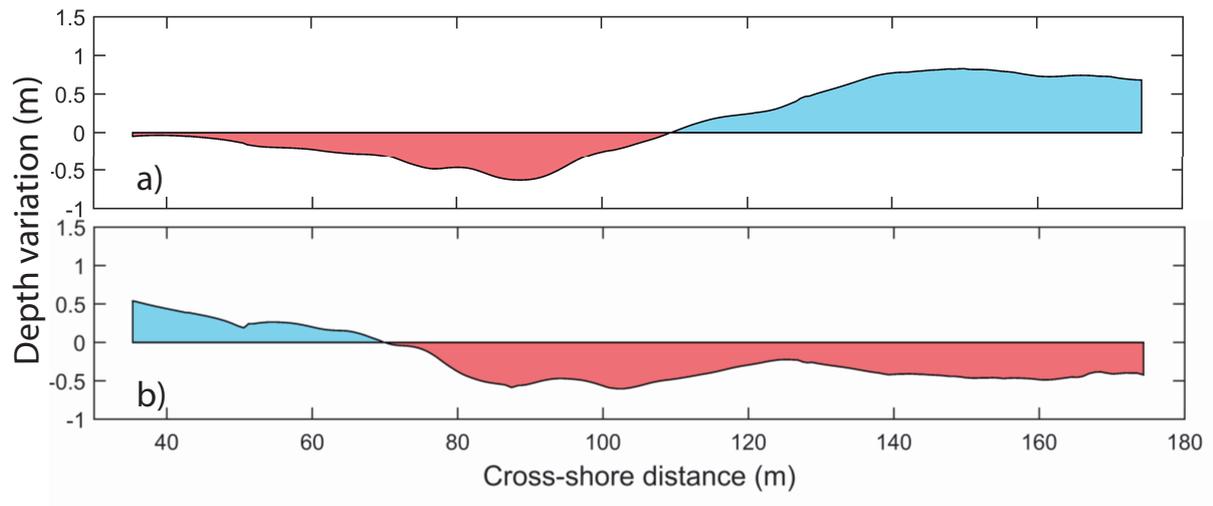


Figure 9. Depth variation estimated from bathymetry inversion of the timesatck during storm conditions; a) between April 8th and March 20th (storm conditions); b) between June 12th and April 8th (calm conditions).

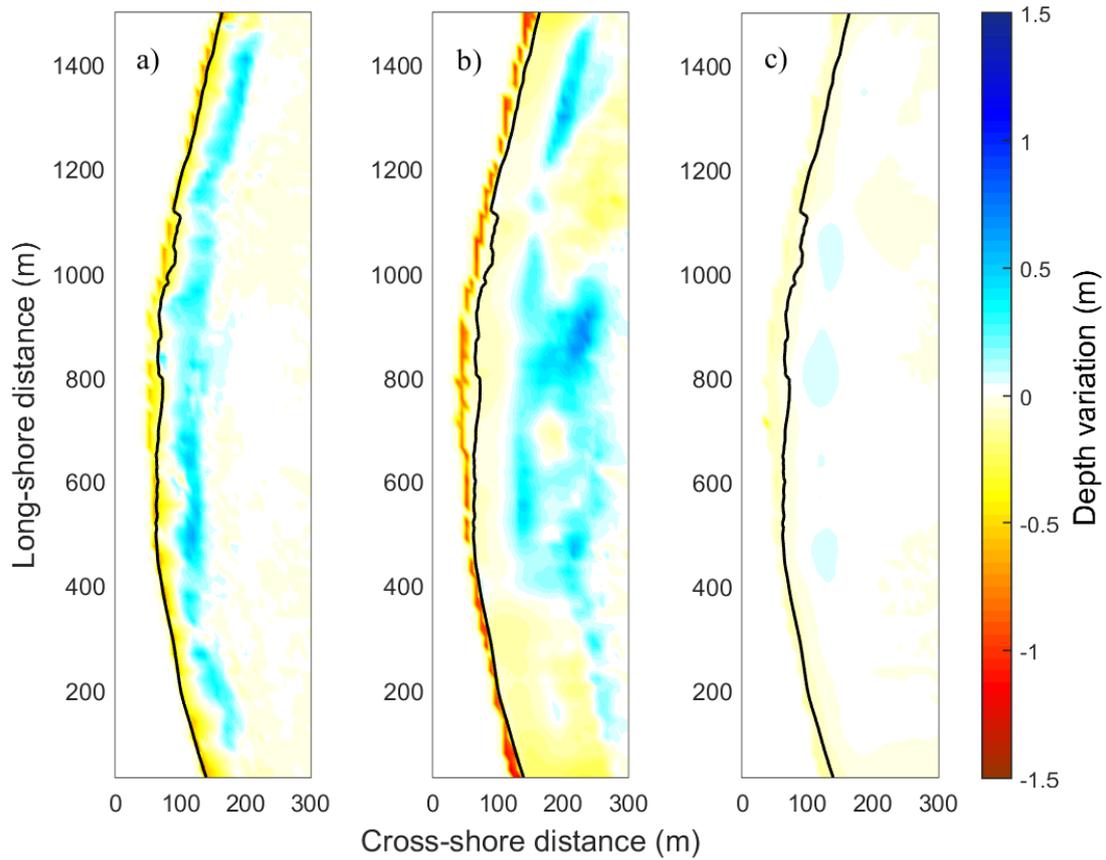


Figure 10. Depth variation estimated from XBeach and from measurements. a) Bottom variation between March 17th to March 28th (storm S1). b) Depth variation between March 28th to April 1st (storm S2). c) Depth variation between April 1st April to 8th (storm S3).