

Improved Accuracy and Efficiency of Flood Inundation Mapping of Low-, Medium-, and High-Flow Events Using the AutoRoute Model

Michael L. Follum^{1,2}, Ricardo Vera³, Ahmad A. Tavakoly^{1,4}, and Joseph L. Gutenson^{1,5}

¹Coastal and Hydraulics Laboratory, Engineer Research and Development Center, 3909 Halls Ferry Road, Vicksburg, MS 39180, USA

²Wyoming Area Office, U.S. Bureau of Reclamation, 705 Pendell Blvd., Mills, WY 82644, USA.

³Cold Regions Research and Engineering Laboratory, Engineer Research and Development Center, 72 Lyme Road, Hanover, NH 03755, USA

⁴Earth System Science Interdisciplinary Center, University of Maryland, College Park, MD 20740, USA

⁵National Water Center, National Oceanic and Atmospheric Administration, 205 Hackberry Ln, Tuscaloosa, AL 35401, USA

Correspondence to: Michael L. Follum (follumm@gmail.com)

Summary of Author Response

We would like to thank both referees (R1 and R2) for their comments and suggestions. We appreciate all their insights, which we believe improved the manuscript. In this document we respond to each comment and describe the associated changes to the manuscript. All line and page numbers refer to the manuscript with no changes marked. The point-by-point response to the reviews are presented first, followed by a blank page, and lastly followed by the marked-up version of the manuscript.

R1 - General Issue #1, rephrasing of the title to capture both the development and application parts of the manuscript. We agree with the reviewer that the title needed to be rephrased to incorporate the “development” part of the manuscript. The title has now been changed to:

“Improved Accuracy and Efficiency of Flood Inundation Mapping of Low-, Medium-, and High-Flow Events Using the AutoRoute Model”.

R1 & R2 - General Issue #2, the use of a water surface elevation interpolator using IDW is the only new component to AutoRoute and not enough to warrant a separate publication. Although simple, the use of the water surface elevation interpolator produces improved accuracy (filling of holes in floodplain while accounting for terrain) and computational efficiency of the AutoRoute model. However, it is not the only new component described in this paper. The use of an automated bathymetric estimation within the AutoRoute is also new (Lines 52-53, 87-89, 102-110, Figure 1) and may actually be more important to the original application of AutoRoute as a connection between hydrologic data and mobility analysis (Lines 36-41, 51-52). The revised paper now provides more emphasis on the automatic bathymetric profile component within AutoRoute and its application for mobility analysis (Lines 318-319, 349-351). A future research area now highlighted is the

use of different bathymetric profile methods to improve flood and mobility analysis (includes reference to Dey et al., 2019)
35 (Lines 349-351).

R1 - General Issue #3, implement a stable solution for fixing the outliers during streamline water depth estimation process.
We agree with the reviewer that a method to omit stream depth outliers will improve the accuracy of the flood inundation
maps. We tested two simple methods to remove outliers based on average depth of a stream reach and average water surface
40 elevation of a stream reach. Stream cell calculations were omitted if outside of 1 or 2 standard deviations from the average
depth or surface elevation of the stream reach. Neither method improved the flood inundation results and often increased the
error in certain locations along the stream reach. Lines 157-161 have been modified to better describe the affect that outliers
have on both flood inundation and mobility assessments. Removal of outliers in the stream water depth estimation process is
now included as an avenue of future research (Lines 160-161, 351-352).

45 R1 & R2 - General Issue #4, rerun flood models using LiDar elevation instead of NED elevation. We agree with the reviewers
that a test using higher-resolution elevation data would be beneficial. We added a new section (Section 4.2) to use 3-m
elevation data and reran the model for the MS and NC test cases. Results are explained in Lines 261-278, 290-291, 335-340,
and Figures 6 and 7.

50 R2 - General Issue #1, testing of low and high flow events within 1-D hydraulic models has previously been completed. This
paper aims to improve the accuracy and computational efficiency of the AutoRoute model in simulating low-, medium-, and
high-flow events. AutoRoute is somewhat unique from other flood-inundation models as it has been applied at the regional-
to continental-scale by the U.S. military for both flood inundation and mobility purposes (Lines 36-41, 54-58), but has only
55 been tested against high-flow events (Lines 15, 82-85). With the noted exception of Wing et al. (2017) (Lines 28-30), most
studies that analyze low- and high-flow events are doing so at the reach-scale using one-dimensional (1-D) hydraulic models
developed for reach- to small basin-scale applications (e.g. Dey et al., 2019; Tayefi et al., 2017). Therefore, analyzing low-,
medium-, and high-flow events within a model developed to operate using high-resolution elevation data at the regional- to
continental-scale is new.

60 We agree with the referee that 1-D hydraulic models often perform better during high flow events, which this study found as
well (Line 245-247) and we now reference a new publication (Dey et al. 2019).

R2 - General Issue #2, provide more discussion on how AutoRoute flood simulations may scale up both in space and time.
We agree with the reviewer that more context was needed for how AutoRoute could be implemented at larger scales. The text
65 was modified to describe how the U.S. Army Coastal and Hydraulics Lab currently uses the Streamflow Prediction Tool (SPT)
and AutoRoute to provide hydrologic and mobility awareness for approximately 70% of the world (Lines 36-41). Lines 306-
309 now discuss how the increased efficiency of the AutoRoute model will enable better use of the tool for applications outside

of the United States. Lines 309-316 and 352-354 describe how future adaptations to AutoRoute could further improve the computational efficiency of the model, enabling it to be used for larger areas.

R1 & R2 - Specific Issue #1, what constitutes an “accurate” F value? To the best of the authors’ knowledge, the threshold of an accurate F value has not been defined in literature. Usually, “F” values are compared relative to scenarios defined in each project (e.g. Model A results have a higher F value than Model B results). Terrain and geographic complexity of the region also affect what is considered an accurate F value. For example, in regions with high topography where channels are well-defined one would expect a one-dimensional model to produce a higher F value than for a shallow river in a coastal plain. Because of this ambiguity, we have modified the text in Lines 16, 20, 225-227, and 329 to reflect that the F values produced in this study are comparable with published values in literature.

R1 - Specific Issue #2, inconsistency in limitations of HAND. The referee is correct that the limitations of the HAND method to operate outside of the United States were incorrectly characterized. We revised Lines 45-49 to describe the limitation of HAND needing flow-depth relationships that are currently not available for much of the world. Lines 310-313 and 352-354 describe how AutoRoute could potentially be used to create these flow-depth relationships that in-turn could be used with the HAND method.

R1 - Specific Issue #3, variations in flow depth along river reach in Figure 2b. The referee is correct that the variations in depth in Figure 2b are caused by individual depth calculations at each cross-section. As discussed in a previous comment, a solution for omitting outliers was tested but was not successful and is therefore left for consideration in future work (Lines 160-161, 351-352). Therefore, we revised/added the text (Lines 157-164) to discuss the variations in depth and how they mainly affect the depth values in the center of the channel. The text also addresses how the variations in depth will likely have a greater affect on mobility analysis when using AutoRoute.

R1 - Specific Issue #4, same medium flow rates at IN and CO sites in Table 2. The flow rates for IN (Nystrom, 2013) and CO (Kohn and Patton, 2018) shown in Table 2 have been checked and are correct.

R1 - Specific Issue #5, addition of a figure showing the river networks for the NC and MS sites. Figures 6 and 7 (referenced in Line 185 & 189) now show the streamlines and gage locations for the NC and MS sites, respectively.

R1 - Specific Issue #6, different spatial resolution reported for NED data. All references to a “10 m” spatial resolution for the 1/3 arc-second National Elevation Dataset have been changed to “9 m”.

R1 - Specific Issue #7, does the land cover dataset have the same resolution as the elevation dataset? The land cover dataset has a spatial resolution of approximately 30 m (Line 195-196) and is therefore resampled to the same resolution as the elevation dataset (Lines 195-196, 265-266).

105 R1 - Specific Issue #8, redundant figures. We agree with the reviewer's suggestion and Figures 3-9 in the original manuscript have now been consolidated into Figures 3-5 (reduction of 4 figures).

R1 - Specific Issue #9, include inundation coverage areas in Table 3. We revised Table 3 to include coverage areas (observed area, simulated area, accurately-simulated area, under-simulated area, and over-simulated area). References to the coverage
110 areas are now made in the Results and Discussion section.

R2 - Specific Issue #1, provide reference for the line "For high flow events the bathymetry in smaller streams can often be ignored...". We revised the text (Lines 102-106) to emphasize the importance of bathymetry in flood model simulations and mobility assessments.

115

References

- Dey, S., Saksena, S., Merwade, V.: Assessing the Effect of Different Bathymetric Models on Hydraulic Simulation of Rivers
120 in Data Sparse Regions, Journal of Hydrology, 575, 838-851, 2019.
- Kohn, M. S. and Patton, T. T.: Flood-inundation maps for the South Platte River at Fort Morgan, Colorado, U.S. Geological Survey Scientific Investigations Report 2018–5114, Available from: <https://doi.org/10.3133/sir20185114>, 2018.
- McKinley, G. B., Mason, G. L., Follum, M. L., Jourdan, M. R., LaHatte, C. W. and Ellis, J.: A Route Corridor Flood Vulnerability System, Geotechnical and Structures Laboratory Technical Report ERDC/GSL TR-12-29. U.S. Army
125 Engineer Research and Development Center, Geotechnical and Structures Laboratory, Vicksburg, Mississippi, 2012.
- Nystrom, E. A.: Flood-inundation maps for the White River at Spencer, Indiana, U.S. Geological Survey Scientific Investigations Map 3251, Available from: <http://pubs.usgs.gov/sim/3251/>, 2013.
- Tayefi, V., Lane, S. N., Hardy, R. J. and Yu, D.: A comparison of one- and two-dimensional approaches to modelling flood inundation over complex upland floodplains, Hydrol. Process., 21, 3190–3202, doi:10.1002/hyp.6523, 2007.
- 130 Wing, O. E. J., Bates, P. D., Sampson, C. C., Smith, A. M., Johnson, K. A. and Erickson, T. A.: Validation of a 30 m resolution flood hazard model of the conterminous United States, Water Resour. Res., 53(9), 7968–7986, doi:10.1002/2017WR020917, 2017.

135

140

145

150

155

160 **Improved Accuracy and Efficiency of Flood Inundation Mapping of**
Low-, Medium-, and High-Flow Events Using the AutoRoute Model

Michael L. Follum^{1,2}, ~~Ricardo Vera~~³, Ahmad A. Tavakoly^{1,2,4}, and Joseph L. Gutenson^{1,3}, ~~and Ricardo~~

~~Vera~~^{4,5}

Formatted: Superscript

165 ¹Coastal and Hydraulics Laboratory, Engineer Research and Development Center, 3909 Halls Ferry Road, Vicksburg, MS 39180, USA

²Earth System Science Interdisciplinary Center, University of Maryland, College Park, MD 20740, USA

³National Water Center, National Oceanic and Atmospheric Administration, 205 Hackberry Ln, Tuscaloosa, AL 35401, USA

⁴Cold²Wyoming Area Office, U.S. Bureau of Reclamation, 705 Pendell Blvd., Mills, WY 82644, USA

170 ³Cold Regions Research and Engineering Laboratory, Engineer Research and Development Center, 72 Lyme Road, Hanover, NH 03755, USA

⁴Earth System Science Interdisciplinary Center, University of Maryland, College Park, MD 20740, USA

⁵National Water Center, National Oceanic and Atmospheric Administration, 205 Hackberry Ln, Tuscaloosa, AL 35401, USA

Correspondence to: Michael L. Follum (follumm@gmail.com)

Abstract. This article presents improvements and development of a post-processing module for the regional scale flood mapping tool, AutoRoute. The accuracy of this model to simulate low, medium, and high flow rate scenarios is demonstrated at seven test sites within the U.S. AutoRoute is one of the tools used to create high-resolution flood inundation maps at regional- to continental-scales. The model has previously only been tested using extreme flood events. In this article flood inundation results for low-flow events are shown to be accurate comparable with published values (average F value of 63.3%) but tend to be overestimated, especially in flatter terrain. Higher-flow scenarios tend to be more accurately simulated (average F value of 77.5%). Additionally, modifications to the AutoRoute model and post-processing scripts are shown to improve computational efficiency (i.e. simulation time) by over 40% when compared to previous versions. With improved computational efficiency and the ability to ~~accurately~~ simulate both low and high flow scenarios the AutoRoute model may be well suited to provide first-order estimates of flooding within an operational, regional- to continental-scale hydrologic modelling framework.

185 **1 Introduction**

Recent advances have demonstrated continental-scale flow forecasting models capable of simulating thousands of stream reaches simultaneously (e.g. National Water Model (NWM) (<http://water.noaa.gov/about/nwm>); Streamflow Prediction Tool (SPT) (Snow et al., 2016; Wahl 2016)). Although flow simulations at these scales are beneficial, water managers and emergency personnel benefit more from high-resolution flood inundation maps to make operational decisions (such as evacuation, road closures, etc.). Advanced hydraulic models typically operated from the reach-scale to the small-basin-scale

have shown some success in simulating flood inundation at the continental scale (Wing et al., 2017), but at a high computational cost. Due to low data requirements, fast initial set-up times, and lower computational burden, lower-complexity hydraulic models have been developed in recent years to simulate flood inundation quickly using continental-scale hydrologic modelling outputs. Although not meant to replace the higher-fidelity hydraulic models, these lower-complexity models can provide a reasonable first-order approximation of flood inundation over regional to continental extents and help prioritize where deployment of the higher-fidelity hydraulic models are needed (Follum et al., 2019). The National Oceanic and Atmospheric Administration (NOAA) National Water Center (NWC) has adopted the Height Above Nearest Drainage (HAND) model (Liu et al., 2018; Zheng et al., 2016) to use in conjunction with the NWM within the U.S. Due to a need for connecting hydrologic data to mobility models for the military, the U.S. Army Coastal and Hydraulics Laboratory (CHL) developed the AutoRoute flood and mobility model (Follum, 2012; Follum et al., 2017); McKinley et al., 2012). AutoRoute works in conjunction with the SPT (Follum et al., 2017) to provide hydrologic and ~~trafficability~~mobility guidance in data sparse environments outside the continental United States (~~OCONUS~~ in data sparse environments). Currently SPT is run operationally (15-day streamflow forecasts updated twice daily) by CHL for approximately 70% of the world. AutoRoute is currently operated in an ad-hoc basis.

Both HAND and AutoRoute are raster-based models. Using the high-resolution National Hydrography Dataset Plus (NHDPlus-database) dataset (Horizon Systems Corporation, 2007; McKay et al., 2012) and a ~~~10m~~9 m digital elevation model (DEM), Liu et al. (2018) created HAND rasters for the entire U.S. A HAND raster simply shows the relative height of a cell above the nearest ~~NHD~~NHDPlus stream line (nearest in terms of drainage distance). Flow-depth rating curves are assigned to each stream reach (Zheng et al., 2018). ~~Given~~ so if given a flow rate the stage of the river can be calculated ~~and used with the~~. Any HAND raster to quickly create continuous flood maps cell with a value less than the calculated river stage is considered flooded (inundated). However, this process relies heavily on pre-computed flow-depth relationships ~~that may be difficult to apply in areas without high resolution DEM or NHD datasets. Additionally, these pre-computed flow-depth relationships must be updated when more accurate or precise DEM or stream line data are made~~currently not available ~~for much of the world.~~

AutoRoute was initially developed by CHL to automatically develop cross-sections along ephemeral streams/rivers to assess gap-crossing capabilities of military vehicles during flood events (Follum, 2012; McKinley et al., ~~2012~~2012). Because AutoRoute was utilized for ephemeral streams the channel profile (including bathymetry) was assumed to be represented by the DEM. Recently, AutoRoute has been applied with large-scale river routing models (such as the RAPID model (David et al., 2011; Tavakoly et al., 2017) within SPT) to simulate high-resolution (<30m spatial resolution) flood inundation maps over large extents: 230,000 km² area in the Midwest United States; 109,500 km² area in the Mississippi Delta (Follum et al., 2017); Sava River Basin; Puerto Rico (Follum et al., 2018); Navajo Nation (Follum et al., 2019); and Luzon, Philippines (Wahl et al., 2017). Stream networks (polyline format) within the U.S. are defined using the NHDPlus dataset. Outside the U.S. stream

225 networks (polyline format) for approximately 70% of the world have been created using HydroSHEDS and HydroBASINS
datasets (Lehner and Grill, 2013) (see Snow et al., 2015 for an example). AutoRoute converts the polyline stream locations to
a raster or table format (see Follum et al. (2017) for details). Cross-sections are automatically sampled for each stream cell
from a DEM and the normal depth is then calculated for a given flow rate using Manning's equation. The extent and depth of
flooding within the cross-section is then mapped to a raster format. Only cells within the raster used for cross-sections will
230 show flood extent or depth. A post-processing step is often utilized where flood extent results in raster format are converted
to a polygon format. The main purpose of the post-processing step is to overcome inaccuracies in the flood extents created by
AutoRoute. Holes in the floodplain (cells not captured by cross-sections) are filled, the boundaries along the floodplain are
smoothed, and outliers in the flood extent (cells that show flooding where no other surrounding cells show flooding) are
omitted. Outliers in the flood map are caused by large variations in flow depths along a given stream reach (Afshari et al.,
235 2018; Follum et al. 2017), often caused by high elevation values due to bridges (Follum et al. 2017) or spikes in the DEM;
cross-sections not being sampled perpendicular to the stream channel; and errors in calculating the slope of the channel (related
to errors in the stream network or DEM). It is expected that these variations in depth and flood extent will be more pronounced
in low-flow events where differences in depth or inundation extent may be more evident in an inundation map.
Computationally, the post-processing step takes almost as long as the execution of the AutoRoute model itself (Follum et al.,
240 2017). Additionally, this post-processing step does not consider the terrain data; the post-processing is used only to make
flood inundation maps appear more continuous.

Afshari et al. (2018) compared HAND, AutoRoute (with post-processing), and HEC-RAS 2D (USACE, 2016) at two locations:
Cedar River watershed in Iowa, and the Black Warrior River in Alabama. Three statistical flow conditions were tested at each
245 site, the 10-, 100-, and 500-yr flow rates. The HAND and AutoRoute models produced similar flood inundation maps when
compared to the more-advanced HEC-RAS 2D model, but both HAND and AutoRoute showed less accuracy in meandering
channels and near confluences. Overall, the AutoRoute model produced slightly higher flood extent accuracy than the HAND
model. However, the AutoRoute model tended to have lower accuracy with lower flow events. This highlights a concern that
the AutoRoute model has typically been tested for large flood events (flood events greater than the 50-yr flood were tested in
250 Follum (2012), Follum et al. (2017; 2018; 2019), and Wahl et al. (2017)) and may not be applicable for less extreme flow
events.

This article presents modifications to the AutoRoute model to better incorporate bathymetry estimations and terrain in the
calculation and post-processing of flood inundation maps ~~and, which are expected to~~ testimprove the flood mapping capability
255 of the AutoRoute model for extreme (>50 yr flood event) and non-extreme flood cases. The modifications are expected to
produce continuous and accurate flood extent results for both low and high flow events. The AutoRoute model is tested at
seven locations within the U.S. where flood inundation maps for multiple flow rate scenarios (ranging from low to high flow

events) have been ~~modeled~~modelled and compared to observed flow events by NOAA's Advanced Hydrologic Prediction Service (McEnery et al., 2005).

2 Methodology

2.1 AutoRoute Model

AutoRoute is a grid-based model where elevation, stream locations (stream cells), and land cover are defined using a raster format. Gridded stream cells were originally defined using a flow accumulation raster (Follum, 2012). With the creation of river networks in polyline format (e.g. ~~NHD~~NHDPlus and HydroSHEDS) stream cells are now created by converting polyline data to a raster or table format (table defines the x- and y- coordinates). Each stream cell retains the unique river reach identifier (e.g. ComID in ~~NHD~~NHDPlus) to associate attributes of the stream reach to each stream cell. For example, streamflow Q ($\text{m}^3 \text{s}^{-1}$) from a hydrologic model, such as SPT or NWM, is assigned to each stream cell using the river reach identifier. At each stream cell, cross-sections are sampled from an elevation dataset (Figure 1). ~~For high flow eventsIn the bathymetry in smaller streams can often be ignored becauseoriginal AutoRoute model the flow eventchannel profile is considerably higher thanestimated only from the base flow. For low flow events the bathymetryelevation dataset; no bathymetric profile is likelyassumed. Although not assuming a bathymetric profile was acceptable in the original applications of more importance because the base flow is a larger portion of the flowAutoRoute where ephemeral streams were being simulated., AutoRoute is being used in more regions and inclusion of bathymetric profiles should improve flood inundation estimations (Dey et al., 2019) and mobility assessments.~~ For each cross-section sampled, ~~AutoRoute now includes a bathymetry estimation.~~ AutoRoute adjusts the centerline ~~of the cross-section~~ to the lowest point ~~in the cross-section~~. The lateral distance that AutoRoute searches for the lowest point is specified by the user, typically defined as 20m. As shown in Figure 1, the cross-section sampled from the DEM often shows the stream/river as a flat surface. AutoRoute automatically finds the top-width of the water surface and then estimates a bathymetric profile. The bathymetric profile is assumed to have an exponential shape, as shown in Figure 1.

Using Manning's equation (described below), the depth of the bathymetric profile is set so that a specified base flow will pass through the bathymetric profile. The bathymetric profile is burned into the cross-section profile and the centerline of the stream/river is again adjusted to the lowest point.

Hydraulic area A (m^2) and wetted perimeter P (m) are calculated at each cross-section for a given flow depth D (m). Using a volume-fill approach D is incrementally increased until there is less than a 1% difference between Q and the calculated streamflow Q_{calc} ($\text{m}^3 \text{s}^{-1}$), calculated using Manning's Equation:

$$Q_{calc} = \frac{c_u}{n} A^{5/3} P^{-2/3} S_f^{1/2}, \quad (1)$$

where c_u is the unit constant (1.0 for metric units), n is the Manning's roughness coefficient, and S_f is the hydraulic slope.

290 Normal depth is assumed, and therefore $S_f = S_o$, where S_o is the slope of the channel. AutoRoute calculates S_o by analyzing the elevations and lateral distances upstream and downstream of the stream cell being analyzed (more explanation found in Follum et al. (2017)). n is estimated as (Horton, 1933; Einstein, 1934):

$$n = \left[\sum_{i=1}^N \frac{P_i n_i^{1.5}}{P} \right]^{2/3}, \quad (2)$$

where P_i and n_i are wetted perimeter and Manning roughness coefficient of the i th segment within the cross-section, and N is the total number of segments within the cross-section that are flooded. n_i values are associated with land cover types, as described in Follum et al. (2017).

An initial cross-section is sampled perpendicular to the stream direction, as defined by positions of upstream and downstream stream cells. However, stream cross-sections may not always adequately capture the floodplain geometry, therefore multiple cross-sections are sampled for each stream cell by incrementally pivoting the cross-section relative to the stream direction. As shown in Follum et al. (2017), these multiple cross-sections have the effect of filling in the floodplain but can also create errant cross-sections and therefore errors in the floodplain mapping. The cross-section for each stream cell (subscript sc) that produces the shortest top width TW_{sc} (m) is expected to be the most representative cross-section for that stream cell. The TW_{sc} and the flow depth D_{sc} (m) of the representative cross-section are recorded for each stream cell.

305 AutoRoute originally created flood inundation and flood depth rasters by mapping all of the cross-section depths and extents onto a raster. An iterative combination of the Boundary Clean and Aggregate Polygons functions within ArcGIS (ESRI, 2011) was then used to fill-in holes, omit outlier flood cells, and smooth boundaries along the flood polygon. None of the previous post-processing considered topography in the creation of the flood polygon.

310 2.2 Development of AutoRoute post-processing script (ARPP)

The AutoRoute post-processing script (ARPP) has been developed to better account for topography when creating the flood inundation map. The water surface elevation of each stream cell WSE_{sc} (m) is calculated:

$$WSE_{sc} = E_c + D_{sc}, \quad (3)$$

where E_c (m) is the elevation of the cell. The water surface elevation for each cell in the model domain (WSE_c , m) is interpolated from the WSE_{sc} values using inverse-distance-weighting:

$$WSE_c = \frac{\sum WSE_{sc} w}{\sum w}, \quad (4)$$

where w is the weight, calculated as:

$$\begin{cases} w = d_{c \rightarrow sc}^{-2} & \text{if } d_{c \rightarrow sc} \leq \alpha TW_{sc} \\ w = 0 & \text{if } d_{c \rightarrow sc} > \alpha TW_{sc} \end{cases} \quad (5)$$

where $d_{c \rightarrow sc}$ (m) is the distance between the model domain cell and the stream cell, and α is a user-defined parameter. Higher values of α increase the influence that each stream cell has on flooding the surrounding cells. The flood depth for each cell in the domain D_c (m) is then calculated as:

$$D_c = WSE_c - E_c, \quad (6)$$

where D_c values less than zero are set to zero and cells with D_c values greater than zero are considered flooded. All flooded cells are then converted to a polygon format.

Figure 2 (top) demonstrates the flooding (D_c values) of the surrounding terrain from a single stream cell. When the depths from all stream cells are included by use of Eqs. 4 and 5 the flooding of the surrounding cells provides a continuous flood map with holes only in the high-elevation areas (bottom frame of Figure 2). Additionally, stream cells that have WSE_{sc} values higher/lower than surrounding stream cells (i.e. outliers) have impact only on the immediately surrounding cells (see shallow locations within river in bottom frame of Figure 2). Although these outliers affect the immediately surrounding cells, they have minimal impact on flooding the surrounding cells in the floodplain. However, these outliers could affect channel profiles for mobility analysis and should be addressed in future research. The minimal impact of outliers on flood inundation is due to the influence of water surface elevations from multiple stream cells on each WSE_c value. Use of ARPP to post-process AutoRoute flood depth results is expected to produce more continuous flood maps, account for topography, and reduce the impact of errant D_{sc} values on the flood inundation results, all of which are expected to be important in simulating both low- and high-flow events.

2.3 Study Locations

For several communities throughout the United States the USGS has created flood inundation maps for multiple water surface elevations (stages) of the river. These maps are intended to be used in conjunction with National Weather Service (NWS) forecasted peak-stage data to show predicted areas of flooding. The modelled stage heights vary between the sites, but are intended to capture the river stage at multiple (often around 20) stages between normal conditions (low flow) and the highest rated stage at the streamgage (high flow). The hydraulic model used to create the flood inundation maps varies between the sites, but each model is validated against observed flood events. For this study seven locations where the U.S. Geological Survey (USGS) has completed flood inundation studies were chosen. Each site varies in complexity as well as geographical location (multiple river basins throughout the U.S.).

For each site used in this study Table 1 lists the location, identification (ID), river(s), USGS streamgage number, length of river segments within the study, and reference. All studies utilized LiDAR elevation datasets ranging between 0.9 and 3 m horizontal spatial resolution. Each study also used the HEC-RAS hydraulic model (USACE, 2010; 2016). Each study calibrated and validated the hydraulic models to observed flood data.

Table 2 lists the base flow and the low, medium, and high flow rates used in the study. The low, medium, and high flow rates were chosen based on the minimum, median, and maximum modelled flow rates in each of the USGS studies (a flow rate was assigned to each stage height in each of the studies). The USGS does not provide base flow estimates for the sites in this study, so the base flow was estimated as the average annual flow rate for each gage listed in Table 1. The annual flow rates were obtained from USGS WaterWatch (https://waterwatch.usgs.gov/?id=ww_current; visited 01 Feb 2019). USGS streamgage 02126375 along the Pee Dee River (Figure 6) does not record flow rates, so the flow data from the USGS streamgage 0212378405 approximately 12-km upstream along the Pee Dee River was used to estimate baseflow. Brown Creek and Rocky River are also included in the NC study (Smith and Wagner, 2016), but are omitted from this study because flow rates were unavailable. The USGS streamgage 02473000 along the Leaf River is used in the MS study and is less than 1 km downstream of the confluence of the Leaf and Bouie Rivers (Figure 7). Above the confluence of the rivers the Leaf and Bouie Rivers are assumed to carry approximately 70% and 30%, respectively, of the flow rates measured at the USGS streamgage 02473000 (Storm, 2014).

3 Model Application

AutoRoute models were developed for each of the seven test locations. Each model was developed using elevation data from the 1/3-arc-second (~9 m) National Elevation Dataset (Gesch et al., 2002), and land cover classifications were obtained from the 2011 National Land Cover Database (Homer et al., 2015; NLCD) (Homer et al., 2015). The NLCD has a spatial resolution of approximately 30 m and therefore was resampled to the resolution of the DEM. The stream networks for each study site were defined using the NHDPlus dataset. The AutoRoute model has few calibration parameters. Following Follum et al. (2017), n_i values were set to the lower bound as described in Moore (2011), Chow (1959), and Calenda et al. (2005). The number of cross-sections sampled at each stream cell was set to 9 following Follum et al. (2017). The influence that each stream cell has on flooding the surrounding cells is controlled by the user-defined α parameter. When tested, setting α to 1.5 provided good coverage of the river floodplain while remaining computationally efficient.

For each simulation, the qualitative performance of the AutoRoute models compared to the USGS data are measured using the F-statistic (F , percentage) (Bates and De Roo, 2000; Tayefi et al., 2007) and error bias (E) (Wing et al. 2017):

$$F = 100 \left(\frac{A_{Acc}}{A_{Obs} + A_{Sim} - A_{Acc}} \right), \quad (7)$$

$$E = \frac{A_{Over}}{A_{Under}}, \quad (8)$$

where A_{Obs} (km^2) is the area of flooding from the USGS flood maps, A_{Sim} (km^2) is the area of flooding from the AutoRoute simulation, A_{Acc} (km^2) is the area where both AutoRoute and the USGS show flooding, A_{Over} (km^2) is the area where only the AutoRoute model shows flooding, and A_{Under} (km^2) is the area where only the USGS flood maps shows flooding. F ranges between 0 and 100% with a value of 100% indicating perfect fit between the AutoRoute and USGS flood inundation maps.

Previous applications of AutoRoute within the U.S. have had F values between 58.4 and 92.5% (Follum et al., 2017), with the IN test site having an F value of 77% when compared to observed flood maps from the June 2008 flood. E ranges between 0 and ∞ with E values less than 1 indicating a bias towards underestimation, E values greater than 1 indicating a bias towards overestimation, and an E value of 1 indicating no bias.

4 Results and Discussion

4.1 Flood Inundation Mapping

For each study site the low, medium, and high flow scenarios were simulated using AutoRoute with the results being post-processed using the ARPP. Figures 3-95 show a comparison between the flood inundation maps generated by AutoRoute and the USGS flood maps for the area. In the figures the areas shaded green (Accurate) indicate areas where AutoRoute and the USGS flood maps agree. Areas shaded red (Over) indicate where only AutoRoute simulates the area as flooded and areas shaded blue (Under) indicate where only the USGS shows the area as flooded. For each test case Table 3 shows the value of A_{Obs} , A_{Sim} , A_{Over} , A_{Under} , and A_{Acc} , as well as the quantitative performance (F and E) of flood inundation maps simulated using AutoRoute compared to the USGS flood inundation maps.

The flood maps generated using low flows are satisfactory (average F value of 63.3%), have an average F value of 63.3%, which are comparable with results from other studies (Afshari et al., 2017; Dey et al., 2019; Follum et al., 2017; Tayefi et al., 2007), but tend to overestimate flooding (all E values are greater than 1 except for the CO test site). Although IN has the highest E value, the high F value and Figure 3 show the flood map during the low flow event is accurately simulated and the E value is inflated due to the minimal underestimation of flooding. (Table 3). Visually and quantitatively, NC (Figure 6) and MS (Figure 73 and Table 3) have the greatest amount of overestimation during the low flow event, resulting in the lowest F values of all the simulations. NC shows overestimation in low-lying areas adjacent to the river where the ARPP allows for flooding in areas even if they are not hydraulically connected to the streamlines, resulting in the lowest overall F value of 39.3%. MS also shows gross overestimation of flooding during the low-flow event. MS has minimal topography, a characteristic that has shown AutoRoute to produce less accurate results (Follum et al., 2017). AutoRoute simulations are essentially one-dimensional (1D); better representation of hydrodynamics in areas with minimal topography occurs with multi-dimensional modelling. Additionally, MS has the highest ratio of low flow to base flow (the low flow used in this study is over 15 times the flow rate of the base flow) which may have led to errors in bathymetry estimation if the elevation dataset was derived during a higher flow event. The coarse resolution used in this study compared to the USGS study may also contribute to inaccuracies (e.g. overestimation) that may be more pronounced in flatter terrain such as MS. While most streams considered in this analysis lie in rural land use environments, such as forested or agricultural areas, MS occurs in a primarily urban to sub-urban environment where small-scale changes in the topography are smoothed or negated in the relatively coarse

10m-9 m DEM. Many of these missed topographic features are likely flood control structures, such as levees. The combination of minimal topography, DEM inaccuracies, and land use complexities likely led to the overestimation found in the MS study.

With a few exceptions (e.g. SC (Figure 5)), the flood maps generated for the med- and high-flow events (Figures 4 and 5) are more accurate than the flood maps generated for the low-flow events (Figure 3). This finding is consistent with flood mapping results using the HEC-RAS hydraulic model in recently published work (Dey et al., 2019). They showed that the median of F values is higher with increasing flow. The average F value for med-flow events is 70.0% and average F value for high-flow events is 77.5%. The maximum F value of 92.6% occurs at NC during the med flow (NC had the lowest overall F value during the low-flow event). The sudden increase in F value between the flood maps generated using low-flow and med-flow at NC is due to the low-lying terrain near the river being simulated as flooded by both AutoRoute and the USGS during the med-flow event, thus reducing the overestimation and increasing the accuracy. Although flood maps for the med- and high-flow events tend to have higher F values, they also tend to have a bias to underestimate the flooded area (E values less than 1). The majority of underestimation at the IN test site (Figure 3 Figures 4 and 5) occurs where a tributary (Meadowbrook Creek) that is not accounted for in the AutoRoute simulation flows into the White River to the south and west of the town of Spencer.

The two test locations along the Deerfield River in Massachusetts (MC in Figure 8 and MW in Figure 9) show consistent accuracy between the low-, med-, and high-flow rates. This region of Massachusetts has well-defined rivers and medium to high topographic relief. These features allow AutoRoute to better capture the riverbanks and floodplain, resulting in consistent accuracy (F values close to 100) and minimal bias (E values close to 1).

4.2 Flood Inundation Mapping Test Using High-Resolution DEM

A simple test is employed to determine if a high-resolution DEM (~3 m) improves the flood inundation accuracy when using AutoRoute and ARPP. The MS and NC sites had the most overestimation of flooding during the low flow event when using a ~9 m resolution DEM and are therefore used in this test. A 1/9-arc-second (~3 m) National Elevation Dataset (Gesch et al., 2002) elevation dataset replaces the ~9 m elevation dataset. The NLCD was resampled to 1/9 arc-second, but all other data remains the same from the previous tests. Figures 6 and 7 show the high-resolution flood inundation for low-, med-, and high-flow events at NC (NC-3m) and MS (MS-3m), respectively. Table 3 shows the quantitative performance for flood inundation maps simulated using AutoRoute compared to the USGS flood inundation maps. Table 3 and Figures 3-6 show the flood results for NC and NC-3m are similar for each of the flow events. Even with the high-resolution DEM the model still simulates flooding in the low-lying terrain near the river in the low-flow event (Figures 3 and 6), thus resulting in a high overestimation (high E and A_{Over} values in Table 3). Comparing the simulated area (A_{sim}) for the MS test site the model using 3-m DEM

data produced a flood map having approximately half the area of the flood map using a ~9 m DEM (Figures 3 and 7). For the med- and high-flow test cases the A_{sim} values were approximately 78% and 97%, respectively, of the values when using a ~9 m DEM. Use of higher resolution at the MS test site produced smaller A_{sim} values (Table 3 and Figure 7), especially for smaller flood events. Although smaller A_{sim} values resulted in lower A_{over} values for MS-3m, they also resulted in higher A_{under} values which showed a bias of the model to underestimate the flooded area and therefore the F values did not improve when compared to the MS results. In general, the higher resolution DEM did not substantially improve flood inundation results in NC or MS as expected.

Regardless of DEM resolution, inaccuracies in flood inundation results may also be due to the use of constant n_i values that are set solely based on land cover maps. Not only are roughness coefficients likely different even under the same land cover types, but the values of n_i also vary with the depth of water (Ree and Palmer, 1949; Temple et al., 1987). In this study the low estimate of n_i values were used based on Follum et al. (2017). However, that study did not include bathymetry estimation within the cross-sections and therefore a reexamination of the proper of n_i values to use within AutoRoute may be warranted. Another source of error may be the simple bathymetry estimation for each cross-section. A more detailed bathymetry would affect the low-flow scenario the most but would likely improve the accuracy of flood inundation for all flow scenarios.

4.2.3 Simulation Time

On average, each flow event for each test case using the ~9 m DEM took approximately 12 seconds to read all data (elevation, land cover, stream location, and flow rates) into memory, simulate flood depth results using AutoRoute, post-process the flood depth results into raster flood maps using ARPP, and convert the raster flood maps into flood inundation polygons. However, these model simulations for the high-resolution test locations (MS-3m and NC-3m) each test case took over 90 seconds. However, all of the test cases were for relatively small areas whereas the main reason to utilize a simplified hydraulics model such as AutoRoute is for computational efficiency when simulating flood inundation along thousands of river reaches at the regional- to continental-scales-scale. Therefore, to compare computation times to the original AutoRoute methods described in Follum et al. (2017) the same domains in the Midwest (230,000 km² area) and Mississippi Delta (109,500 km² area) were simulated again using the methods described in this paper. Similar to Follum et al. (2017), the domains were discretized into thirty-nine 1° by 1° tiles (as defined by how USGS NED data is disseminated). Flow rates from Tavakoly et al. (2017) were once again used to define the peak flow in each river reach in the domain.

The AutoRoute simulations in Follum et al. (2017) required approximately 20-minutes to simulate a 1° by 1° tile, compared to 17.5-minutes using the current version of AutoRoute. The current version of AutoRoute is more computationally efficient through the use of the Geospatial Data Abstraction Library (GDAL/OGR Contributors, 2019) for reading and writing data. The post-processing procedure described in Follum et al. (2017) required approximately 15-minutes for each 1° by 1° tile. Post-processing using ARPP to convert flood depth data to a flood depth raster and flood polygon takes approximately 3

480 minutes. Overall, the current version of AutoRoute and the use of ARPP is over 40% more computationally efficient in
simulating flood inundation maps.

The increased computational efficiency of AutoRoute and ARPP along with removing the requirement for ArcGIS software
in post-processing may allow for the AutoRoute model to more effectively be implemented ~~at the regional to continental scale.~~
485 ~~A further improvement on computational servers by CHL to provide flood and mobility assessments for OCONUS applications.~~
~~These assessments will likely use SPT for streamflow data and be operated at the regional-scale using a 1° by 1° spatial~~
~~discretization. A further modification to improve computational efficiency~~ may be to create a database of AutoRoute
simulations for varying flow rates. When forecast flowrates become available the database could be used instead of an
AutoRoute simulation to determine the depth within each stream cell. ~~ARPP~~ could then be used to generate the flood maps.
490 ~~This type of database could also provide flow-depth relationships to be used with the HAND method.~~ Additionally, a
production system could determine if streams within each modelling domain cross a specified bankfull streamflow threshold
and AutoRoute simulations would only occur if the streamflows for a given hydrometeorological forecast exceeded these
bankfull thresholds. Either process may further improve the computational efficiency in creating production flood inundation
maps.

495 **5 Conclusions**

The AutoRoute model is a simplified hydraulics model designed to quickly provide high-resolution flood inundation ~~and~~
~~mobility~~ results at the regional to continental scale. The main purpose of this paper was to test the computational efficiency
and accuracy of flood inundation maps generated by the AutoRoute model with special consideration given to less-extreme
flow events (i.e. low and medium flood events). Seven test cases were chosen to compare flood inundation maps using low-
500 , medium-, and high-flow rates. The seven ~~test sites used a ~9 m elevation dataset and the~~ locations correspond to existing
USGS flood inundation studies and represent different regions within the U.S. The primary conclusions of the paper are as
follows:

- 1.) Recent updates to the input and output methods within AutoRoute model as well as the post-processing procedure
allow for the creation of flood inundation ~~rasters (~9 m resolution) and~~ polygons in 20.5 minutes for a 1° by 1° area,
505 as compared to 35-minutes in previous studies. Increased computational efficiency may allow for the AutoRoute
model to more effectively be implemented in a production environment at the regional to continental scale.
- 2.) Although the flood inundation results for low-flow events are ~~accurate comparable with other studies~~ (average F
value of 63.3%), the simulated flooding tends to be overestimated. Higher-flow scenarios tend to be more
accurately simulated (F value for ~~med medium-flow event events~~ is 70.0% and average F value for high-flow
510 ~~event events~~ is 77.5%). Simplifications in estimating roughness coefficients, cross-section profiles (including

bathymetry estimation), and the hydraulic simulation allow for AutoRoute to be computationally efficient but also may lead to errors in flood map simulation.

3.) Use of higher-resolution (~3 m) elevation data within the AutoRoute model was also tested at two of the sites and did not significantly improve the accuracy of the flood inundation maps. One of the sites showed only minimal difference in flood inundation when using the higher-resolution elevation data. The second site had an almost 50% reduction in simulated area for the low-flow test case, which reduced the overestimation of flooded area but also increased the underestimation of flooded area. Use of the higher-resolution elevation datasets increased computation time by 750% compared to when the ~9 m elevation dataset was used.

3-4.) As has been found in other studies, AutoRoute performs best in areas with mid-to-high topographic relief where 1D one-dimensional flood models often perform well. Areas of minimal relief are more susceptible to back-water effects. AutoRoute physics do not account for such physical complexities and model results tend to be less accurate. As such, flood inundation results from AutoRoute should be viewed as a first-order approximation with the use of more detailed hydraulic models providing more actionable flood data.

The scope of this research was limited to small and medium inland rivers within the U.S. Several areas of future research were highlighted, including the need to better estimate roughness coefficients based on land cover and to account for change in roughness with changes in flow depth. Improved bathymetry estimation where no bathymetry data exists could improve both the flood inundation estimates and mobility assessment when using AutoRoute. Based on the recent work by Dey et al. (2019), different bathymetric methods could be implemented into AutoRoute for differing geomorphological conditions. Removal of outlier flood depth values will also improve AutoRoute the flood inundation estimation as well as the channel profiles that are used for mobility analysis. Use of a database system to store precomputed AutoRoute results could also improve efficiency and connect to other hydraulic models, such as HAND. Flood inundation models capable of quickly providing high-resolution flood maps have seen great improvement over the past decade as regional- to continental-scale flow simulation models are becoming operationalized by the U.S. Army, NOAA, and others. While the flow and flood inundation models continue to improve, the connection between the flood maps generated and the impacts to the population/environment need to become more fully-developed.

Acknowledgements

This project was supported by the Deputy Assistant Secretary of the Army for Research and Technology through the Engineer Research and Development Center's Military Engineering applied research work package title Austere Entry; the Geospatial Intelligence Directorate of the Marine Corps Intelligence Activity; and ERDC's collaborative research project supporting the NOAA National Water Center.

550

555

560

References

Afshari, S., Tavakoly, A. A., Rajib, M. A., Zheng, X., Follum, M. L., Omranian, E. and Fekete, B. M.: Comparison of new generation low-complexity flood inundation mapping tools with a hydrodynamic model, *J. Hydrol.*, 556, 539–556, doi:10.1016/j.jhydrol.2017.11.036, 2018.

Bates, P. D. and De Roo, A. P. J.: A simple raster-based model for flood inundation simulation, *J. Hydrol.*, 236(1–2), 54–77, doi:10.1016/S0022-1694(00)00278-X, 2000.

Benedict, S. T., Caldwell, A. W. and Clark, J. M.: Flood-inundation maps for the Saluda River from Old Easley Bridge Road to Saluda Lake Dam near Greenville, South Carolina., U.S. Geological Survey Scientific Investigations Map 3244, 2013.

Calenda, G., Mancini, C. P. and Volpi, E.: Distribution of the extreme peak floods of the Tiber River from the XV century, Adv. Water Resour., 28(6), 615–625, doi:10.1016/j.advwatres.2004.09.010, 2005.

Chow, V. T.: Open Channel Hydraulics, McGraw-Hill Book Company Inc, New York City, New York, 1959.

David, C. H., Maidment, D. R., Niu, G.-Y., Yang, Z.-L., Habets, F. and Eijkhout, V.: River Network Routing on the NHDPlus Dataset, J. Hydrometeorol., 12(5), 913–934, doi:10.1175/2011JHM1345.1, 2011.

Dey, S., Saksena, S., Merwade, V.: Assessing the Effect of Different Bathymetric Models on Hydraulic Simulation of Rivers in Data Sparse Regions, Journal of Hydrology, 575, 838-851, 2019.

Einstein, H. A.: The Hydraulic Cross Section Radius, Schweizerische Bauzeitung, 103(8), 89–91, 1934.

ESRI: ArcGIS Desktop: Release 10, Environmental Systems Research Institute, Redlands, CA, 2011.

Follum, M. L.: AutoRoute Rapid Flood Inundation Model, Coastal and Hydraulics Engineering Technical Note ERDC/CHL CHETN-IV-88. U.S. Army Engineer Research and Development Center, Coastal and Hydraulics Laboratory, Vicksburg, Mississippi 2012.

Follum, M. L., Gutenson, J. L., Wahl, M. D., Hunter, C. J. and Maldonado Linas, J. E.: Rapid Flood Inundation Modeling, Mil. Eng., 110(715), 37–38, 2018.

Follum, M. L., Paredes, J. M., Yeates, E. M. and Vera, R.: Utilizing Simple Large-Scale Flood Models to Prioritize Deployment of HEC-RAS 2D Models: Case Study of Navajo Nation Flood Inundation Maps, Flood Risk Management Newsletter , 12(2), 4–7, 2019.

Follum, M. L., Tavakoly, A. A., Niemann, J. D. and Snow, A. D.: AutoRAPID: A Model for Prompt Streamflow Estimation and Flood Inundation Mapping over Regional to Continental Extents, J. Am. Water Resour. Assoc., 53(2), 280–299, doi:10.1111/1752-1688.12476, 2017.

GDAL/OGR Contributors: GDAL/OGR Geospatial Data Abstraction Software Library, Available from: <https://gdal.org>, 2019.

Gesch, D. B., Oimoen, M., Greenlee, S., Nelson, C., Steuck, M., and Tyler, D.: The National Elevation Dataset, Photogrammetric Engineering and Remote Sensing, 68(1):5-32, DOI: 10.1007/978-94-007-6769-0_1, 2002.

Homer, C., Dewitz, J., Yang, L., Jin, S., Danielson, P., Xian, G., Coulston, J., Herold, N., Wickham, J. and Megown, K.: Completion of the 2011 National Land Cover Database for the Conterminous United States – Representing a Decade of Land Cover Change Information, Photogramm. Eng. Remote Sensing, 81(5), 345–354, doi:10.14358/PERS.81.5.345, 2015.

Horizon Systems Corporation: National Hydrography Dataset Plus: Documentation, Available from: http://www.horizon-systems.com/NHDPlus/NHDPlusV1_home.php, 2007.

Horton, R. E.: Separate Roughness Coefficients for Channel Bottom and Sides, Eng. News Rec., 111(22), 652–653, 1933.

Kohn, M. S. and Patton, T. T.: Flood-inundation maps for the South Platte River at Fort Morgan, Colorado, U.S. Geological Survey Scientific Investigations Report 2018–5114, Available from: <https://doi.org/10.3133/sir20185114>, 2018.

Lehner, B. and Grill, G.: Global river hydrography and network routing: Baseline data and new approaches to study the world's large river systems, Hydrol. Process., 27(15), 2171–2186, doi:10.1002/hyp.9740, 2013.

- Liu, Y. Y., Maidment, D. R., Tarboton, D. G., Zheng, X. and Wang, S.: A CyberGIS Integration and Computation Framework for High-Resolution Continental-Scale Flood Inundation Mapping, *J. Am. Water Resour. Assoc.*, 54(4), 770–784, doi:10.1111/1752-1688.12660, 2018.
- Lombard, P. J. and Bent, G. C.: Flood-inundation maps for the Deerfield River, Franklin County, Massachusetts, from the confluence with the Cold River tributary to the Connecticut River, U.S. Geological Survey Scientific Investigations Report 2015–5104, Available from: <http://dx.doi.org/10.3133/sir20155104>, 2015.
- McEnergy, J., Ingram, J., Duan, Q., Adams, T. and Anderson, L.: NOAA’s Advanced Hydrologic Prediction Service, *Bull. Am. Meteorol. Soc.*, 86(3), 375–386, doi:10.1175/BAMS-86-3-375, 2005.
- McKay, L., Bondelid, T., Rea, A., Johnston, C., Moore, R. and Deward, T.: NHDPlus Version 2: User Guide., 2012.
- McKinley, G. B., Mason, G. L., Follum, M. L., Jourdan, M. R., LaHatte, C. W. and Ellis, J.: A Route Corridor Flood Vulnerability System, Geotechnical and Structures Laboratory Technical Report ERDC/GSL TR-12-29. U.S. Army Engineer Research and Development Center, Geotechnical and Structures Laboratory, Vicksburg, Mississippi, 2012.
- Moore, M. R.: Development of a High-Resolution 1D/2D Coupled Flood Simulation of Charles City, Iowa, M.S. Thesis, University of Iowa., 2011.
- Nystrom, E. A.: Flood-inundation maps for the White River at Spencer, Indiana, U.S. Geological Survey Scientific Investigations Map 3251, Available from: <http://pubs.usgs.gov/sim/3251/>, 2013.
- Ree, W. and Palmer, V.: Flow of water in channels protected by vegetative linings, U.S. Dept. of Agriculture, No. 967, 1949.
- Smith, D. G. and Wagner, C. R.: Hydraulic model and flood-inundation maps developed for the Pee Dee National Wildlife Refuge, North Carolina, U.S. Geological Survey Scientific Investigations Report 2015–5137, Available from: <http://dx.doi.org/10.3133/sir20155137>, 2016.
- Snow, A. D.: A New Global Forecasting Model to Produce High-Resolution Stream Forecasts, MS Thesis, Brigham Young University - Provo., 2015.
- Snow, A. D., Christensen, S. D., Swain, N. R., Nelson, E. J., Ames, D. P., Jones, N. L., Ding, D., Noman, N. S., David, C. H., Pappenberger, F. and Zsoter, E.: A High-Resolution National-Scale Hydrologic Forecast System from a Global Ensemble Land Surface Model, *J. Am. Water Resour. Assoc.*, 52(4), 950–964, doi:10.1111/1752-1688.12434, 2016.
- Storm, J. B.: An expanded model—Flood-inundation maps for the Leaf River at Hattiesburg, Mississippi, U.S. Geological Survey Scientific Investigations Map 3300, Available from: <http://dx.doi.org/10.3133/sim3228>, 2014.
- Tavakoly, A. A., Snow, A. D., David, C. H., Follum, M. L., Maidment, D. R. and Yang, Z. L.: Continental-Scale River Flow Modeling of the Mississippi River Basin Using High-Resolution NHDPlus Dataset, *J. Am. Water Resour. Assoc.*, 53(2), 258–279, doi:10.1111/1752-1688.12456, 2017.
- Tayefi, V., Lane, S. N., Hardy, R. J. and Yu, D.: A comparison of one- and two-dimensional approaches to modelling flood inundation over complex upland floodplains, *Hydrol. Process.*, 21, 3190–3202, doi:10.1002/hyp.6523, 2007.
- Temple, D. M., Robinson, K. M., Ahring, R. M. and Davis, A. G.: Stability Design of Grass- lined Open Channels, *Agric. Handb.*, 667, 1987.

U.S. Army Corps of Engineers: HEC-RAS River Analysis System, hydraulic reference manual, 2010.

U.S. Army Corps of Engineers: HEC-RAS River Analysis System, hydraulic reference manual, 2016.

Wahl, M. D., Follum, M. L., Snow, A. D. and Tavakoly, A. A.: Developing Hydrologic Awareness, Mil. Eng., 108(700), 2016.

645 Wing, O. E. J., Bates, P. D., Sampson, C. C., Smith, A. M., Johnson, K. A. and Erickson, T. A.: Validation of a 30 m resolution
flood hazard model of the conterminous United States, Water Resour. Res., 53(9), 7968–7986,
doi:10.1002/2017WR020917, 2017.

Zheng, X., Maidment, D. R., Tarboton, D. G., Liu, Y. Y. and Passalacqua, P.: GeoFlood: Large-Scale Flood Inundation
Mapping Based on High-Resolution Terrain Analysis, Water Resour. Res., 54(12), 10,013-10,033,
650 doi:10.1029/2018WR023457, 2018.

Zheng, X., Maidment, D., Liu, Y., Tarboton, D. G. and Lin, P.: From Forecast Hydrology to Real-Time Inundation Mapping
at Continental Scale, in AGU Fall Meeting, Available from:
https://agu.confex.com/agu/fm16/meetingapp.cgi/Paper/186012, 2016.

655

660

Tables and Figures

665 **Table 1: USGS study sites used in this study. For each study site the location, ID, river(s), USGS streamgage, model length, and reference are provided.**

Location	ID	River(s)	USGS Streamgage	Model	Reference
			Number	Length (km)	
Spencer, IN	IN	White River	03357000	8.5	Nystrom (2013)
Fort Morgan, CO	CO	S. Platte River	06759500	7.2	Kohn and Patton (2018)
Greenville, SC	SC	Saluda	02162500	6.4	Benedict et al. (2013)
Pee Dee, NC	NC	Pee Dee River	02126375	17.0	Smith and Wagner (2016)
Hattiesburg, MS	MS	Leaf and Bouie Rivers	02473000	10.9	Storm (2014)

Charlemont, MA	MC	Deerfield River	01168500	14.6	Lombard and Bent (2015)
West Deerfield, MA	MW	Deerfield River	01170000	14.3	Lombard and Bent (2015)

670

675

680

685

Table 2: Base flow and Low, Medium (Med), and High flow rates for each study site.

ID	Base Flow (m ³ s ⁻¹)	Low Flow (m ³ s ⁻¹)	Med Flow (m ³ s ⁻¹)	High Flow (m ³ s ⁻¹)
IN	83.9	164.0	577.7	2027.5
CO	16.6	79.9	577.7	2814.7
SC	17.2	79.6	222.9	373.8
NC	145.4	911.8	3021.1	7391.8
MS	63.5	999.6	1730.2	3409.3
MC	25.9	311.5	996.8	2415.4
MW	38.2	455.9	1659.4	3344.2

690

695

700

705

710

715

720

Table 3: F-statistic (F , percentage) and error bias (E), and inundation coverage areas (A_{Obs} , A_{Sim} , A_{Over} , A_{Under} , and A_{Acc}) for each flow scenario at all seven test locations. F ranges between 0 and 100% with a value of 100% indicating perfect fit between the AutoRoute and USGS flood inundation maps. E values less than 1 indicate a bias towards underestimation, E values greater than 1 indicate a bias towards overestimation, and an E value of 1 indicates no bias. All inundation coverage areas have units of km^2 .

Location	Flow Scenario	Rate	F (%)	E	A_{Obs}	A_{Sim}	A_{Over}	A_{Under}	A_{Acc}
IN	Low		78.2	8.22	0.75	0.91	0.18	0.02	0.72
	Med		63.0	2.60	2.36	2.89	0.86	0.33	2.03
	High		81.7	0.11	5.48	4.66	0.10	0.92	4.56

Formatted: English (United States)

Inserted Cells

Formatted: Left

Inserted Cells

Inserted Cells

Formatted: English (United States)

Formatted: English (United States)

Inserted Cells

Inserted Cells

Formatted: English (United States)

CO	Low	63.1	0.70	<u>0.71</u>	<u>0.66</u>	<u>0.13</u>	<u>0.18</u>	<u>0.53</u>
	Med	62.2	0.15	<u>2.68</u>	<u>1.89</u>	<u>0.14</u>	<u>0.93</u>	<u>1.75</u>
	High	83.2	0.18	<u>6.67</u>	<u>5.87</u>	<u>0.17</u>	<u>0.97</u>	<u>5.69</u>
SC	Low	71.6	2.59	<u>0.26</u>	<u>0.30</u>	<u>0.07</u>	<u>0.03</u>	<u>0.23</u>
	Med	60.6	0.39	<u>0.63</u>	<u>0.51</u>	<u>0.08</u>	<u>0.20</u>	<u>0.43</u>
	High	65.9	0.12	<u>0.97</u>	<u>0.70</u>	<u>0.04</u>	<u>0.31</u>	<u>0.66</u>
NC	Low	39.3	10.97	<u>3.65</u>	<u>7.82</u>	<u>4.58</u>	<u>0.42</u>	<u>3.23</u>
	Med	92.6	1.32	<u>20.27</u>	<u>20.48</u>	<u>0.89</u>	<u>0.67</u>	<u>19.60</u>
	High	87.7	0.15	<u>25.69</u>	<u>23.34</u>	<u>0.43</u>	<u>2.78</u>	<u>22.91</u>
MS	Low	46.1	3.49	<u>6.45</u>	<u>9.78</u>	<u>4.66</u>	<u>1.33</u>	<u>5.12</u>
	Med	67.6	0.49	<u>14.40</u>	<u>12.59</u>	<u>1.71</u>	<u>3.52</u>	<u>10.88</u>
	High	70.2	0.20	<u>21.46</u>	<u>16.98</u>	<u>1.13</u>	<u>5.61</u>	<u>15.85</u>
MC	Low	80.0	2.62	<u>1.26</u>	<u>1.39</u>	<u>0.21</u>	<u>0.08</u>	<u>1.18</u>
	Med	76.7	2.10	<u>2.18</u>	<u>2.39</u>	<u>0.41</u>	<u>0.19</u>	<u>1.99</u>
	High	80.0	2.25	<u>3.42</u>	<u>3.73</u>	<u>0.55</u>	<u>0.25</u>	<u>3.18</u>
MW	Low	65.0	1.02	<u>1.76</u>	<u>1.77</u>	<u>0.38</u>	<u>0.37</u>	<u>1.39</u>
	Med	67.5	0.09	<u>6.91</u>	<u>4.97</u>	<u>0.19</u>	<u>2.12</u>	<u>4.79</u>
	High	74.0	0.17	<u>8.57</u>	<u>6.93</u>	<u>0.34</u>	<u>1.98</u>	<u>6.59</u>
MS (3 m)	Low	<u>45.2</u>	<u>0.55</u>	<u>6.45</u>	<u>5.18</u>	<u>1.56</u>	<u>2.83</u>	<u>3.62</u>
	Med	<u>56.8</u>	<u>0.20</u>	<u>14.40</u>	<u>9.90</u>	<u>1.10</u>	<u>5.59</u>	<u>8.81</u>
	High	<u>71.2</u>	<u>0.12</u>	<u>21.46</u>	<u>16.41</u>	<u>0.66</u>	<u>5.71</u>	<u>15.75</u>
NC (3 m)	Low	<u>39.5</u>	<u>10.69</u>	<u>3.65</u>	<u>7.75</u>	<u>4.53</u>	<u>0.42</u>	<u>3.23</u>
	Med	<u>93.5</u>	<u>1.86</u>	<u>20.27</u>	<u>20.68</u>	<u>0.90</u>	<u>0.48</u>	<u>19.79</u>
	High	<u>88.0</u>	<u>0.15</u>	<u>25.69</u>	<u>23.39</u>	<u>0.42</u>	<u>2.72</u>	<u>22.97</u>

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

Formatted: English (United States)

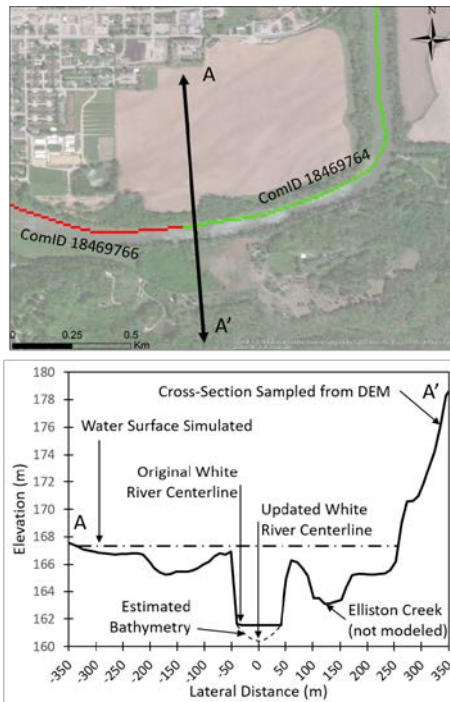


Figure 1: Cross-section profile of the White River near Spencer, IN. Sources of the background imagery in Figures 1-97 include ESRI, DigitalGlobe, Earthstar Geographics, CNES/Airbus DS, GeoEye, USDA FSA, USGS, Getmapping, Aerogrid, IGN, IGP, and the GIS User Community.

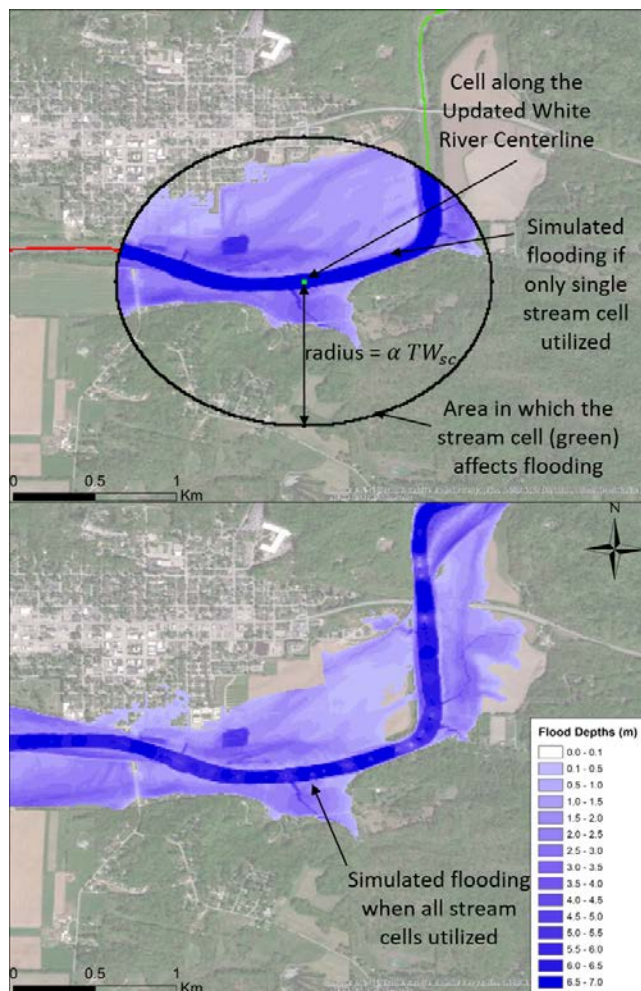
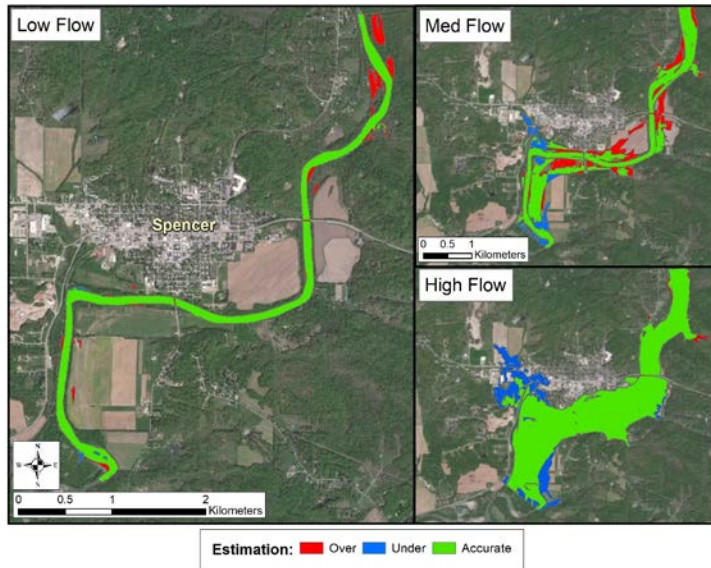


Figure 2: Top shows flood depths of surrounding terrain from at a single stream cell. Notice the area of influence (cells within radius= αTW_{sc}) appears elliptical due to projection of the map. Bottom shows flood depths along the river when the depth from all stream cells are utilized. Notice that some areas shown as flooded in top figure are not flooded in bottom figure due to the influence of stream cells with lower depth calculations.



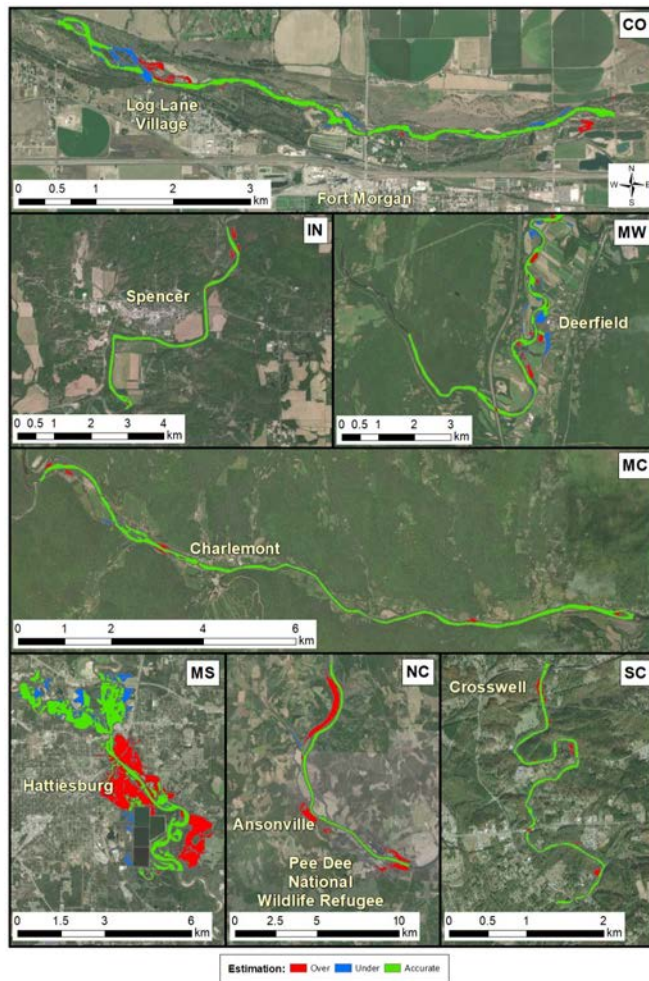


Figure 3: Spencer, IN, (IN) flood map comparison between AutoRoute simulations and USGS flood maps. Areas shaded green (Accurate) indicate areas where AutoRoute and for low flow events at the USGS flood maps agree. Areas shaded red (Over) indicate where only AutoRoute simulates the area as flooded. Areas shaded blue (Under) indicate where only the USGS shows the area as flooded.

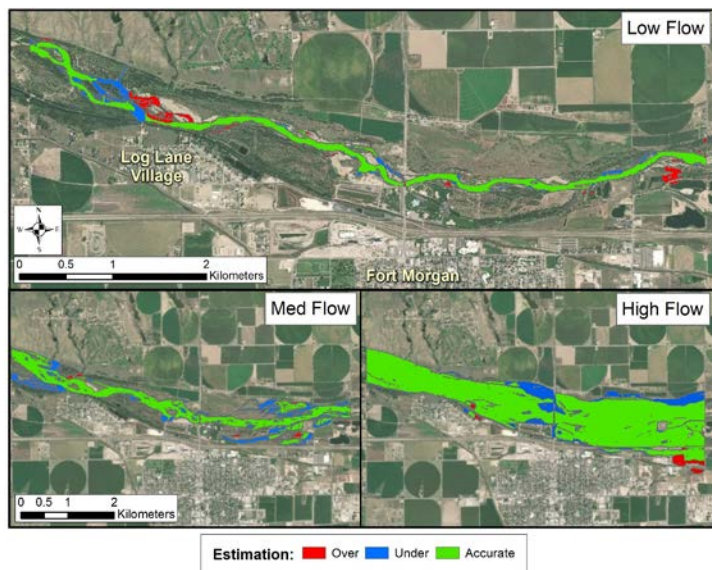


Figure 4: Fort Morgan, CO (CO) flood map comparison between AutoRoute simulations and USGS flood maps. Areas shaded green (Accurate) indicate areas where AutoRoute and the USGS flood maps agree. Areas shaded red (Over) indicate where only AutoRoute simulates the area as flooded. Areas shaded blue (Under) indicate where only the USGS shows the area as flooded.

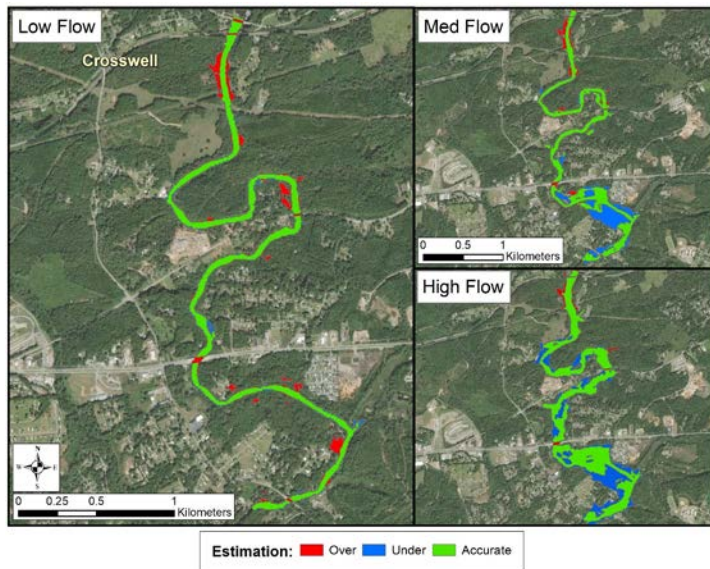
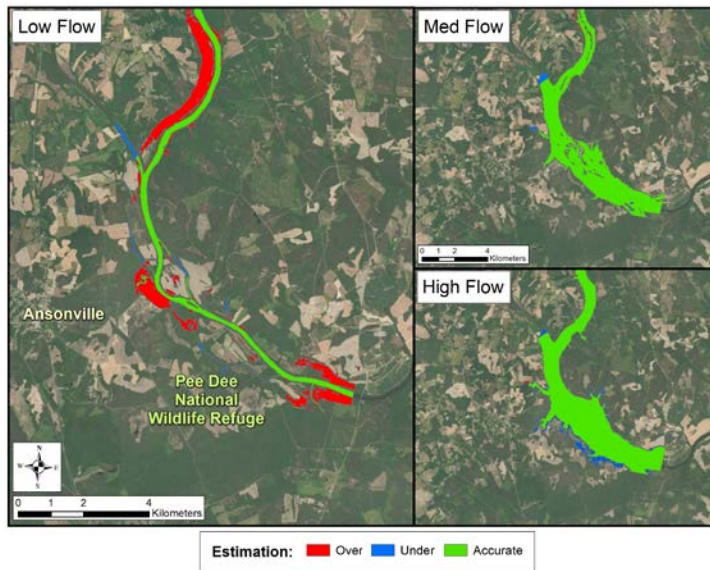


Figure 5: Greenville, SC (SC) flood map comparison between AutoRoute simulations and USGS flood maps seven test sites. Areas shaded green (Accurate) indicate areas where AutoRoute and the USGS flood maps agree. Areas shaded red (Over) indicate where only AutoRoute simulates the area as flooded. Areas shaded blue (Under) indicate where only the USGS shows the area as flooded.





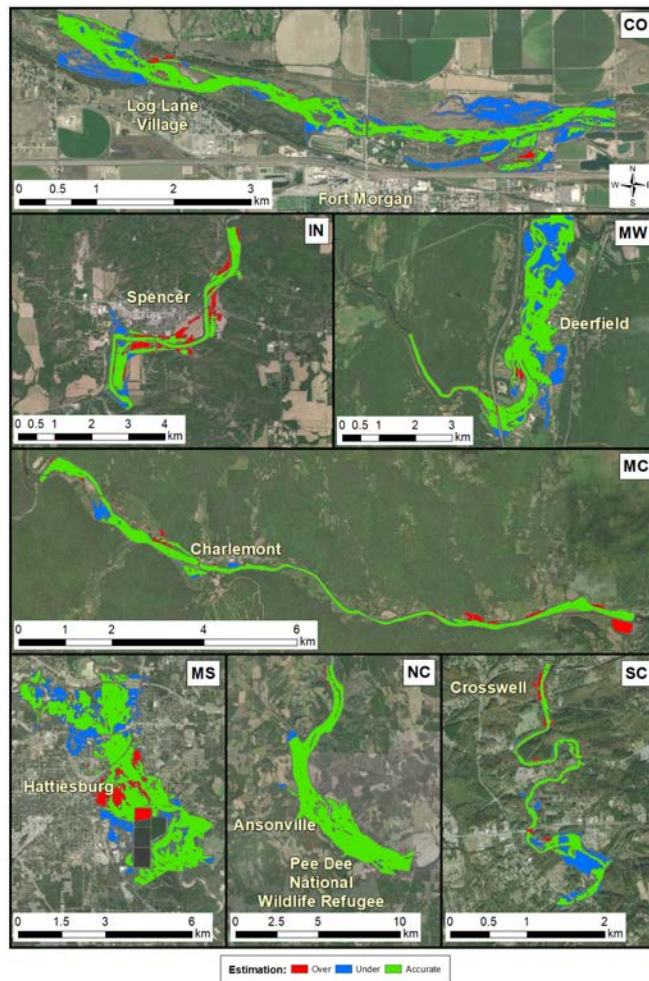


Figure 6: Pee Dee, NC (NC) flood4: Flood map comparison between AutoRoute simulations and USGS flood maps for medium flow events at the seven test sites. Areas shaded green (Accurate) indicate areas where AutoRoute and the USGS flood maps agree. Areas shaded red (Over) indicate where only AutoRoute simulates the area as flooded. Areas shaded blue (Under) indicate where only the USGS shows the area as flooded.

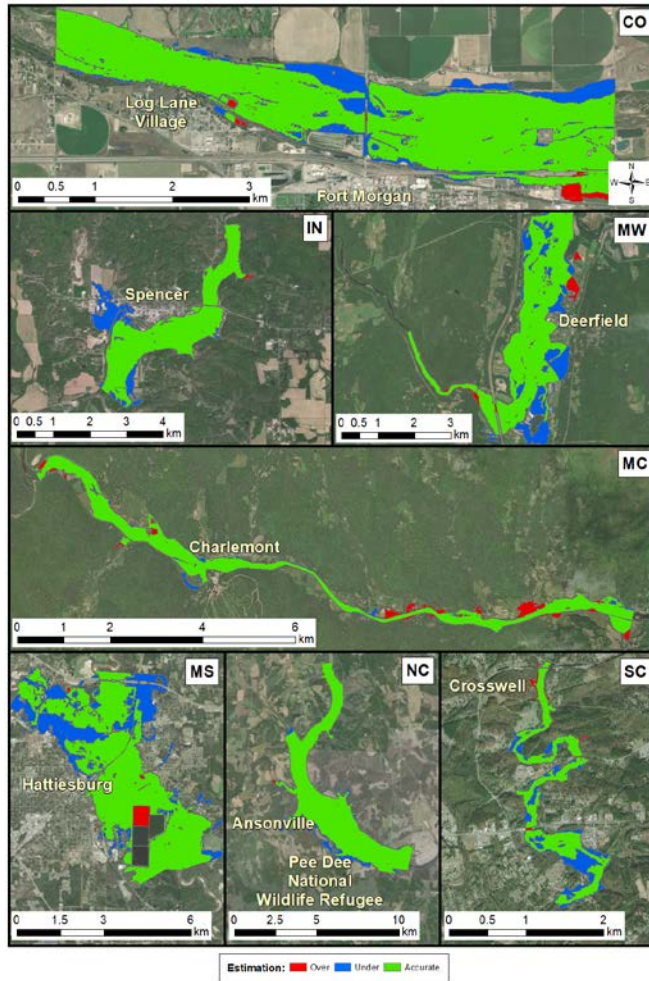

765 Figure 5: Flood map comparison between AutoRoute simulations and USGS flood maps for high flow events at the seven test sites. Areas shaded green (Accurate) indicate areas where AutoRoute and the USGS flood maps agree. Areas shaded red (Over) indicate where only AutoRoute simulates the area as flooded. Areas shaded blue (Under) indicate where only the USGS shows the area as flooded.

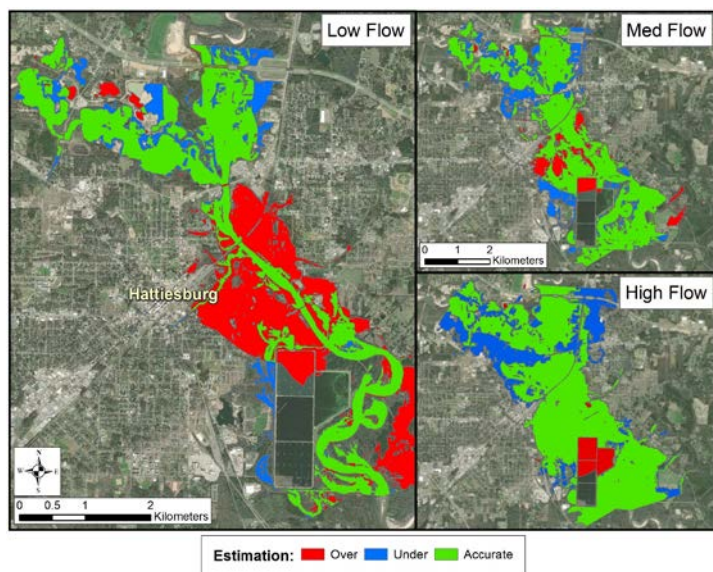

770 **Figure 7:—Hattiesburg, MS (MS) flood-map comparison-between-AutoRoute-simulations-and-USGS-flood-maps. Some of the overestimation in the MS model simulation occurs at water treatment ponds, which were not included in the USGS flood maps and can bias the results.**

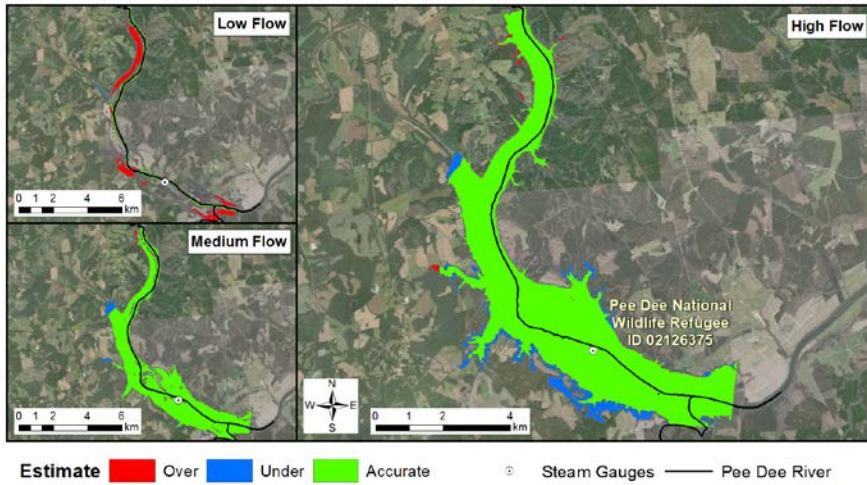


Figure 6: Pee Dee, NC (NC-3m) flood map comparison between AutoRoute simulations using ~3 m DEM and USGS flood maps. Areas shaded green (Accurate) indicate areas where AutoRoute and the USGS flood maps agree. Areas shaded red (Over) indicate where only AutoRoute simulates the area as flooded. Areas shaded blue (Under) indicate where only the USGS shows the area as flooded.

Formatted: Justified

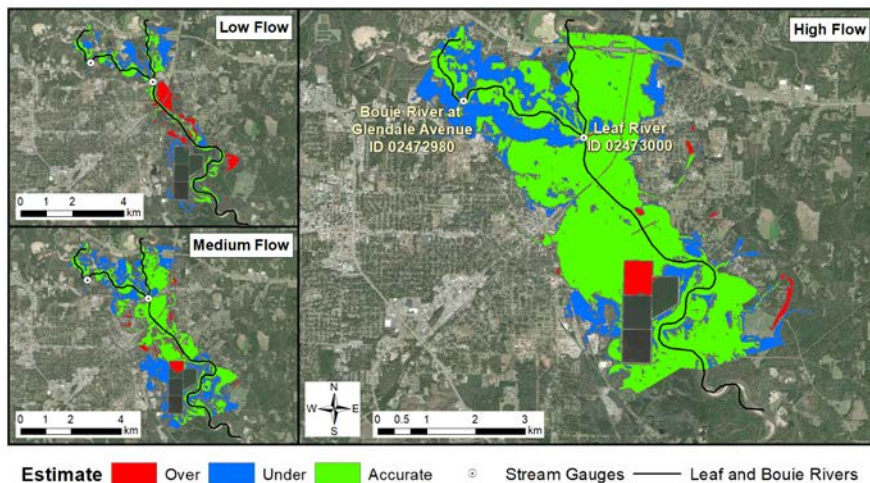


Figure 7: Hattiesburg, MS (MS-3m) flood map comparison between AutoRoute simulations using ~3 m DEM and USGS flood maps. Areas shaded green (Accurate) indicate areas where AutoRoute and the USGS flood maps agree. Areas shaded red (Over) indicate where only AutoRoute simulates the area as flooded. Areas shaded blue (Under) indicate where only the USGS shows the area as flooded. Some of the overestimation in the model simulation occurs water treatment ponds, which were not included in the USGS flood maps and can bias the results.

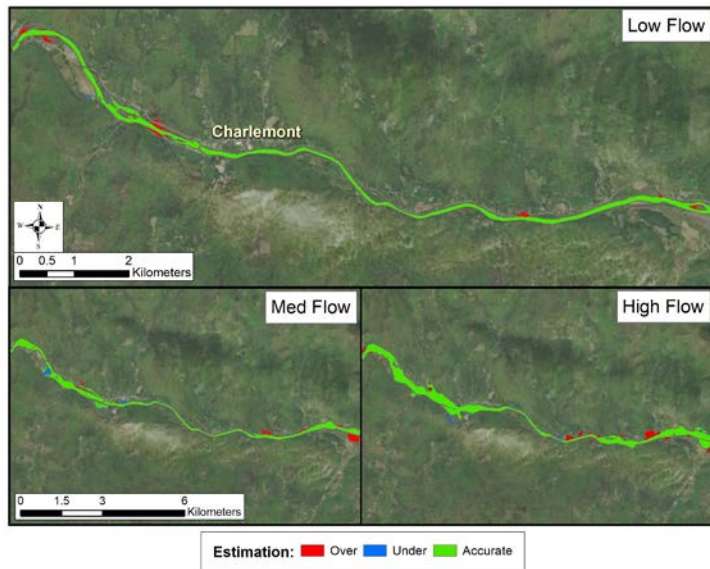


Figure 8: Charlemon, MA (MC) flood map comparison between AutoRoute simulations and USGS flood maps. Areas shaded green (Accurate) indicate areas where AutoRoute and the USGS flood maps agree. Areas shaded red (Over) indicate where only AutoRoute simulates the area as flooded. Areas shaded blue (Under) indicate where only the USGS shows the area as flooded.

Formatted: Justified

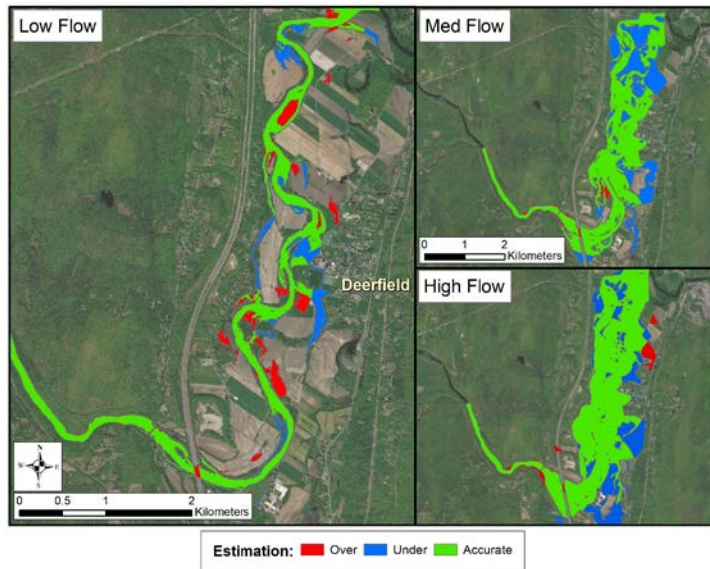


Figure 9: West Deerfield, MA (MW) flood map comparison between AutoRoute simulations and USGS flood maps. Areas shaded green (Accurate) indicate areas where AutoRoute and the USGS flood maps agree. Areas shaded red (Over) indicate where only AutoRoute simulates the area as flooded. Areas shaded blue (Under) indicate where only the USGS shows the area as flooded.